


WEBENCH[®] Design Report

Design : 4354344/47 LM3880MF-1AE/NOPB Design 47 - LM3880MF-1AE/NOPB VinMin = 14.0V VinMax = 22.0V Vout = 3.3V Iout = 2.0A Device = LM3880MF-1AE/NOPB Topology = SEQUENCER Created = 7/13/16 1:37:01 AM BOM Cost = \$0.48 BOM Count = 4 Total Pd = 0.0W

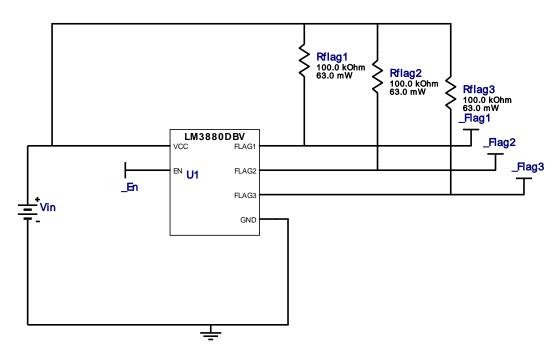


My Comments

No comments

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Rflag1	Vishay-Dale	CRCW0402100KFKED Series= CRCWe3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	■ 0402 3 mm ²
2.	Rflag2	Vishay-Dale	CRCW0402100KFKED Series= CRCWe3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	■ 0402 3 mm ²
3.	Rflag3	Vishay-Dale	CRCW0402100KFKED Series= CRCWe3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	■ 0402 3 mm ²
4.	U1	Texas Instruments	LM3880MF-1AE/NOPB	Switcher	1	\$0.45	R-PDSO-G6 10 mm ²

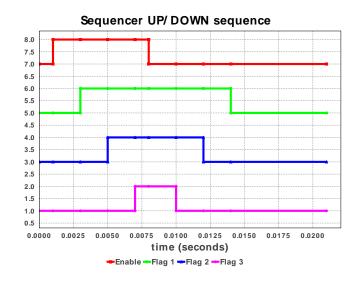

Operating Values

#	Name	Value	Category	Description
1.	BOM Count	4	General	Total Design BOM count
2.	FootPrint	19.0 mm ²	General	Total Foot Print Area of BOM components
3.	Total BOM	\$0.48	General	Total BOM Cost
4.	Total Pd	75.0 μW	Power	Total Power Dissipation
5.	Flag Voltage	3.0 V		Flag Voltage
6.	Flag1 Down delay	6.0 ms		Flag Delay
	(From EN high to low)			
7.	Flag1 Up delay (From	2.0 ms		Flag Delay
	EN low to high)			
8.	Flag2 Down delay	4.0 ms		Flag Delay
	(From EN high to low)			
9.	Flag2 Up delay (From	4.0 ms		Flag Delay
	EN low to high)			
10.	Flag3 Down delay	2.0 ms		Flag Delay
	(From EN high to low)			
11.	0 1)(6.0 ms		Flag Delay
	EN low to high)			
12.	Flags Used	2.0		Flags Used
13.	Total Flags	3.0		Total Flags
14.	Vcc	3.0 V		Vcc
Desi	ign Inputs			
#	Name	Value		Description

Π	Name	π	Value	Description
5	5. base_pn	5.	LM3880	Base Product Number

Design Assistance

1. LM3880 Product Folder : http://www.ti.com/product/LM3880 : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to Texas Instruments' Site Terms and Conditions of Use. Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the Evaluation License Agreement.