


## WEBENCH® Amplifier Design Report

Design : 4077713/12 OPA2188AID  
Your OPA2188AID Non-inverting Amp Design

Device = OPA2188AID  
Topology = Non-inverting  
Created = Jul 17 2016 1:43AM  
BOM Cost = \$1.72  
Footprint = 62.6 mm<sup>2</sup>  
BOM Count = 3

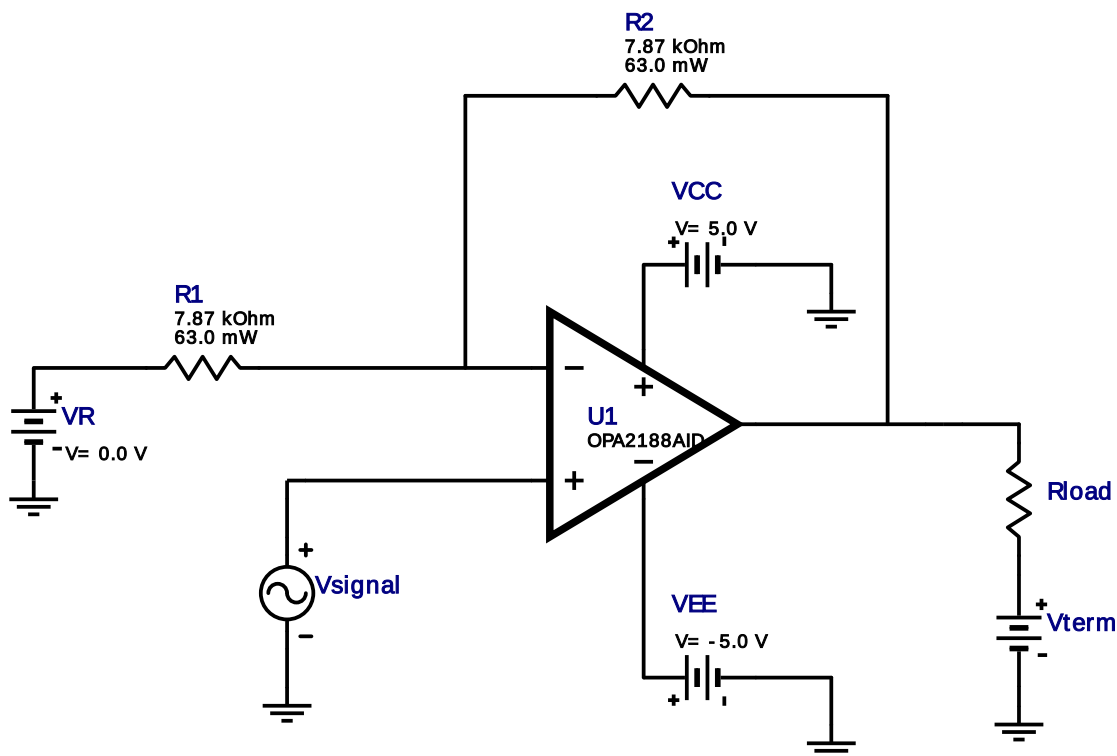

### My Comments

No comments

### Electrical BOM

| #  | Name | Manufacturer            | Part Number                          | Properties                                          | Qty | Price  | Footprint              |
|----|------|-------------------------|--------------------------------------|-----------------------------------------------------|-----|--------|------------------------|
| 1. | R1   | Vishay-Dale             | CRCW04027K87FKED<br>Series= CRCW..e3 | Res= 7.87 kOhm<br>Power= 63.0 mW<br>Tolerance= 1.0% | 1   | \$0.01 | 0402 3 mm <sup>2</sup> |
| 2. | R2   | Vishay-Dale             | CRCW04027K87FKED<br>Series= CRCW..e3 | Res= 7.87 kOhm<br>Power= 63.0 mW<br>Tolerance= 1.0% | 1   | \$0.01 | 0402 3 mm <sup>2</sup> |
| 3. | U1   | Texas Instruments, Inc. | OPA2188AID                           | GbwTyp= 2.0 MHz<br>VccMin= 4.0 V<br>VccMax= 36.0 V  | 1   | \$1.70 |                        |



D0008A 57 mm<sup>2</sup>

### Design Inputs

| #  | Name                           | Value         | Description                     |
|----|--------------------------------|---------------|---------------------------------|
| 1. | Topology                       | Non-inverting |                                 |
| 2. | ClosedLoopGain                 | 2.0 V/V       | System Gain                     |
| 3. | SmallSignalClosedLoopBandwidth | 10000.0 Hz    | Circuit Bandwidth               |
| 4. | DualSupply                     | true          | Power supply(s) to active chips |
| 5. | PositiveSupplyVoltage          | 5.0 V         |                                 |
| 6. | PositiveSupplyTolerance        | 5.0 %         |                                 |

| #   | Name                    | Value     | Description                                                 |
|-----|-------------------------|-----------|-------------------------------------------------------------|
| 7.  | NegativeSupplyVoltage   | -5.0 V    |                                                             |
| 8.  | NegativeSupplyTolerance | 5.0 %     |                                                             |
| 9.  | VinMin                  | -2.0 V    | Minimum input voltage                                       |
| 10. | VinMax                  | 2.0 V     | Maximum input voltage                                       |
| 11. | VinPkPk                 | 4.0 V     | Peak to peak input voltage (VinMax – VinMin)                |
| 12. | VinMidpointVoltage      | 0.0 V     | Midpoint of input voltage ((VinMax – VinMin)/2 + VinMin)    |
| 13. | VoutMin                 | -4.0 V    | Minimum output voltage                                      |
| 14. | VoutMax                 | 4.0 V     | Maximum output voltage                                      |
| 15. | VoutPkPk                | 8.0 V     | Peak to peak input voltage (VoutMax – VoutMin)              |
| 16. | VoutMidpointVoltage     | 0.0 V     | Midpoint of input voltage ((VoutMax – VoutMin)/2 + VoutMin) |
| 17. | VRefRecommended         | 0.0 V     | Recommended WEBENCH Voltage Reference Value                 |
| 18. | VRefUserSpec            | 0.0 V     | User override of Voltage Reference Value                    |
| 19. | TempMin                 | 0.0 degC  | Minimum Specified Temperature                               |
| 20. | TempMax                 | 70.0 degC | Maximum Specified Temperature                               |

## Performance Values - Design Criteria

| #   | Name              | Value       | Description                     |
|-----|-------------------|-------------|---------------------------------|
| 1.  | Vcc               | 5.0 V       | Positive Power Supply           |
| 2.  | Vee               | -5.0 V      | Negative Power Supply           |
| 3.  | Op Amp            | OPA2188AID  | Circuit's Operational Amplifier |
| 4.  | Gain              | 2.0 V/V     | Signal Gain                     |
| 5.  | Vin Min           | -2.0 V      | Input minimum voltage           |
| 6.  | Vin Max           | 2.0 V       | Input maximum voltage           |
| 7.  | Vin pk-pk         | 4.0 V       | Input peak-to-peak voltage      |
| 8.  | Vin Midpoint      | 0.0 V       | Input midpoint voltage          |
| 9.  | Vout Min          | -4.0 V      | Output minimum voltage          |
| 10. | Vout Max          | 4.0 V       | Output maximum voltage          |
| 11. | Vout pk-pk        | 8.0 V       | Output peak-to-peak voltage     |
| 12. | Vout Midpoint     | 0.0 V       | Output midpoint voltage         |
| 13. | Voltage Reference | 0.0 V       | Voltage reference               |
| 14. | R1                | 7.699 kOhms | Gain resistor                   |
| 15. | R1 Tolerance      |             | Gain resistor tolerance         |
| 16. | R2                | 7.699 kOhms | Feedback resistor               |
| 17. | R2 Tolerance      |             | Feedback resistor tolerance     |
| 18. | SS Bandwidth      | 10.0 kHz    | Small Signal Bandwidth          |
| 19. | Temp Minimum      | 0.0 degC    | Minimum circuit temperature     |
| 20. | Temp Maximum      | 70.0 degC   | Maximum circuit temperature     |
| 21. | R1                | 7.87 kOhms  | Gain resistor                   |
| 22. | R1 Tolerance      | 1.0 %       | Gain resistor tolerance         |
| 23. | R2                | 7.87 kOhms  | Feedback resistor               |
| 24. | R2 Tolerance      | 1.0 %       | Feedback resistor tolerance     |
| 25. | SS Bandwidth      | 1000.0 kHz  | Small Signal Bandwidth          |

## Performance Values - Actual Design

| #   | Name              | Value      | Description                          |
|-----|-------------------|------------|--------------------------------------|
| 1.  | Vcc               | 5.0 V      | Positive Power Supply                |
| 2.  | Vee               | -5.0 V     | Negative Power Supply                |
| 3.  | Op Amp            | OPA2188AID | Actual Circuit operational amplifier |
| 4.  | Gain_target       | 2.0 V/V    | Signal gain with actual resistors    |
| 5.  | Vin Min           | -2.0 V     | Input minimum voltage                |
| 6.  | Vin Max           | 2.0 V      | Input maximum voltage                |
| 7.  | Vin pk-pk         | 4.0 V      | Input peak-to-peak voltage           |
| 8.  | Vin Midpoint      | 0.0 V      | Input midpoint voltage               |
| 9.  | Vout Min          | -4.0 V     | Actual Output minimum voltage        |
| 10. | Vout Max          | 4.0 V      | Actual Output maximum voltage        |
| 11. | Vout pk-pk        | 8.0 V      | Actual Output peak-to-peak voltage   |
| 12. | Vout Midpoint     | 0.0 V      | Actual Output midpoint voltage       |
| 13. | Voltage Reference | 0.0 V      | Actual Voltage reference             |
| 14. | Temp Minimum      | 0.0 degC   | Minimum circuit temperature          |
| 15. | Temp Maximum      | 70.0 degC  | Maximum circuit temperature          |

## Performance Values - Operating Frequency Values

| #  | Name                  | Value         | Description                      |
|----|-----------------------|---------------|----------------------------------|
| 1. | Amplifier GBWP        | 2.0 MHz       | Amplifier Gain Bandwidth Product |
| 2. | Amplifier Slew Rate   | 800.0 mV/usec | Amplifier Slew Rate              |
| 3. | Closed Loop Bandwidth | 1.0 MHz       | System Bandwidth                 |
| 4. | FPBW                  | 12.732 mKHz   | Circuit Full-power Bandwidth     |

## Performance Values - Power Requirements

| #  | Name | Value | Description                   |
|----|------|-------|-------------------------------|
| 1. | Vcc  | 5.0 V | Positive nominal power supply |

| #  | Name        | Value   | Description                                      |
|----|-------------|---------|--------------------------------------------------|
| 2. | Vee         | -5.0 V  | Negative nominal power supply                    |
| 3. | Vsupply Max | 36.0 V  | Operational amplifier maximum power supply range |
| 4. | Vsupply Min | 4.0 V   | Operational amplifier minimum power supply range |
| 5. | Power IC    | 3.85 mW | Operational amplifier nominal power dissipation  |

### Performance Values - Vos / Ib Vout error

| #  | Name                 | Value   | Description                                             |
|----|----------------------|---------|---------------------------------------------------------|
| 1. | Vout Vos(max) error  | 50.0 mV | 25 deg C maximum offset voltage error at the output     |
| 2. | Vout Ib(max) error   | 0.0 mV  | 25 deg C maximum input bias current error at the output |
| 3. | Tot error RSS        | 50.0 mV | Root sum square of output offset errors                 |
| 4. | Tot error Worst Case | 50.0 mV | Sum of output offset errors                             |

### Performance Values - Vout Gain vs. Resistor Tolerance

No calculated performance values for this design.

### Performance Values - Error Over Temperature

| #  | Name                       | Value   | Description                                                      |
|----|----------------------------|---------|------------------------------------------------------------------|
| 1. | Vos at maximum temperature | 14.7 mV | Maximum amplifier offset voltage drift error at high temperature |
| 2. | Vos at minimum temperature | 13.5 mV | Maximum amplifier offset voltage drift error at low temperature  |

### Performance Values - Total Output Noise

| #  | Name        | Value         | Description                                        |
|----|-------------|---------------|----------------------------------------------------|
| 1. | Noise (rms) | 29.557 uVrms  | Total output rms noise error                       |
| 2. | Noise (p-p) | 195.073 uVp-p | Total peak-to-peak output noise (3 sigma)          |
| 3. | SNR         | 99.62 dB      | Operational amplifier output Signal to Noise ratio |

### Design Assistance

1. **OPA2188** Product Folder : <http://www.ti.com/product/OPA2188> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

**You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.**

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).