


WEBENCH® Design Report



Design : 3893481/3 LMR14020SDDAR
LMR14020SDDAR 20.0V-30.0V to 5.00V @ 2.0001874999999996A

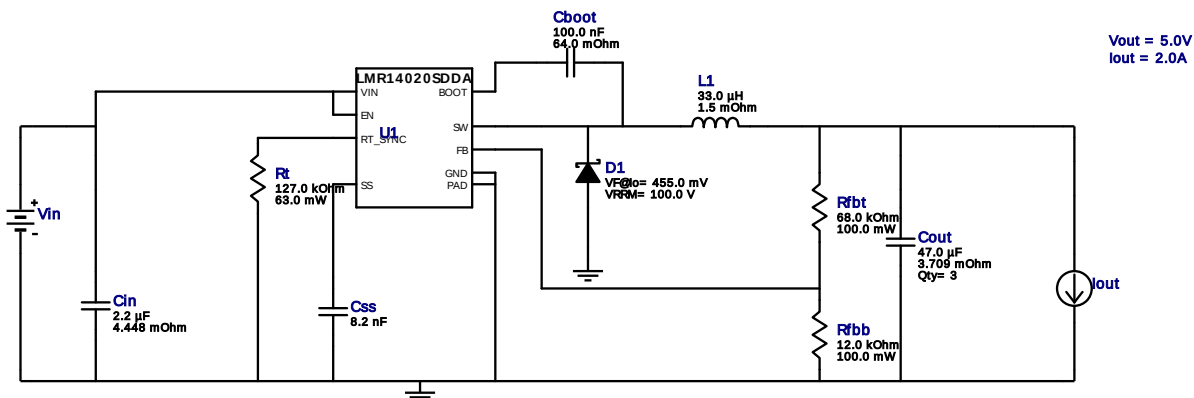

My Comments


4

Electrical BOM


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	Kemet	C0805C104K5RACTU Series= X7R	Cap= 100.0 nF ESR= 64.0 mOhm VDC= 50.0 V IRMS= 1.64 A	1	\$0.01	 0805 7 mm ²
2.	Cin	MuRata	GRM31CR71H225KA88L Series= X7R	Cap= 2.2 uF ESR= 4.448 mOhm VDC= 50.0 V IRMS= 2.2252 A	1	\$0.05	 1206_190 11 mm ²
3.	Cout	MuRata	GRM31CR61A476KE15L Series= X5R	Cap= 47.0 uF ESR= 3.709 mOhm VDC= 10.0 V IRMS= 4.2862 A	3	\$0.15	 1206_190 11 mm ²
4.	Css	MuRata	GRM155R71C822KA01D Series= X7R	Cap= 8.2 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
5.	D1	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
6.	L1	Coilcraft	SER2915L-333KL	L= 33.0 uH DCR= 1.5 mOhm	1	\$1.88	 SER2915L 652 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
7.	Rfbb	Yageo America	RC0603FR-0712KL Series= ?	Res= 12.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
8.	Rfbt	Yageo America	RC0603FR-0768KL Series= ?	Res= 68.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
9.	Rt	Vishay-Dale	CRCW0402127KFKED Series= CRCW..e3	Res= 127.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
10.	U1	Texas Instruments	LMR14020SDDAR	Switcher	1	\$1.46	 DDA0008E_N 57 mm ²


IC Tj

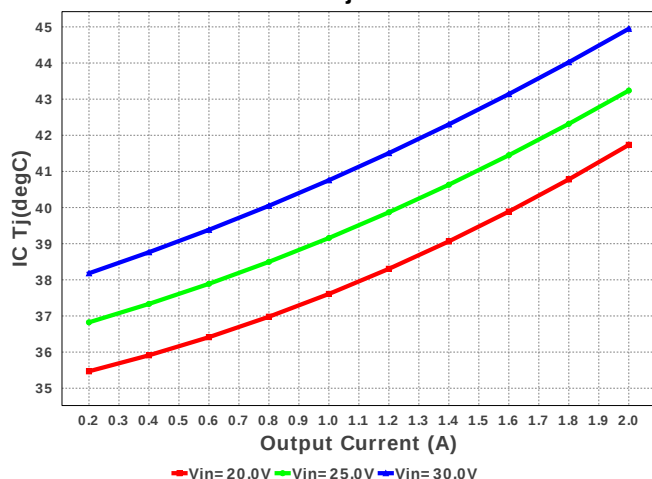


Duty Cycle






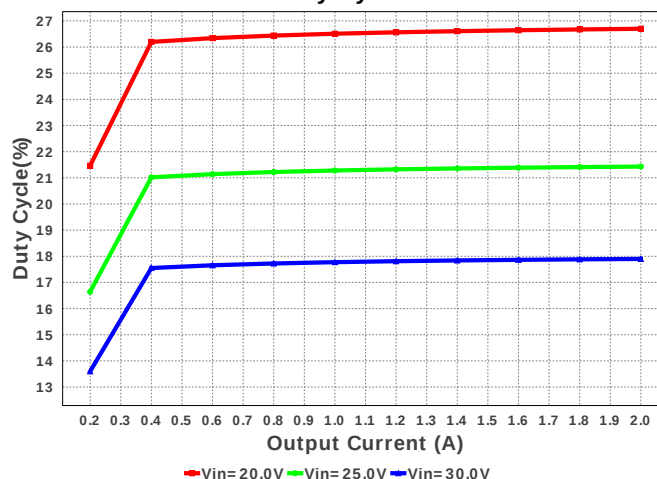








Cin IRMS





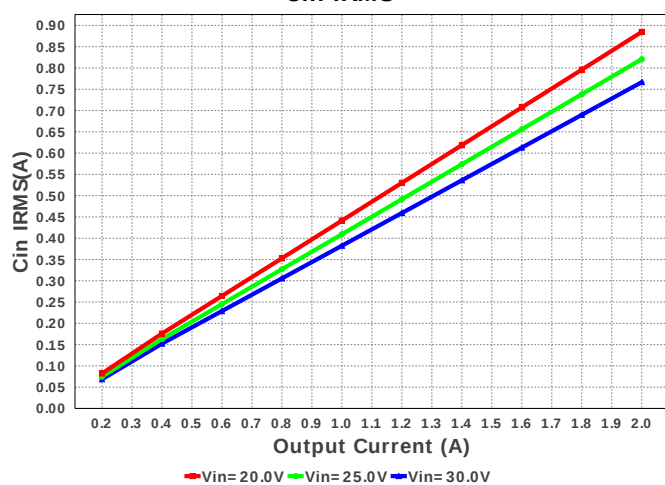


IC Ipk

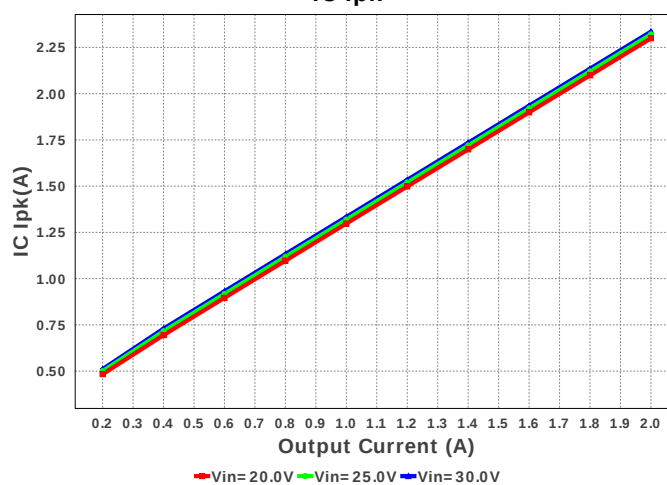

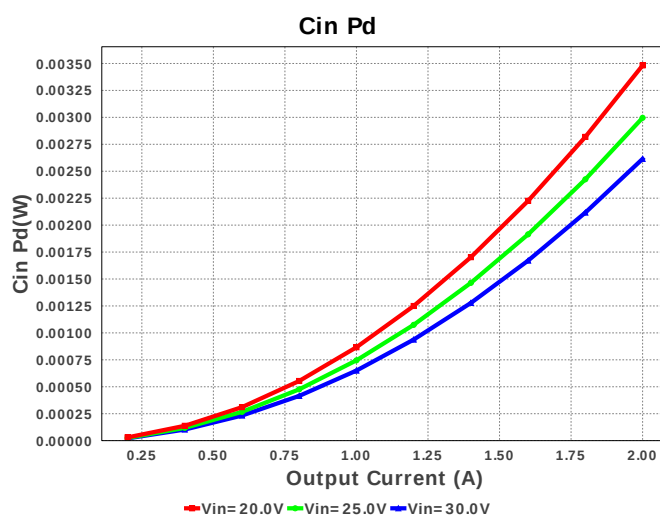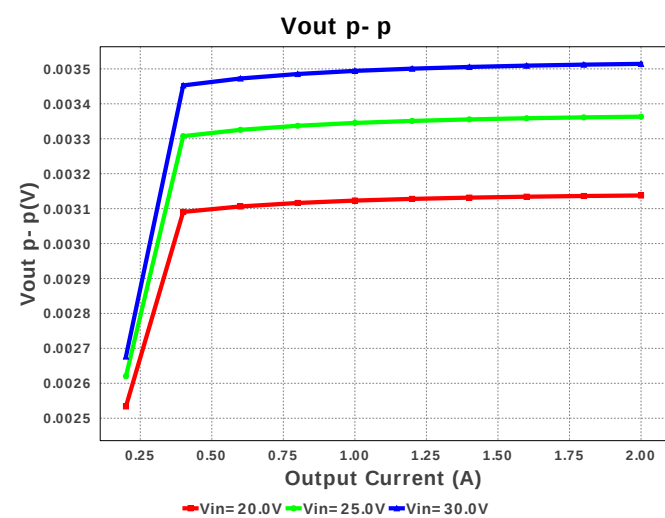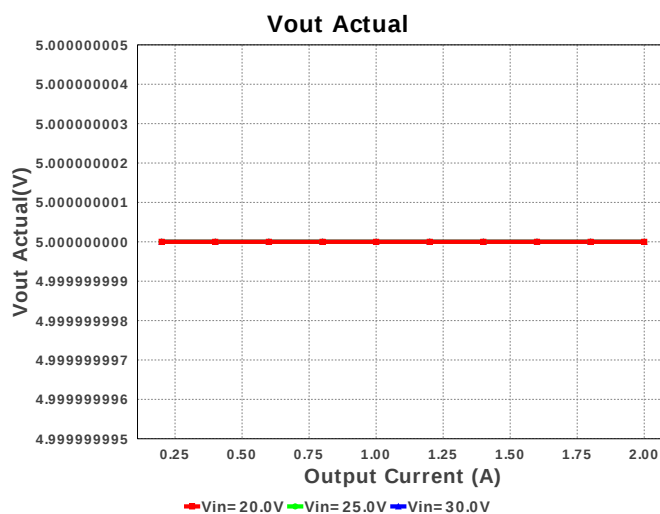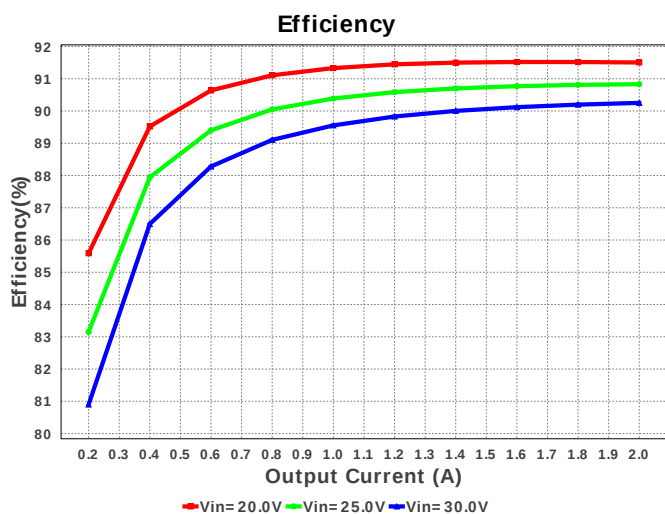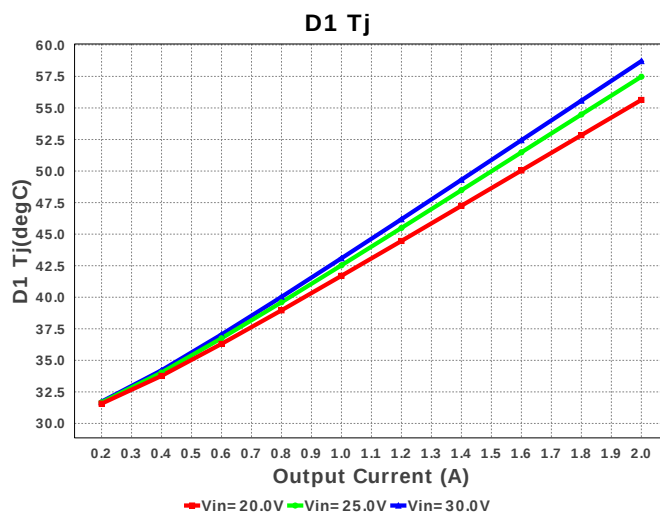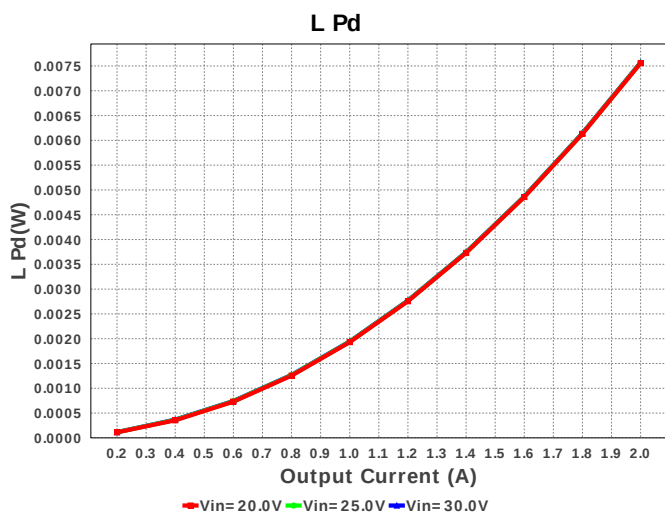

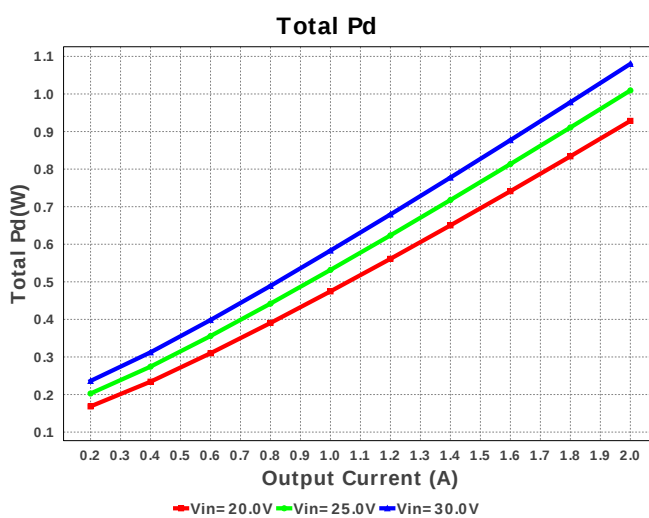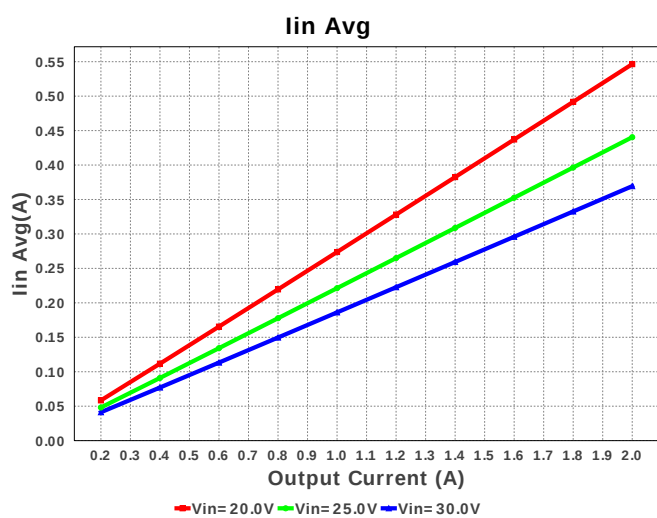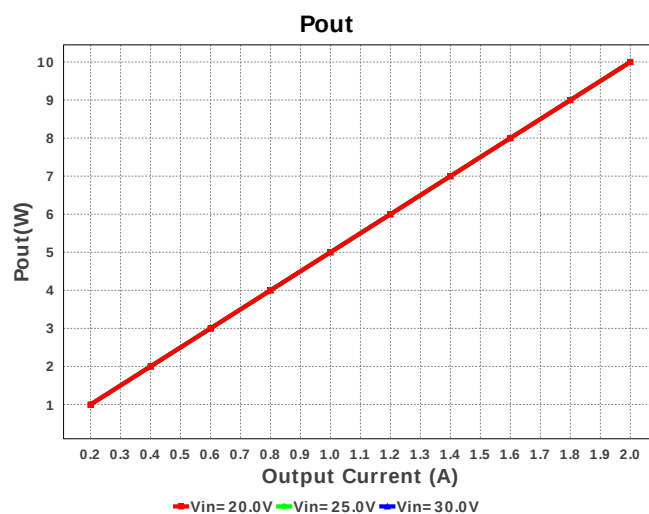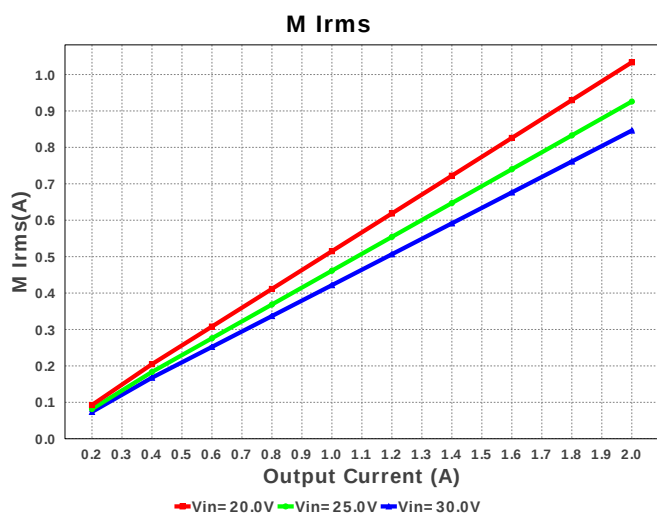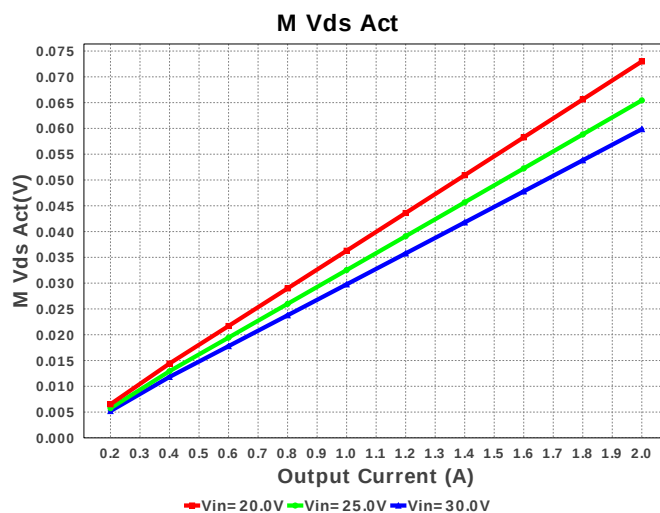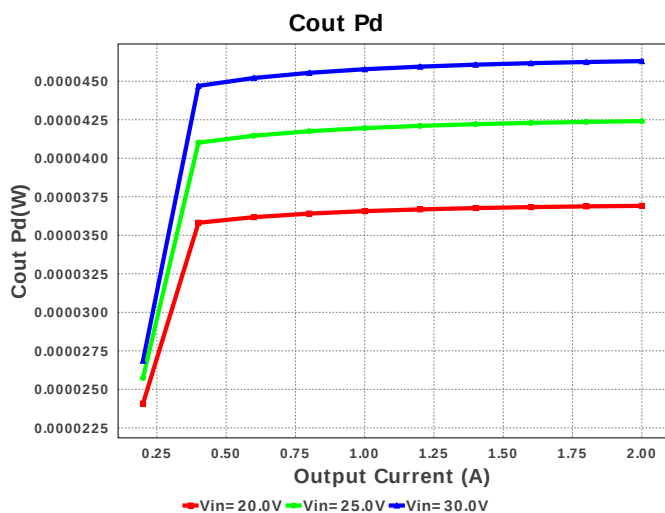

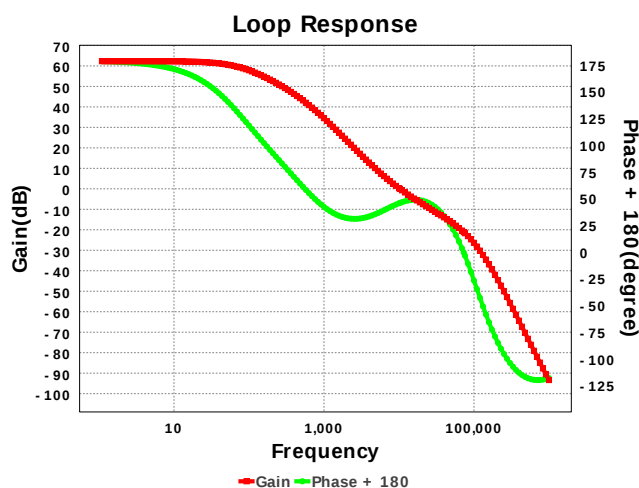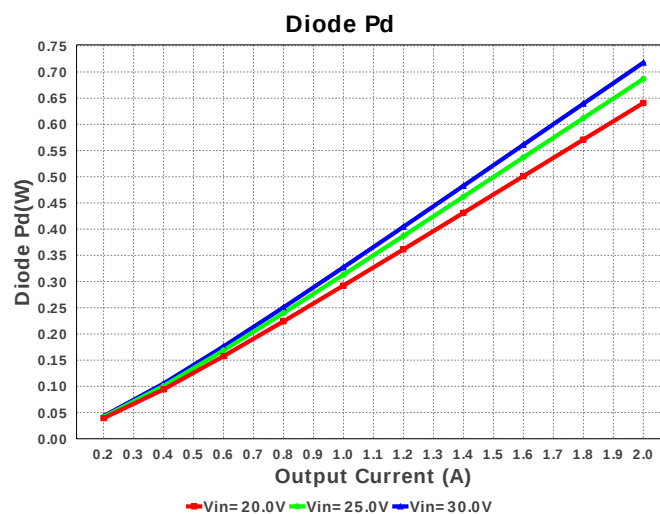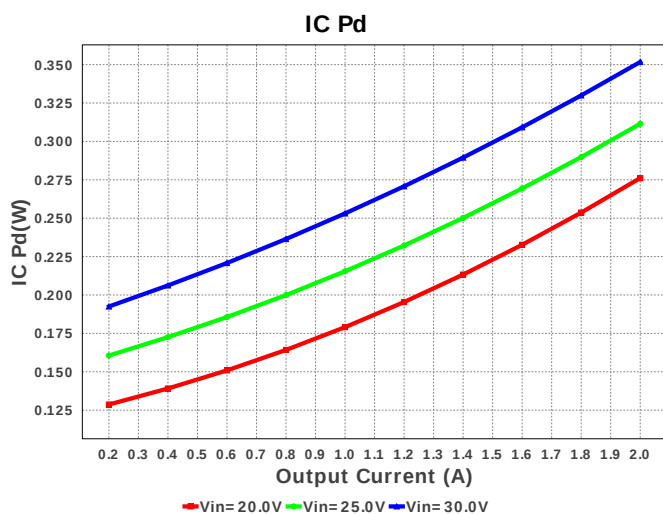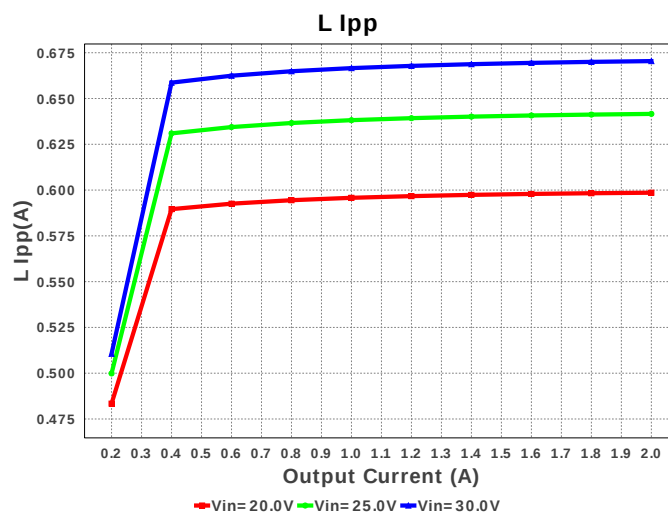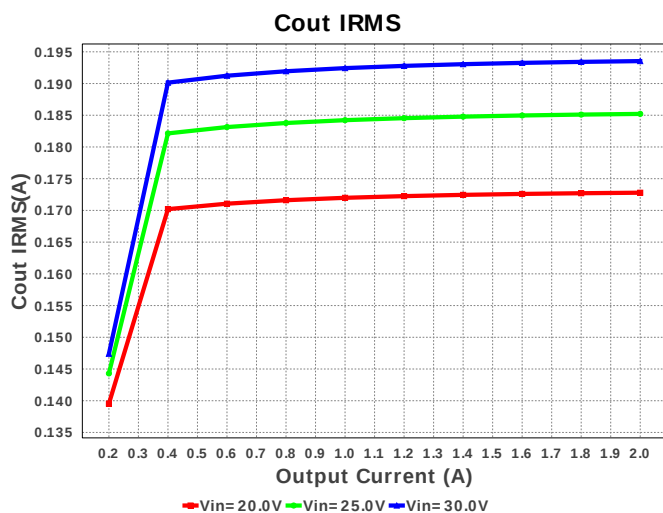

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	766.707 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	193.535 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	2.335 A	Current	Peak switch current in IC
4.	Iin Avg	369.35 mA	Current	Average input current
5.	L Ipp	670.43 mA	Current	Peak-to-peak inductor ripple current
6.	M1 Irms	846.163 mA	Current	Q lavg
7.	BOM Count	12	General	Total Design BOM count
8.	FootPrint	985.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	201.769 kHz	General	Switching frequency
10.	IC Tolerance	18.0 mV	General	IC Feedback Tolerance
11.	M Vds Act	59.85 mV	General	Voltage drop across the MosFET

#	Name	Value	Category	Description
12.	Pout	10.0 W	General	Total output power
13.	Total BOM	\$5.22	General	Total BOM Cost
14.	D1 Tj	58.713 degC	Op_Point	D1 junction temperature
15.	Vout Actual	5.0 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
16.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
17.	Cross Freq	10.301 kHz	Op_point	Bode plot crossover frequency
18.	Duty Cycle	17.899 %	Op_point	Duty cycle
19.	Efficiency	90.252 %	Op_point	Steady state efficiency
20.	IC Tj	44.772 degC	Op_point	IC junction temperature
21.	ICThetaJA	42.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
22.	IOUT_OP	2.0 A	Op_point	Iout operating point
23.	Phase Marg	46.514 deg	Op_point	Bode Plot Phase Margin
24.	VIN_OP	30.0 V	Op_point	Vin operating point
25.	Vout p-p	3.514 mV	Op_point	Peak-to-peak output ripple voltage
26.	Cin Pd	2.615 mW	Power	Input capacitor power dissipation
27.	Cout Pd	46.308 µW	Power	Output capacitor power dissipation
28.	Diode Pd	717.815 mW	Power	Diode power dissipation
29.	IC Pd	351.709 mW	Power	IC power dissipation
30.	L Pd	7.571 mW	Power	Inductor power dissipation
31.	Total Pd	1.08 W	Power	Total Power Dissipation
32.	Vout Tolerance	4.158 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	SoftStart	2.0 ms	Soft Start Time (ms)
3.	VinMax	30.0	Maximum input voltage
4.	VinMin	20.0	Minimum input voltage
5.	Vout	5.0	Output Voltage
6.	base_pn	LMR14020S	Base Product Number
7.	source	DC	Input Source Type
8.	Ta	30.0	Ambient temperature
9.	UserFsw	982.032 k	Customer Selected Frequency

Design Assistance

1. **LMR14020S** Product Folder : <http://www.ti.com/product/LMR14020> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).