
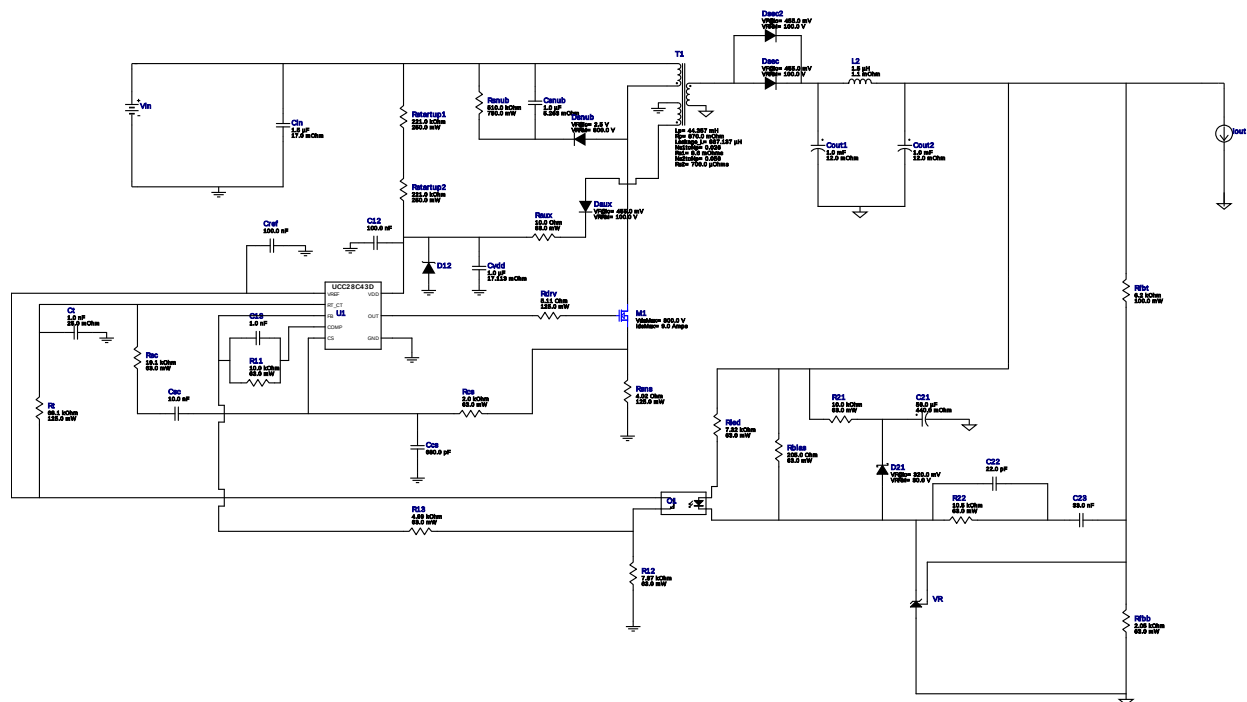









Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C12	MuRata	GRM155R61C104KA88D Series= X5R	Cap= 100.0 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
2.	C13	MuRata	GRM033R71C102KA01D Series= X7R	Cap= 1.0 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²
3.	C21	Nichicon	UUD1A560MCL1GS Series= uD	Cap= 56.0 uF ESR= 440.0 mOhm VDC= 10.0 V IRMS= 230.0 mA	1	\$0.11	 SM_RADIAL_6.3AMM 80 mm ²
4.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
5.	C23	MuRata	GRM033R60J333KE01D Series= X5R	Cap= 33.0 nF VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²
6.	Ccs	MuRata	GRM033R71C681KA01D Series= X7R	Cap= 680.0 pF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
7.	Cin	TDK	B32923C3155M Series= B32923	Cap= 1.5 uF ESR= 17.0 mOhm VDC= 630.0 V IRMS= 146.0 mA	1	\$0.19	 B32923_22mm 399 mm ²
8.	Cout1	Panasonic	16SVPF1000M Series= ?	Cap= 1.0 mF ESR= 12.0 mOhm VDC= 16.0 V IRMS= 5.4 A	1	\$0.74	 CAPSMT_62_F12 151 mm ²
9.	Cout2	Panasonic	16SVPF1000M Series= ?	Cap= 1.0 mF ESR= 12.0 mOhm VDC= 16.0 V IRMS= 5.4 A	1	\$0.74	 CAPSMT_62_F12 151 mm ²
10.	Cref	MuRata	GRM155R61C104KA88D Series= X5R	Cap= 100.0 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
11.	Csc	MuRata	GRM033R60J103KA01D Series= X5R	Cap= 10.0 nF VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²
12.	Csnub	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
13.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
14.	Cvdd	MuRata	GRM188R61E105KA12D Series= X5R	Cap= 1.0 uF ESR= 17.113 mOhm VDC= 25.0 V IRMS= 979.39 mA	1	\$0.01	 0603 5 mm ²
15.	D12	Diodes Inc.	DFLZ18-7	Zener	1	\$0.13	 PowerDI123 13 mm ²
16.	D21	Toshiba	CMS06	VF@Io= 320.0 mV VRRM= 30.0 V	1	\$0.19	 M-FLAT 19 mm ²
17.	Daux	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
18.	Dsec	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
19.	Dsec2	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
20.	Dsnub	Bourns	CD1408-FU1800	VF@Io= 2.5 V VRRM= 800.0 V	1	\$0.13	 Diode_1408 13 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
21. L2	Coilcraft	SER1590-152MLB	L= 1.5 µH DCR= 1.1 mOhm	1	\$1.12	 SER1590 324 mm ²	
22. M1	STMicroelectronics	STF10N80K5	VdsMax= 800.0 V IdsMax= 9.0 Amps	1	\$2.52	 TO-220FP 79 mm ²	
23. O1	Vishay-Semiconductor	TCMT1109	Optocoupler	1	\$0.21	 SOP-4 44 mm ²	
24. R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
25. R12	Vishay-Dale	CRCW04027K87FKED Series= CRCW..e3	Res= 7.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
26. R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
27. R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
28. R22	Vishay-Dale	CRCW040210K5FKED Series= CRCW..e3	Res= 10.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
29. Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
30. Rbias	Vishay-Dale	CRCW0402205RFBKED Series= CRCW..e3	Res= 205.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
31. Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
32. Rdrv	Vishay-Dale	CRCW08055R11FKEA Series= CRCW..e3	Res= 5.11 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²	
33. Rfbb	Vishay-Dale	CRCW04022K05FKED Series= CRCW..e3	Res= 2.05 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
34. Rfbt	Yageo America	RC0603FR-076K2L Series= ?	Res= 6.2 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²	
35. Rled	Vishay-Dale	CRCW04027K32FKED Series= CRCW..e3	Res= 7.32 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
36. Rsc	Vishay-Dale	CRCW040219K1FKED Series= CRCW..e3	Res= 19.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²	
37. Rsns	Vishay-Dale	CRCW08054R02FKEA Series= CRCW..e3	Res= 4.02 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²	
38. Rsnub	Vishay-Dale	CRCW2010510KFKEF Series= ?	Res= 510.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²	
39. Rstartup1	Panasonic	ERJ-8ENF2213V Series= ERJ-8E	Res= 221.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²	







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
40.	Rstartup2	Panasonic	ERJ-8ENF2213V Series= ERJ-8E	Res= 221.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
41.	Rt	Panasonic	ERJ-6ENF6812V Series= ERJ-6E	Res= 68.1 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
42.	T1	CUSTOM	CUSTOM	Lp= 44.357 mH Rp= 870.0 mOhm Leakage_L= 887.137 μH Ns1toNp= 0.026 Rs1= 8.6 mOhms Ns2toNp= 0.056 Rs2= 700.0 μOhms	1	NA	CUSTOM 0 mm ²
43.	U1	Texas Instruments	UCC28C43DR	Switcher	1	\$0.60	 D0008A 57 mm ²
44.	VR	Texas Instruments	LMV431CM5/NOPB	Voltage References	1	\$0.16	 R-PDSO-G3 16 mm ²





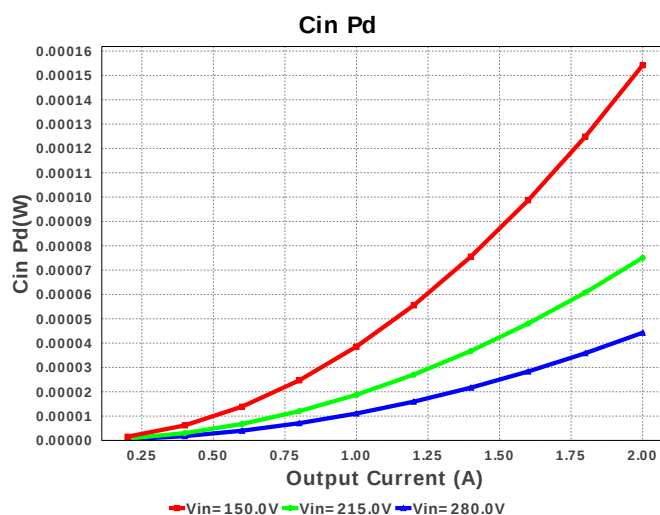
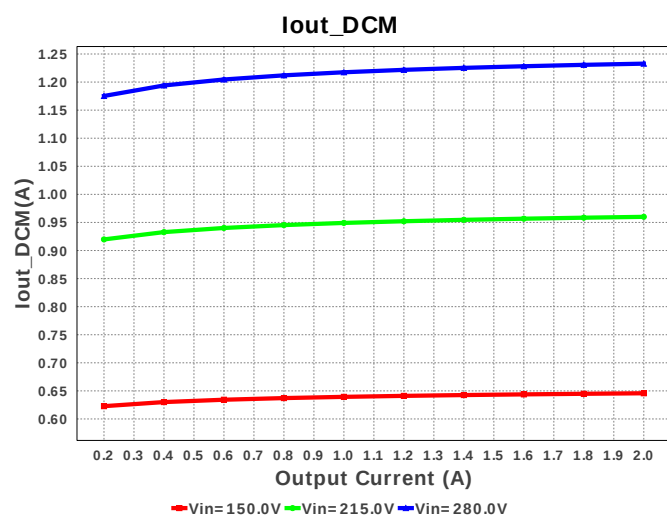


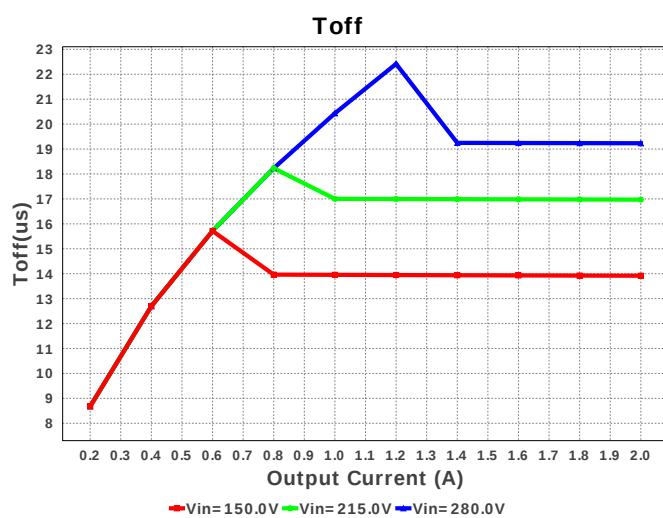
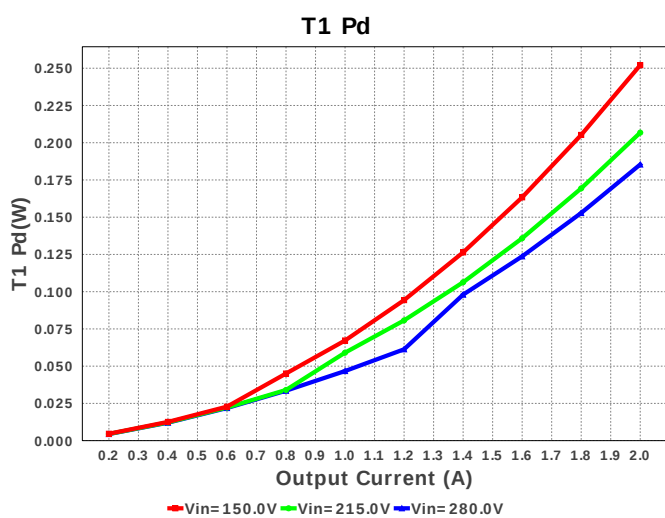
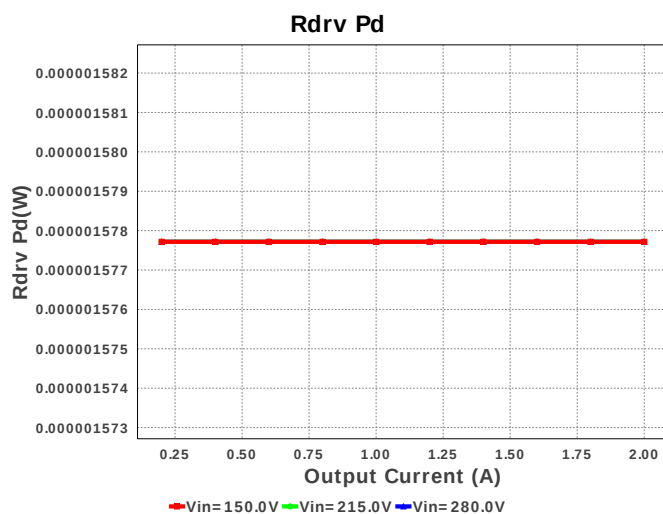
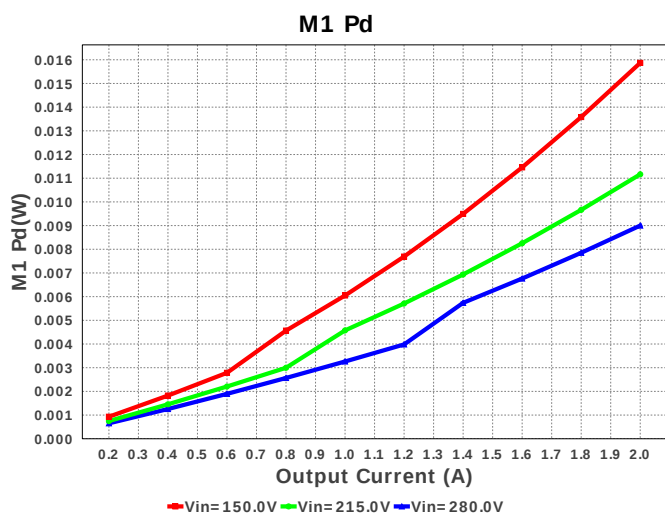
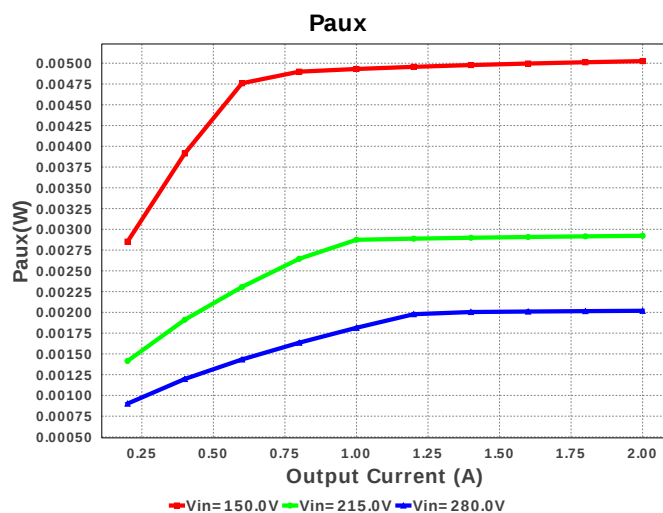
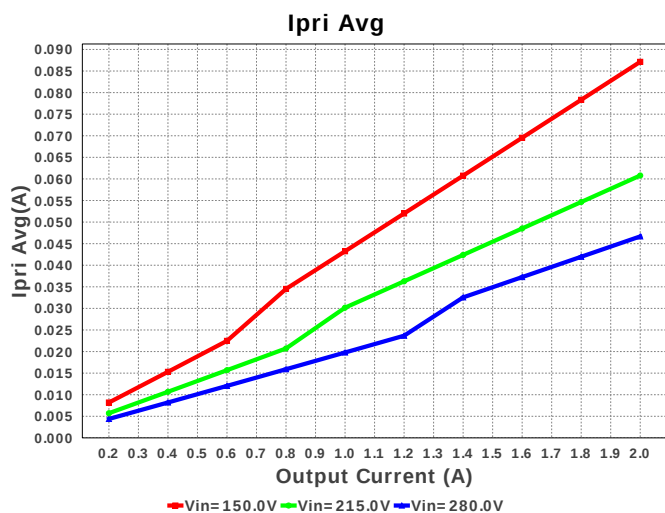


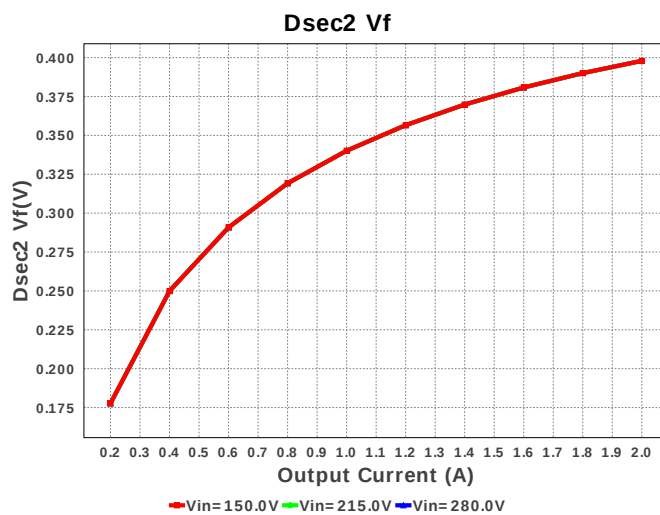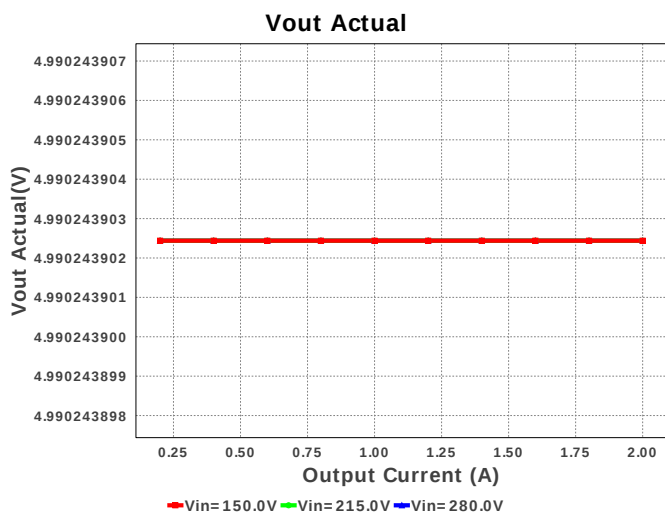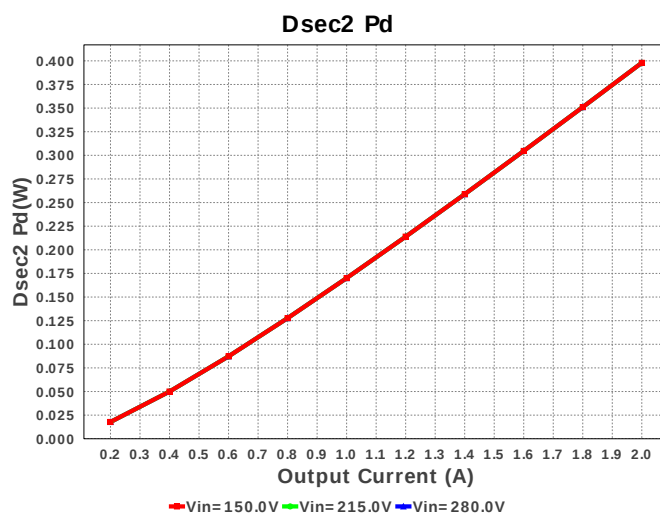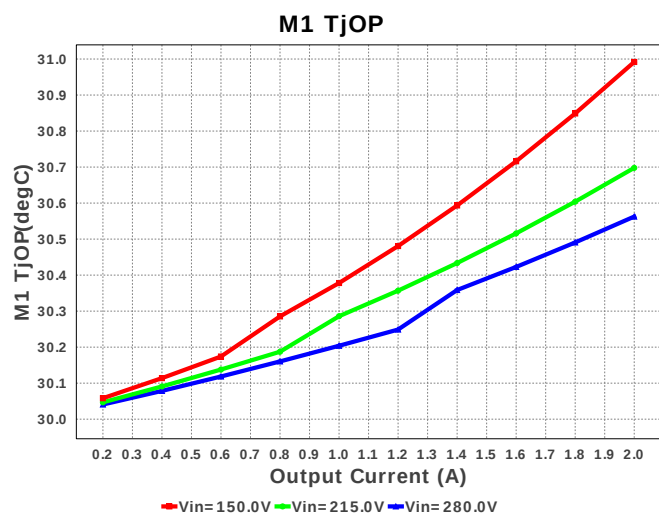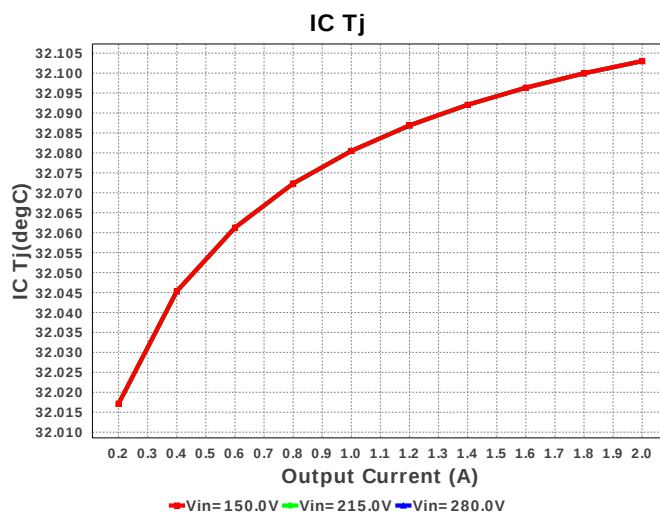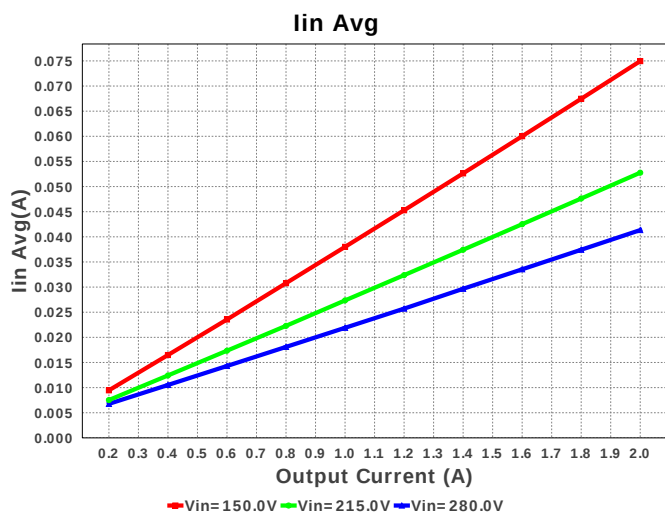


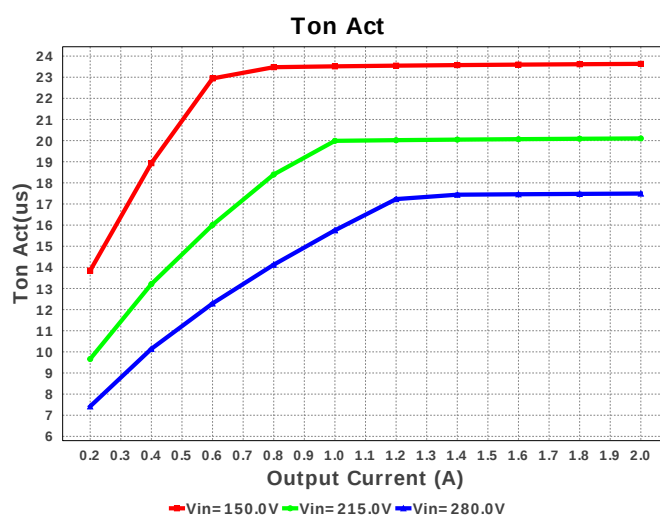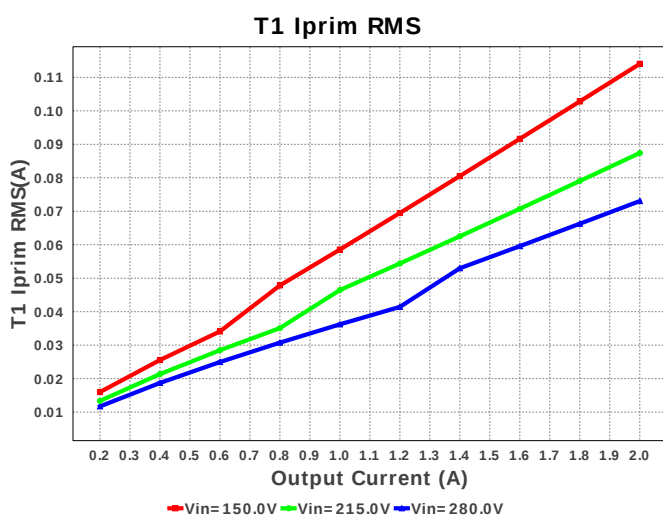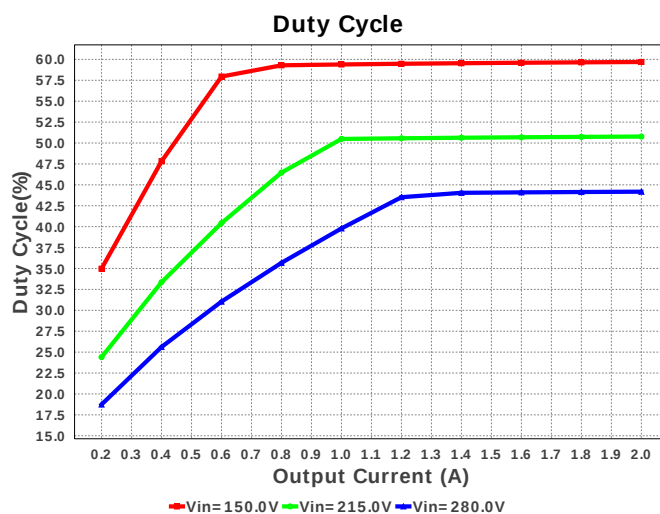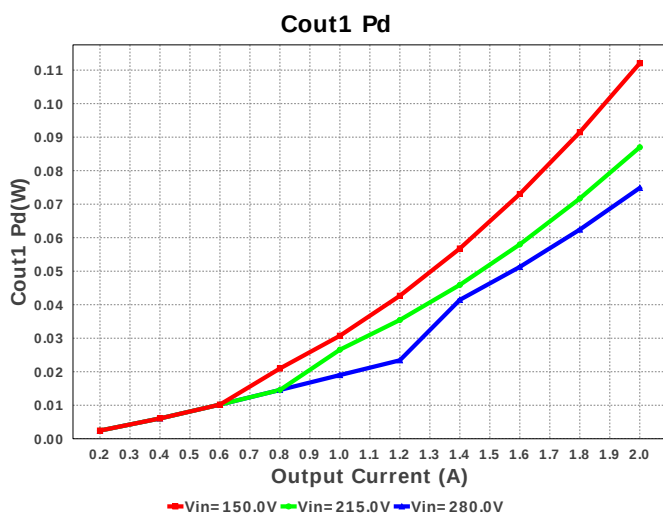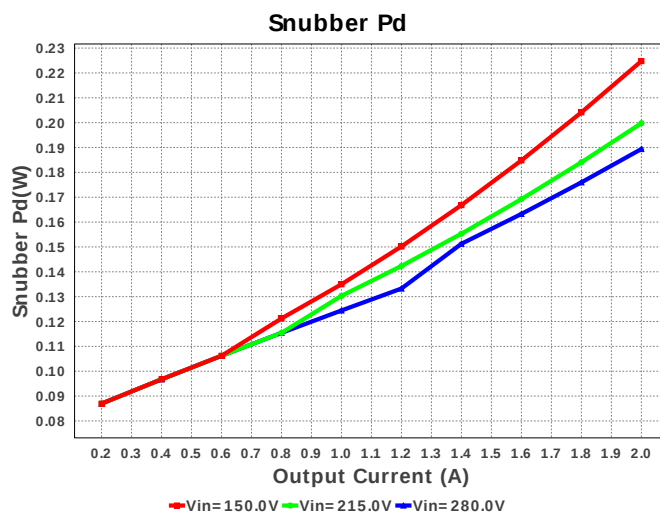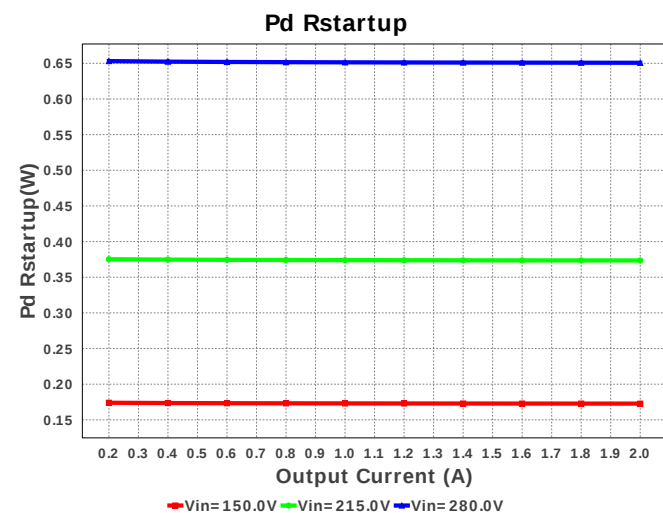

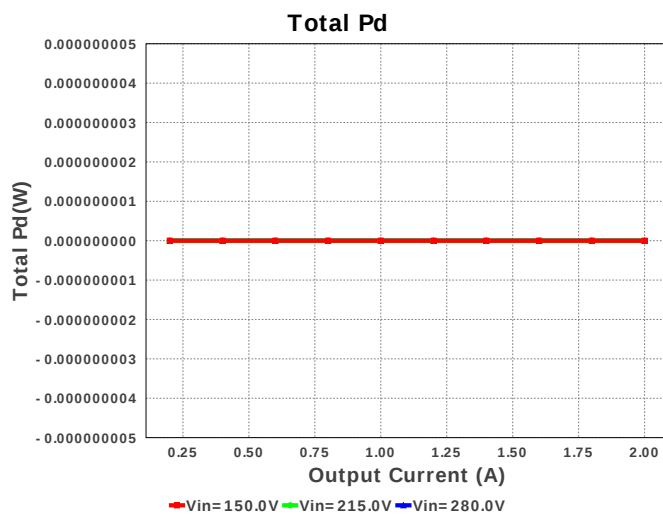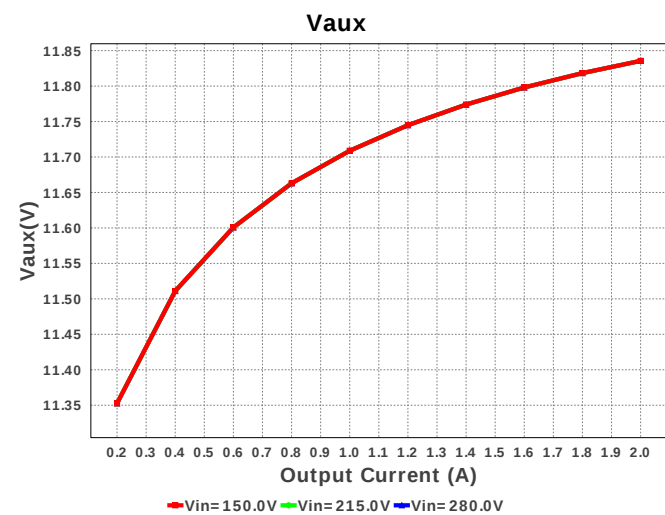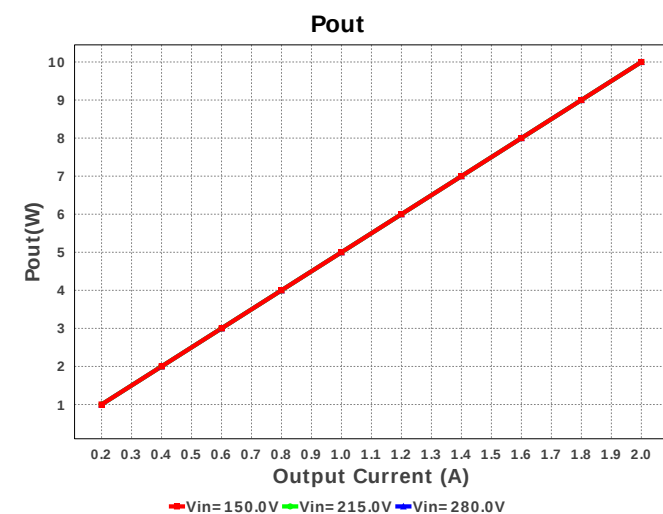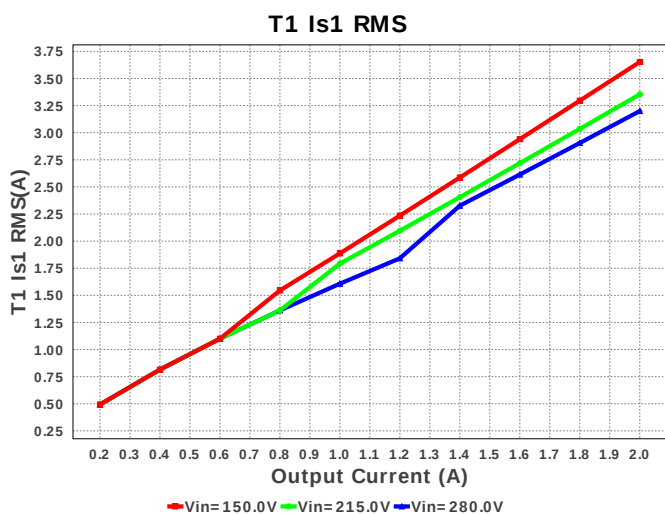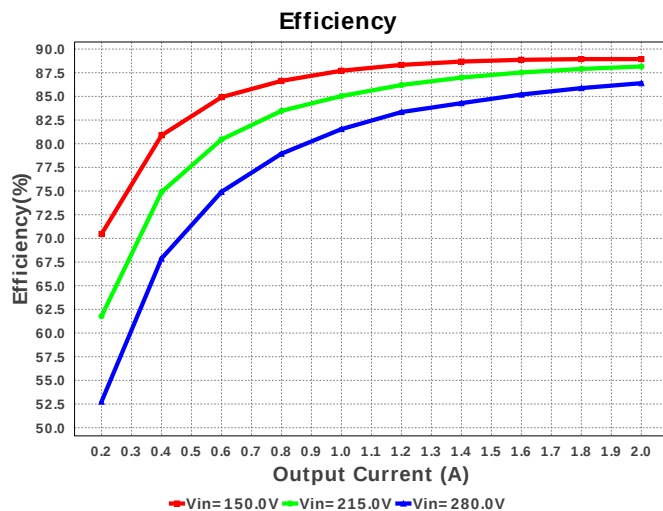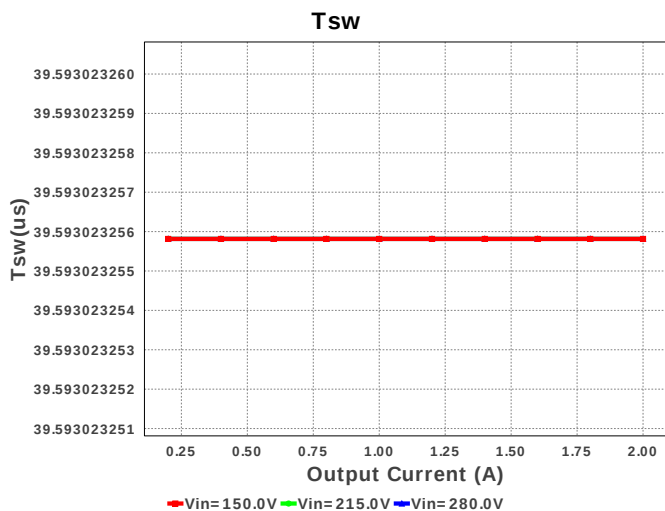

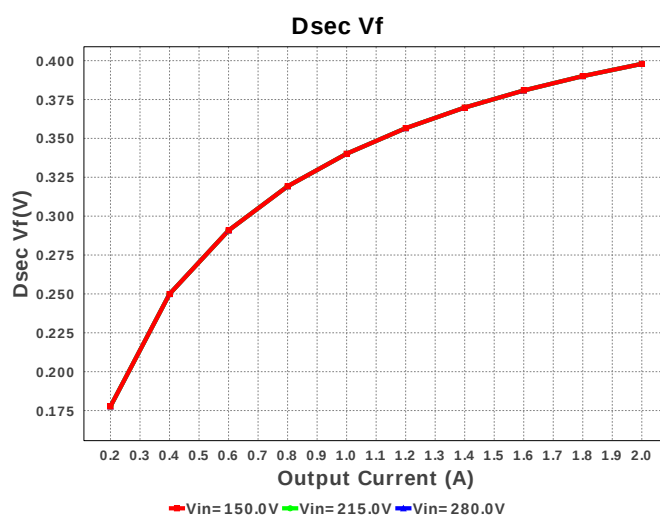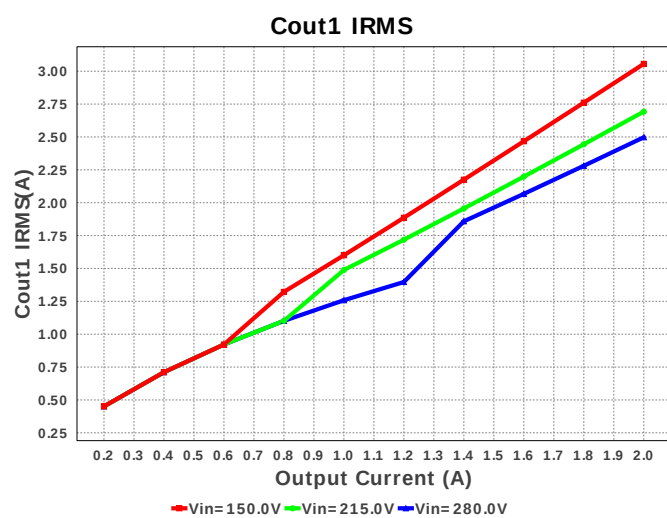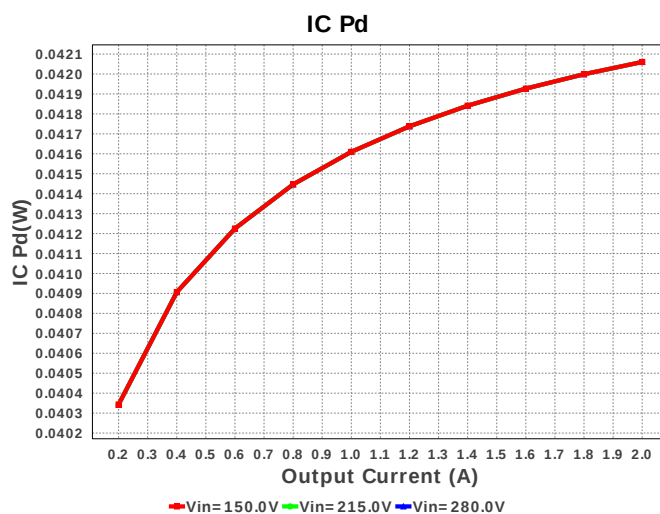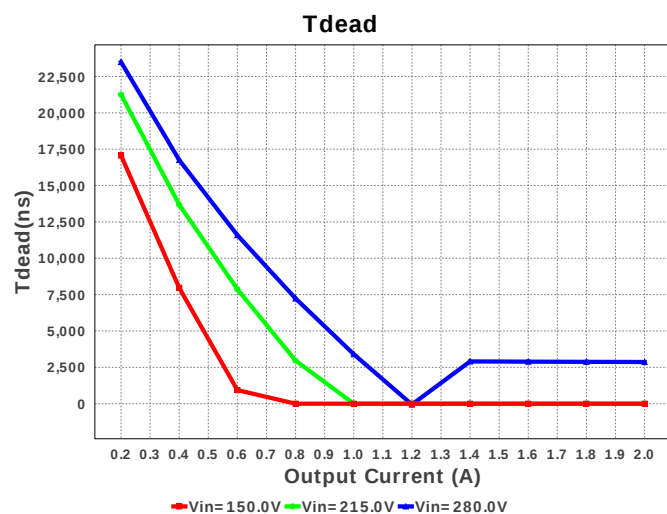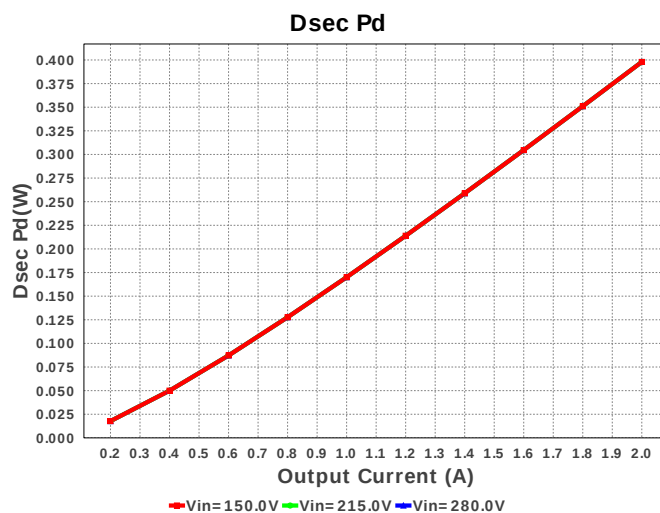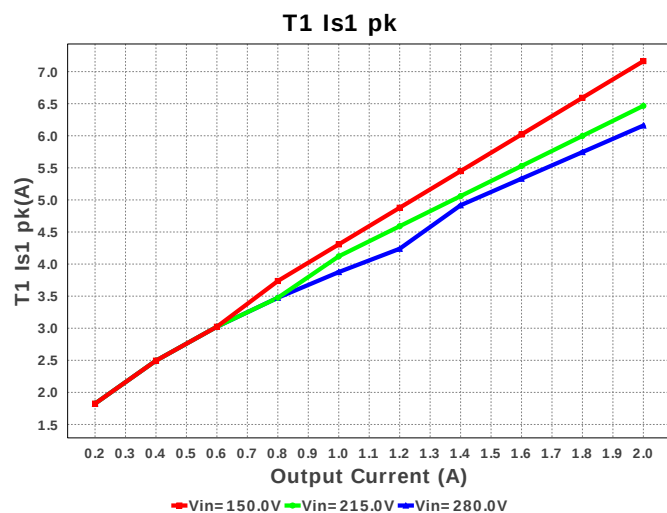

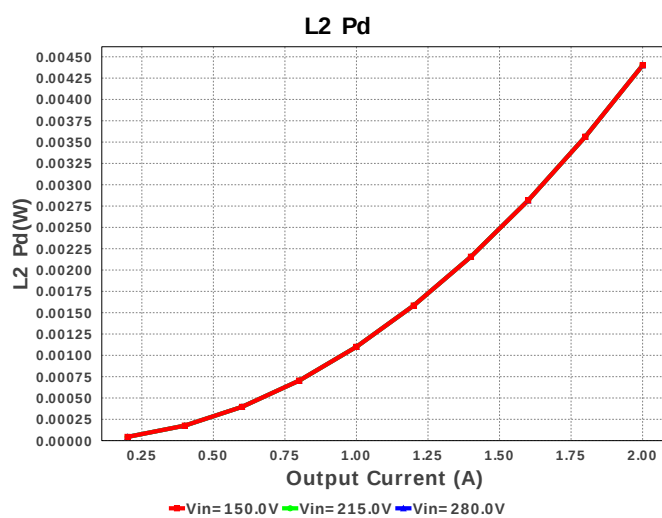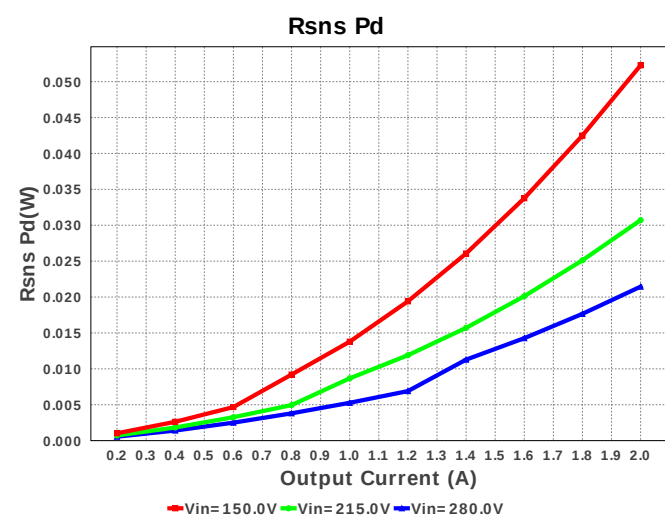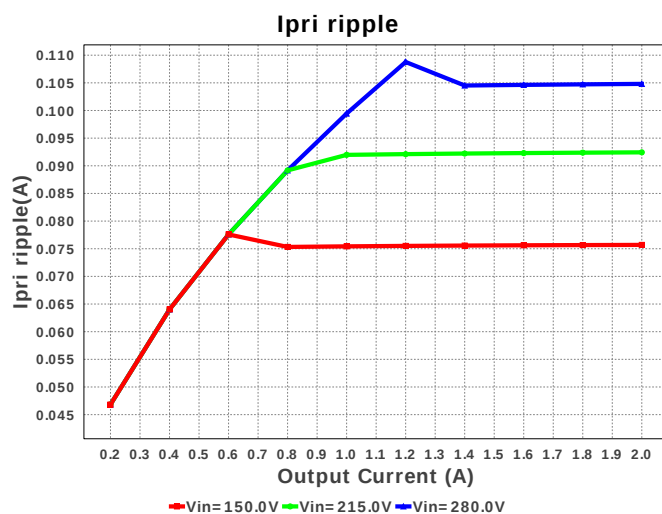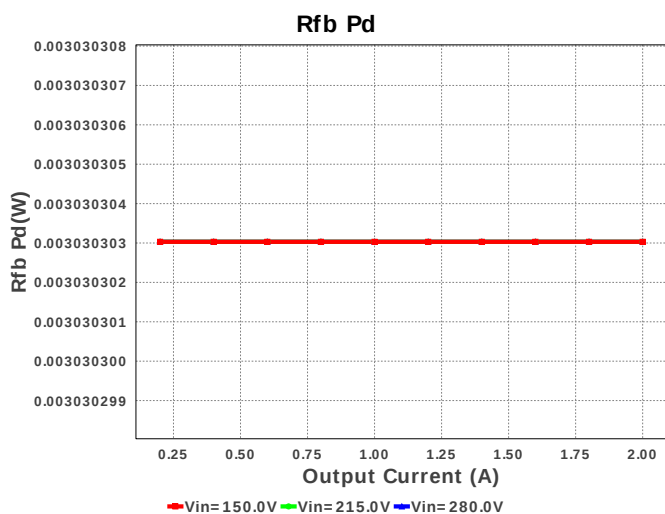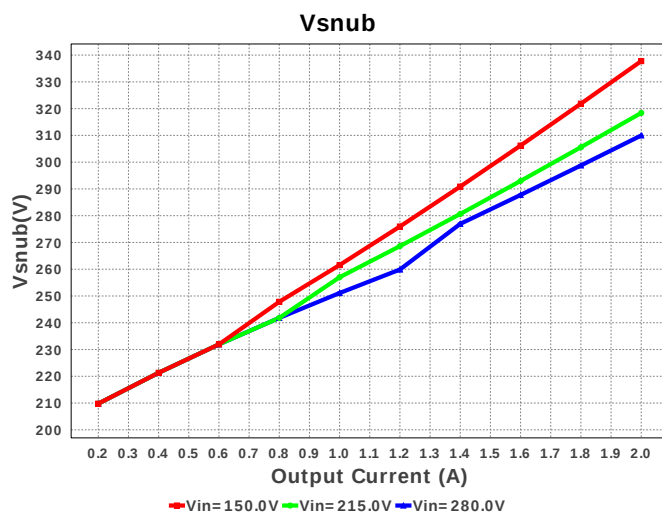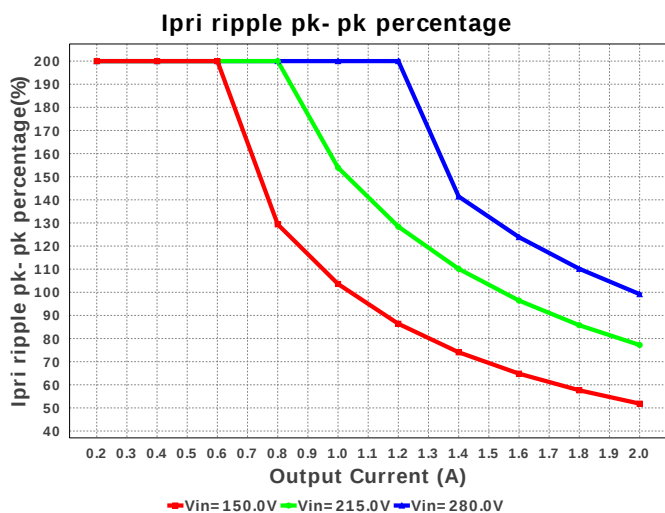

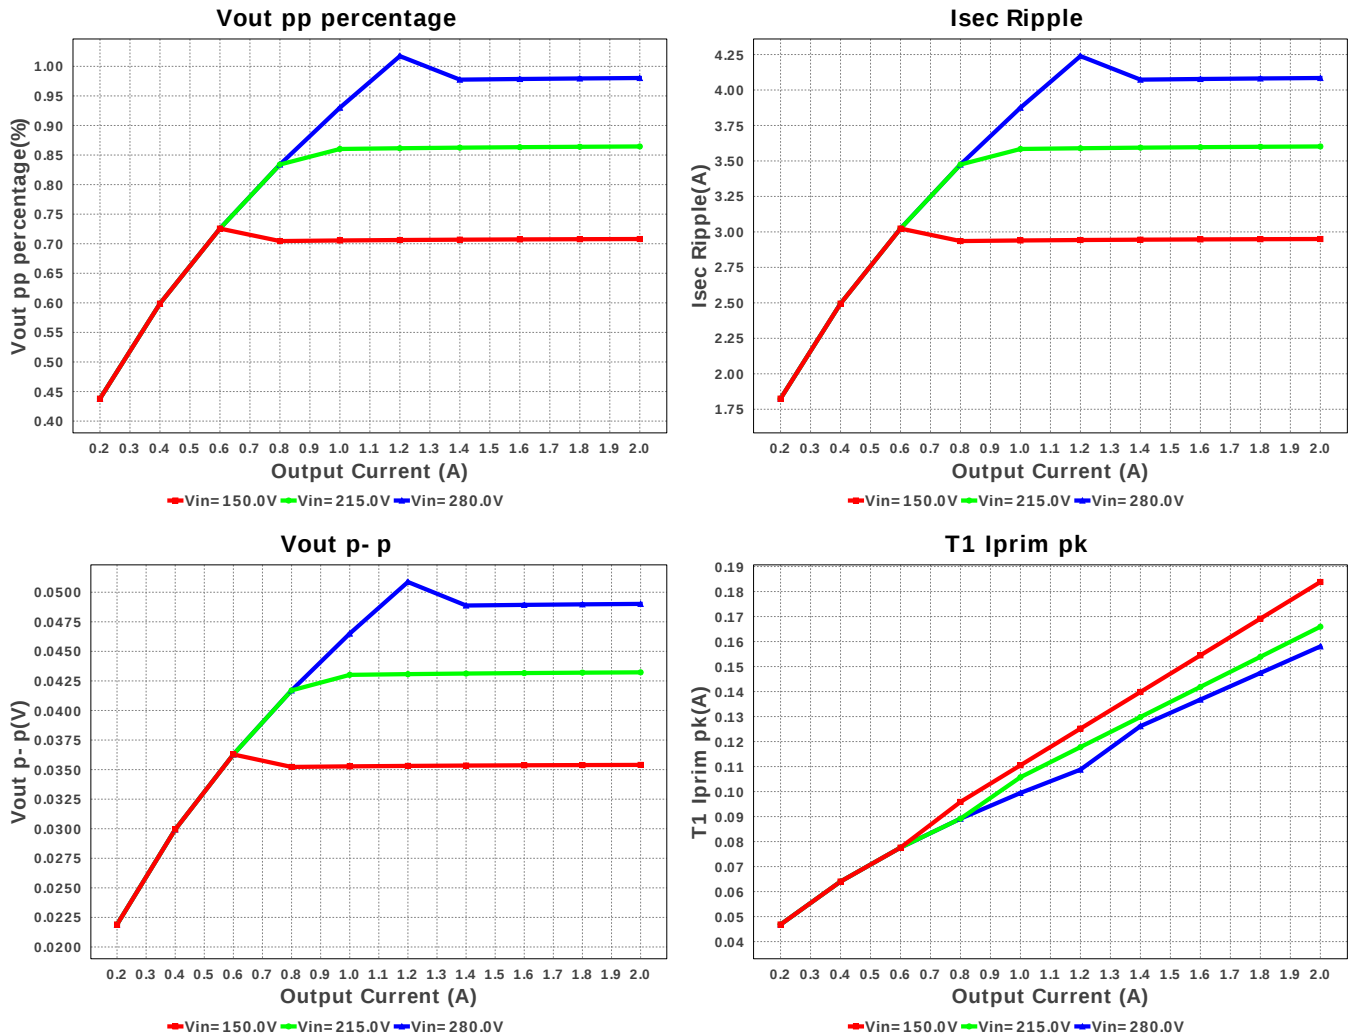

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	3.056 A	Current	Output capacitor1 RMS ripple current
2.	Iin Avg	74.959 mA	Current	Average input current
3.	Iout_DCM	645.742 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	87.13 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	75.693 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	51.853 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	2.95 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	114.035 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	183.823 mA	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	3.652 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	7.164 A	Current	Transformer Secondary1 Peak Current
12.	BOM Count	44	General	Total Design BOM count
13.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
14.	Dsec Vf	397.923 mV	General	Effective Forward Voltage Drop at the Operating Current
15.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
16.	Dsec2 Vf	397.923 mV	General	Effective Forward Voltage Drop at the Operating Current
17.	Dsnub trr	35.0 ns	General	Snubber Diode Reverse Recovery Time
18.	FootPrint	2.179 k mm ²	General	Total Foot Print Area of BOM components
19.	Frequency	25.257 kHz	General	Switching frequency
20.	Pout	10.0 W	General	Total output power
21.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
22.	Toff	13.92 us	General	Approximate Converter Off Time
23.	Ton Act	23.632 us	General	Approximate Converter On Time
24.	Total BOM	\$0.0	General	Total BOM Cost
25.	Tsw	39.593 us	General	Switching Time Period
26.	Vaux	11.836 V	General	Auxiliary Voltage
27.	Vsnub	337.758 V	General	Voltage Across the Snubber
28.	Vout Actual	4.99 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
29.	Vout OP	5.0 V	Op_Point	Operational Output Voltage

#	Name	Value	Category	Description
30.	Duty Cycle	59.688 %	Op_point	Duty cycle
31.	Efficiency	88.937 %	Op_point	Steady state efficiency
32.	IC Tj	32.103 degC	Op_point	IC junction temperature
33.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
34.	IOUT_OP	2.0 A	Op_point	Iout operating point
35.	M1 TjOP	30.992 degC	Op_point	M1 MOSFET junction temperature
36.	Vout p-p	35.398 mV	Op_point	Peak-to-peak output ripple voltage
37.	Cin Pd	154.195 μ W	Power	Input capacitor power dissipation
38.	Cout1 Pd	112.059 mW	Power	Output capacitor1 power dissipation
39.	Dsec Pd	397.923 mW	Power	Secondary Diode Power Dissipation
40.	Dsec2 Pd	397.923 mW	Power	Secondary Diode Power Dissipation
41.	IC Pd	42.06 mW	Power	IC power dissipation
42.	L2 Pd	4.4 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
43.	M1 Pd	15.869 mW	Power	M1 MOSFET total power dissipation
44.	Paux	5.026 mW	Power	Power Dissipation in Raux and Daux
45.	Pd Rstartup	172.739 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
46.	Rdrv Pd	1.578 μ W	Power	Power Dissipation in Gate Drive Resistor
47.	Rfb Pd	3.03 mW	Power	Rfb Power Dissipation
48.	Rsns Pd	52.276 mW	Power	Current Limit Sense Resistor Power Dissipation
49.	Snubber Pd	224.768 mW	Power	Snubber Power Dissipation
50.	T1 Pd	252.045 mW	Power	Estimated Losses in Transformer
51.	Total Pd	0.0 W	Power	Total Power Dissipation
52.	Vout Tolerance	2.173 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
53.	Vout pp percentage	707.956 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	280.0	Maximum input voltage
3.	VinMin	150.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	base_pn	UCC28C43	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. UCC28C43 Product Folder : <http://www.ti.com/product/UCC28C43> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).