


WEBENCH® Design Report


Design : 3893481/19 LM5005MHX/NOPB
LM5005MHX/NOPB 14.0V-22.0V to 3.30V @ 2.0A


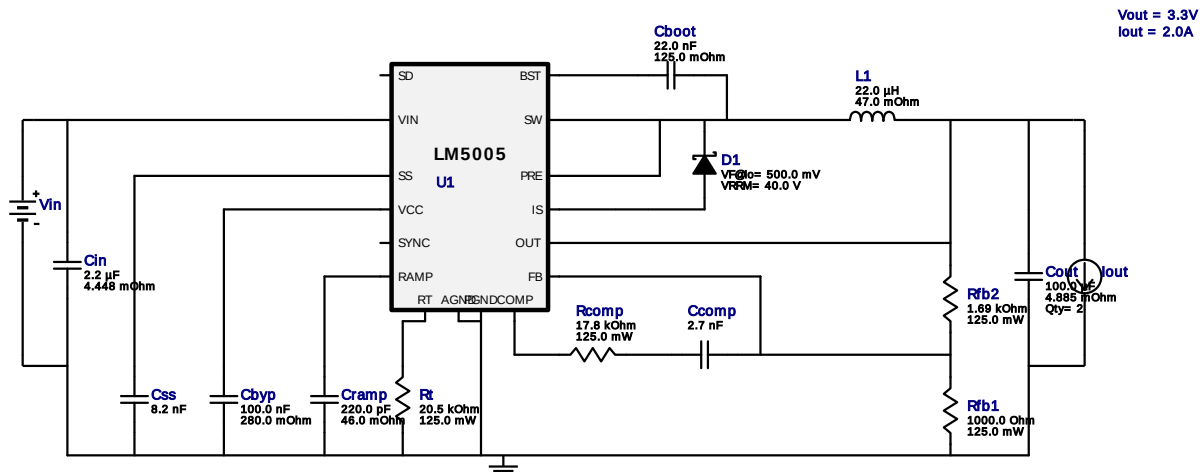








My Comments







Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	Kemet	C0805C223K5RACTU Series= X7R	Cap= 22.0 nF ESR= 125.0 mOhm VDC= 50.0 V IRMS= 645.0 mA	1	\$0.01	0805 7 mm ²
2.	Cbyp	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	Ccomp	Yageo America	CC0805KRX7R9BB272 Series= X7R	Cap= 2.7 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
4.	Cin	MuRata	GRM31CR71H225KA88L Series= X7R	Cap= 2.2 uF ESR= 4.448 mOhm VDC= 50.0 V IRMS= 2.2252 A	1	\$0.05	1206_190 11 mm ²
5.	Cout	MuRata	GRM31CR60J107ME39L Series= X5R	Cap= 100.0 uF ESR= 4.885 mOhm VDC= 6.3 V IRMS= 4.4118 A	2	\$0.14	1206_190 11 mm ²
6.	Cramp	Kemet	C0805C221J5GACTU Series= C0G/NP0	Cap= 220.0 pF ESR= 46.0 mOhm VDC= 50.0 V IRMS= 888.0 mA	1	\$0.01	0805 7 mm ²
7.	Css	MuRata	GRM155R71E822KA01D Series= X7R	Cap= 8.2 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
8.	D1	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	SMA 37 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	L1	Bourns	SDR1307-220ML	L= 22.0 μ H DCR= 47.0 mOhm	1	\$0.35	 SDR1307 227 mm ²
10.	Rcomp	Panasonic	ERJ-6ENF1782V Series= ERJ-6E	Res= 17.8 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
11.	Rfb1	Panasonic	ERJ-6ENF1001V Series= ERJ-6E	Res= 1000.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
12.	Rfb2	Panasonic	ERJ-6ENF1691V Series= ERJ-6E	Res= 1.69 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
13.	Rt	Panasonic	ERJ-6ENF2052V Series= ERJ-6E	Res= 20.5 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
14.	U1	Texas Instruments	LM5005MHX/NOPB	Switcher	1	\$1.75	 MXA20A 71 mm ²

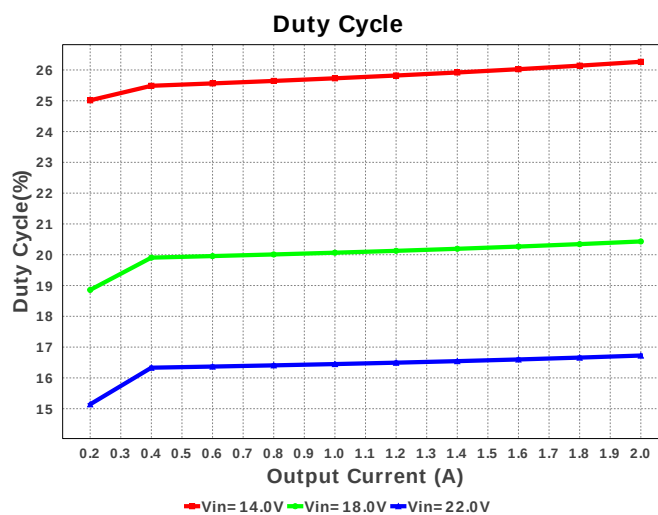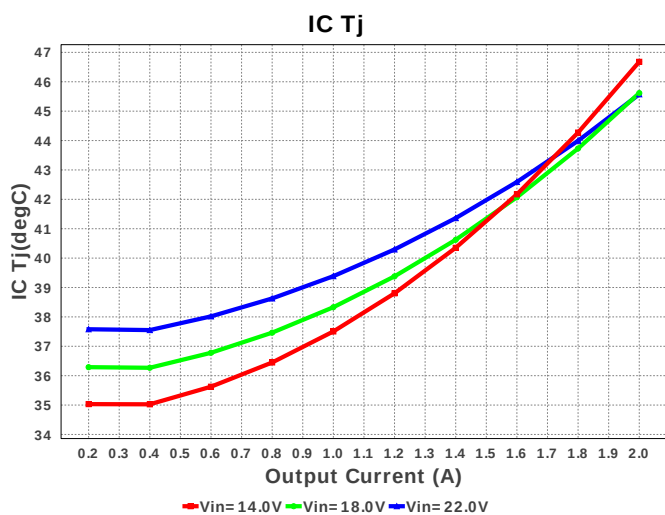

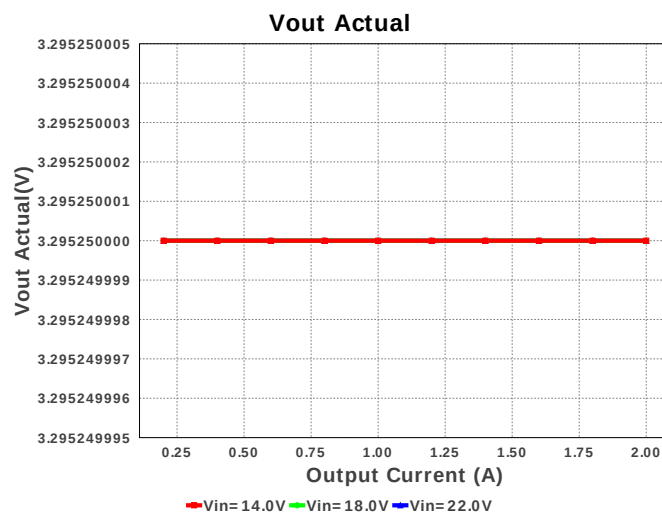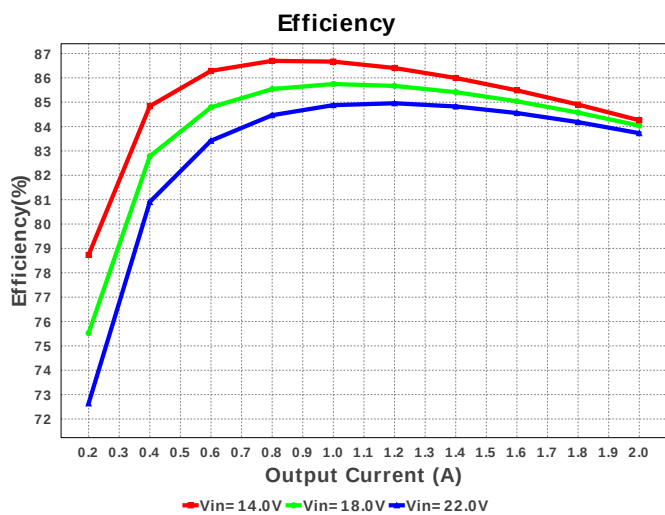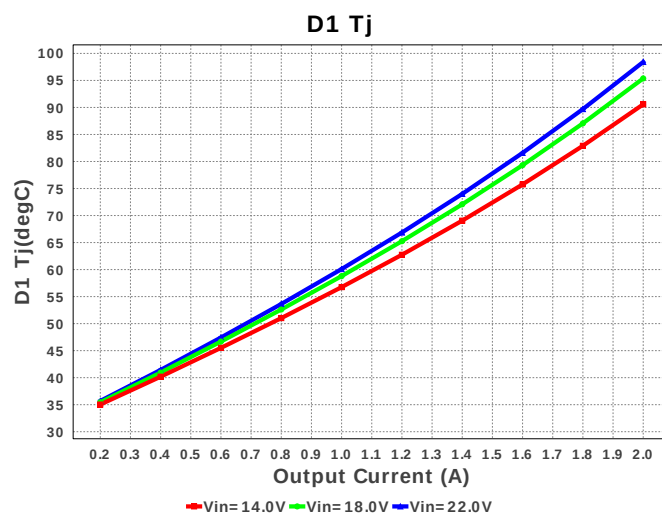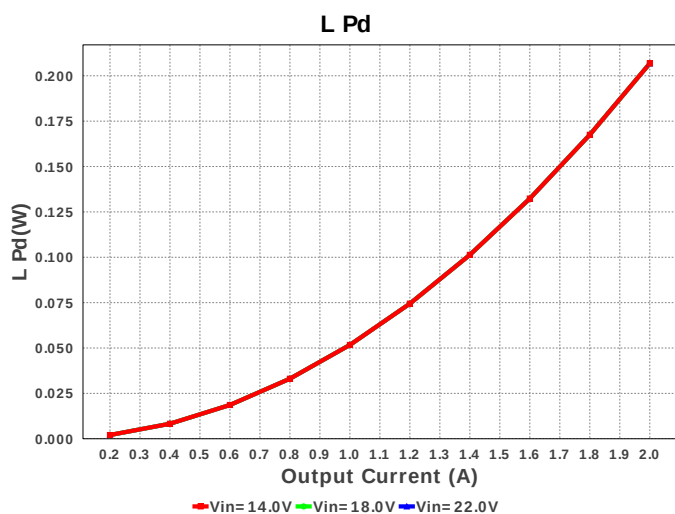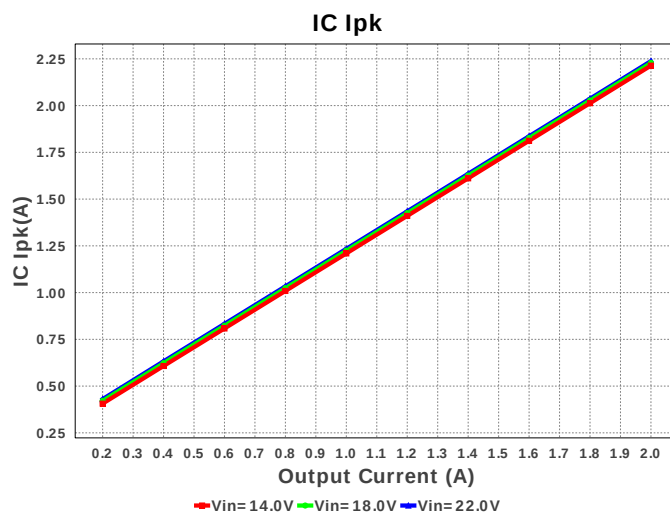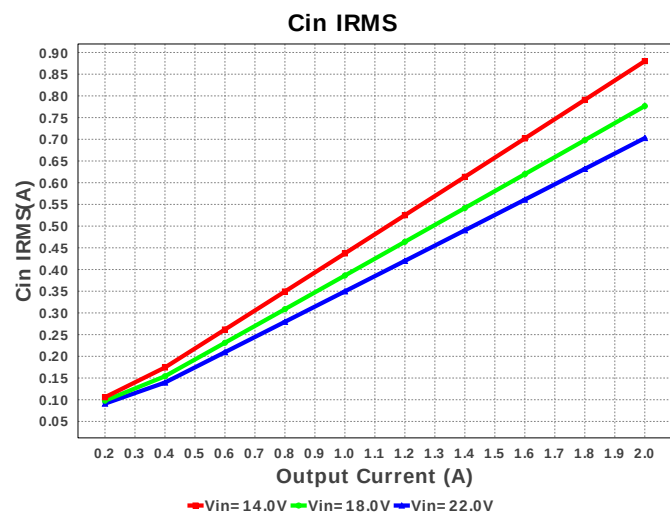

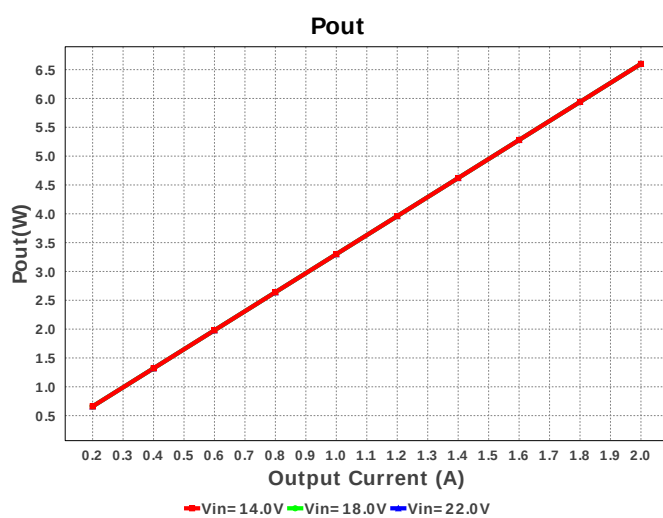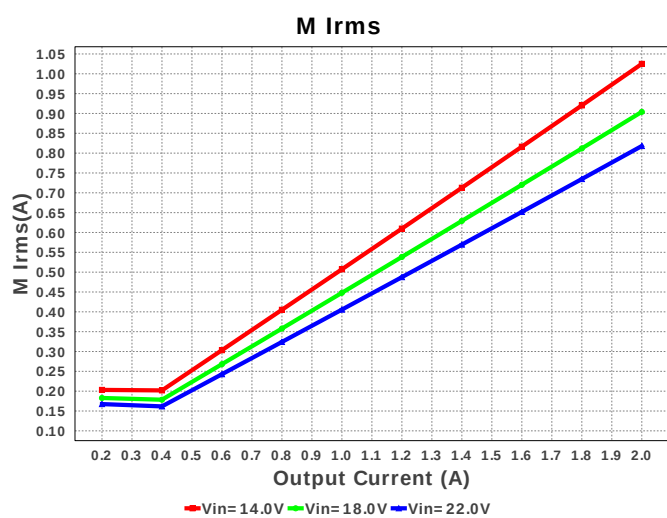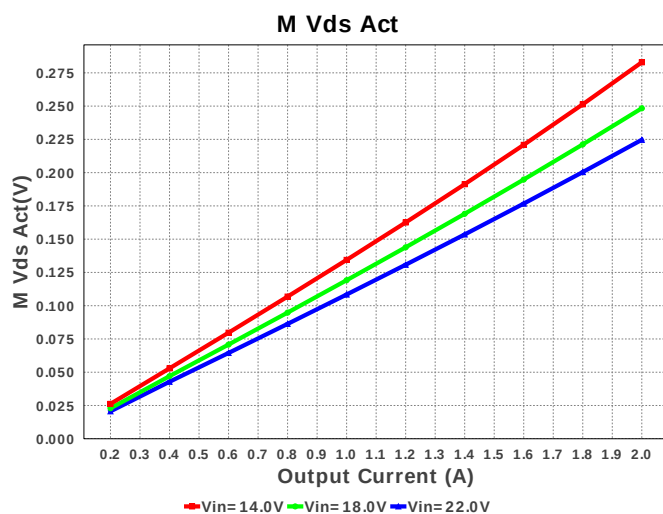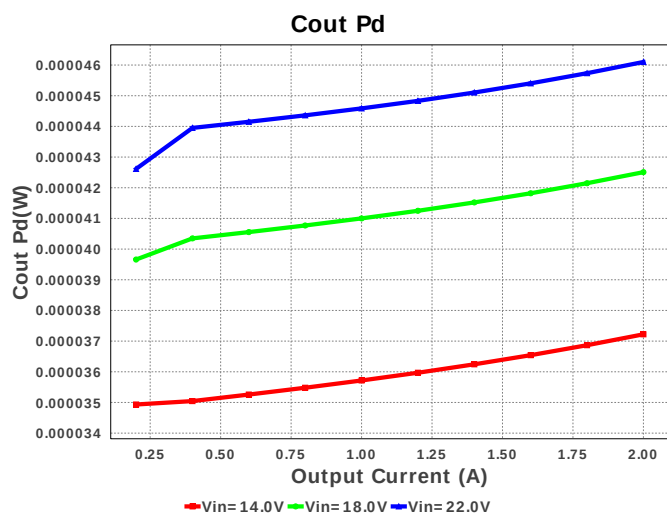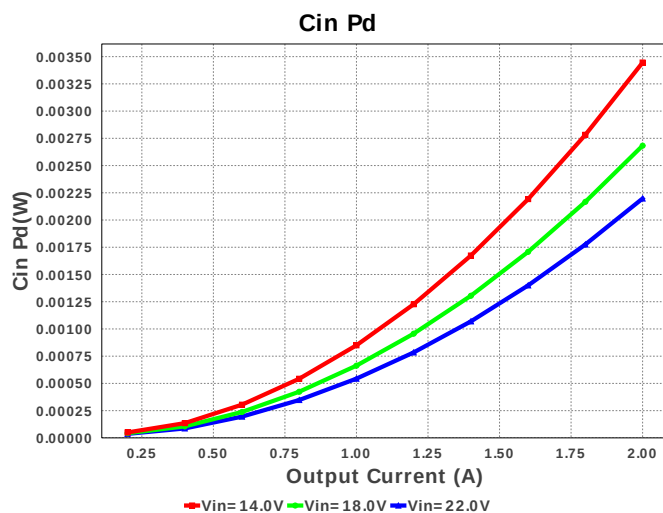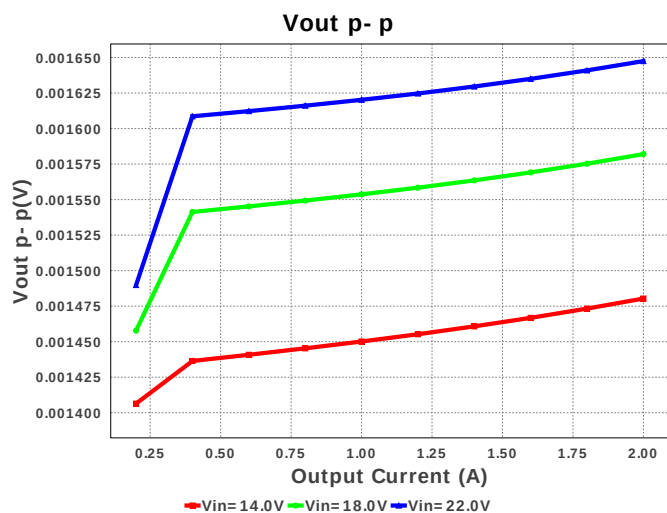

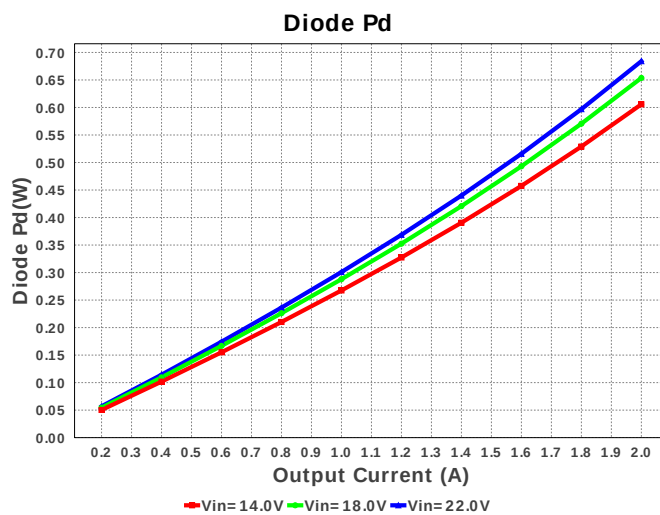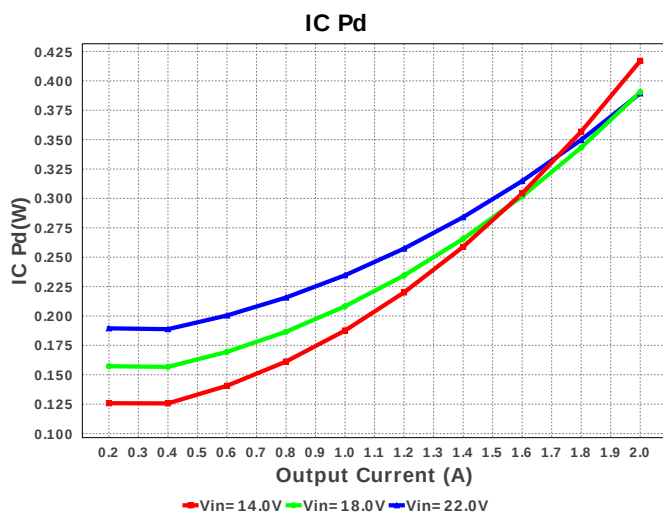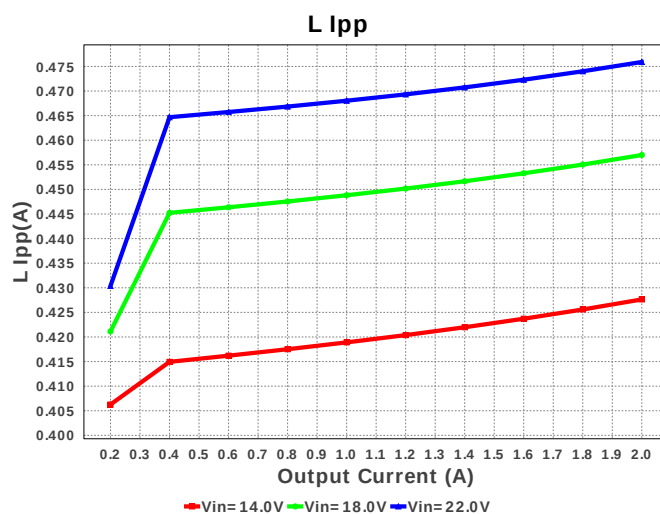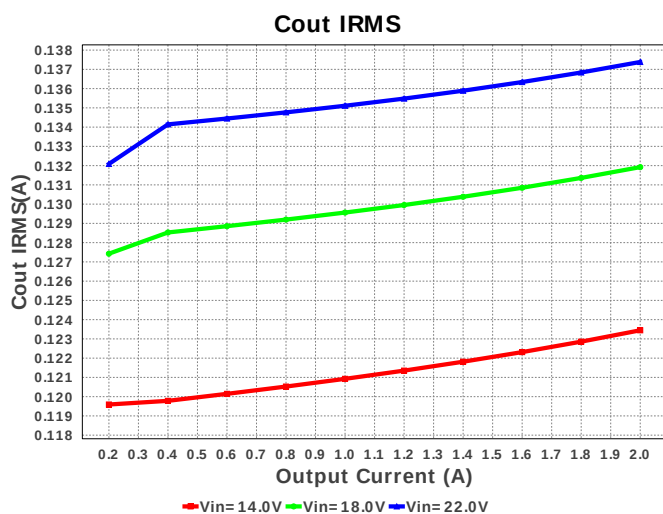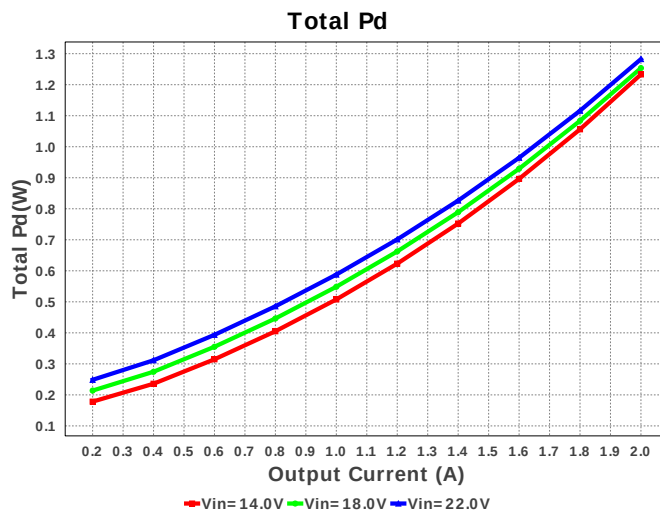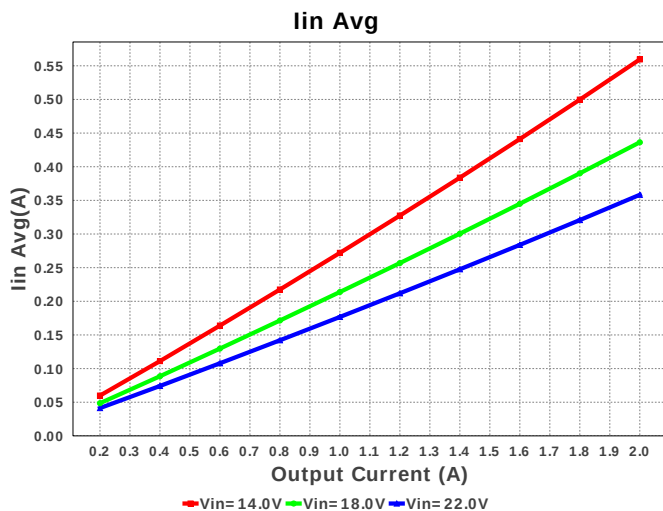

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	702.869 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	137.383 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	2.237 A	Current	Peak switch current in IC
4.	Iin Avg	358.3 mA	Current	Average input current
5.	L Ipp	475.91 mA	Current	Peak-to-peak inductor ripple current
6.	M Irms	817.941 mA	Current	MOSFET RMS current
7.	BOM Count	15	General	Total Design BOM count
8.	FootPrint	425.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	298.73 kHz	General	Switching frequency
10.	IC Tolerance	18.0 mV	General	IC Feedback Tolerance
11.	M Vds Act	224.679 mV	General	Voltage drop across the MosFET

#	Name	Value	Category	Description
12.	Pout	6.6 W	General	Total output power
13.	Total BOM	\$2.63	General	Total BOM Cost
14.	D1 Tj	98.414 degC	Op_Point	D1 junction temperature
15.	Vout Actual	3.295 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
16.	Vout OP	3.3 V	Op_Point	Operational Output Voltage
17.	Duty Cycle	16.726 %	Op_point	Duty cycle
18.	Efficiency	83.73 %	Op_point	Steady state efficiency
19.	IC Tj	45.574 degC	Op_point	IC junction temperature
20.	ICThetaJA	40.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
21.	IOUT_OP	2.0 A	Op_point	Iout operating point
22.	VIN_OP	22.0 V	Op_point	Vin operating point
23.	Vout p-p	1.647 mV	Op_point	Peak-to-peak output ripple voltage
24.	Cin Pd	2.197 mW	Power	Input capacitor power dissipation
25.	Cout Pd	46.1 μ W	Power	Output capacitor power dissipation
26.	Diode Pd	684.142 mW	Power	Diode power dissipation
27.	IC Pd	389.34 mW	Power	IC power dissipation
28.	L Pd	206.8 mW	Power	Inductor power dissipation
29.	Total Pd	1.282 W	Power	Total Power Dissipation
30.	Vout Tolerance	2.757 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	22.0	Maximum input voltage
3.	VinMin	14.0	Minimum input voltage
4.	Vout	3.3	Output Voltage
5.	base_pn	LM5005	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. LM5005 Product Folder : <http://www.ti.com/product/LM5005> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).