


WEBENCH® Design Report

Design : 3893481/34 LM5022MM/NOPB
LM5022MM/NOPB 10.0V-25.0V to 48.00V @ 1.0A

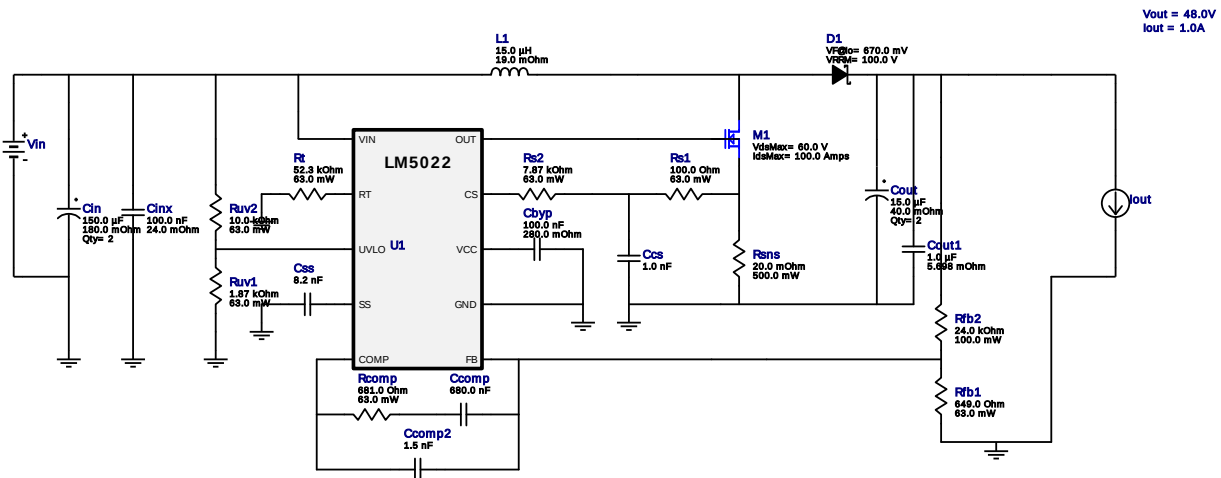







My Comments







36







Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbyp	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	Ccomp	MuRata	GRM155R60J684KE19D Series= X5R	Cap= 680.0 nF VDC= 6.3 V IRMS= 0.0 A	1	\$0.02	0402 3 mm ²
3.	Ccomp2	Yageo America	CC0805KRX7R9BB152 Series= X7R	Cap= 1.5 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
4.	Ccs	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	Cin	Nichicon	UUD1H151MNL1GS Series= uD	Cap= 150.0 uF ESR= 180.0 mOhm VDC= 50.0 V IRMS= 670.0 mA	2	\$0.26	SM_RADIAL_10BMM 160 mm ²
6.	Cinx	AVX	08055C104JAT2A Series= X7R	Cap= 100.0 nF ESR= 24.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
7.	Cout	Panasonic	100SXV15M Series= ?	Cap= 15.0 uF ESR= 40.0 mOhm VDC= 100.0 V IRMS= 2.35 A	2	\$1.25	CAPSMT_62_E12 106 mm ²
8.	Cout1	TDK	C3216X5R2A105K Series= X5R	Cap= 1.0 uF ESR= 5.698 mOhm VDC= 100.0 V IRMS= 0.0 A	1	\$0.07	1206 11 mm ²






#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Css	MuRata	GRM155R71E822KA01D Series= X7R	Cap= 8.2 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm²
10.	D1	Fairchild Semiconductor	FSV8100V	VF@Io= 670.0 mV VRRM= 100.0 V	1	\$0.21	 TO-277A 56 mm²
11.	L1	Coilcraft	MSS1210-153MEB	L= 15.0 µH DCR= 19.0 mOhm	1	\$0.81	 MSS1210 204 mm²
12.	M1	Texas Instruments	CSD18563Q5A	VdsMax= 60.0 V IdsMax= 100.0 Amps	1	\$0.68	 TRANS_NexFET_Q5A 55 mm²
13.	Rcomp	Vishay-Dale	CRCW0402681RFKED Series= CRCW..e3	Res= 681.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
14.	Rfb1	Vishay-Dale	CRCW0402649RFKED Series= CRCW..e3	Res= 649.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
15.	Rfb2	Yageo America	RC0603FR-0724KL Series= ?	Res= 24.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
16.	Rs1	Vishay-Dale	CRCW0402100RFKED Series= CRCW..e3	Res= 100.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
17.	Rs2	Vishay-Dale	CRCW04027K87FKED Series= CRCW..e3	Res= 7.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
18.	Rsns	Stackpole Electronics Inc	CSR1206FK20L0 Series= ?	Res= 20.0 mOhm Power= 500.0 mW Tolerance= 1.0%	1	\$0.10	 1206 11 mm²
19.	Rt	Vishay-Dale	CRCW040252K3FKED Series= CRCW..e3	Res= 52.3 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
20.	Ruv1	Vishay-Dale	CRCW04021K87FKED Series= CRCW..e3	Res= 1.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
21.	Ruv2	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
22.	U1	Texas Instruments	LM5022MM/NOPB	Switcher	1	\$0.90	 MUB10A 24 mm²

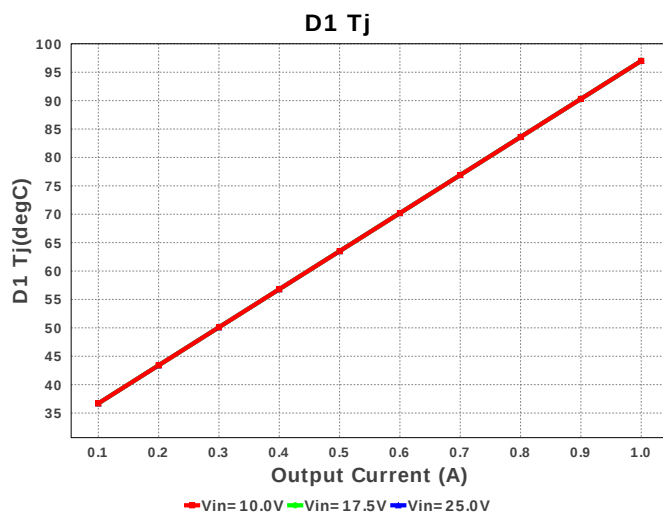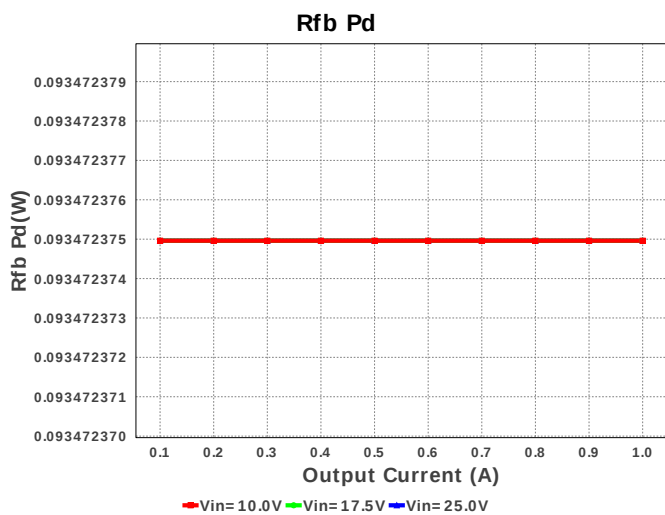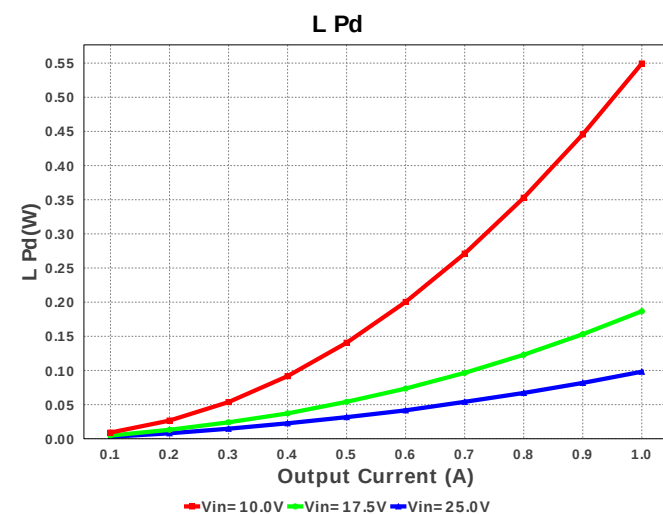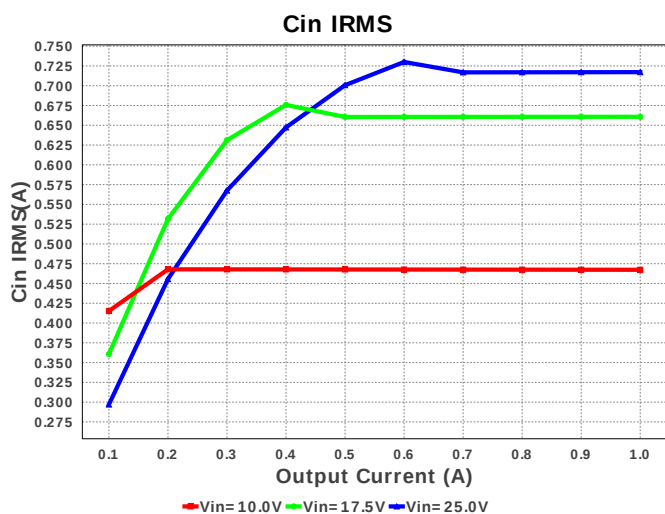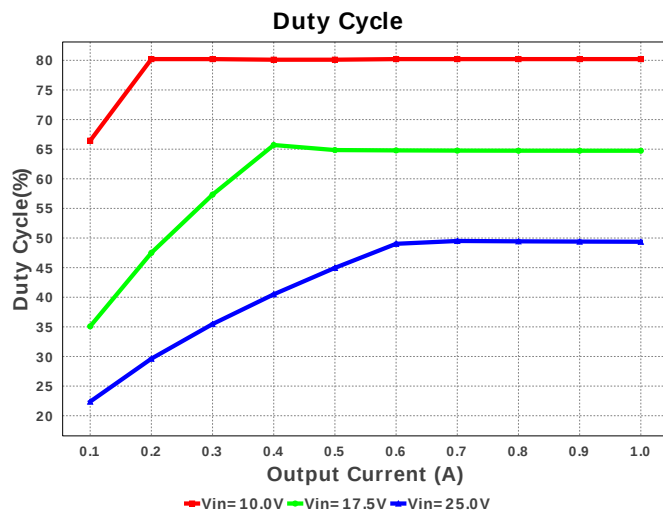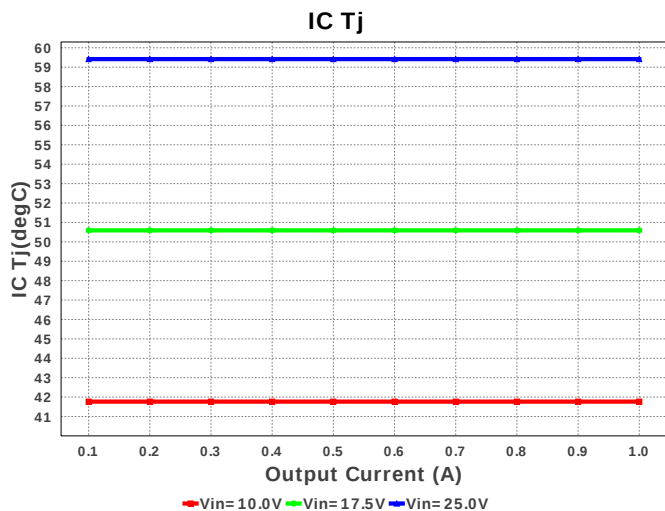

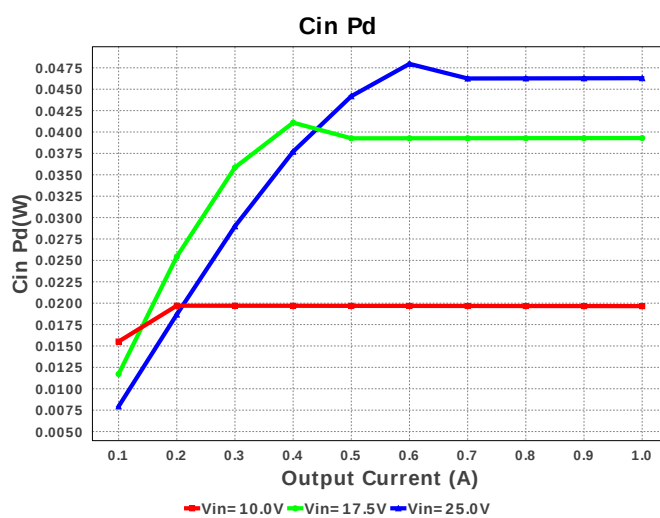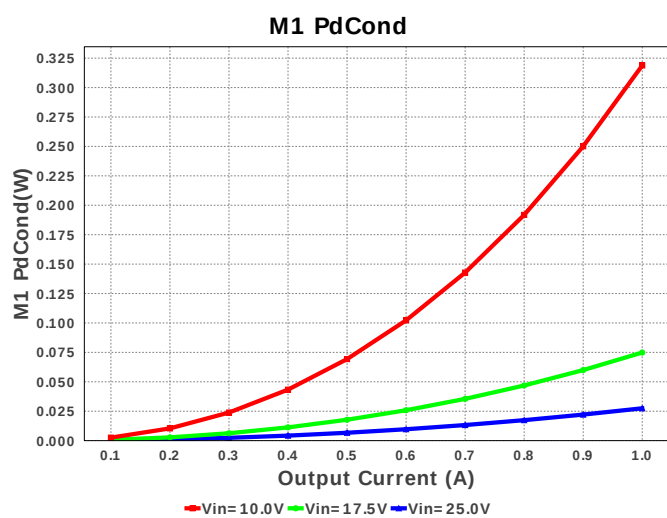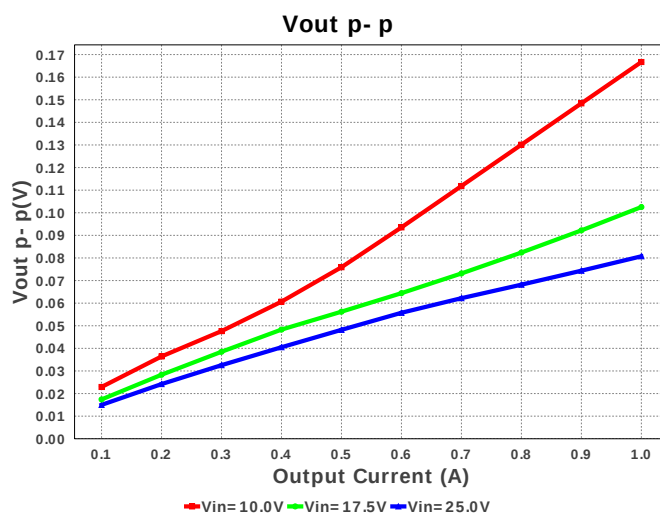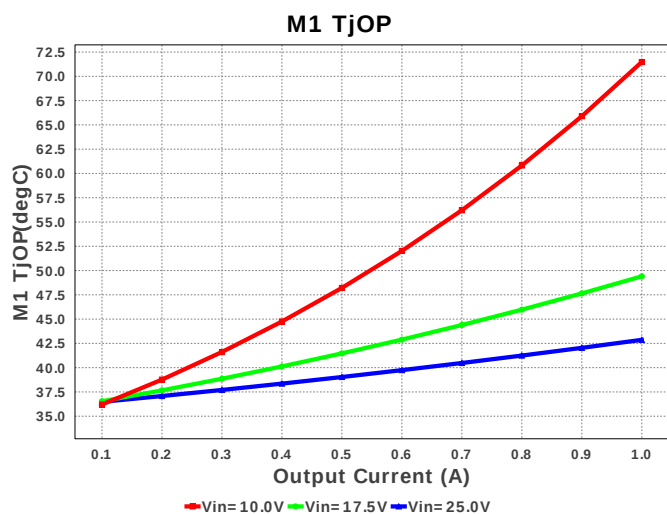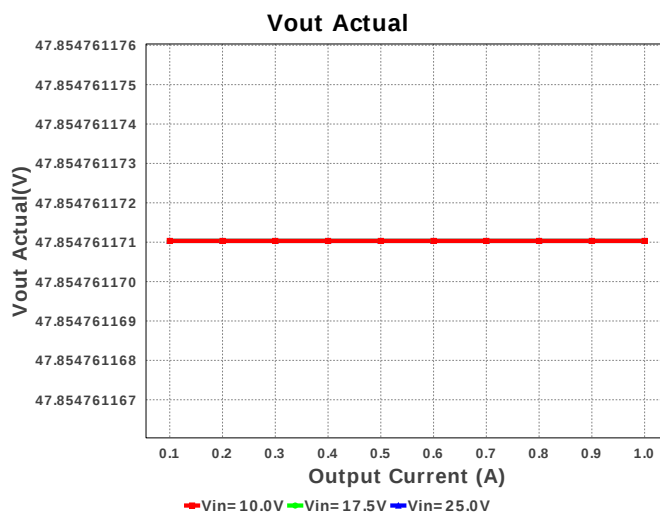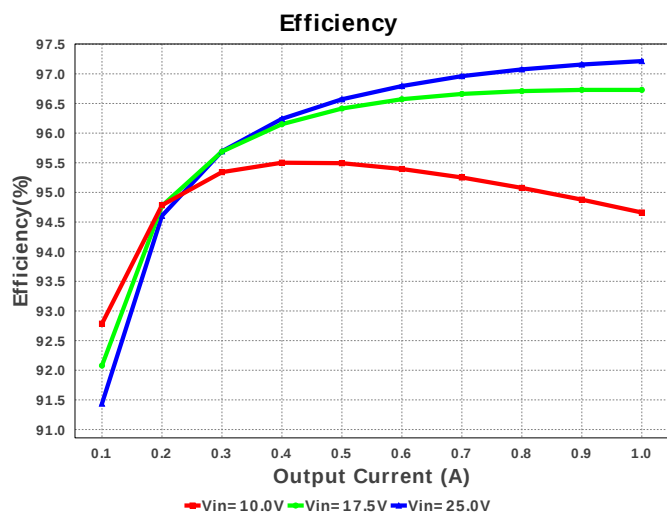

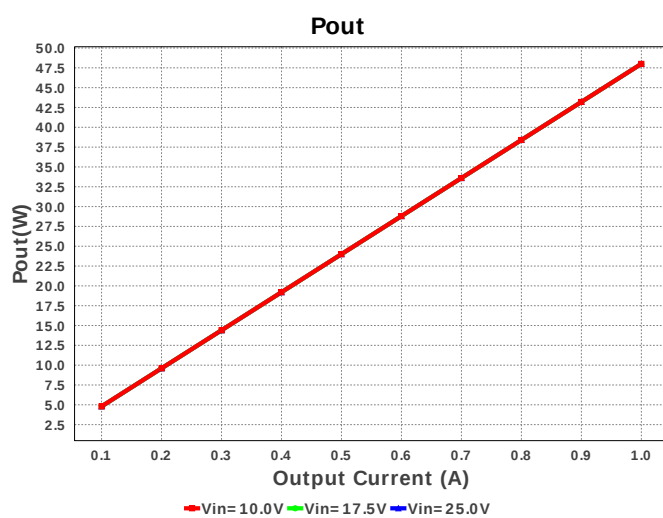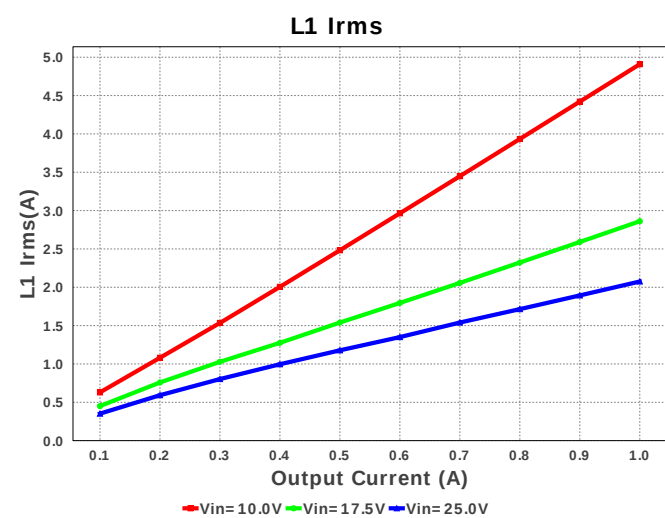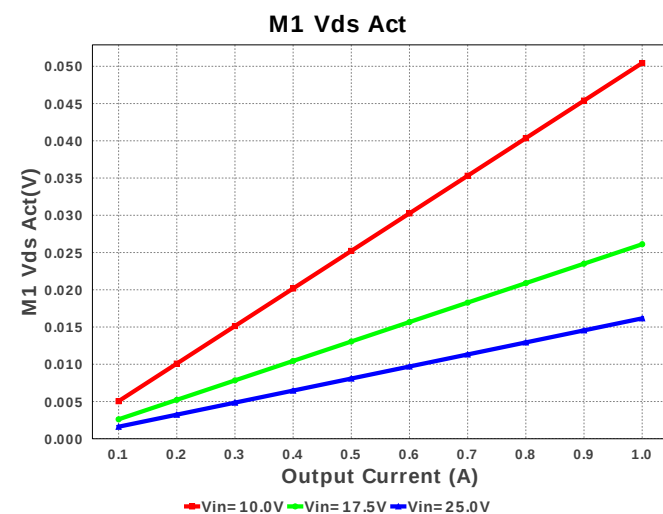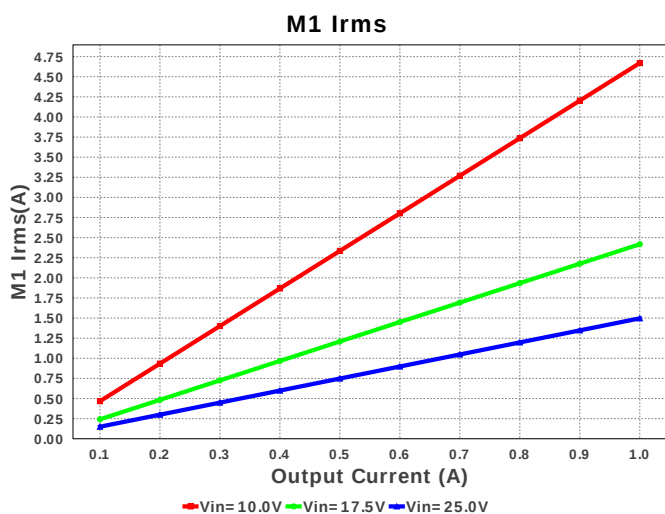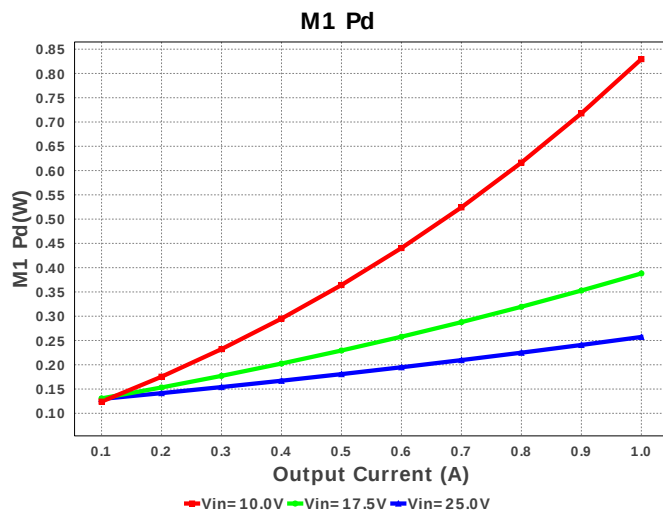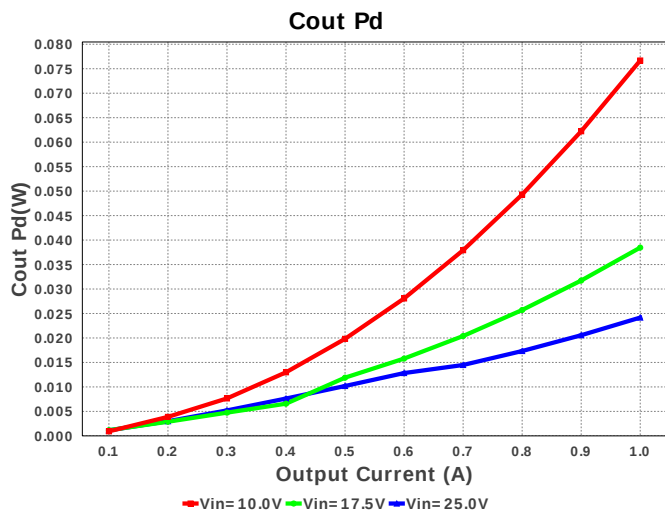

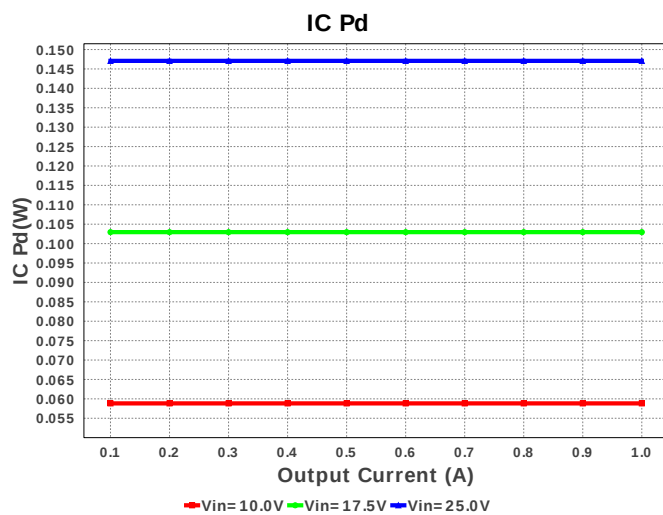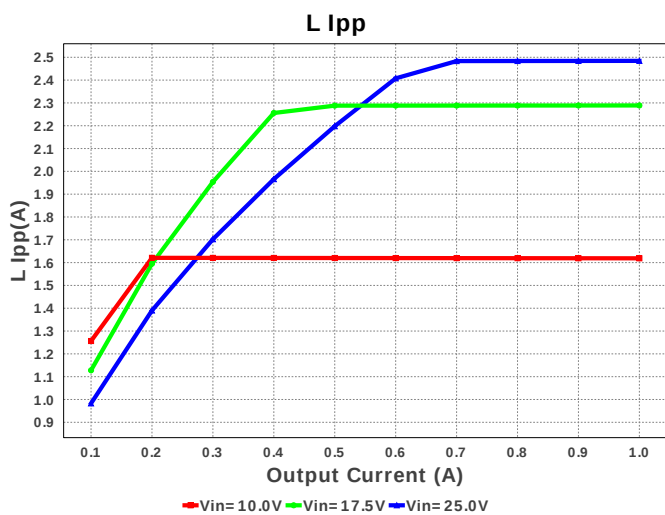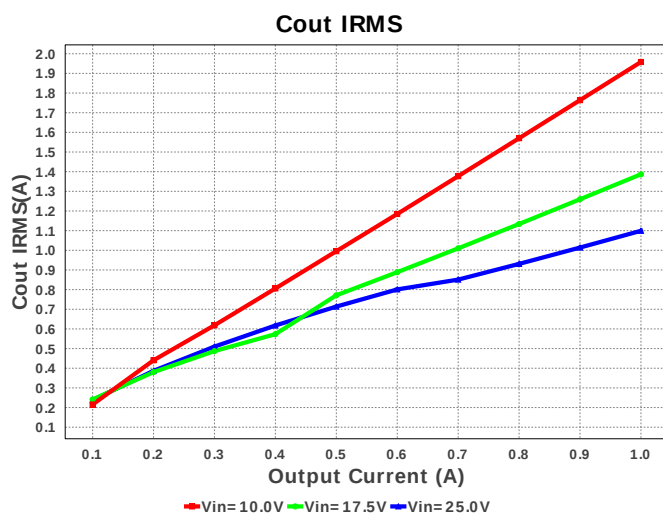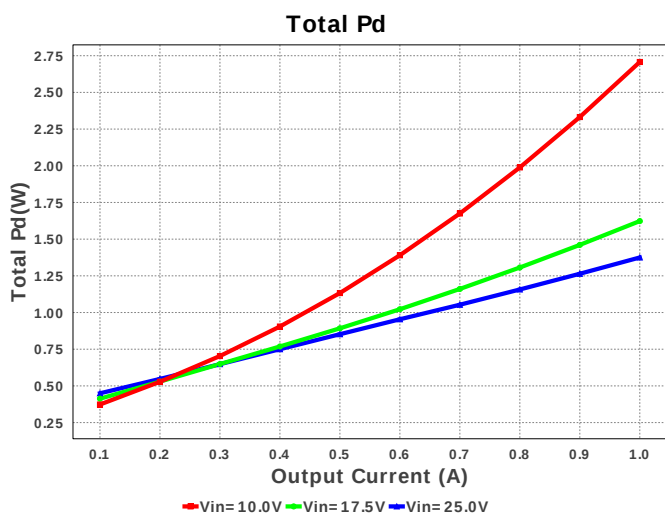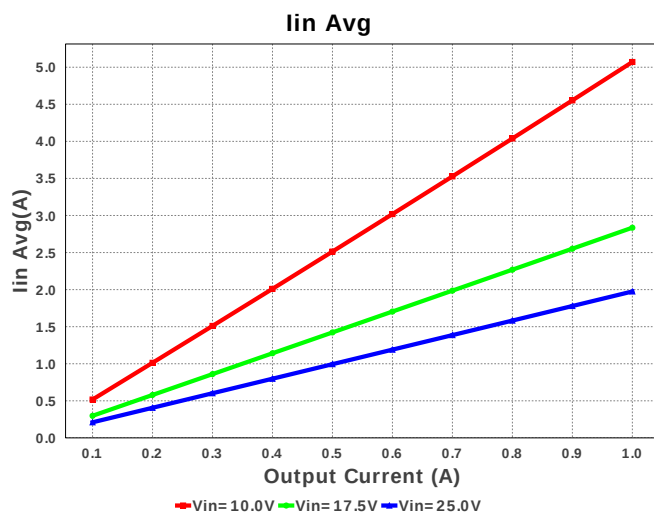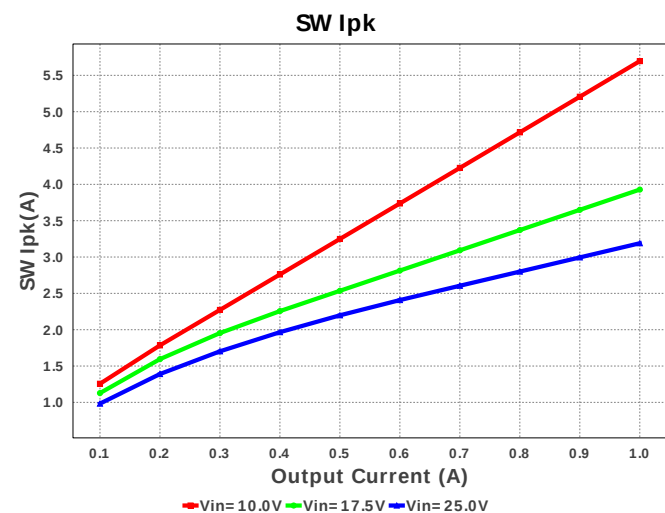

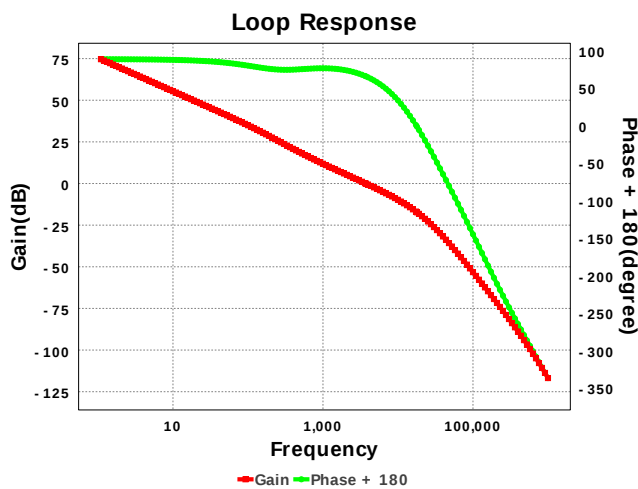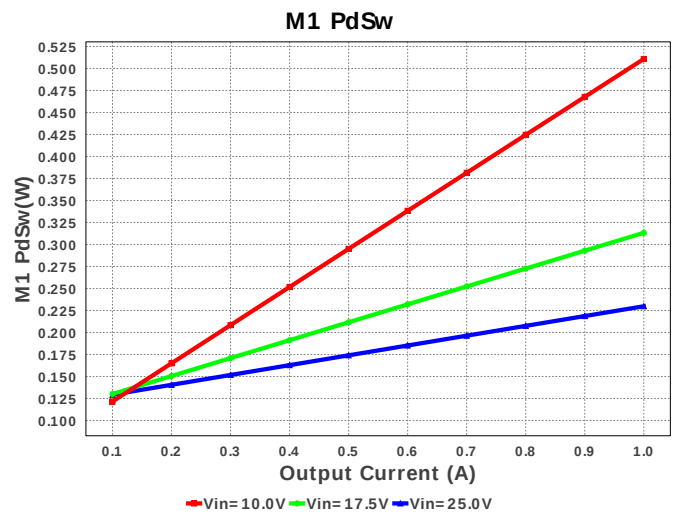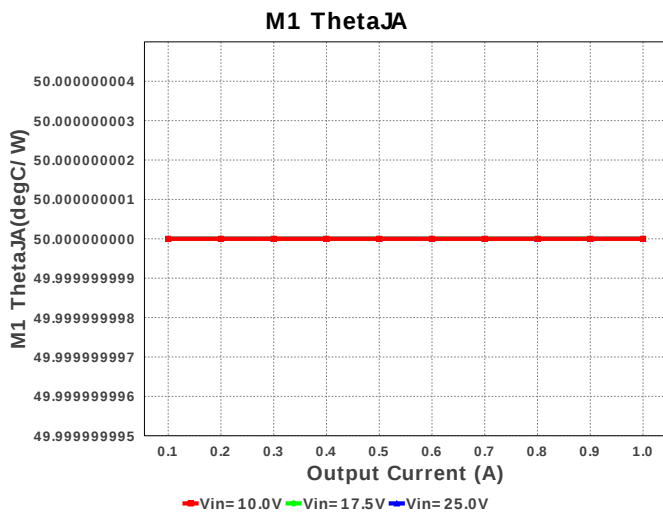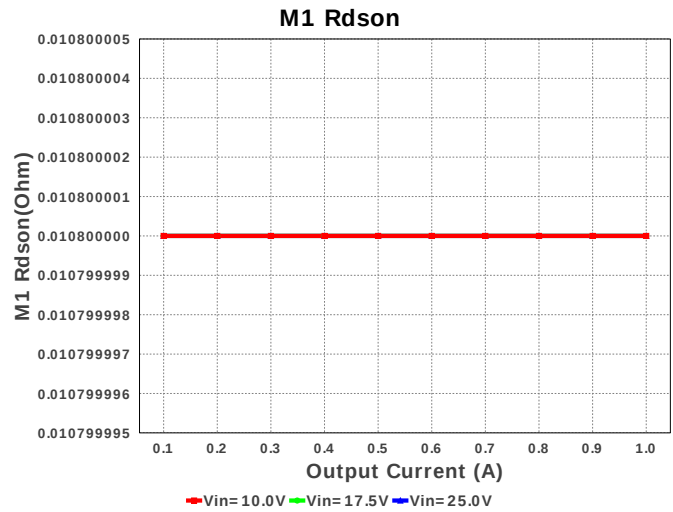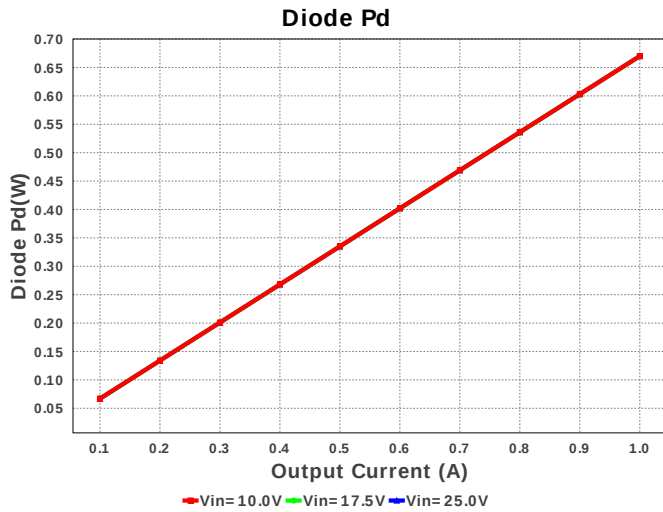

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	471.741 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	1.934 A	Current	Output capacitor RMS ripple current
3.	Iin Avg	5.221 A	Current	Average input current
4.	L Ipp	1.634 A	Current	Peak-to-peak inductor ripple current
5.	L1 Irms	4.909 A	Current	Inductor ripple current
6.	M1 Irms	4.67 A	Current	M1 MOSFET Irms
7.	SW Ipk	5.704 A	Current	Peak switch current
8.	BOM Count	24	General	Total Design BOM count
9.	FootPrint	952.0 mm ²	General	Total Foot Print Area of BOM components
10.	Frequency	323.611 kHz	General	Switching frequency
11.	IC Tolerance	25.0 mV	General	IC Feedback Tolerance

#	Name	Value	Category	Description
12.	M1 Rdson	10.8 mOhm	General	Drain-Source On-resistance
13.	M1 ThetaJA	50.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
14.	Pout	48.0 W	General	Total output power
15.	Total BOM	\$5.94	General	Total BOM Cost
16.	D1 Tj	221.151 degC	Op_Point	D1 junction temperature
17.	Low Freq Gain	66.197 dB	Op_Point	Gain at 10Hz
18.	Vout Actual	47.855 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
19.	Vout OP	48.0 V	Op_Point	Operational Output Voltage
20.	Cross Freq	1.464 kHz	Op_point	Bode plot crossover frequency
21.	Duty Cycle	80.835 %	Op_point	Duty cycle
22.	Efficiency	91.942 %	Op_point	Steady state efficiency
23.	Gain Marg	-19.156 dB	Op_point	Bode Plot Gain Margin
24.	IC Tj	46.106 degC	Op_point	IC junction temperature
25.	ICThetaJA	200.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
26.	IOUT_OP	1.0 A	Op_point	Iout operating point
27.	M1 TjOP	81.829 degC	Op_point	M1 MOSFET junction temperature
28.	Phase Marg	74.646 deg	Op_point	Bode Plot Phase Margin
29.	VIN_OP	10.0 V	Op_point	Vin operating point
30.	Vout p-p	171.277 mV	Op_point	Peak-to-peak output ripple voltage
31.	Cin Pd	20.029 mW	Power	Input capacitor power dissipation
32.	Cout Pd	74.84 mW	Power	Output capacitor power dissipation
33.	Diode Pd	1.912 W	Power	Diode power dissipation
34.	IC Pd	80.53 mW	Power	IC power dissipation
35.	L Pd	549.513 mW	Power	Inductor power dissipation
36.	M1 Pd	1.037 W	Power	M1 MOSFET total power dissipation
37.	M1 PdCond	337.296 mW	Power	M1 MOSFET conduction losses
38.	M1 PdSw	699.284 mW	Power	M1 MOSFET switching losses
39.	Rfb Pd	93.472 mW	Power	Rfb Power Dissipation
40.	Total Pd	4.207 W	Power	Total Power Dissipation
41.	M1 Vds Act	50.438 mV		M Vds
42.	Vout Tolerance	3.99 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	VinMax	25.0	Maximum input voltage
3.	VinMin	10.0	Minimum input voltage
4.	Vout	48.0	Output Voltage
5.	base_pn	LM5022	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. LM5022 Product Folder : <http://www.ti.com/product/LM5022> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).