


WEBENCH® Design Report





Design : 1641152/102 TPS55340RTER
TPS55340RTER 10.0V-14.4V to 19.00V @ 1.5A






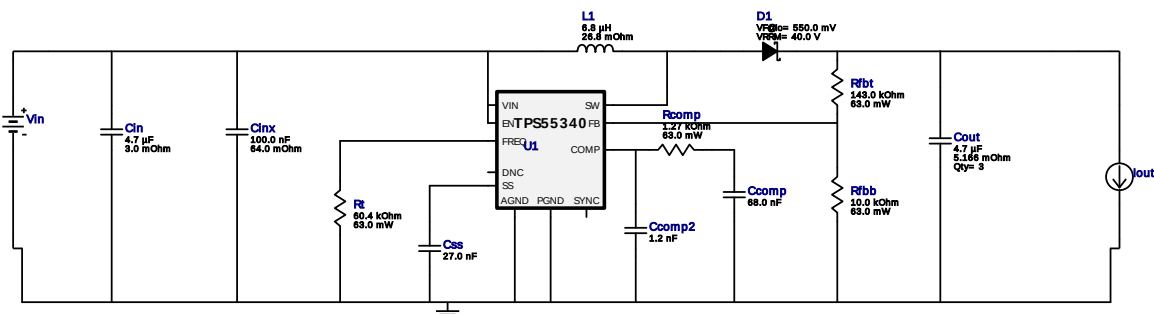








Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Ccomp	MuRata	GRM155R61A683KA01D Series= X5R	Cap= 68.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
2.	Ccomp2	MuRata	GRM033R71C122KA01D Series= X7R	Cap= 1.2 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	0201 2 mm ²
3.	Cin	MuRata	GRM31CR71H475KA12L Series= X7R	Cap= 4.7 uF ESR= 3.0 mOhm VDC= 50.0 V IRMS= 4.98 A	1	\$0.07	1206 11 mm ²
4.	Cinx	Kemet	C0805C104K5RACTU Series= X7R	Cap= 100.0 nF ESR= 64.0 mOhm VDC= 50.0 V IRMS= 1.64 A	1	\$0.01	0805 7 mm ²
5.	Cout	MuRata	GRM21BC81E475KA12L Series= X6S	Cap= 4.7 uF ESR= 5.166 mOhm VDC= 25.0 V IRMS= 2.03531 A	3	\$0.02	0805 7 mm ²
6.	Css	MuRata	GRM155R61A273KA01D Series= X5R	Cap= 27.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
7.	D1	Diodes Inc.	B540C-13-F	VF@Io= 550.0 mV VRRM= 40.0 V	1	\$0.17	SMC 83 mm ²
8.	L1	Coilcraft	XAL5050-682MEB	L= 6.8 uH DCR= 26.8 mOhm	1	\$0.92	XAL5050 54 mm ²
9.	Rcomp	Vishay-Dale	CRCW04021K27FKED Series= CRCW..e3	Res= 1.27 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
10.	Rfbb	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
11.	Rfht	Vishay-Dale	CRCW0402143KFKED Series= CRCW..e3	Res= 143.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
12.	Rt	Vishay-Dale	CRCW040260K4FKED Series= CRCW..e3	Res= 60.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
13.	U1	Texas Instruments	TPS55340RTER	Switcher	1	\$1.85	S-PWQFN-N16 17 mm ²

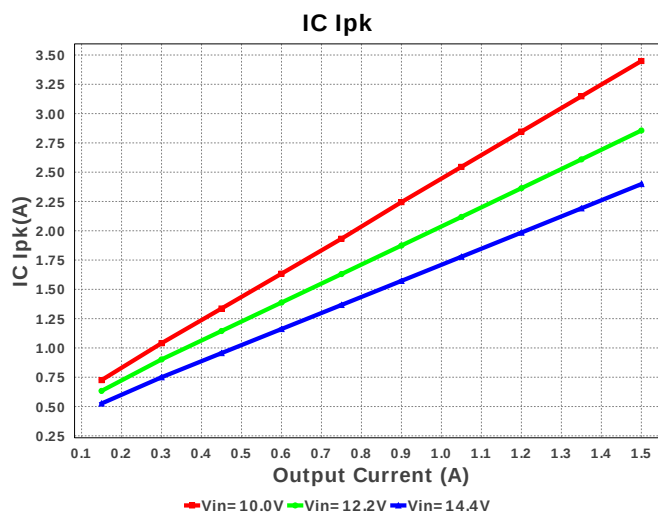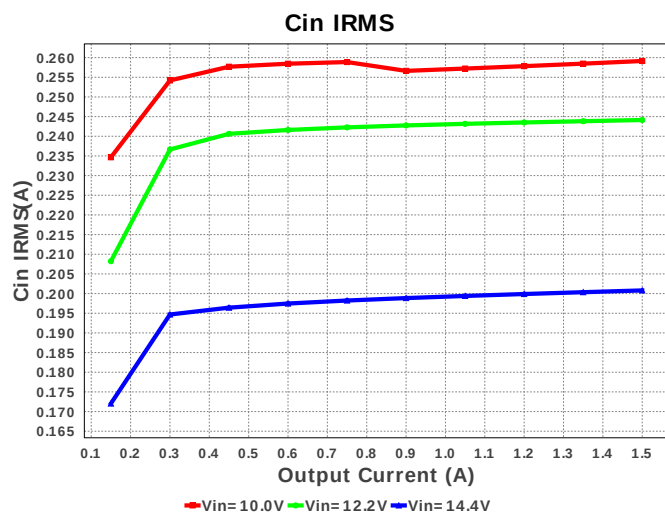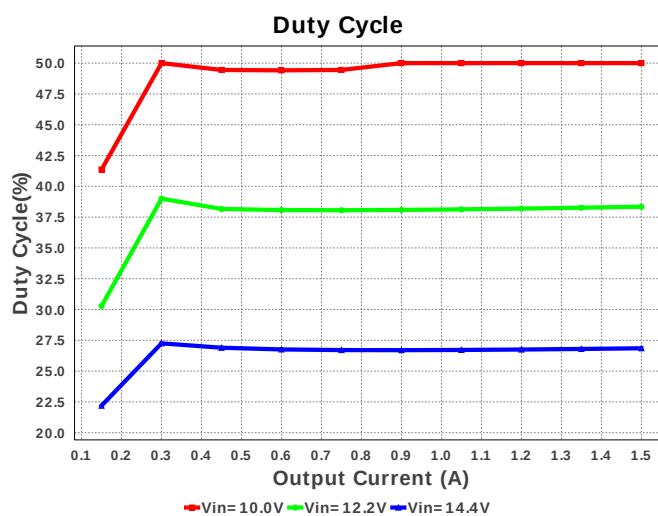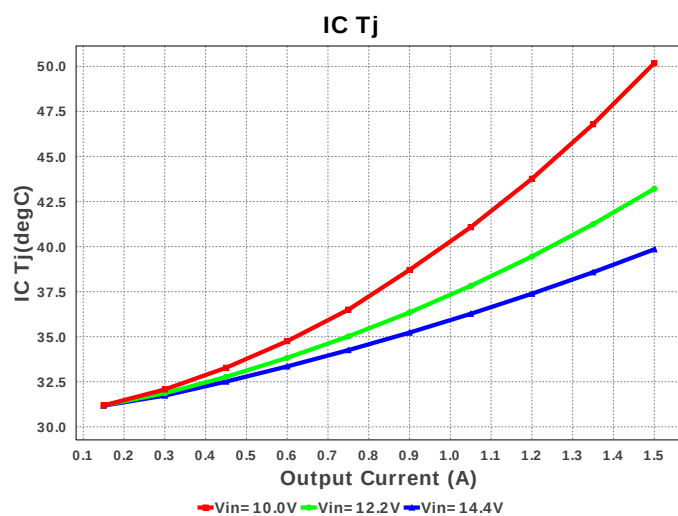

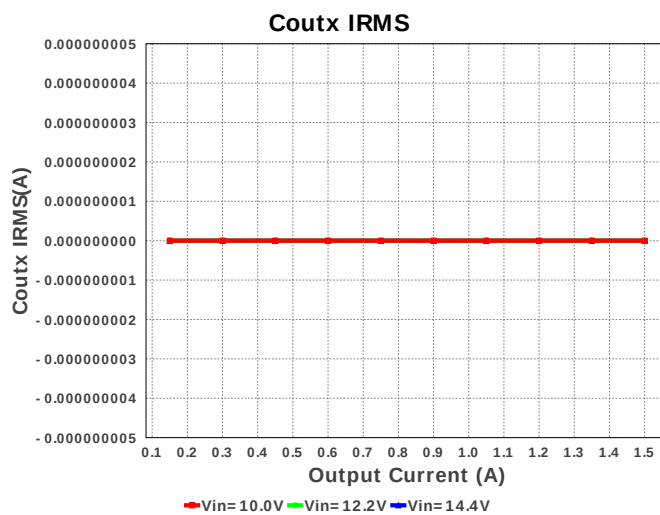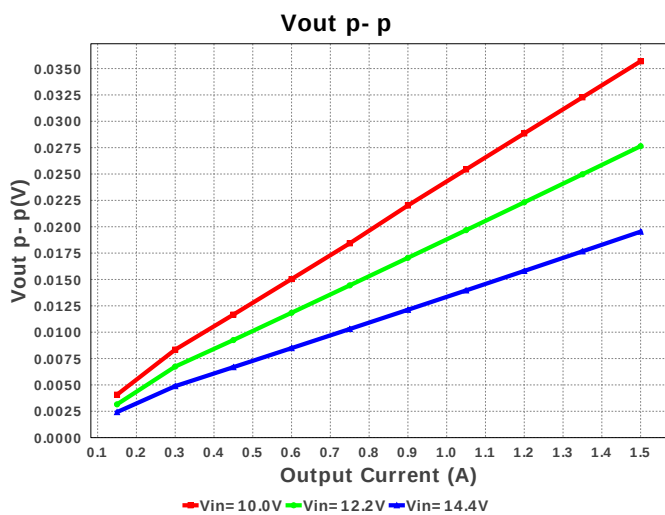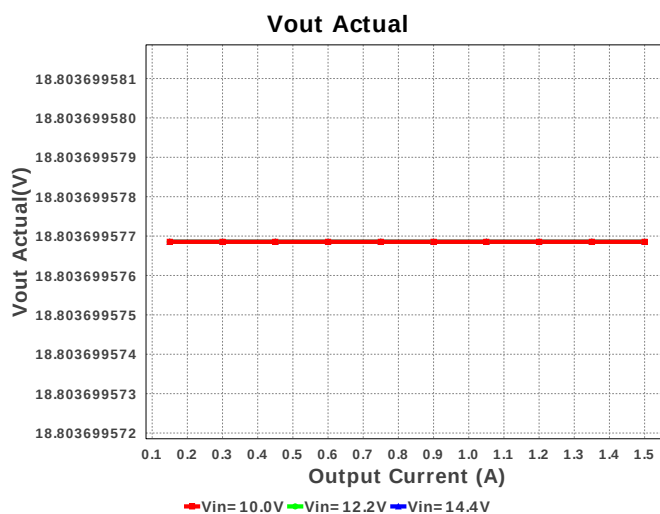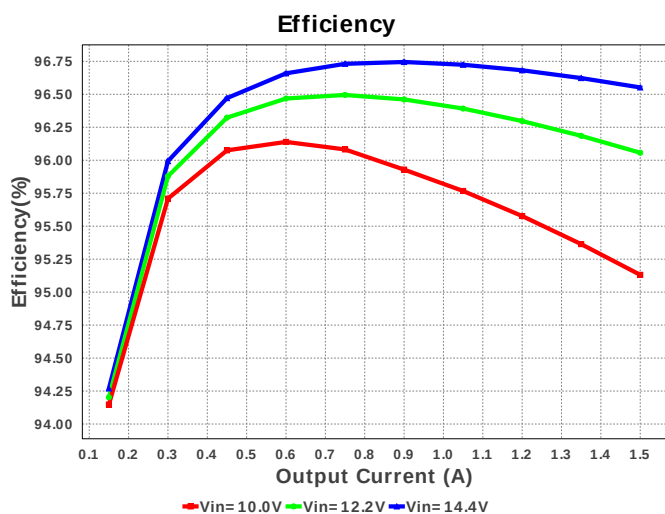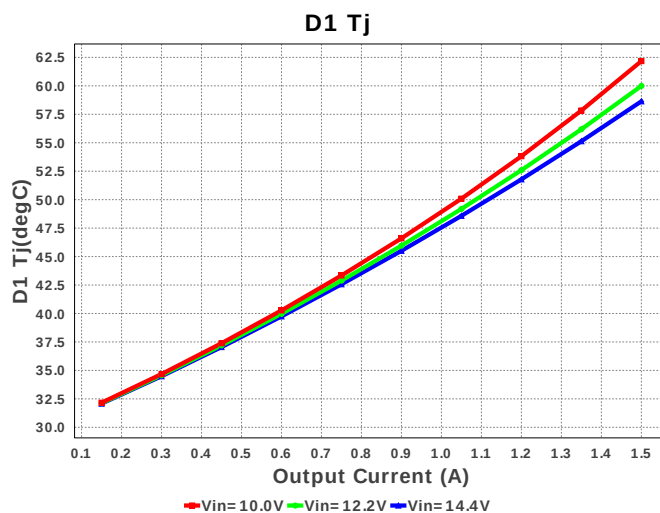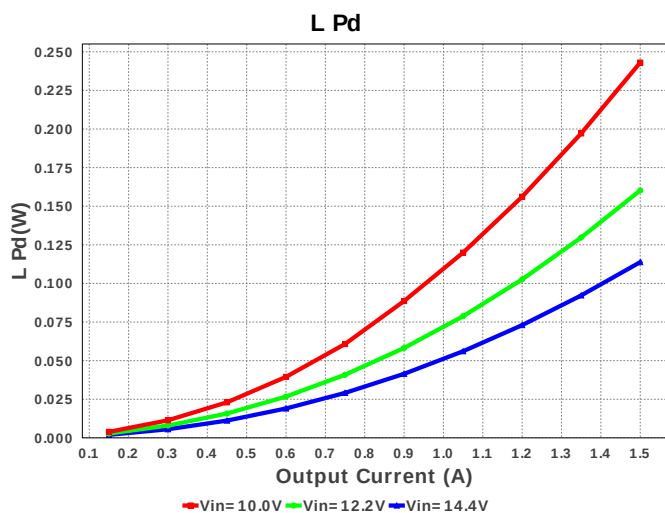

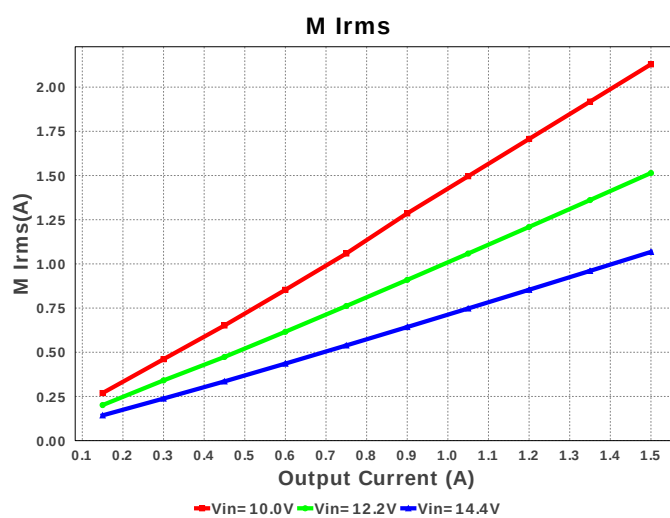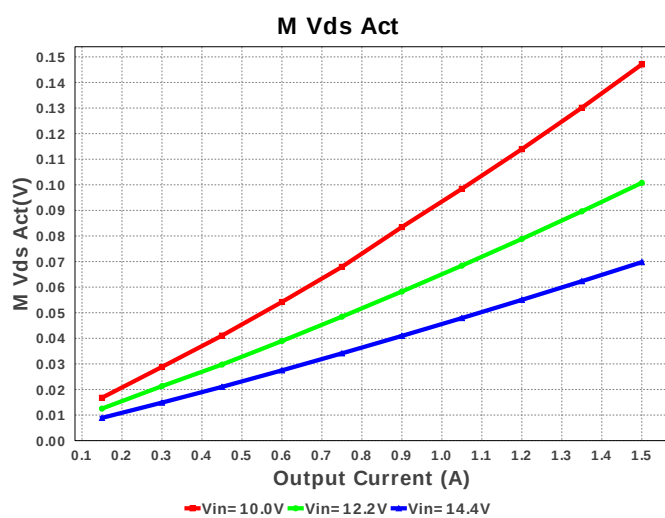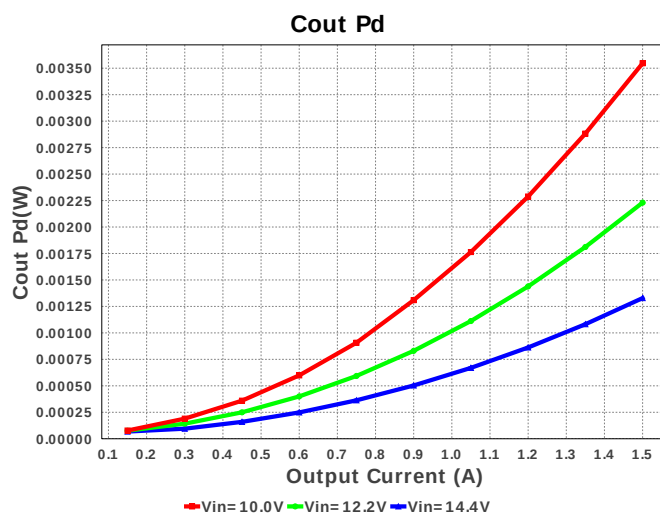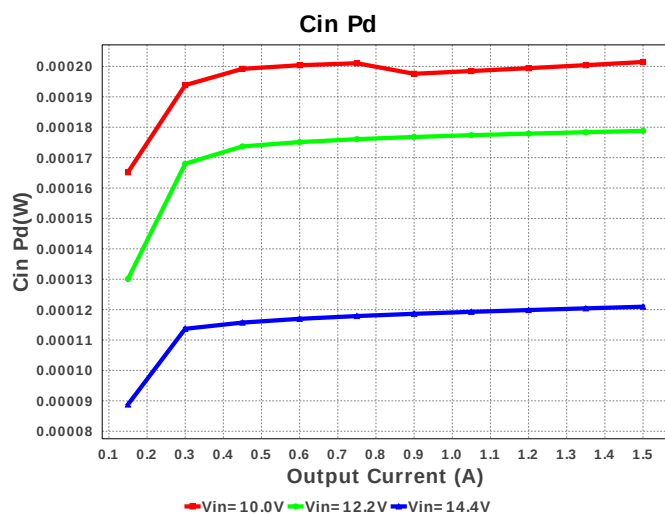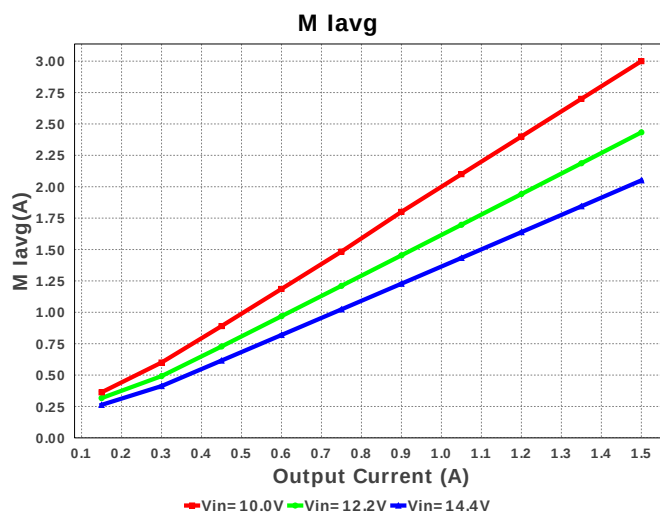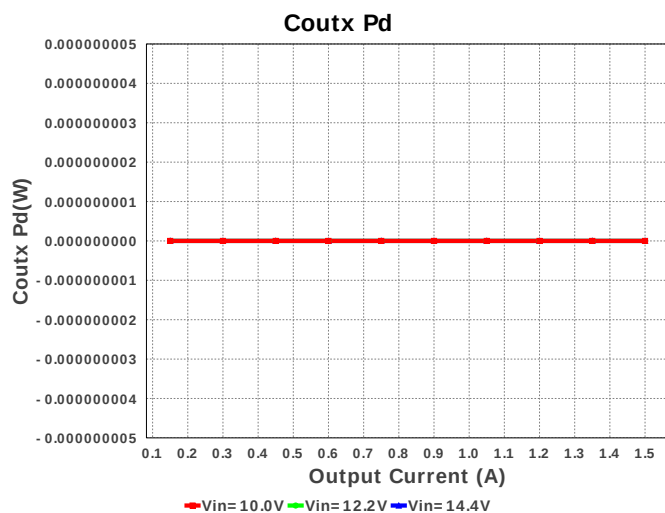

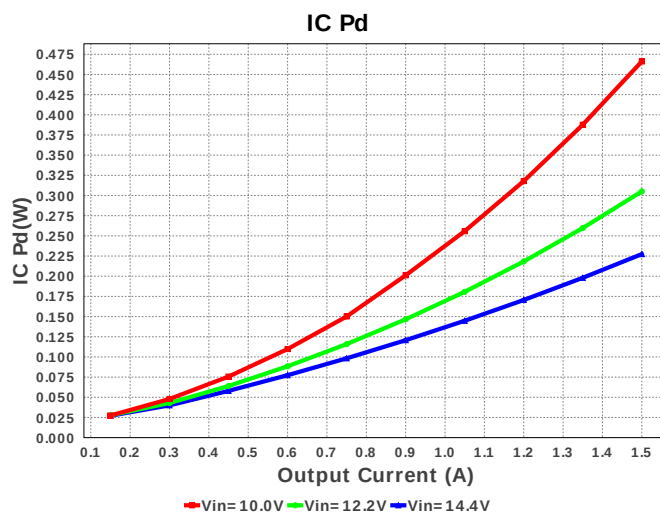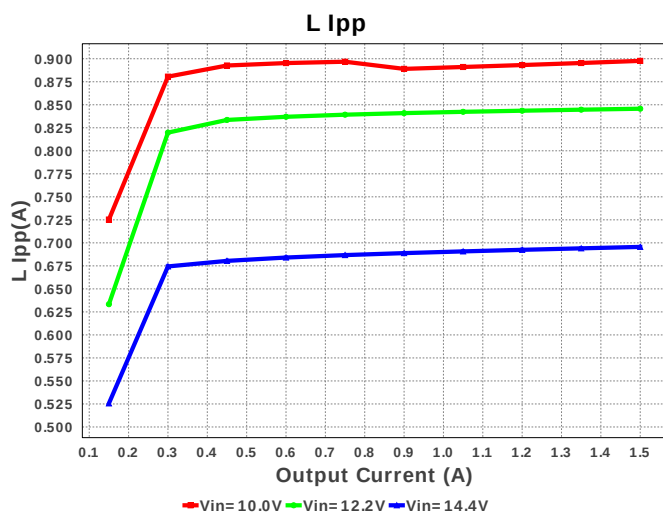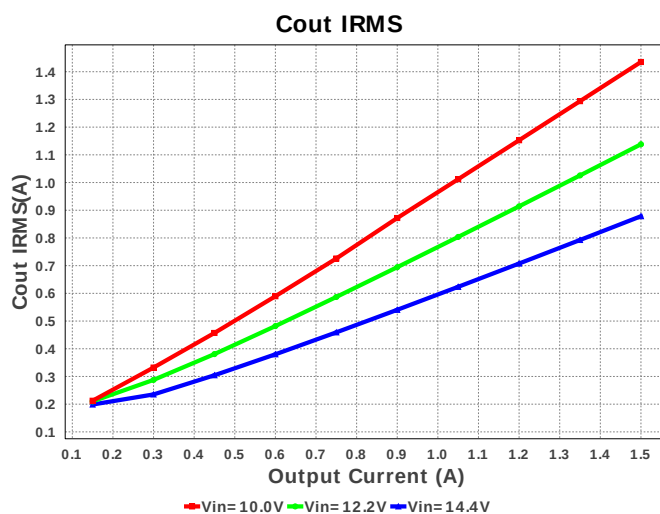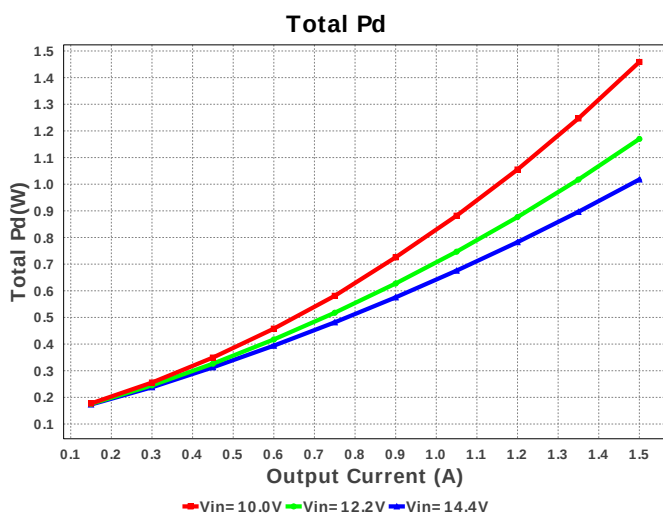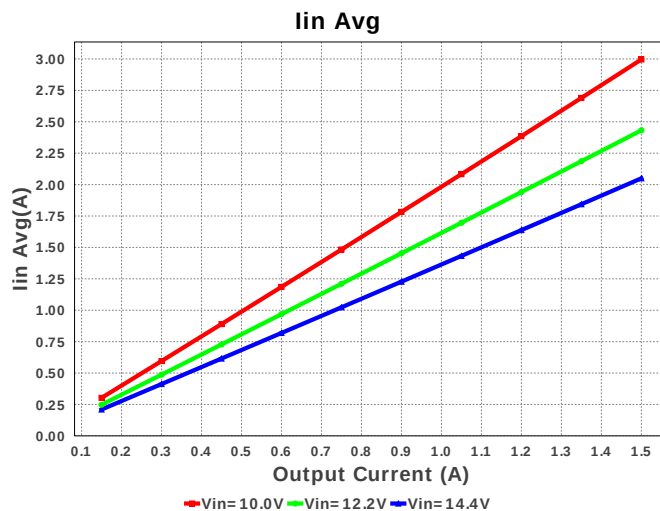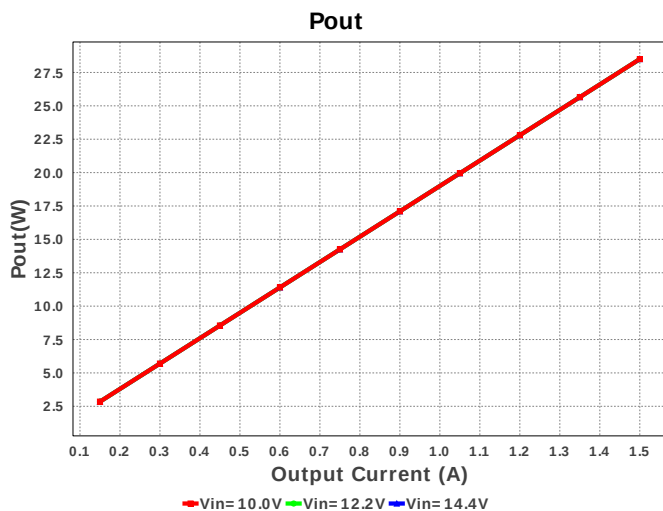

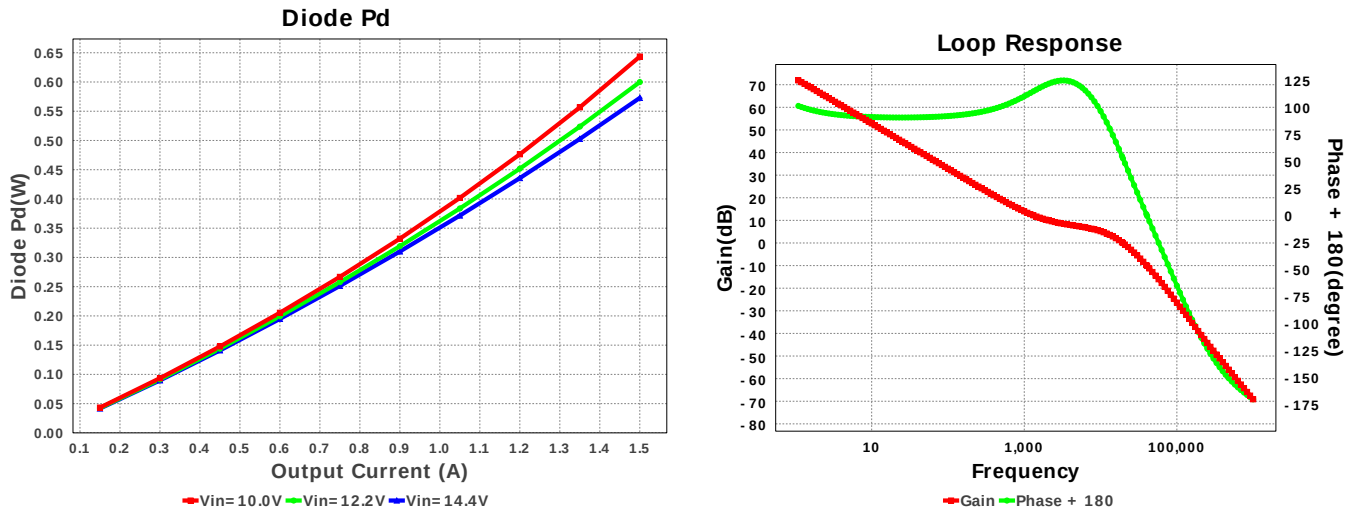

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	259.14 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	1.411 A	Current	Output capacitor RMS ripple current
3.	Coutx IRMS	0.0 A	Current	Output capacitor_x RMS ripple current
4.	IC Ipk	3.449 A	Current	Peak switch current in IC
5.	Iin Avg	2.996 A	Current	Average input current
6.	L Ipp	897.69 mA	Current	Peak-to-peak inductor ripple current
7.	M Iavg	3.0 A	Current	MOSFET Average current
8.	M1 Irms	2.129 A	Current	Q Iavg
9.	BOM Count	16	General	Total Design BOM count
10.	FootPrint	220.0 mm ²	General	Total Foot Print Area of BOM components
11.	Frequency	778.91 kHz	General	Switching frequency
12.	IC Tolerance	9.0 mV	General	IC Feedback Tolerance
13.	M Vds Act	147.056 mV	General	Voltage drop across the MosFET
14.	Pout	28.5 W	General	Total output power
15.	Total BOM	\$3.18	General	Total BOM Cost
16.	D1 Tj	62.173 degC	Op_Point	D1 junction temperature
17.	Low Freq Gain	72.051 dB	Op_Point	Gain at 10Hz
18.	Vout Actual	18.804 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
19.	Vout OP	19.0 V	Op_Point	Operational Output Voltage
20.	Cross Freq	14.08 kHz	Op_point	Bode plot crossover frequency
21.	Duty Cycle	50.0 %	Op_point	Duty cycle
22.	Efficiency	95.131 %	Op_point	Steady state efficiency
23.	Gain Marg	-9.668 dB	Op_point	Bode Plot Gain Margin
24.	IC Tj	50.182 degC	Op_point	IC junction temperature
25.	ICThetaJA	43.3 degC/W	Op_point	IC junction-to-ambient thermal resistance
26.	IOUT_OP	1.5 A	Op_point	Iout operating point
27.	Phase Marg	55.576 deg	Op_point	Bode Plot Phase Margin
28.	VIN_OP	10.0 V	Op_point	Vin operating point
29.	Vout p-p	47.584 mV	Op_point	Peak-to-peak output ripple voltage
30.	Cin Pd	201.461 μW	Power	Input capacitor power dissipation
31.	Cout Pd	3.427 mW	Power	Output capacitor power dissipation
32.	Coutx Pd	0.0 W	Power	Output capacitor_x power loss
33.	Diode Pd	643.468 mW	Power	Diode power dissipation
34.	IC Pd	466.107 mW	Power	IC power dissipation
35.	L Pd	243.0 mW	Power	Inductor power dissipation
36.	Total Pd	1.459 W	Power	Total Power Dissipation
37.	Vout Tolerance	2.634 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.5	Maximum Output Current
2.	VinMax	14.4	Maximum input voltage
3.	VinMin	10.0	Minimum input voltage
4.	Vout	19.0	Output Voltage
5.	base_pn	TPS55340	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **TPS55340** Product Folder : <http://www.ti.com/product/TPS55340> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).