
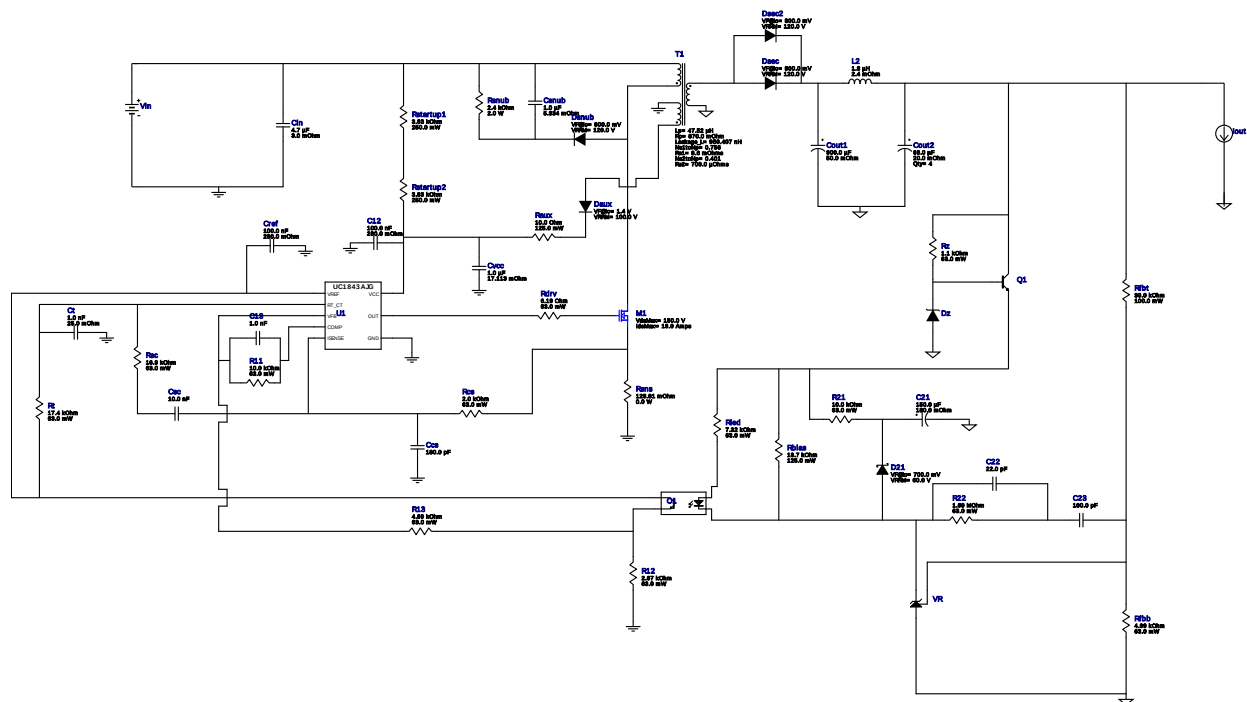



WEBENCH® Design Report

Design : 4738744/27 UC1843AJ
UC1843AJ 22.0V-34.0V to 22.00V @ 2.0A








Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	C21	Nichicon	UUD1H151MNL1GS Series= uD	Cap= 150.0 uF ESR= 180.0 mOhm VDC= 50.0 V IRMS= 670.0 mA	1	\$0.26	 SM_RADIAL_10BMM 160 mm ²
4.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	C23	Yageo America	CC0805JRNPO9BN101 Series= C0G/NP0	Cap= 100.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
7.	Cin	MuRata	GRM31CR71H475KA12L Series= X7R	Cap= 4.7 uF ESR= 3.0 mOhm VDC= 50.0 V IRMS= 4.98 A	1	\$0.07	1206 11 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Cout1	TDK	B41607A8907M008 Series= 2360	Cap= 900.0 uF ESR= 50.0 mOhm VDC= 63.0 V IRMS= 10.2 A	1	\$4.84	B41607_2200x4000_8 576 mm ²
9.	Cout2	Panasonic	50SVPF68M Series= ?	Cap= 68.0 uF ESR= 20.0 mOhm VDC= 50.0 V IRMS= 4.3 A	4	\$0.92	 CAPSMT_62_F12 151 mm ²
10.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
11.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csnub	MuRata	GRM31CR72A105KA01L Series= X7R	Cap= 1.0 uF ESR= 5.334 mOhm VDC= 100.0 V IRMS= 1.55432 A	1	\$0.11	 1206_190 11 mm ²
13.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
14.	Cvcc	MuRata	GRM188R61E105KA12D Series= X5R	Cap= 1.0 uF ESR= 17.113 mOhm VDC= 25.0 V IRMS= 979.39 mA	1	\$0.01	 0603 5 mm ²
15.	D21	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.09	 SMA 37 mm ²
16.	Daux	NXP Semiconductor	BAS316,115	VF@Io= 1.4 V VRRM= 100.0 V	1	\$0.02	 SOD-323 9 mm ²
17.	Dsec	Fairchild Semiconductor	FSV10120V	VF@Io= 800.0 mV VRRM= 120.0 V	1	\$0.21	 TO-277A 56 mm ²
18.	Dsec2	Fairchild Semiconductor	FSV10120V	VF@Io= 800.0 mV VRRM= 120.0 V	1	\$0.21	 TO-277A 56 mm ²
19.	Dsnub	Fairchild Semiconductor	FSV10120V	VF@Io= 800.0 mV VRRM= 120.0 V	1	\$0.21	 TO-277A 56 mm ²
20.	Dz	Diodes Inc.	MMSZ5250B-7-F	Zener	1	\$0.03	 SOD-123 13 mm ²
21.	L2	Coilcraft	SER1360-182KLB	L= 1.8 uH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm ²
22.	M1	Fairchild Semiconductor	FDMC86240	VdsMax= 150.0 V IdsMax= 16.0 Amps	1	\$0.93	 TRANS_Fairchild_MLP08S 18 mm ²
23.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
24.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
25.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
26.	R12	Vishay-Dale	CRCW04022K67FKED Series= CRCW..e3	Res= 2.67 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
27.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
28.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
29.	R22	Vishay-Dale	CRCW04021M69FKED Series= CRCW..e3	Res= 1.69 MOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
30.	Raux	Vishay-Dale	CRCW080510R0FKEA Series= CRCW..e3	Res= 10.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
31.	Rbias	Panasonic	ERJ-6ENF1372V Series= ERJ-6E	Res= 13.7 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
32.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
33.	Rdrv	Vishay-Dale	CRCW04026R19FKED Series= CRCW..e3	Res= 6.19 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
34.	Rfbb	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
35.	Rfbt	Yageo America	RC0603FR-0739KL Series= ?	Res= 39.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
36.	Rled	Vishay-Dale	CRCW04027K32FKED Series= CRCW..e3	Res= 7.32 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
37.	Rsc	Vishay-Dale	CRCW040216K9FKED Series= CRCW..e3	Res= 16.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
38.	Rsns	CUSTOM	CUSTOM Series= ?	Res= 128.81 mOhm Power= 0.0 W Tolerance= 0.0%	1	NA	CUSTOM 0 mm²
39.	Rsnub	Vishay-Bccomponents	PR02000202401JR500 Series= ?	Res= 2.4 kOhm Power= 2.0 W Tolerance= 5.0%	1	\$0.05	PR02 113 mm²
40.	Rstartup1	Panasonic	ERJ-8ENF3831V Series= ERJ-8E	Res= 3.83 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
41.	Rstartup2	Panasonic	ERJ-8ENF3831V Series= ERJ-8E	Res= 3.83 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
42.	Rt	Vishay-Dale	CRCW040217K4FKED Series= CRCW..e3	Res= 17.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
43.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW..e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
44.	T1	CUSTOM	CUSTOM	Lp= 47.52 μ H Rp= 870.0 mOhm Leakage_L= 950.407 nH Ns1toNp= 0.756 Rs1= 8.6 mOhms Ns2toNp= 0.401 Rs2= 700.0 μ Ohms	1	NA	CUSTOM 0 mm ²
45.	U1	Texas Instruments	UC1843AJ	Switcher	1	\$15.60	 JG0008A 111 mm ²
46.	VR	Texas Instruments	TL431AIDBVR	Voltage References	1	\$0.07	 R-PDSO-G3 16 mm ²



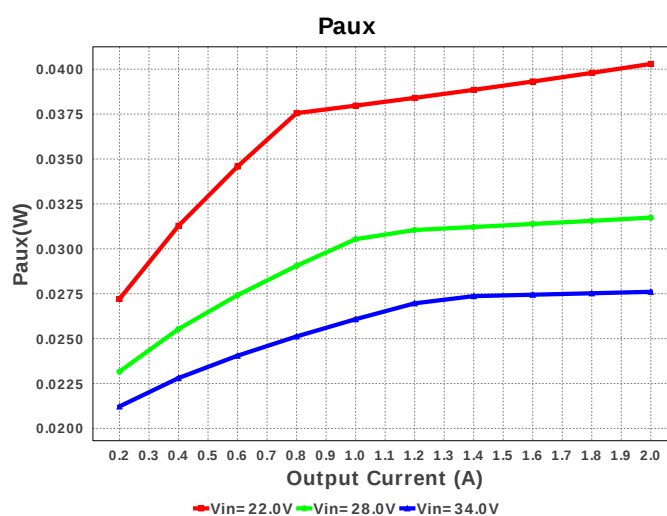
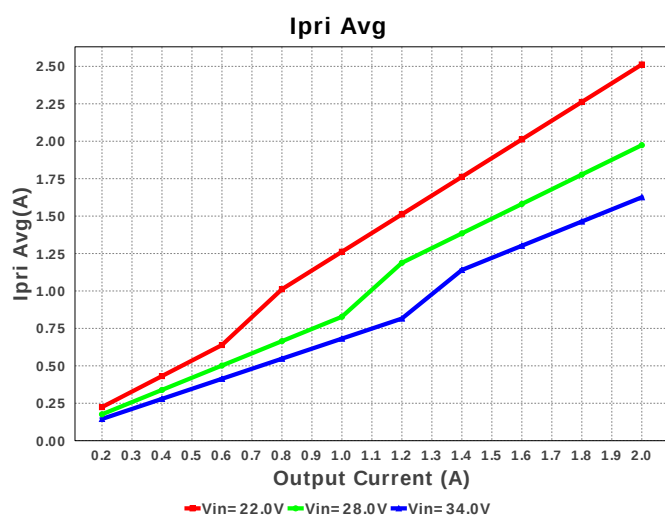
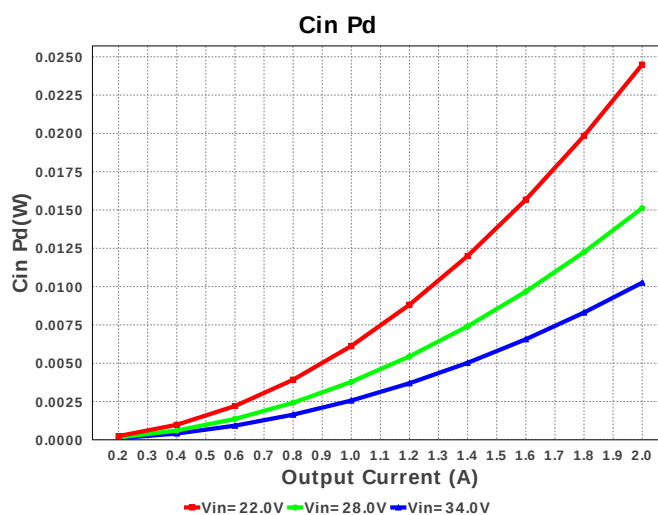
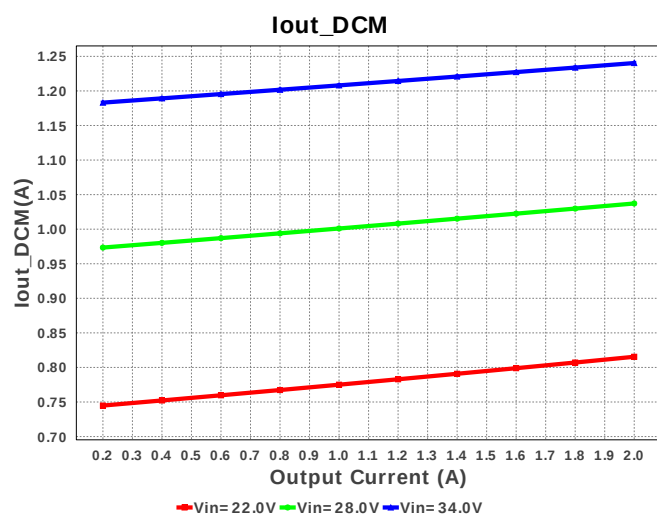


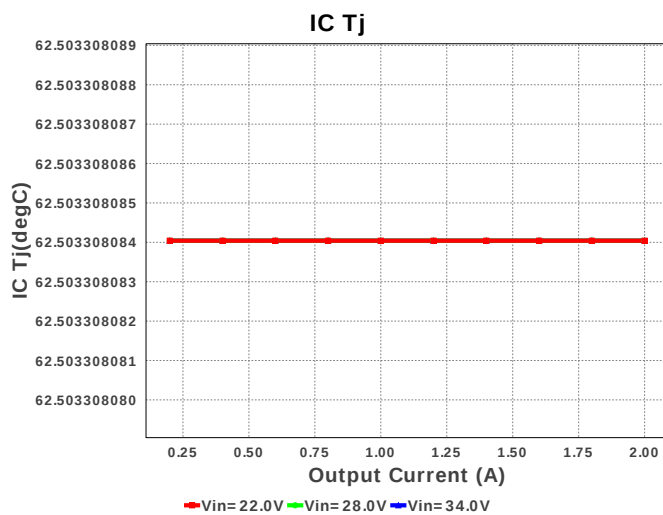
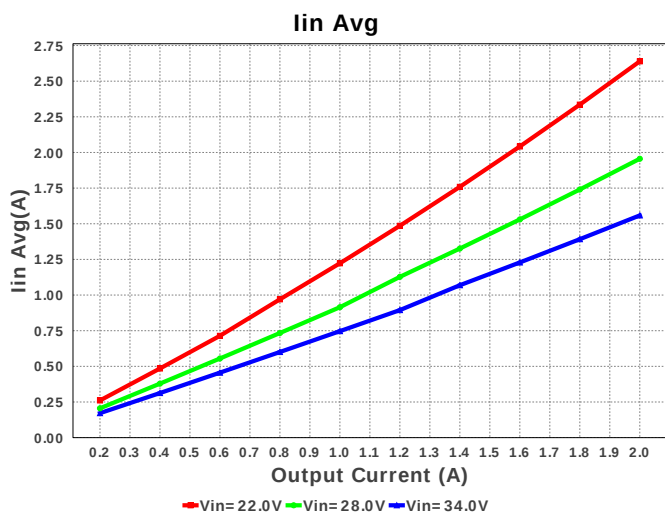
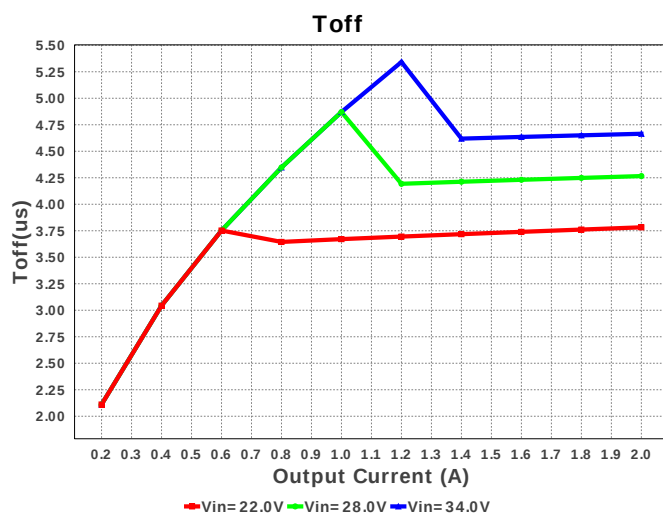
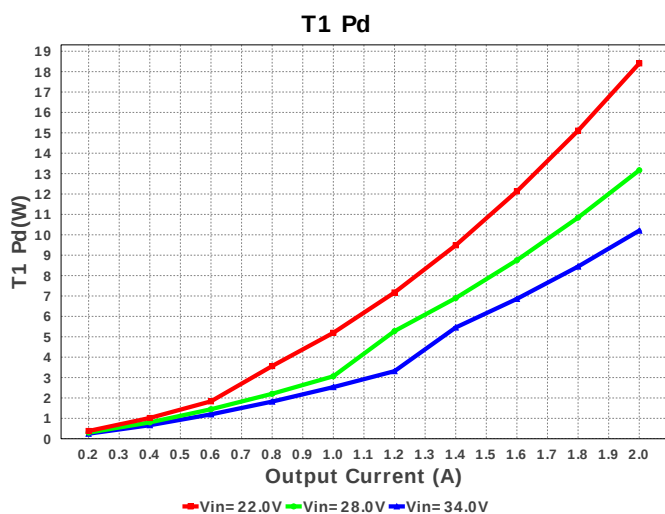
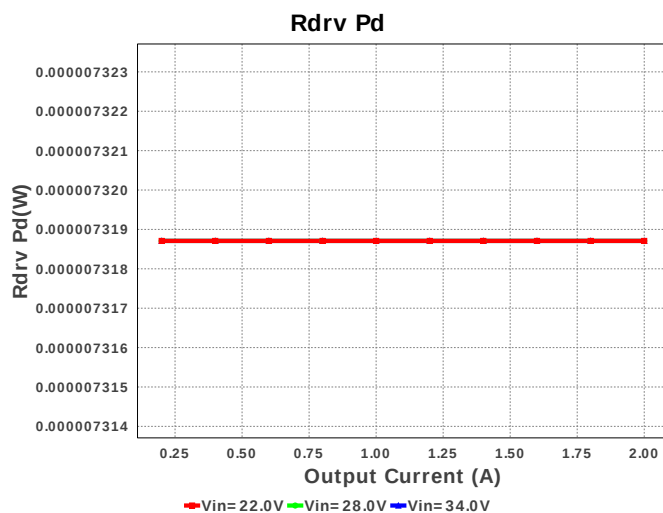
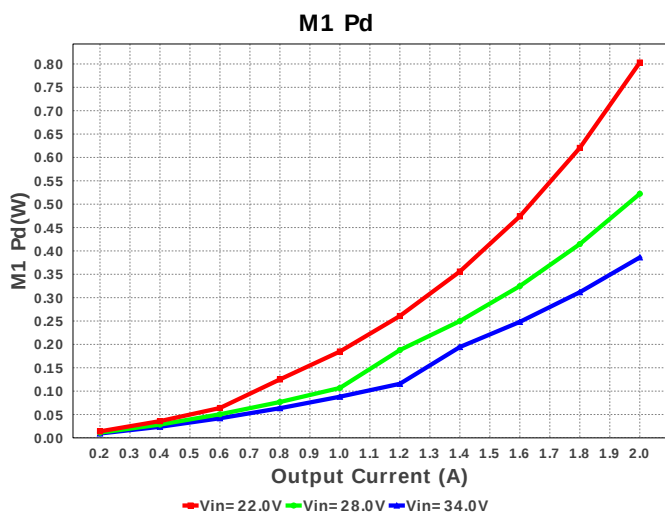


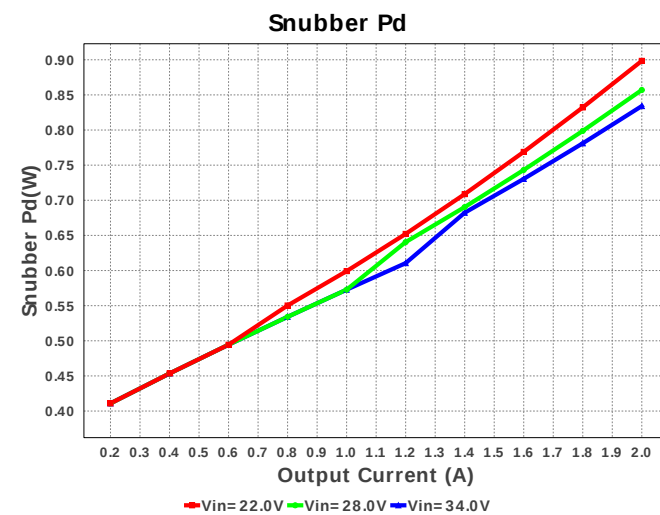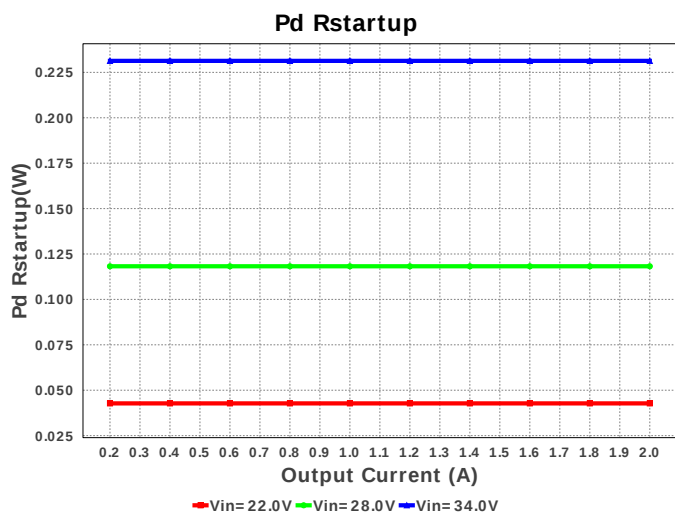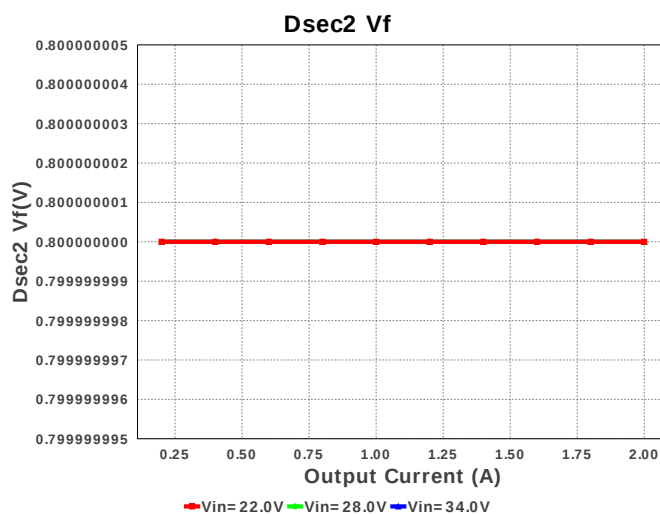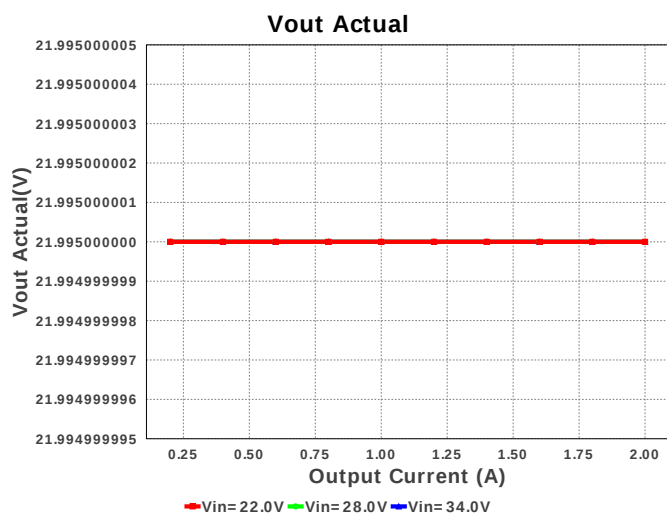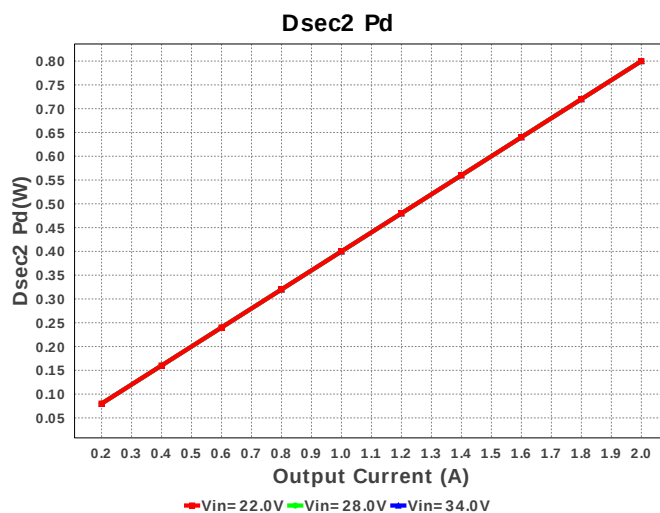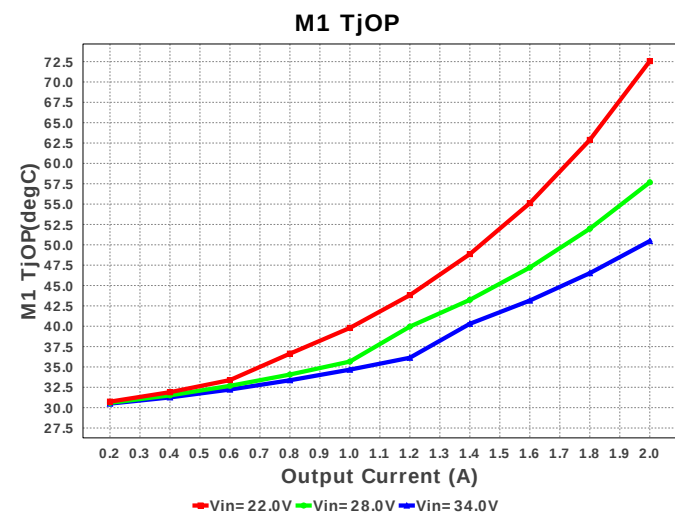


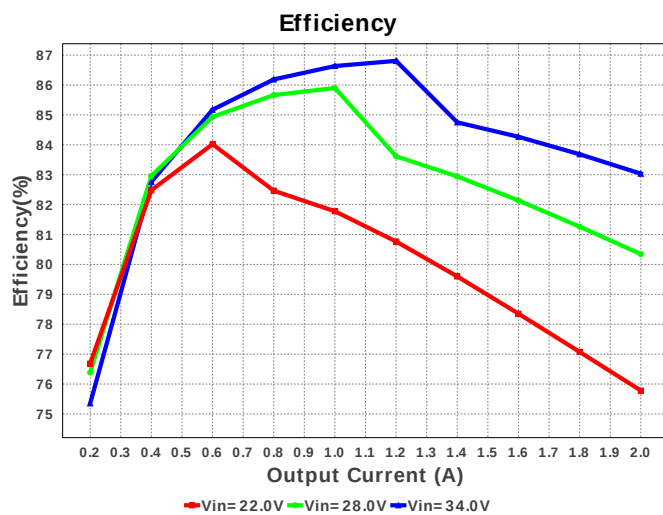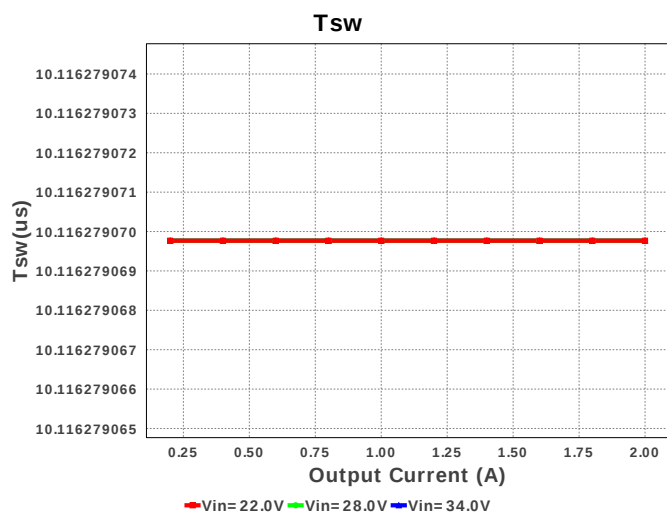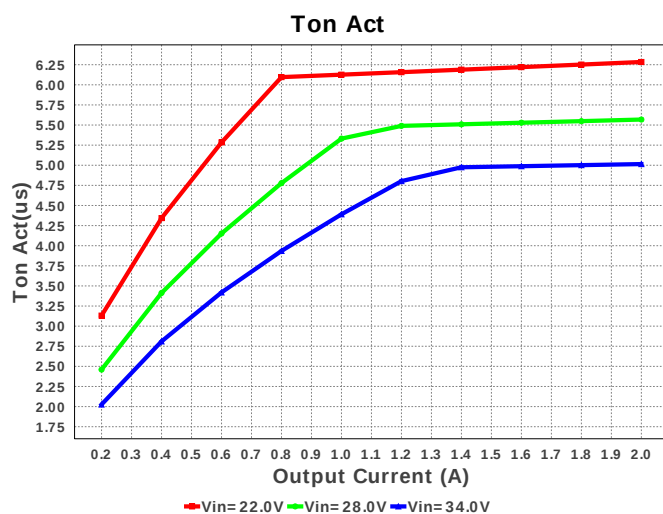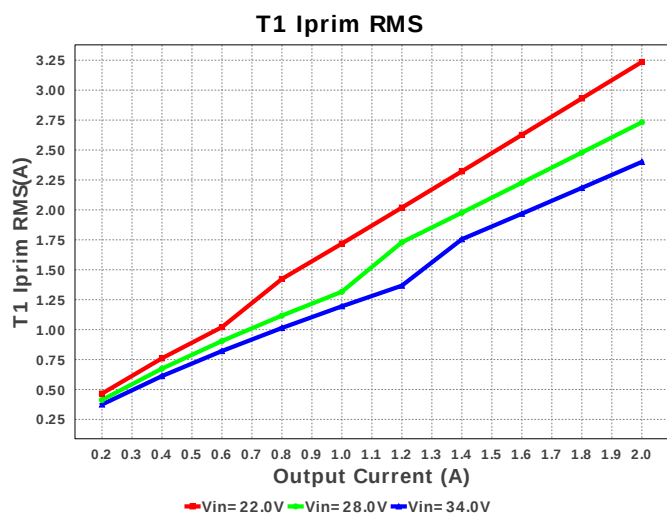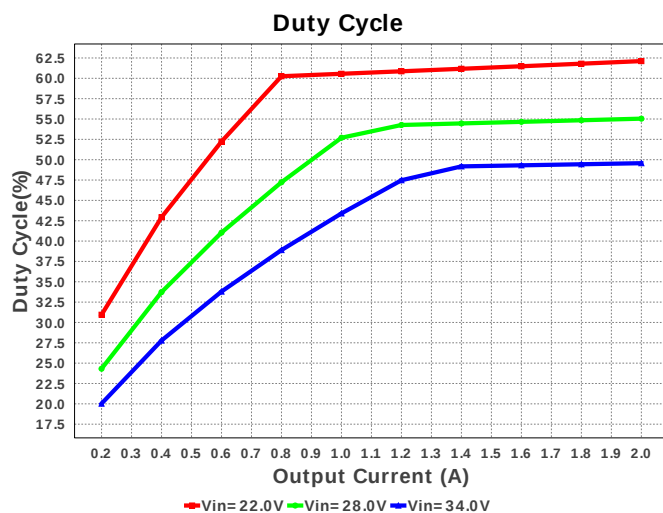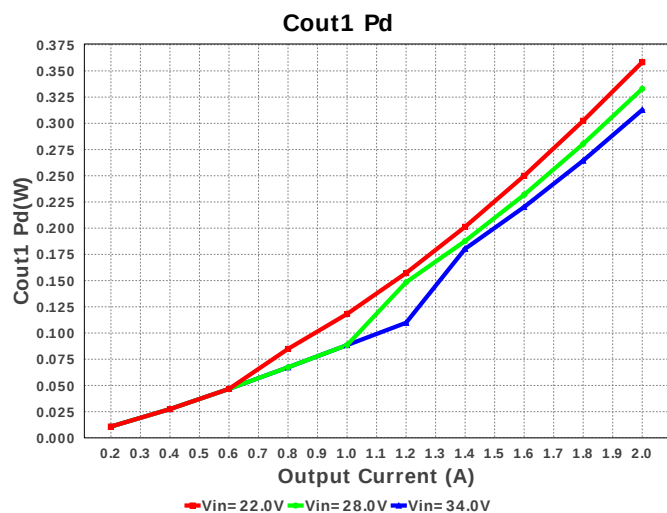

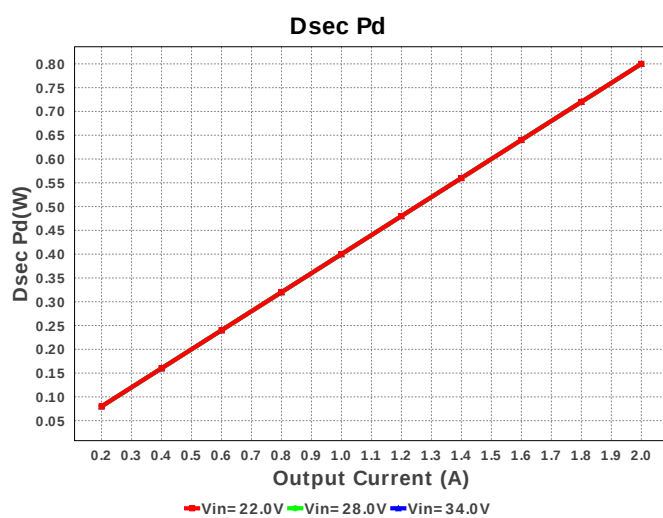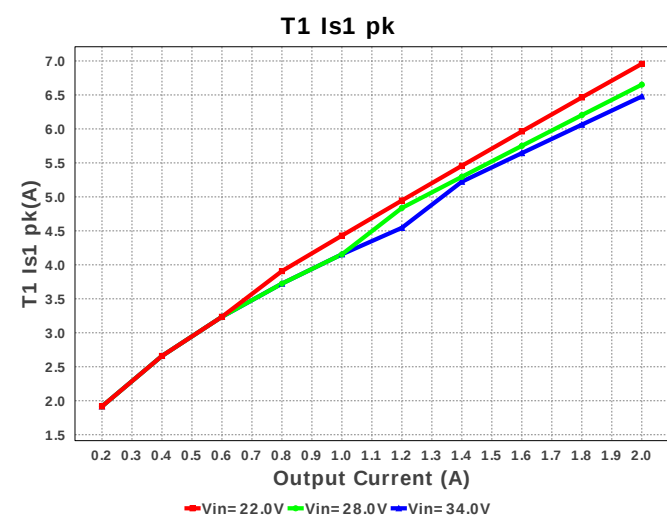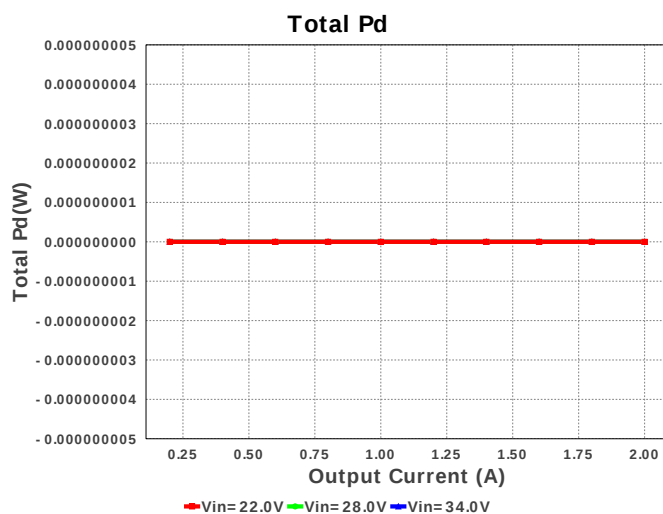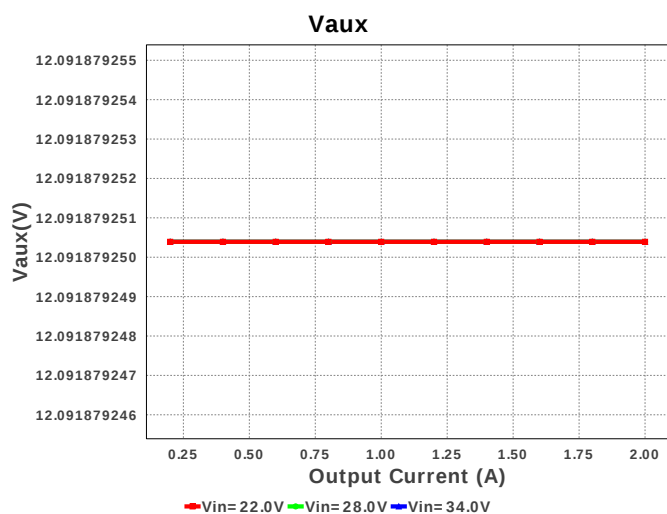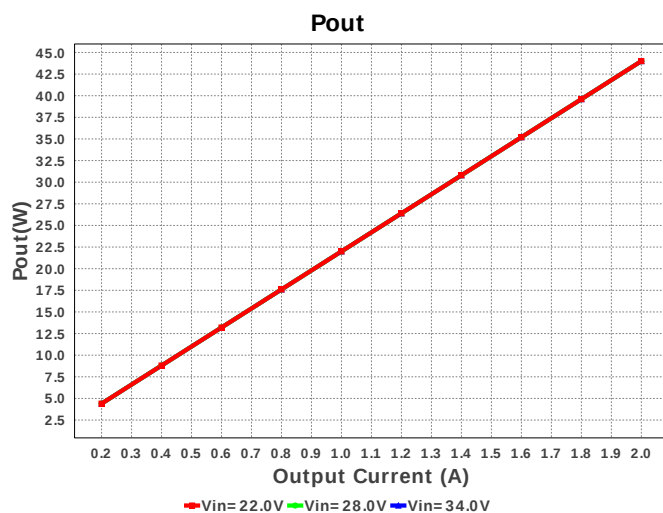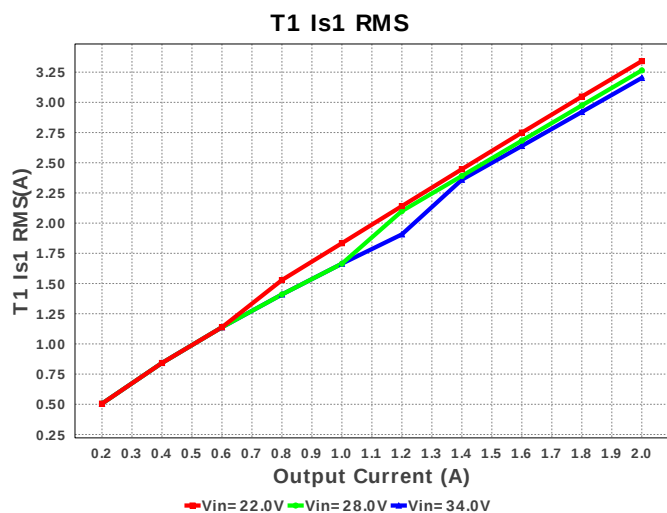

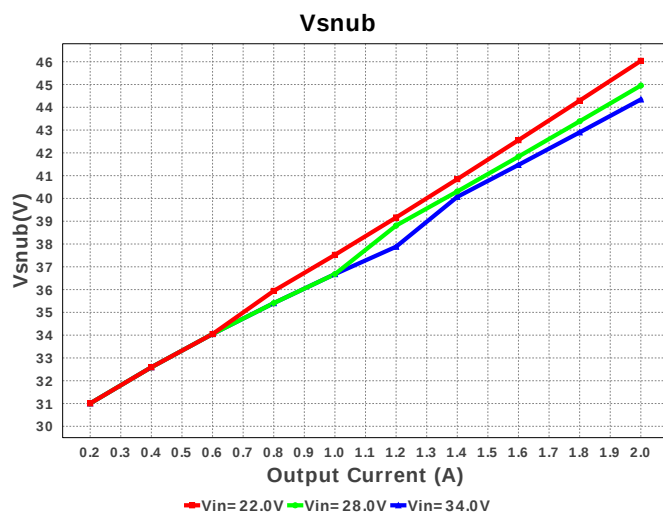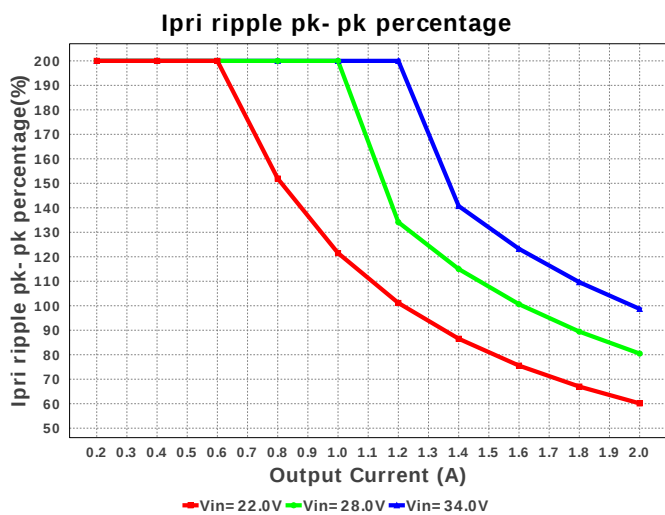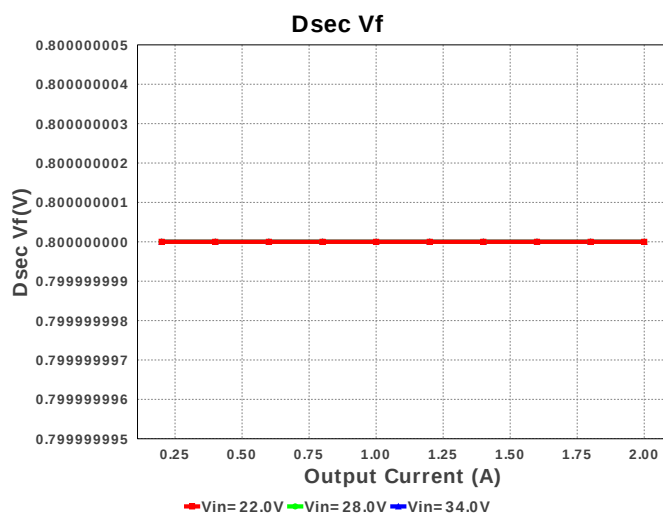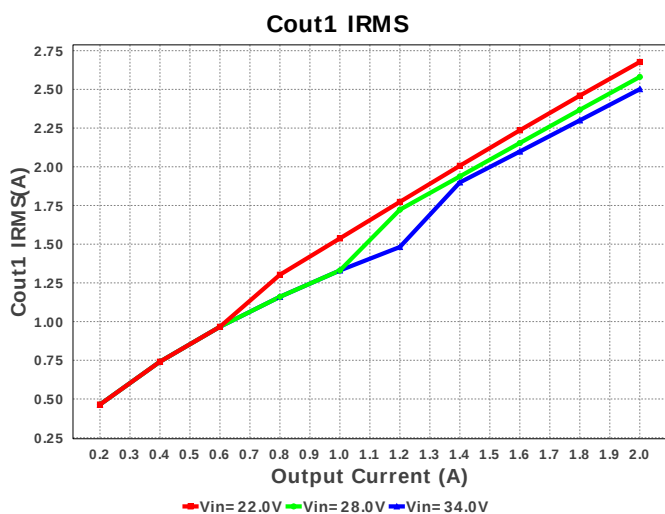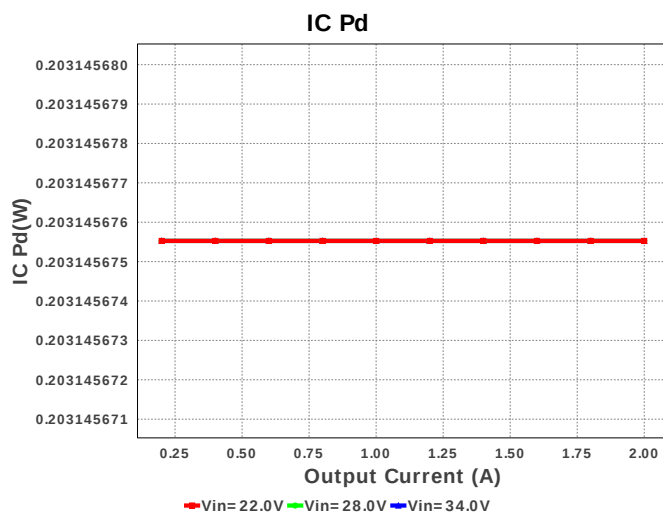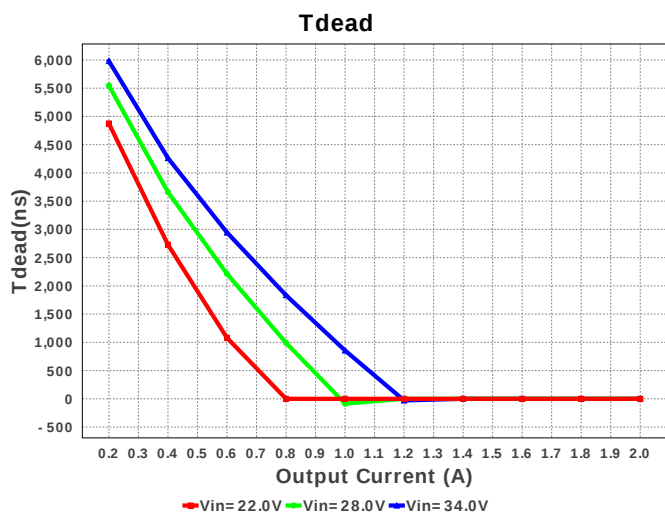

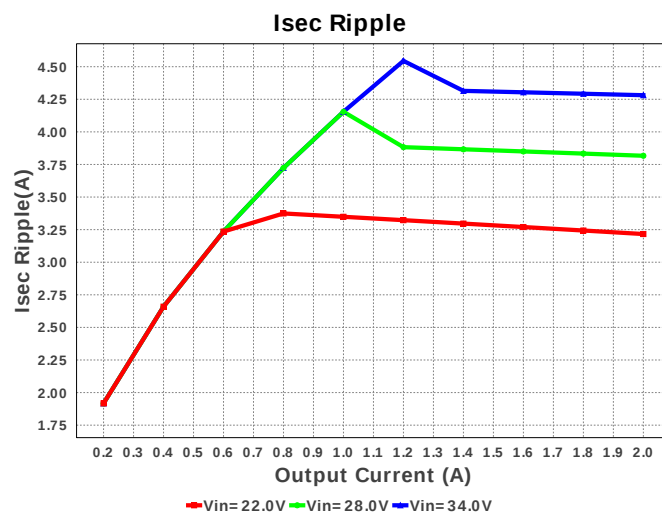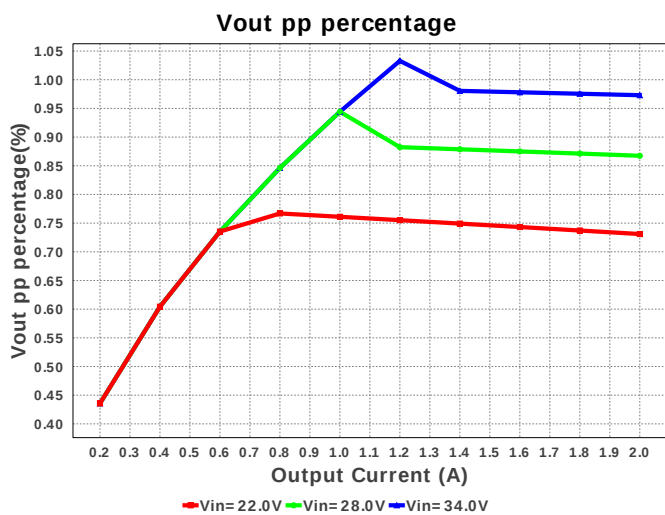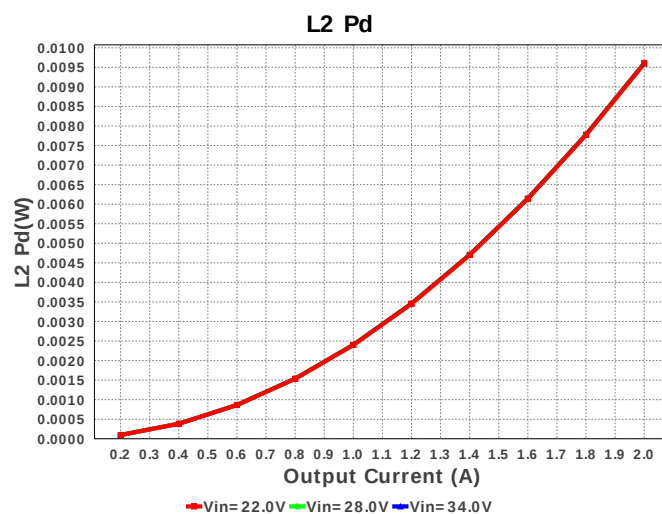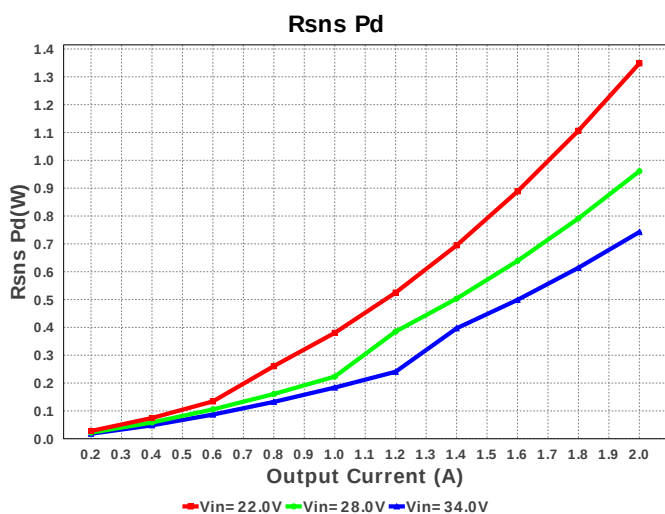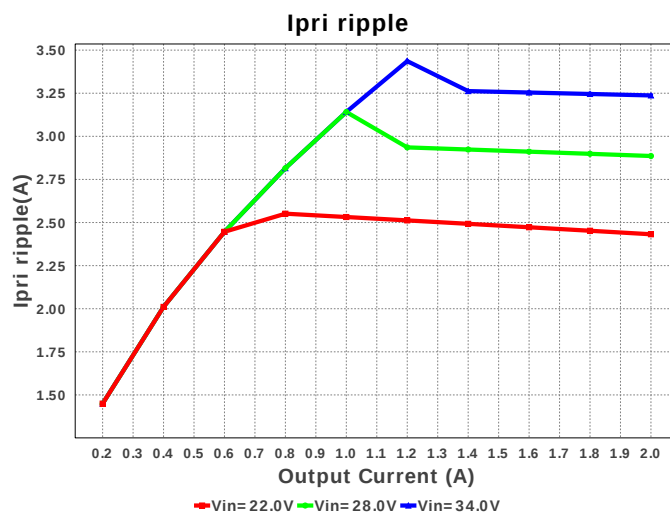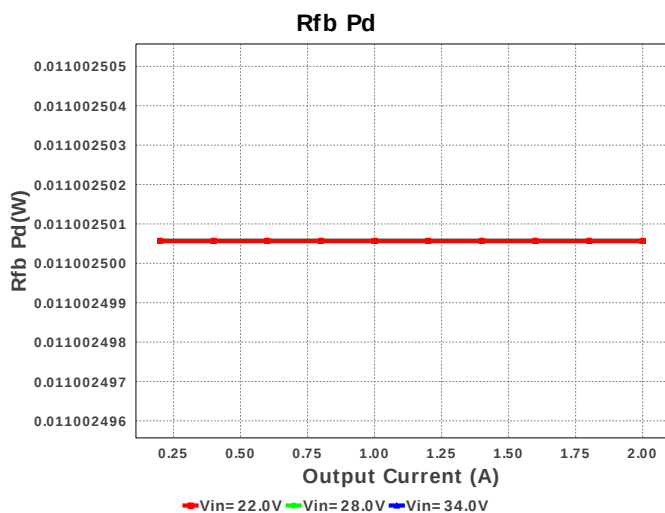

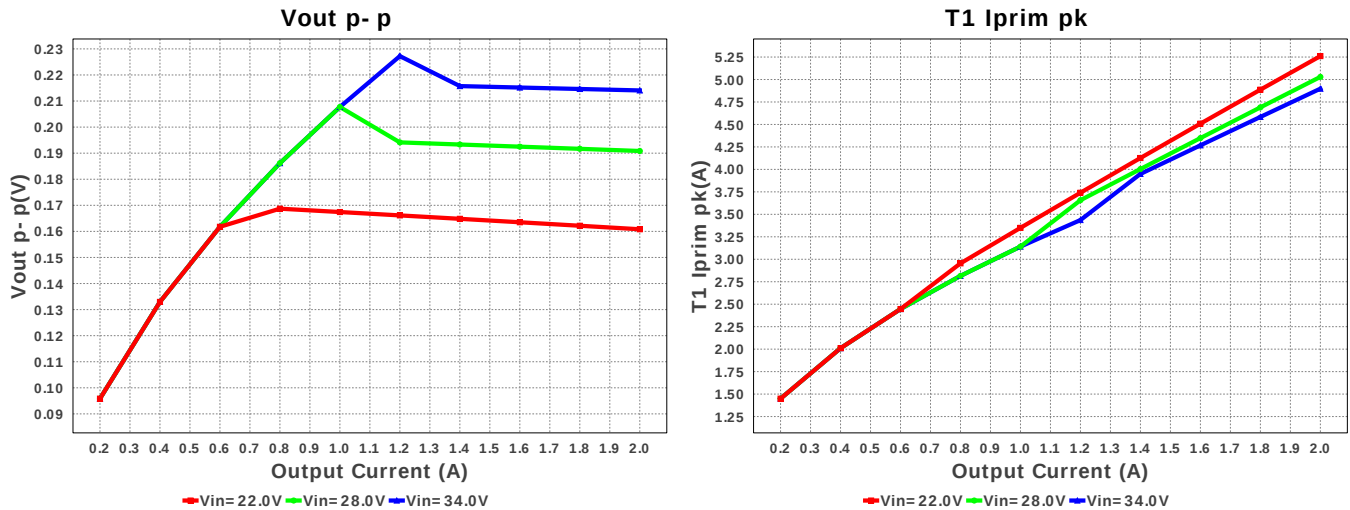

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	2.677 A	Current	Output capacitor1 RMS ripple current
2.	Iin Avg	2.639 A	Current	Average input current
3.	Iout_DCM	815.428 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	2.512 A	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	2.432 A	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	60.127 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	3.216 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	3.235 A	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	5.26 A	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	3.342 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	6.957 A	Current	Transformer Secondary1 Peak Current
12.	BOM Count	49	General	Total Design BOM count
13.	Daux trr	4.0 ns	General	Auxiliary Diode Reverse Recovery Time
14.	Dsec Vf	800.0 mV	General	Effective Forward Voltage Drop at the Operating Current
15.	Dsec trr	16.7 ns	General	Output Diode Reverse Recovery Time
16.	Dsec2 Vf	800.0 mV	General	Effective Forward Voltage Drop at the Operating Current
17.	Dsnub trr	16.7 ns	General	Snubber Diode Reverse Recovery Time
18.	FootPrint	2.277 k mm ²	General	Total Foot Print Area of BOM components
19.	Frequency	98.851 kHz	General	Switching frequency
20.	Pout	44.0 W	General	Total output power
21.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
22.	Toff	3.782 us	General	Approximate Converter Off Time
23.	Ton Act	6.284 us	General	Approximate Converter On Time
24.	Total BOM	\$0.0	General	Total BOM Cost
25.	Tsw	10.116 us	General	Switching Time Period
26.	Vaux	12.092 V	General	Auxiliary Voltage
27.	Vsnub	46.037 V	General	Voltage Across the Snubber
28.	Vout Actual	21.995 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
29.	Vout OP	22.0 V	Op_Point	Operational Output Voltage
30.	Duty Cycle	62.116 %	Op_point	Duty cycle
31.	Efficiency	75.783 %	Op_point	Steady state efficiency
32.	IC Tj	62.503 degC	Op_point	IC junction temperature
33.	ICThetaJA	160.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
34.	IOUT_OP	2.0 A	Op_point	Iout operating point
35.	M1 TJOP	72.563 degC	Op_point	M1 MOSFET junction temperature
36.	Vout p-p	160.812 mV	Op_point	Peak-to-peak output ripple voltage
37.	Cin Pd	24.49 mW	Power	Input capacitor power dissipation
38.	Cout1 Pd	358.308 mW	Power	Output capacitor1 power dissipation
39.	Dsec Pd	800.0 mW	Power	Secondary Diode Power Dissipation
40.	Dsec2 Pd	800.0 mW	Power	Secondary Diode Power Dissipation
41.	IC Pd	203.146 mW	Power	IC power dissipation
42.	L2 Pd	9.6 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
43.	M1 Pd	803.08 mW	Power	M1 MOSFET total power dissipation
44.	Paux	40.293 mW	Power	Power Dissipation in Raux and Daux
45.	Pd Rstartup	42.746 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
46.	Rdrv Pd	7.319 μW	Power	Power Dissipation in Gate Drive Resistor
47.	Rfb Pd	11.003 mW	Power	Rfb Power Dissipation
48.	Rsns Pd	1.348 W	Power	Current Limit Sense Resistor Power Dissipation
49.	Snubber Pd	898.443 mW	Power	Snubber Power Dissipation
50.	T1 Pd	18.405 W	Power	Estimated Losses in Transformer

#	Name	Value	Category	Description
51.	Total Pd	0.0 W	Power	Total Power Dissipation
52.	Vout Tolerance	2.117 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
53.	Vout pp percentage	730.965 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	Iout1	2.0	Output Current #1
3.	Iout2	5.0	Output Current #2
4.	Iout3	2.0	Output Current #3
5.	VinMax	34.0	Maximum input voltage
6.	VinMin	22.0	Minimum input voltage
7.	Vout	22.0	Output Voltage
8.	Vout1	22.0	Output Voltage #1
9.	Vout2	7.0	Output Voltage #2
10.	Vout3	4.0	Output Voltage #3
11.	base_pn	UC1843A	Texas Instruments Base Part Number
12.	source	DC	Input Source Type
13.	ta	30.0	Ambient temperature

Design Assistance

1. UC1843A Product Folder : <http://www.ti.com/product/UC1843A> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).