


WEBENCH® Design Report

Design : 1194016/2074 LM3444MM/NOPB
LM3444MM/NOPB 210.0V-240.0V to 20.95V @ 0.7A

OUTPUT_BLOCK

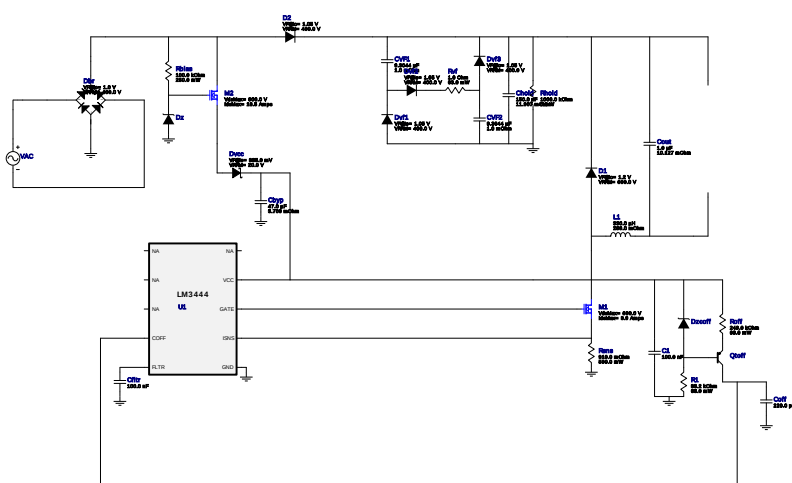


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C1	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	CVF1	CUSTOM	CUSTOM Series= ?	Cap= 9.3044 uF ESR= 1.0 mOhm VDC= 271.529 V IRMS= 837.64 mA	1	NA	CUSTOM 0 mm ²
3.	CVF2	CUSTOM	CUSTOM Series= ?	Cap= 9.3044 uF ESR= 1.0 mOhm VDC= 271.529 V IRMS= 837.64 mA	1	NA	CUSTOM 0 mm ²
4.	Cby	MuRata	GRM31CR61A476KE15L Series= X5R	Cap= 47.0 uF ESR= 3.709 mOhm VDC= 10.0 V IRMS= 4.2862 A	1	\$0.15	1206_190 11 mm ²
5.	Cftr	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Chold	TDK	C3225X7T2J154K Series= X7T	Cap= 150.0 nF ESR= 11.907 mOhm VDC= 630.0 V IRMS= 0.0 A	1	\$0.19	1210 15 mm ²
7.	Coff	Yageo America	CC0805JRNPO9BN221 Series= C0G/NP0	Cap= 220.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Cout	MuRata	GRM188R61C105KA93D Series= X5R	Cap= 1.0 uF ESR= 10.127 mOhm VDC= 16.0 V IRMS= 994.63 mA	1	\$0.01	 0603 5 mm ²
9.	D1	Bourns	CD214B-F3600	VF@Io= 1.2 V VRRM= 600.0 V	1	\$0.14	 SMB 44 mm ²
10.	D2	Bourns	CD1408-FU1400	VF@Io= 1.05 V VRRM= 400.0 V	1	\$0.13	 Diode_1408 13 mm ²
11.	D_LED	Cree	XHP50A-00-0000-0D00J40CB	LED	1	\$5.02	 xlampxhp 0 mm ²
12.	Dbr	Diodes Inc.	HD04-T	VF@Io= 1.0 V VRRM= 400.0 V	1	\$0.12	 MiniDIP 62 mm ²
13.	Dvcc	ON Semiconductor	MBR0520LT1G	VF@Io= 385.0 mV VRRM= 20.0 V	1	\$0.06	 SOD-123 13 mm ²
14.	Dvf1	Bourns	CD1408-FU1400	VF@Io= 1.05 V VRRM= 400.0 V	1	\$0.13	 Diode_1408 13 mm ²
15.	Dvf2	Bourns	CD1408-FU1400	VF@Io= 1.05 V VRRM= 400.0 V	1	\$0.13	 Diode_1408 13 mm ²
16.	Dvf3	Bourns	CD1408-FU1400	VF@Io= 1.05 V VRRM= 400.0 V	1	\$0.13	 Diode_1408 13 mm ²
17.	Dz	ON Semiconductor	BZX84C15LT1G	Zener	1	\$0.02	 SOT-23 14 mm ²
18.	Dzcoff	ON Semiconductor	BZX84C5V1LT1G	Zener	1	\$0.02	 SOT-23 14 mm ²
19.	L1	Coilcraft	MSS1210-334KEB	L= 330.0 uH DCR= 289.0 mOhm	1	\$0.81	 MSS1210 204 mm ²
20.	M1	Fairchild Semiconductor	FCD4N60TM	VdsMax= 600.0 V IdsMax= 3.9 Amps	1	\$0.49	 DPAK 102 mm ²
21.	M2	STMicroelectronics	STW21N90K5	VdsMax= 900.0 V IdsMax= 18.5 Amps	1	\$3.94	 TO-247 123 mm ²
22.	Qtoff	Fairchild Semiconductor	MMBT4403	Bipolar Transistor	1	\$0.03	 SOT-23 14 mm ²
23.	R1	Vishay-Dale	CRCW040233K2FKED Series= CRCW..e3	Res= 33.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
24.	Rbias	Panasonic	ERJ-8ENF1003V Series= ERJ-8E	Res= 100.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
25.	Rhold	CUSTOM	CUSTOM Series= ?	Res= 1000.0 kOhm Power= 0.0 W Tolerance= 0.0%	1	NA	CUSTOM 0 mm ²
26.	Roff	Vishay-Dale	CRCW0402249KFKED Series= CRCW..e3	Res= 249.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
27.	Rsns	Bourns	CRM1206-FX-R910ELF Series= ?	Res= 910.0 mOhm Power= 500.0 mW Tolerance= 1.0%	1	\$0.03	 1206 11 mm ²
28.	Rvf	Vishay-Dale	CRCW04021R00FKED Series= CRCW..e3	Res= 1.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
29.	U1	Texas Instruments	LM3444MM/NOPB	Switcher	1	\$0.35	0 mm ²


Avg FET Pd

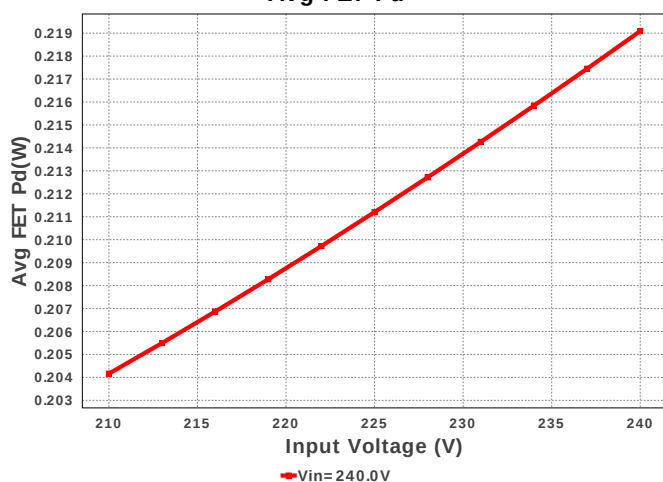


Avg M1 FET Tj






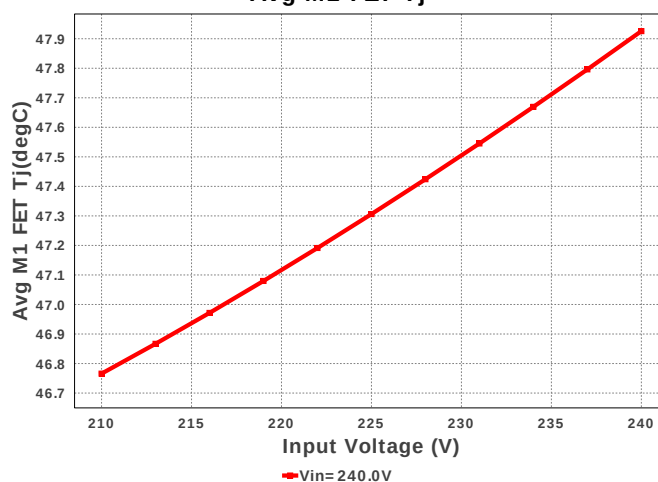








Avg IC Tj

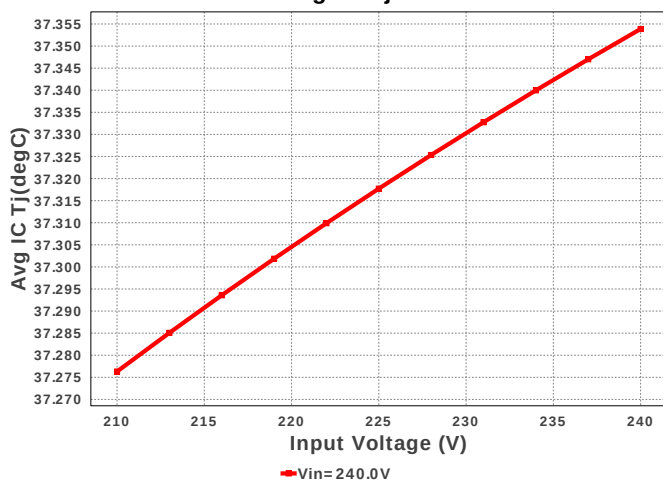


Avg L pd

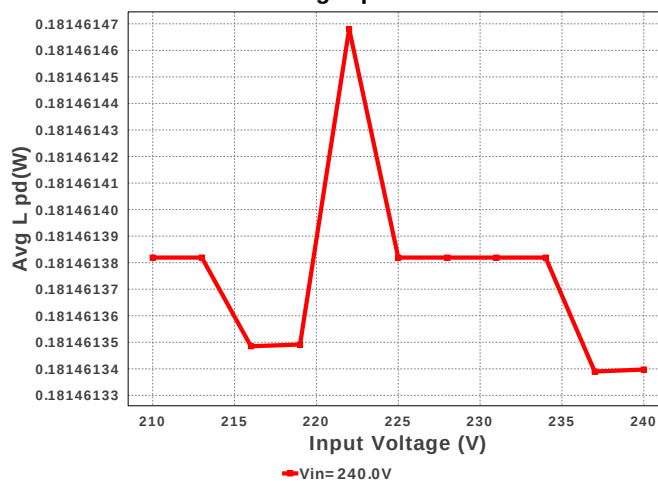

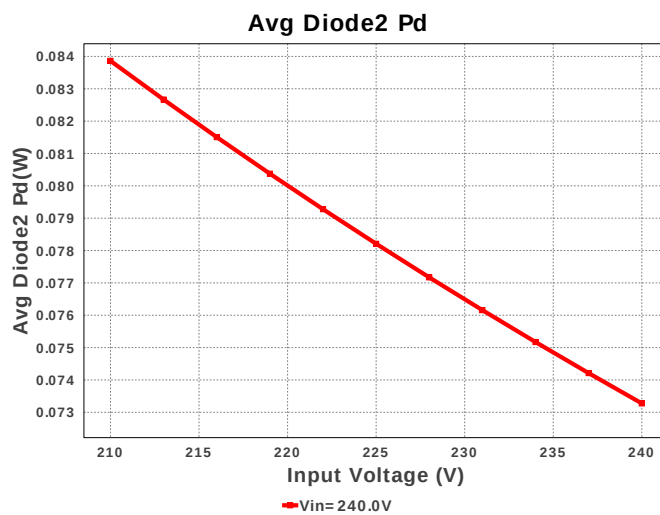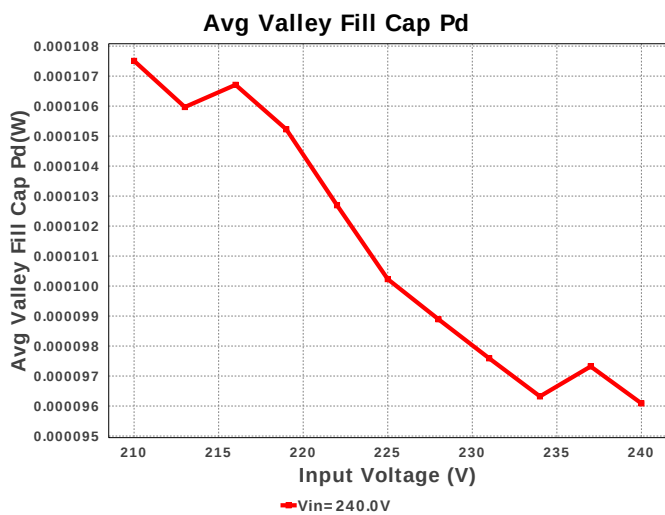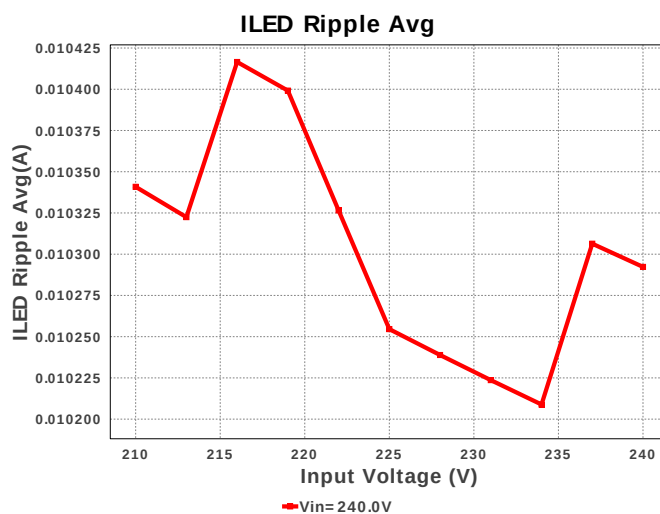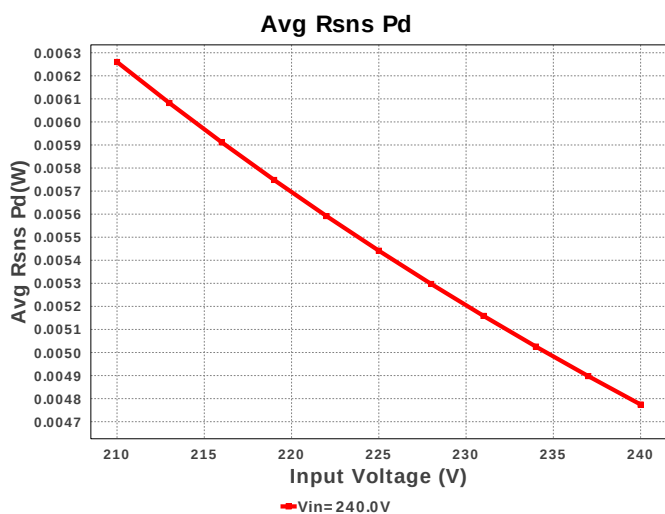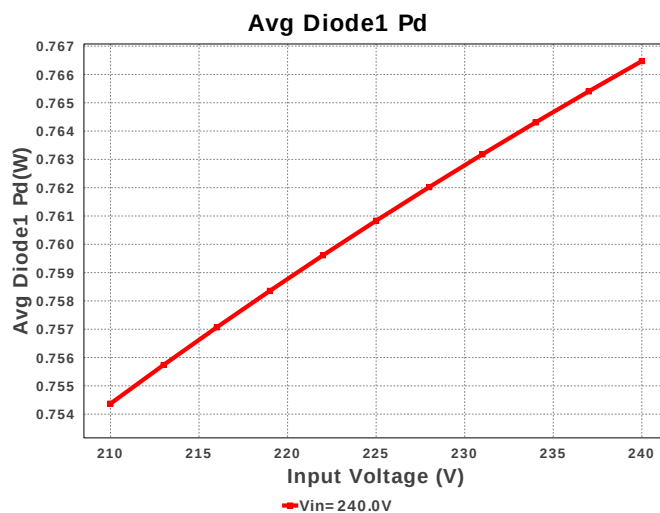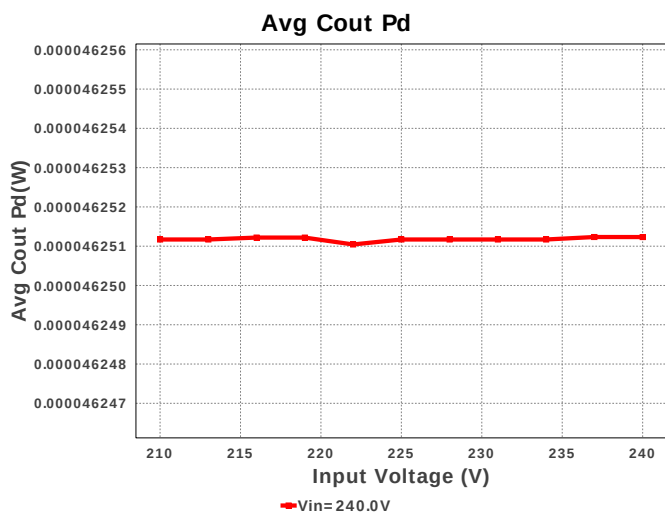

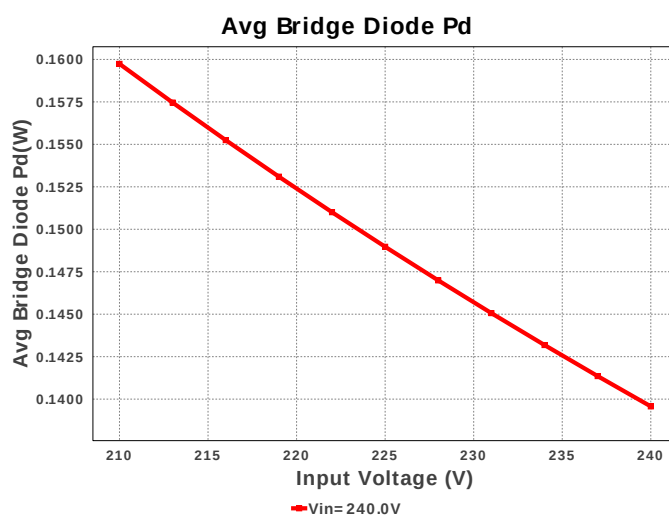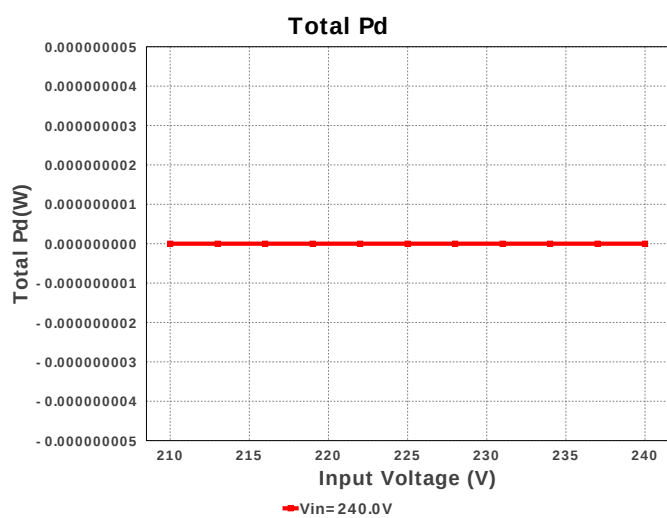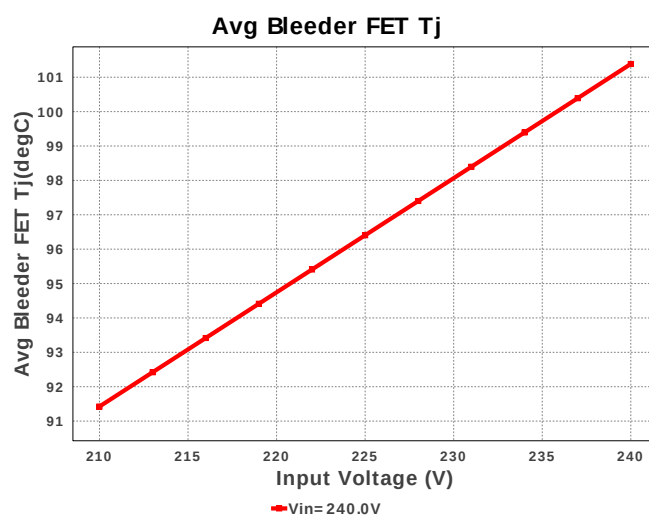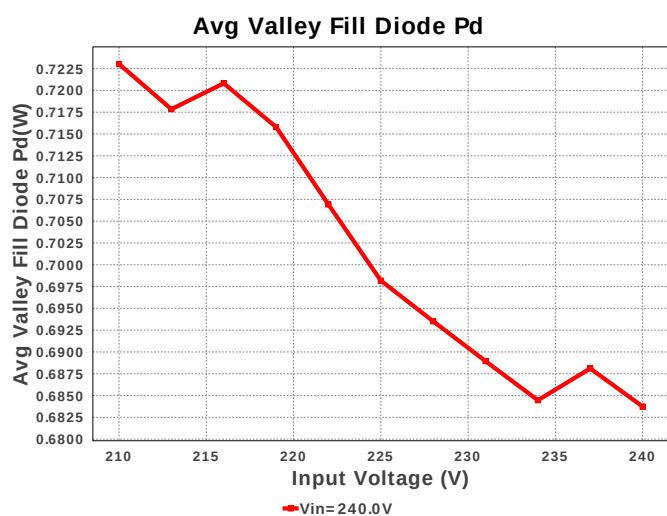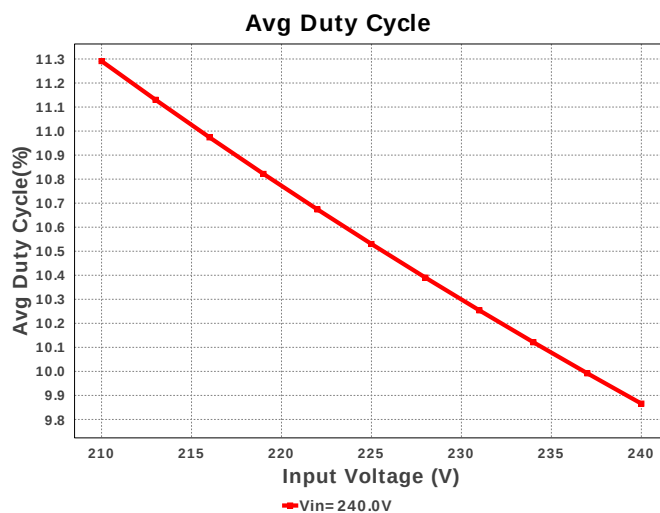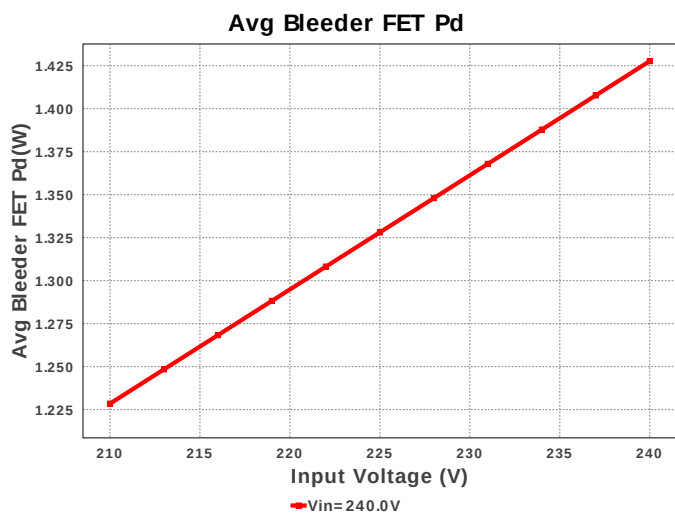

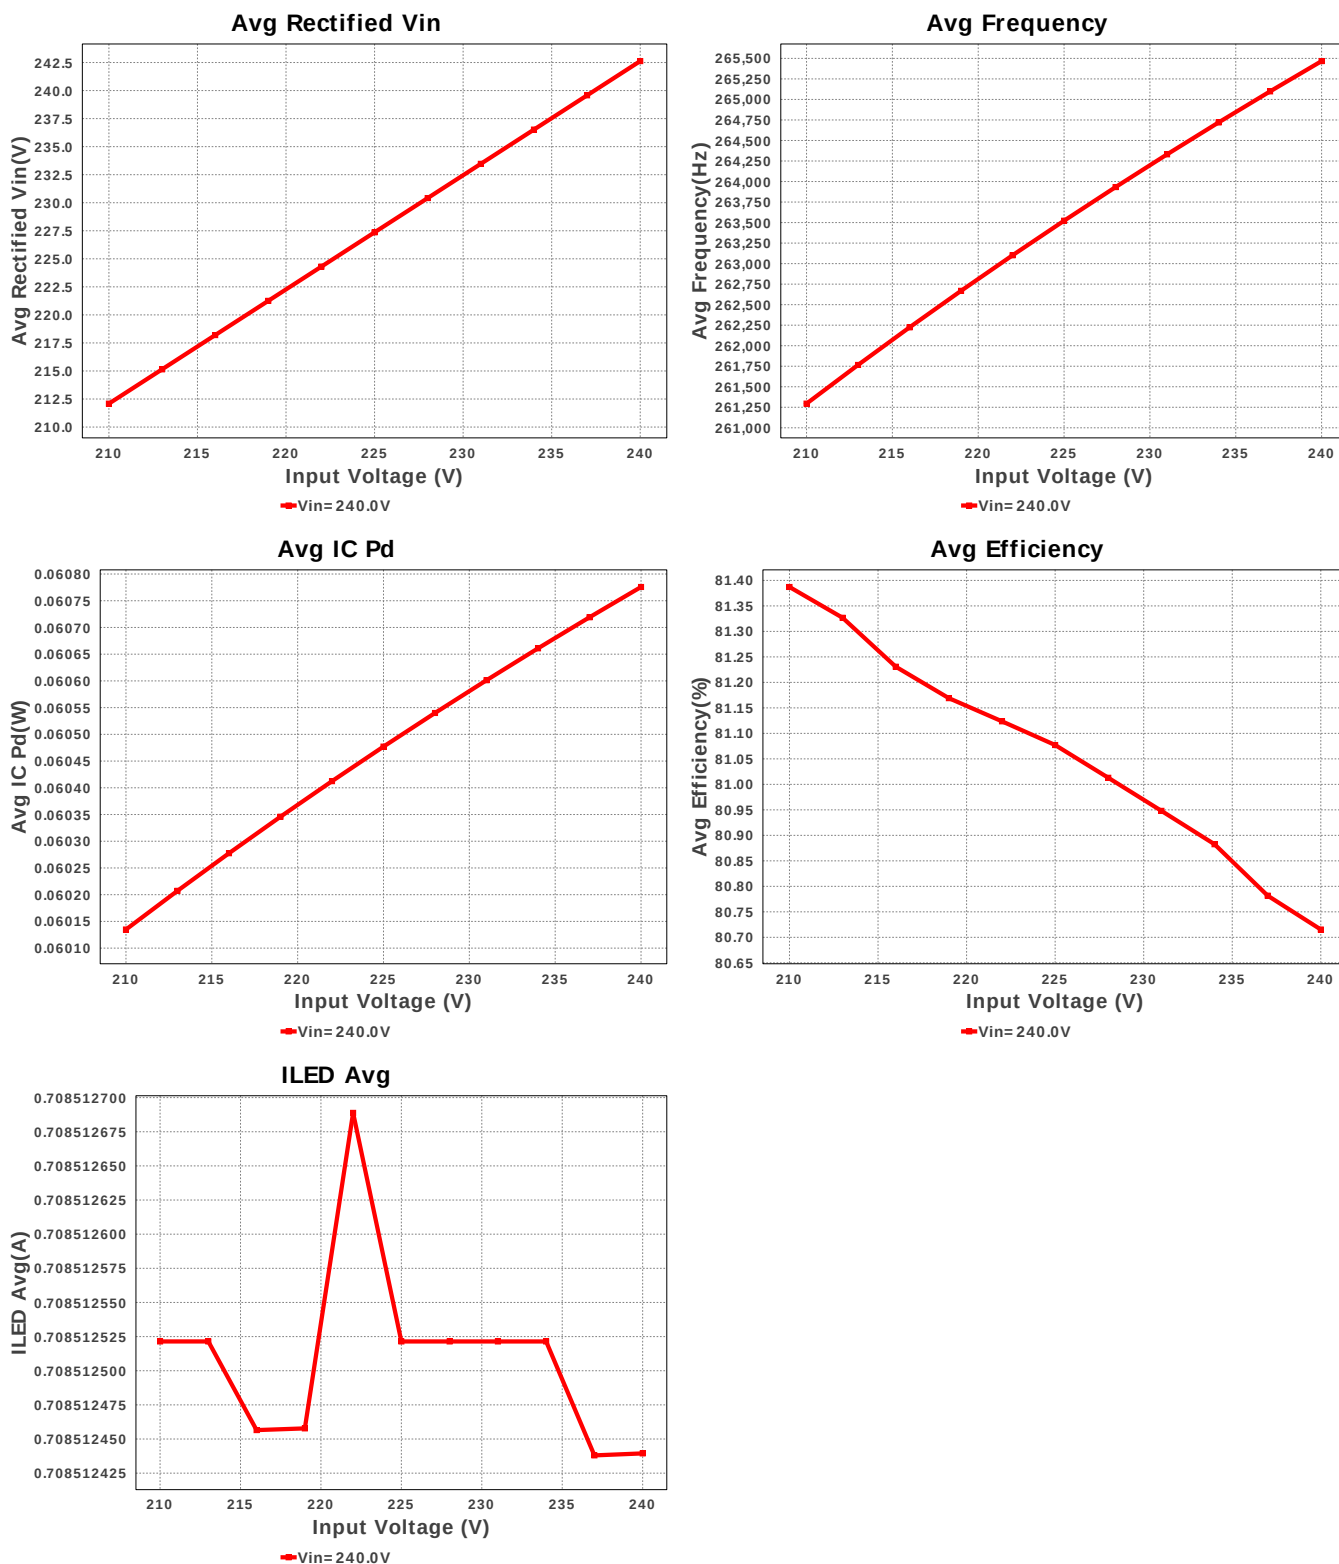

Operating Values

#	Name	Value	Category	Description
1.	ILED Avg	708.513 mA	Current	Average Current per LED for the AC line period
2.	ILED Ripple Avg	10.18 mA	Current	Average LED Ripple Current for the AC line period
3.	Avg Rectified Vin	242.627 V	General	Average Rectified Voltage for the AC Line Period
4.	BOM Count	29	General	Total Design BOM count
5.	FootPrint	763.0 mm ²	General	Total Foot Print Area of BOM components
6.	Total BOM	\$0.0	General	Total BOM Cost
7.	Avg Bleeder FET Tj	101.385 degC	Op_Point	Bleeder MOSFET average junction temperature over the AC Line Period
8.	Avg M1 FET Tj	47.925 degC	Op_Point	M1 MOSFET average junction temperature over the AC Line Period
9.	Avg Duty Cycle	9.865 %	Op_point	Average Duty Cycle over the AC Line Period
10.	Avg Efficiency	80.964 %	Op_point	Average Efficiency over the AC Line Period

#	Name	Value	Category	Description
11.	Avg Frequency	265.469 kHz	Op_point	Average Switching Frequency over the AC Line Period
12.	Avg IC Tj	37.354 degC	Op_point	Average IC junction temperature for the AC line period
13.	VIN_OP	240.0 V	Op_point	AC Input RMS Voltage
14.	Avg Bleeder FET Pd	1.428 W	Power	Average power dissipation in the bleeder FET over the AC line period
15.	Avg Bridge Diode Pd	95.546 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
16.	Avg Cout Pd	46.251 μW	Power	Average Power Dissipation in the Output Capacitor over the AC Line Period
17.	Avg Diode1 Pd	766.479 mW	Power	Average Power Dissipation in D1 over the AC Line Period
18.	Avg Diode2 Pd	73.269 mW	Power	Average Power Dissipation in D1 over the AC Line Period
19.	Avg FET Pd	214.989 mW	Power	Average power dissipation in the switching FET over the AC line period
20.	Avg IC Pd	60.776 mW	Power	Average Power Dissipation in the IC over the AC line period
21.	Avg L pd	181.461 mW	Power	Average Inductor power dissipation over the AC line period
22.	Avg Rsns Pd	4.774 mW	Power	Average power dissipation in the Current limit resistor over the AC line period
23.	Avg Valley Fill Cap Pd	93.885 μW	Power	Average Power Dissipation in the Valley Fill Capacitors over the AC Line Period
24.	Avg Valley Fill Diode Pd	675.755 mW	Power	Average Power Dissipation in the Valley Fill Diodes over the AC Line Period
25.	Total Pd	0.0 W	Power	Total Power Dissipation
26.	Vout Tolerance	143.184 m%		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	700.0 mA	Maximum Output Current
2.	VinMax	240.0	Maximum input voltage
3.	VinMin	210.0	Minimum input voltage
4.	Vout	11.5	Output Voltage
5.	line_fsw	60.0	Light Output in Lumen
6.	application	LED_DRIVER	LED Application
7.	base_pn	LM3444	Base Product Number
8.	LED_Architect	N	LED Architect Project
9.	ledparallel	1.0	Number of LED in parallel
10.	ledpartnumber	XHP50A-00-0000-0D00140C	LED Part number
11.	ledseries	1.0	Number of LED in series
12.	line_fsw	60.0	AC Line Frequency
13.	source	AC	Input Source Type
14.	Ta	30.0	Ambient temperature

Design Assistance

1. **LM3444** Product Folder : <http://www.ti.com/product/LM3444> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).