


WEBENCH® Design Report


Design : 4738744/38 UCC28C40DR
UCC28C40DR 35.0V-40.0V to 17.00V @ 1.0A





VinMin = 35.0V
VinMax = 40.0V
Vout = 17.0V
Iout = 1.0A

Device = UCC28C40DR
Topology = Flyback
Created = 7/13/16 2:07:33 AM
BOM Cost = \$0.00
BOM Count = 49
Total Pd = 0.0W

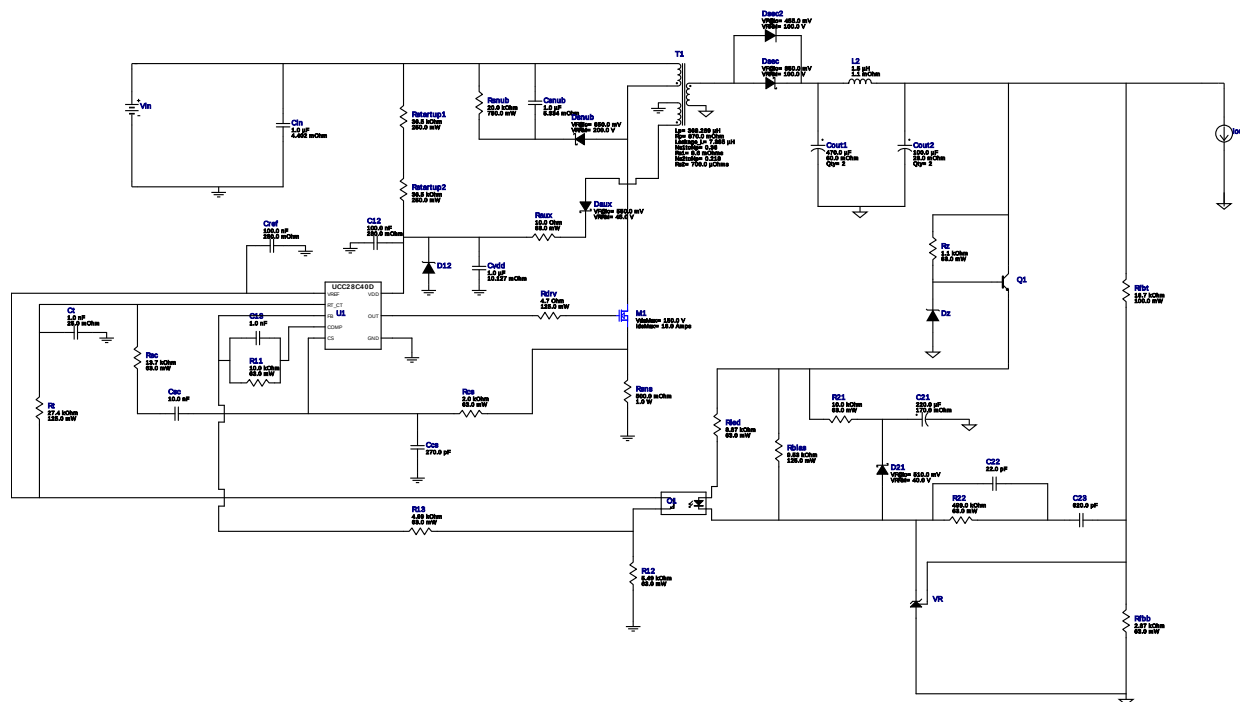

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	C21	Nichicon	UUD1V221MNL1GS Series= uD	Cap= 220.0 uF ESR= 170.0 mOhm VDC= 35.0 V IRMS= 450.0 mA	1	\$0.20	 SM_RADIAL_8MM 113 mm ²
4.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	C23	Samsung Electro-Mechanics	CL21C621JBCNNNC Series= C0G/NP0	Cap= 620.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Ccs	Yageo America	CC0805KRX7R9BB271 Series= X7R	Cap= 270.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
7.	Cin	MuRata	GRM21BR71H105KA12L Series= X7R	Cap= 1.0 uF ESR= 4.402 mOhm VDC= 50.0 V IRMS= 1.677 A	1	\$0.05	0805 7 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Cout1	Panasonic	EEV-FK1V471Q Series= FK	Cap= 470.0 uF ESR= 60.0 mOhm VDC= 35.0 V IRMS= 1.1 A	2	\$0.48	 SM_RADIAL_H13 264 mm²
9.	Cout2	Panasonic	EEHZA1H101P Series= ?	Cap= 100.0 uF ESR= 28.0 mOhm VDC= 50.0 V IRMS= 2.0 A	2	\$2.54	 SM_RADIAL_10BMM 160 mm²
10.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm²
11.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm²
12.	Csnub	MuRata	GRM31CR72A105KA01L Series= X7R	Cap= 1.0 uF ESR= 5.334 mOhm VDC= 100.0 V IRMS= 1.55432 A	1	\$0.11	 1206_190 11 mm²
13.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm²
14.	Cvdd	MuRata	GRM188R61C105KA93D Series= X5R	Cap= 1.0 uF ESR= 10.127 mOhm VDC= 16.0 V IRMS= 994.63 mA	1	\$0.01	 0603 5 mm²
15.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm²
16.	D21	ON Semiconductor	MBR0540T1G	VF@Io= 510.0 mV VRRM= 40.0 V	1	\$0.06	 SOD-123 13 mm²
17.	Daux	Bourns	CD0603-B0240	VF@Io= 550.0 mV VRRM= 45.0 V	1	\$0.10	 Diode_0603 5 mm²
18.	Dsec	Micro Commercial Components	SK310A-TP	VF@Io= 850.0 mV VRRM= 100.0 V	1	\$0.10	 SMA 37 mm²
19.	Dsec2	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm²
20.	Dsnub	Diodes Inc.	DFLS1200-7	VF@Io= 850.0 mV VRRM= 200.0 V	1	\$0.21	 PowerDI123 13 mm²
21.	Dz	ON Semiconductor	BZG03C15G	Zener	1	\$0.12	 SMA 37 mm²
22.	L2	Coilcraft	SER1590-152MLB	L= 1.5 uH DCR= 1.1 mOhm	1	\$1.12	 SER1590 324 mm²
23.	M1	Fairchild Semiconductor	FDMC86240	VdsMax= 150.0 V IdsMax= 16.0 Amps	1	\$0.93	 TRANS_Fairchild_MLP08S 18 mm²





#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
24.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
25.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
26.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
27.	R12	Vishay-Dale	CRCW04025K49FKED Series= CRCW..e3	Res= 5.49 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
28.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
29.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
30.	R22	Vishay-Dale	CRCW0402499KFKED Series= CRCW..e3	Res= 499.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
31.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
32.	Rbias	Panasonic	ERJ-6ENF9531V Series= ERJ-6E	Res= 9.53 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
33.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
34.	Rdrv	Yageo America	RC0805FR-074R7L Series= ?	Res= 4.7 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
35.	Rfbb	Vishay-Dale	CRCW04022K87FKED Series= CRCW..e3	Res= 2.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
36.	Rfbt	Yageo America	RT0603BRD0716K7L Series= ?	Res= 16.7 kOhm Power= 100.0 mW Tolerance= 0.1%	1	\$0.04	 0603 5 mm ²
37.	Rled	Vishay-Dale	CRCW04028K87FKED Series= CRCW..e3	Res= 8.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
38.	Rsc	Vishay-Dale	CRCW040213K7FKED Series= CRCW..e3	Res= 13.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
39.	Rsns	Stackpole Electronics Inc	CSRN2010FKR500 Series= ?	Res= 500.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.10	 2010 32 mm ²
40.	Rsns	Vishay-Dale	CRCW201020K0KFEF Series= CRCW..e3	Res= 20.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
41.	Rstartup1	Panasonic	ERJ-8ENF3652V Series= ERJ-8E	Res= 36.5 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
42.	Rstartup2	Panasonic	ERJ-8ENF3652V Series= ERJ-8E	Res= 36.5 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
43.	Rt	Panasonic	ERJ-6ENF2742V Series= ERJ-6E	Res= 27.4 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
44.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW..e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
45.	T1	CUSTOM	CUSTOM	Lp= 369.269 μ H Rp= 870.0 mOhm Leakage_L= 7.385 μ H Ns1toNp= 0.36 Rs1= 8.6 mOhms Ns2toNp= 0.218 Rs2= 700.0 μ Ohms	1	NA	CUSTOM 0 mm ²







46.	U1	Texas Instruments	UCC28C40DR	Switcher	1	\$0.75	
-----	----	-------------------	------------	----------	---	--------	--







D0008A 57 mm²







47.	VR	Texas Instruments	TL431AIDBVR	Voltage References	1	\$0.07	
-----	----	-------------------	-------------	--------------------	---	--------	--



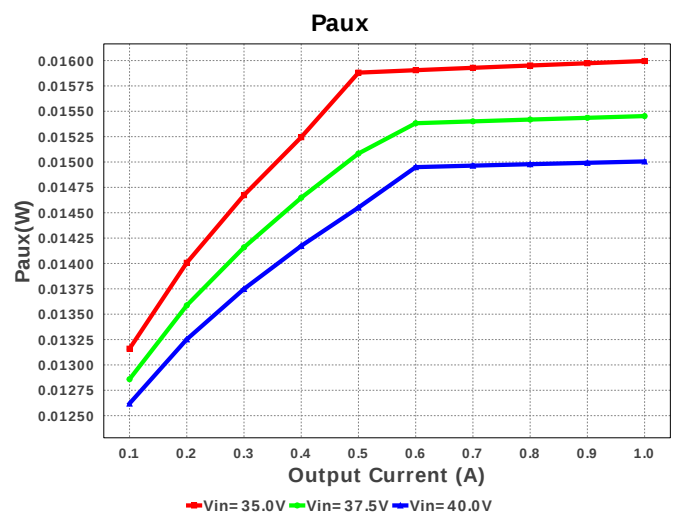
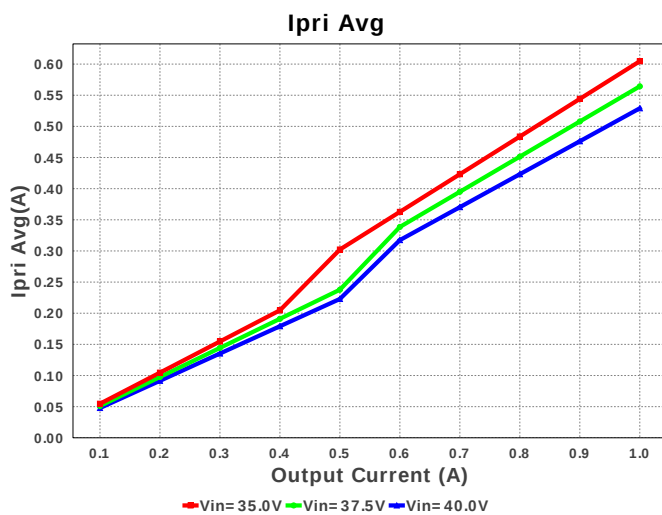
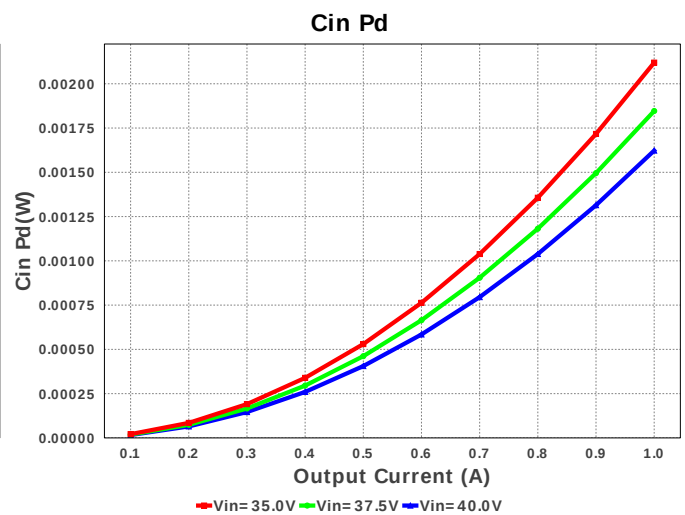
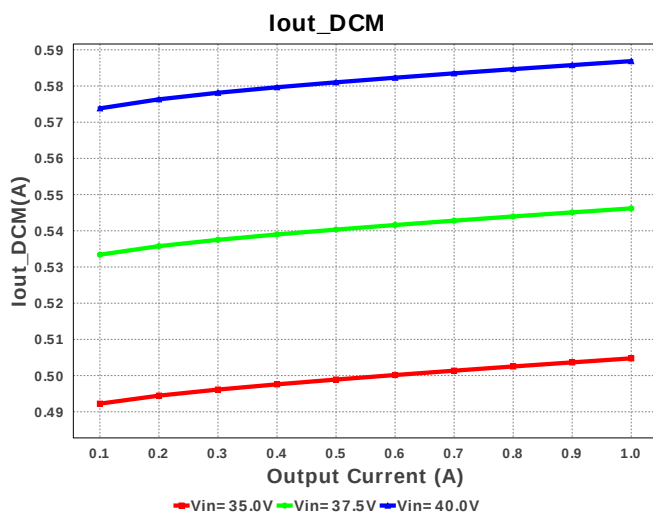
R-PDSO-G3 16 mm²

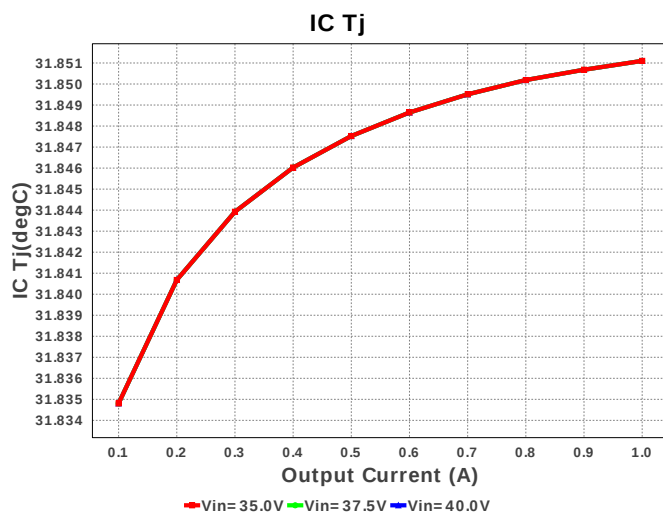
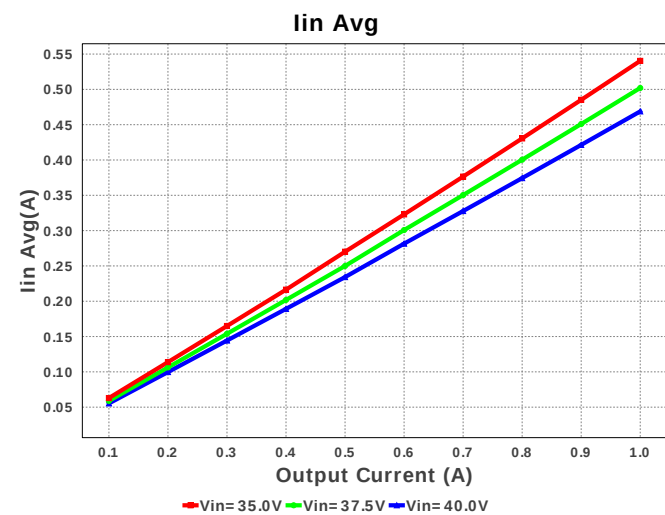
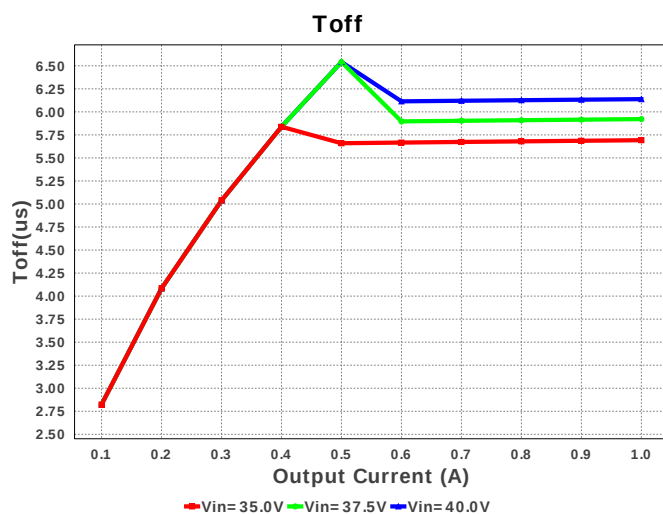
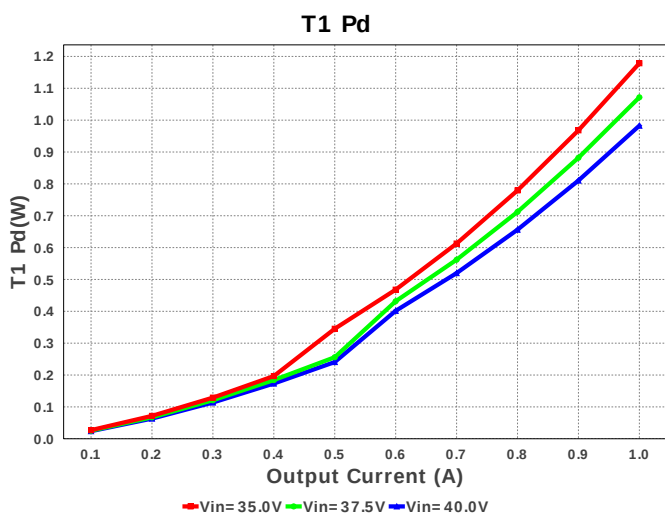
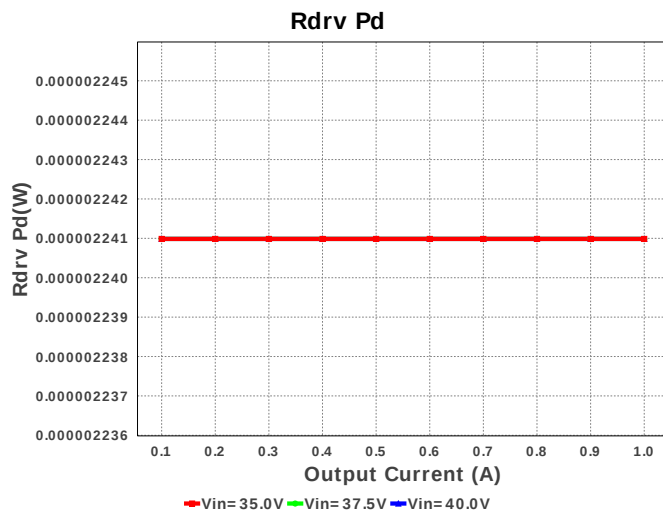
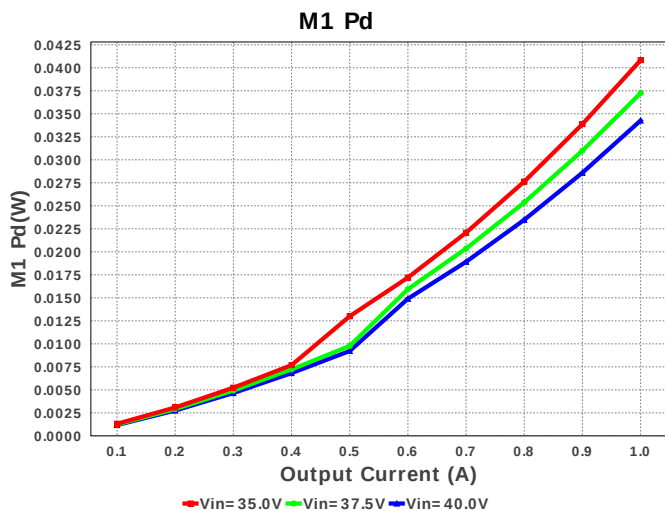


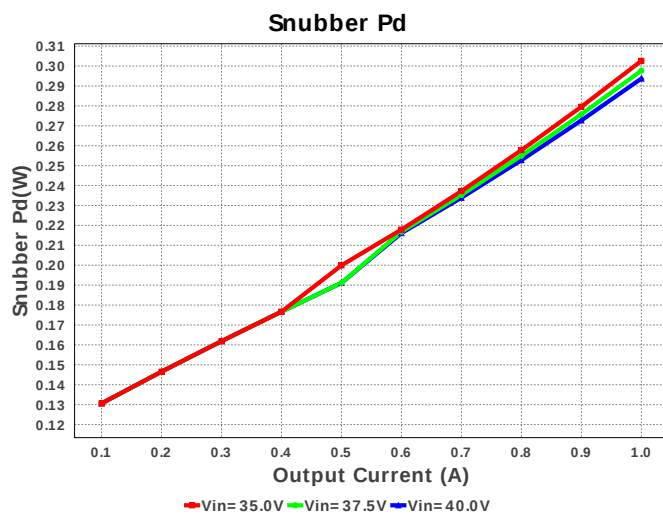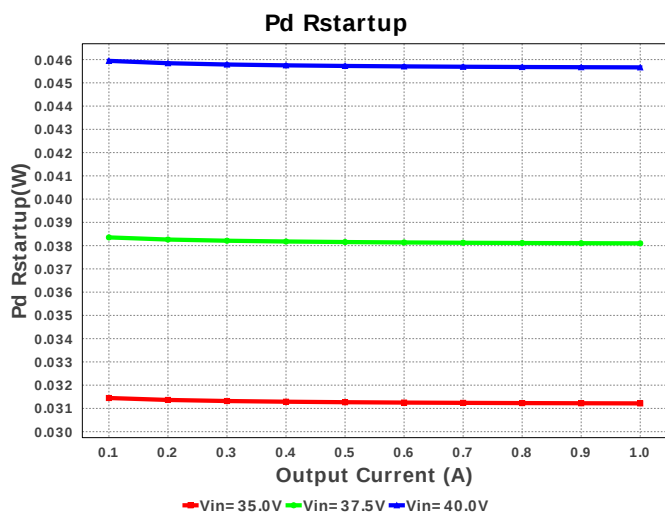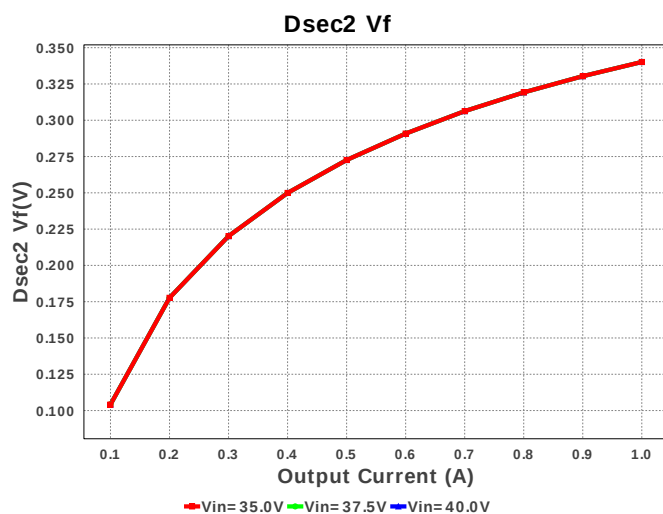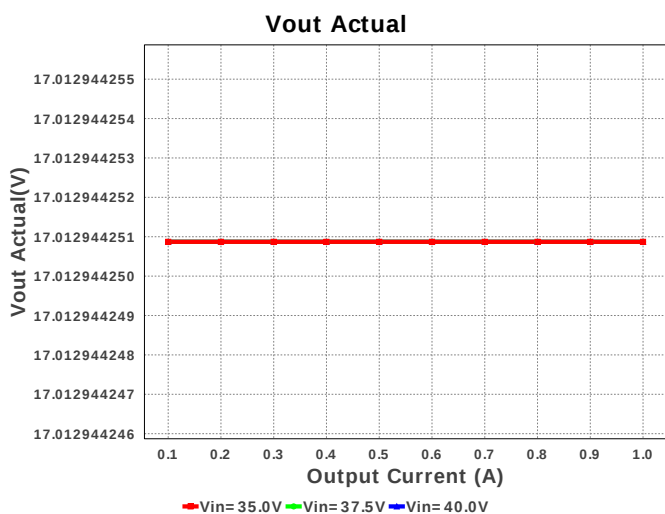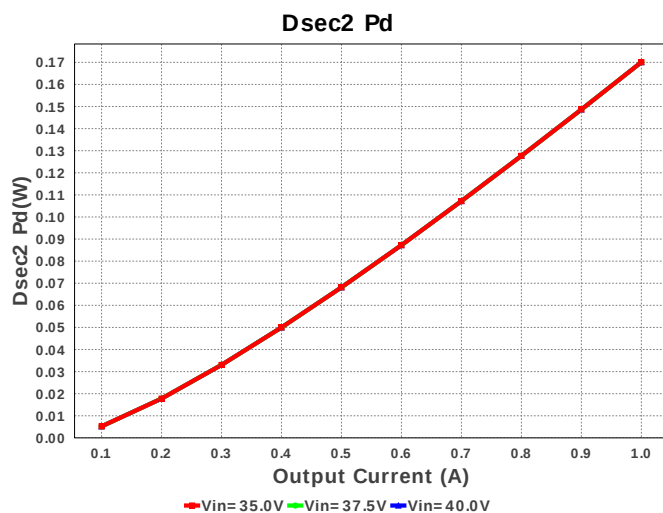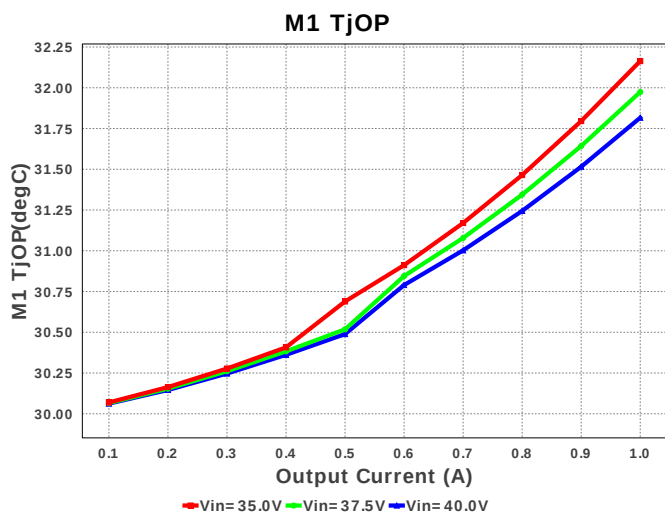


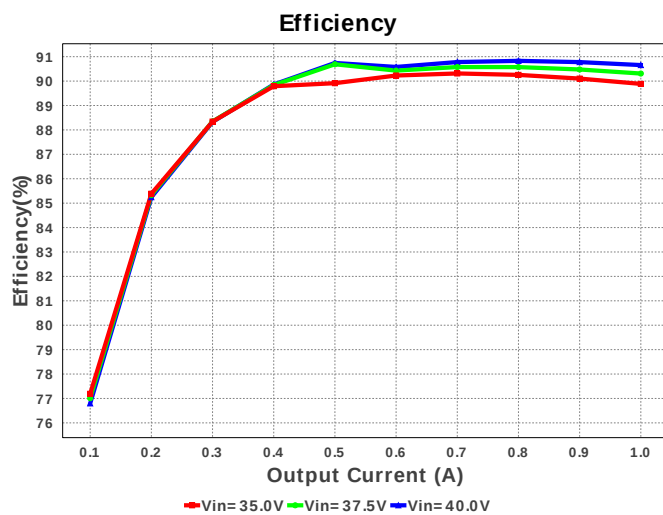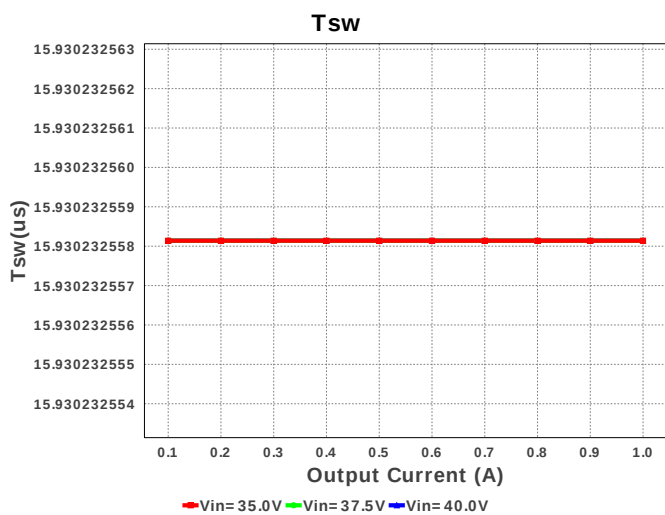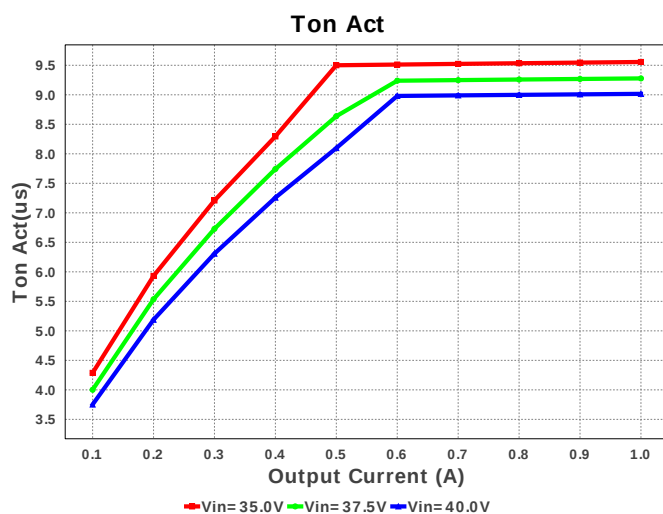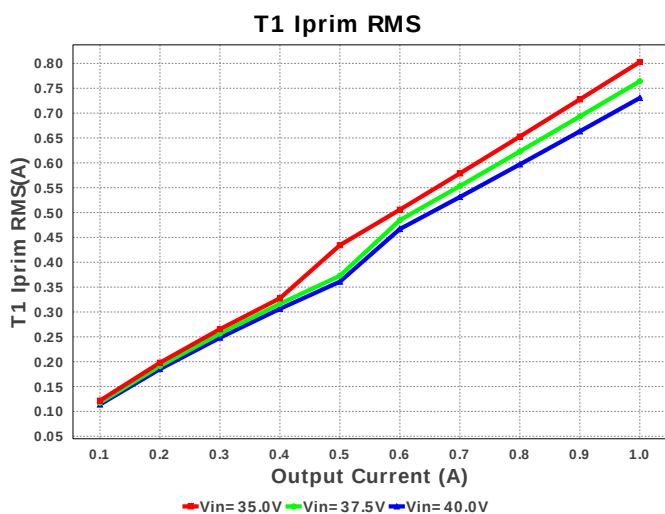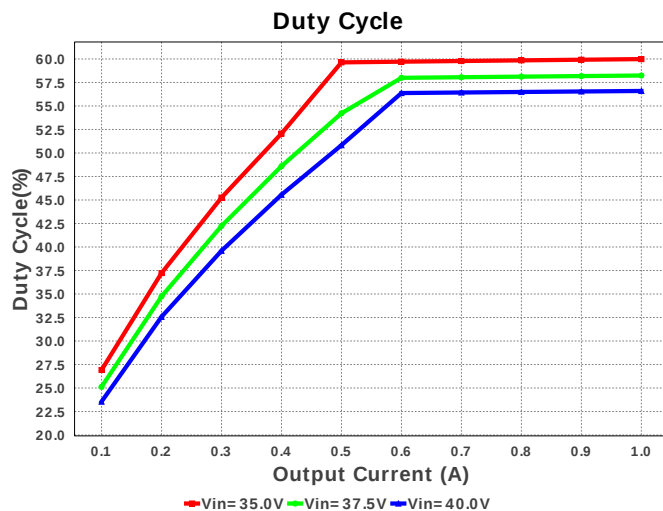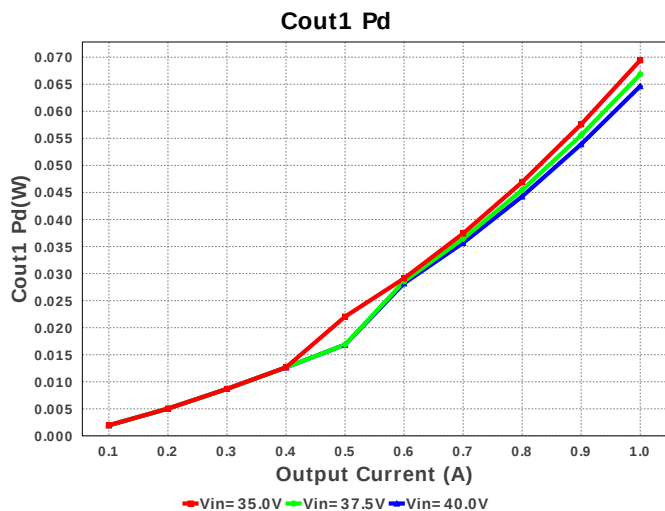

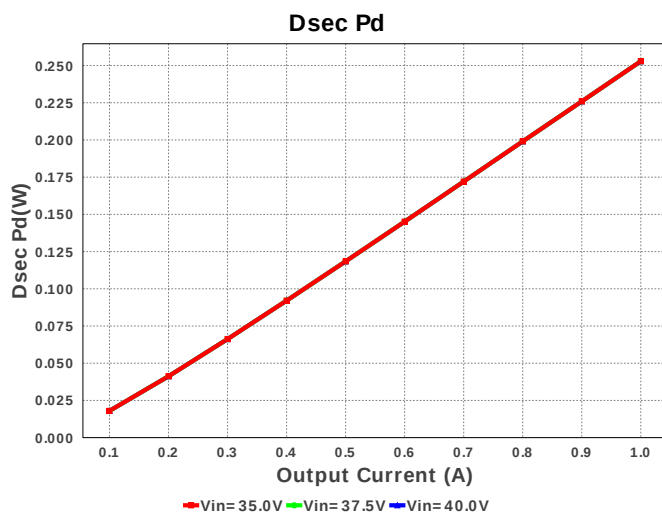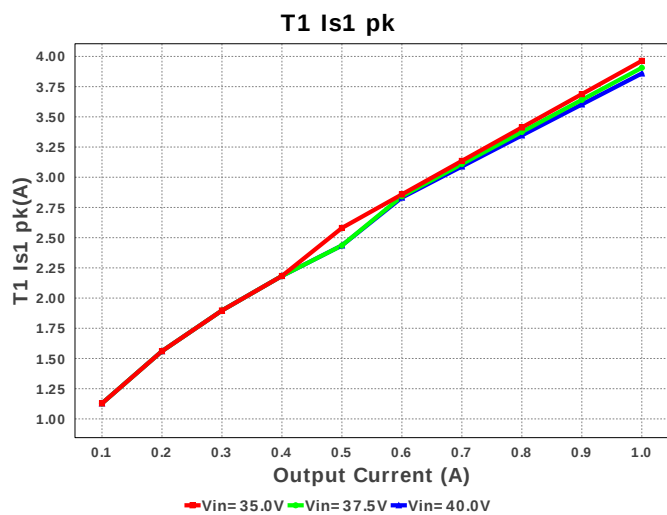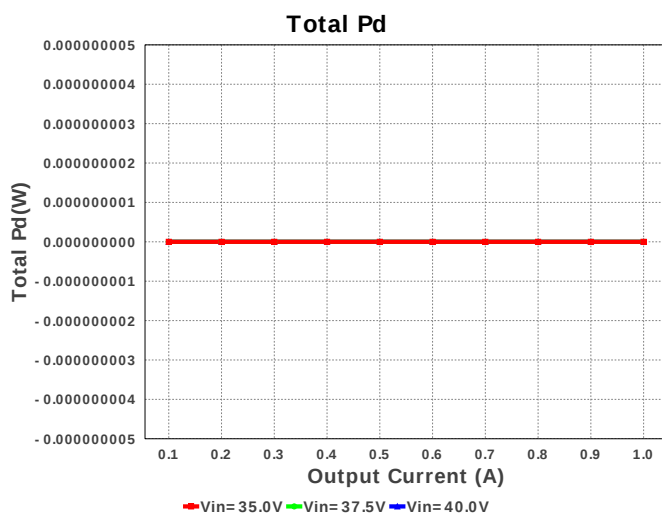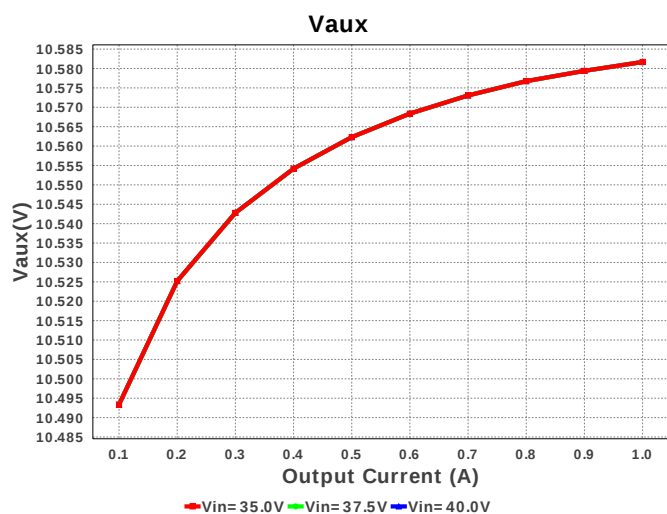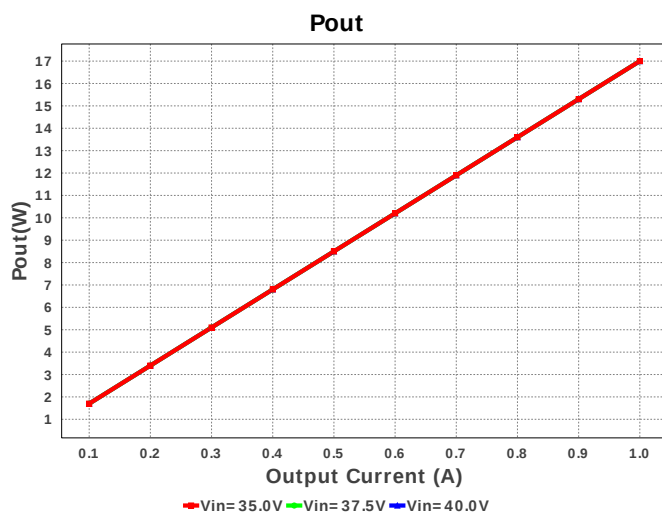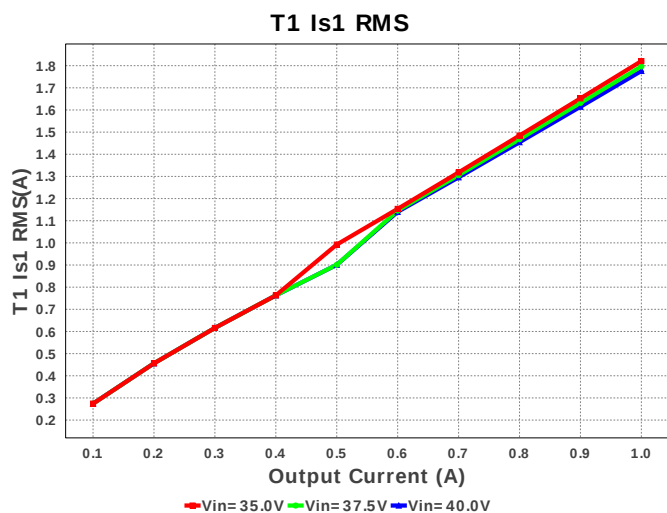

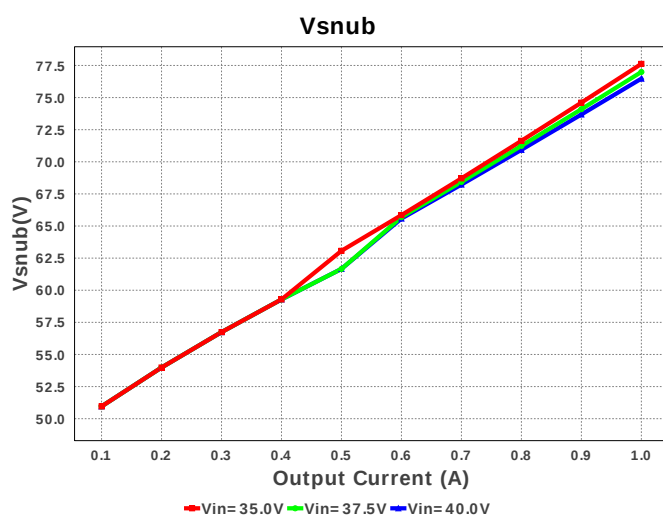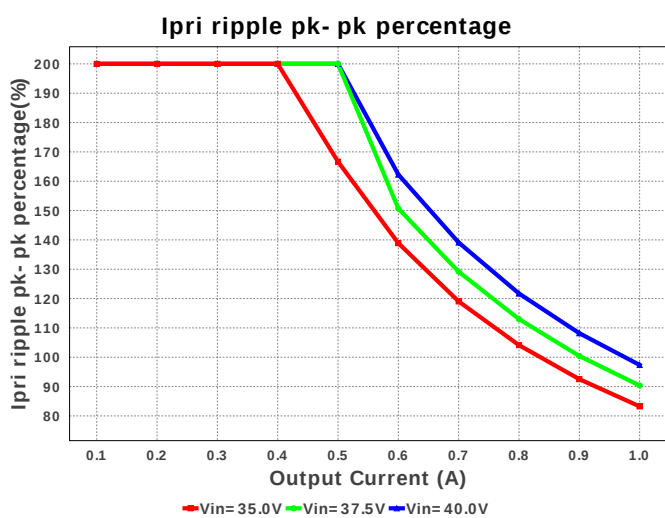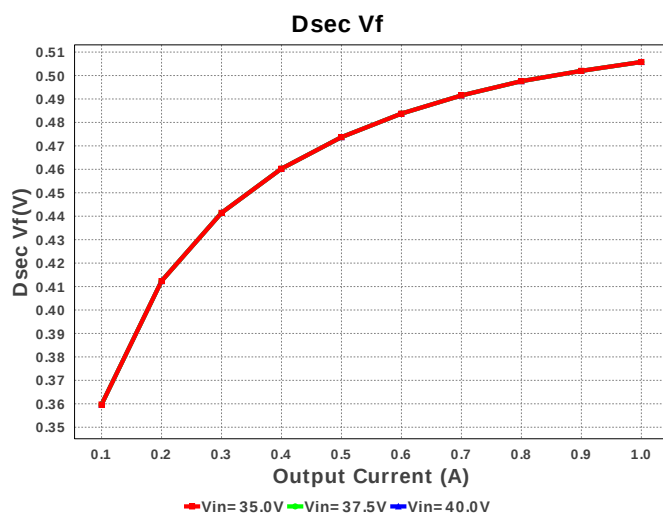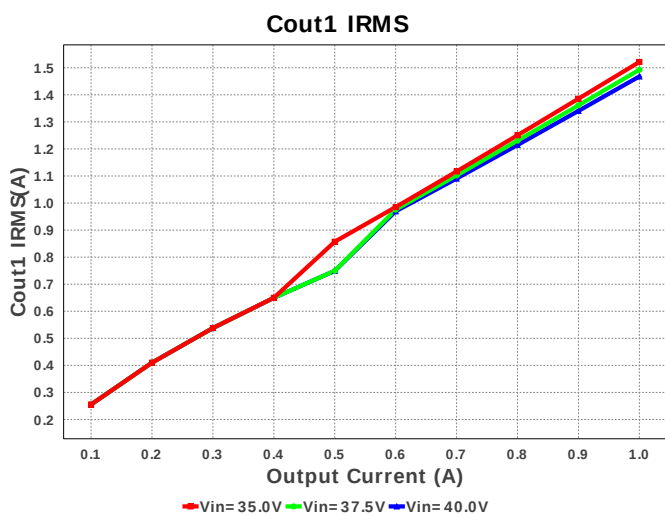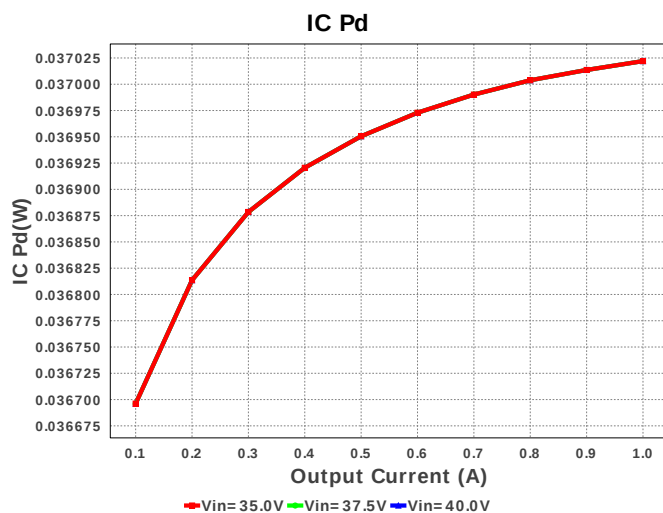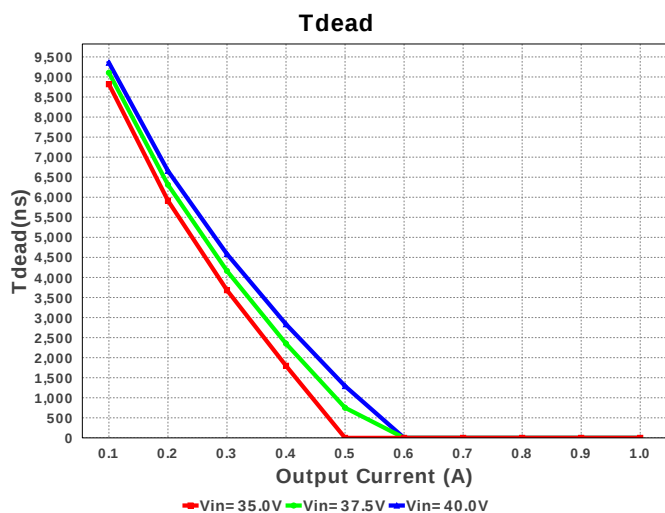

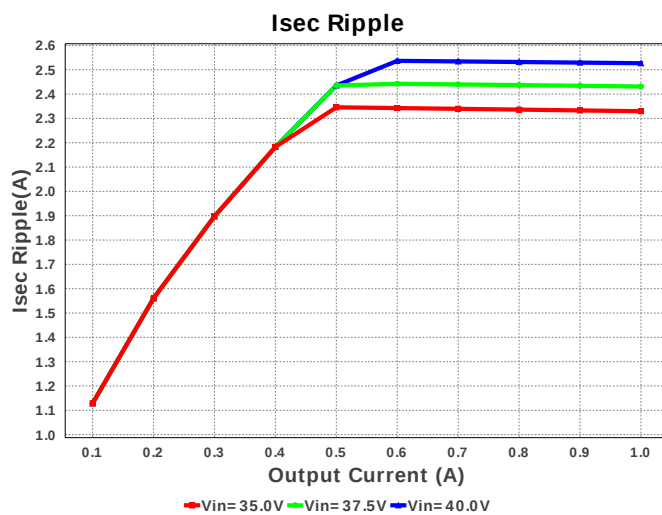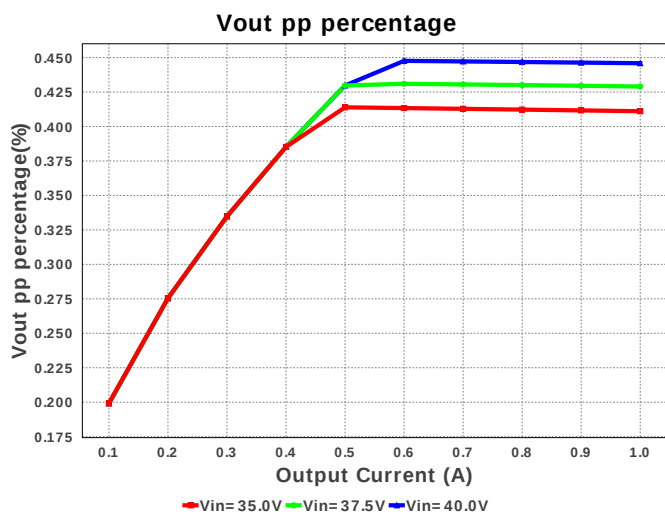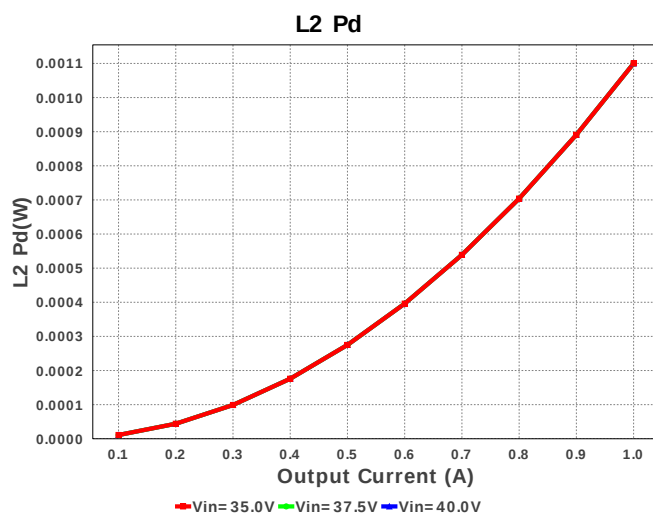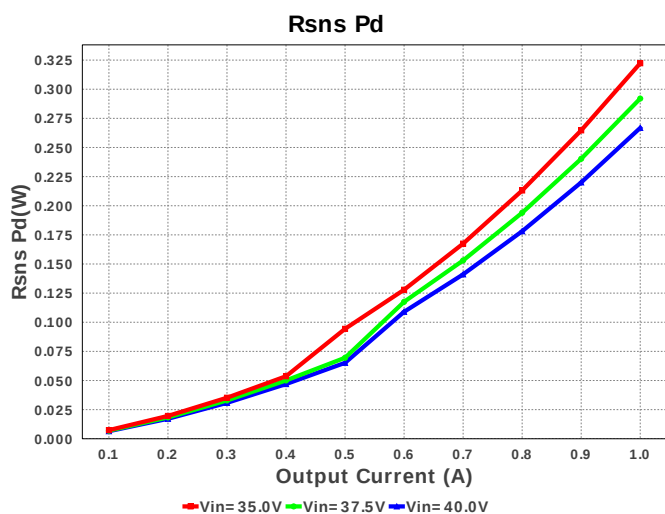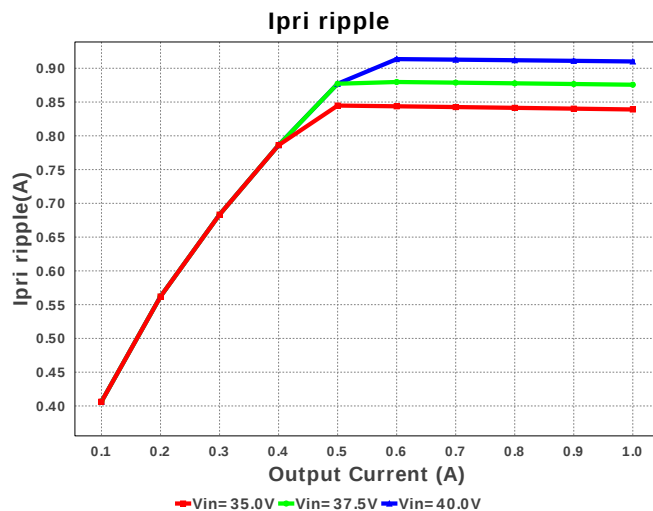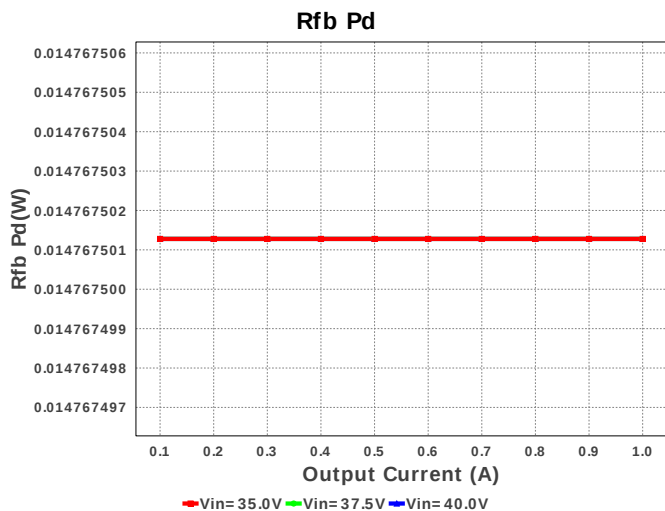

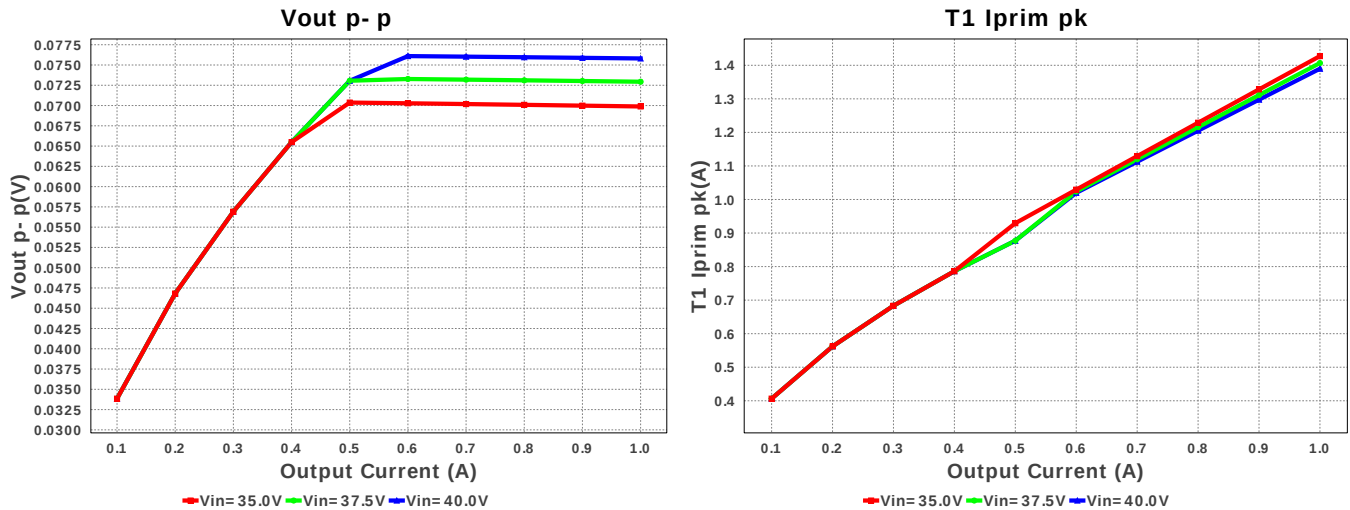

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	1.521 A	Current	Output capacitor1 RMS ripple current
2.	Iin Avg	540.37 mA	Current	Average input current
3.	Iout_DCM	504.765 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	604.612 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	839.011 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	83.242 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	2.33 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	802.861 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	1.427 A	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	1.821 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	3.963 A	Current	Transformer Secondary1 Peak Current
12.	BOM Count	49	General	Total Design BOM count
13.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
14.	Dsec Vf	505.777 mV	General	Effective Forward Voltage Drop at the Operating Current
15.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
16.	Dsec2 Vf	340.147 mV	General	Effective Forward Voltage Drop at the Operating Current
17.	Dsnub trr	0.0 ns	General	Snubber Diode Reverse Recovery Time
18.	FootPrint	1.986 k mm ²	General	Total Foot Print Area of BOM components
19.	Frequency	62.774 kHz	General	Switching frequency
20.	Pout	17.0 W	General	Total output power
21.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
22.	Toff	5.692 us	General	Approximate Converter Off Time
23.	Ton Act	9.556 us	General	Approximate Converter On Time
24.	Total BOM	\$0.0	General	Total BOM Cost
25.	Tsw	15.93 us	General	Switching Time Period
26.	Vaux	10.582 V	General	Auxiliary Voltage
27.	Vsnub	77.624 V	General	Voltage Across the Snubber
28.	Vout Actual	17.013 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
29.	Vout OP	17.0 V	Op_Point	Operational Output Voltage
30.	Duty Cycle	59.986 %	Op_point	Duty cycle
31.	Efficiency	89.885 %	Op_point	Steady state efficiency
32.	IC Tj	31.851 degC	Op_point	IC junction temperature
33.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
34.	IOUT_OP	1.0 A	Op_point	Iout operating point
35.	M1 TJOP	32.164 degC	Op_point	M1 MOSFET junction temperature
36.	Vout p-p	69.886 mV	Op_point	Peak-to-peak output ripple voltage
37.	Cin Pd	2.119 mW	Power	Input capacitor power dissipation
38.	Cout1 Pd	69.439 mW	Power	Output capacitor1 power dissipation
39.	Dsec Pd	252.888 mW	Power	Secondary Diode Power Dissipation
40.	Dsec2 Pd	170.073 mW	Power	Secondary Diode Power Dissipation
41.	IC Pd	37.022 mW	Power	IC power dissipation
42.	L2 Pd	1.1 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
43.	M1 Pd	40.822 mW	Power	M1 MOSFET total power dissipation
44.	Paux	15.995 mW	Power	Power Dissipation in Raux and Daux
45.	Pd Rstartup	31.216 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
46.	Rdrv Pd	2.241 μW	Power	Power Dissipation in Gate Drive Resistor
47.	Rfb Pd	14.768 mW	Power	Rfb Power Dissipation
48.	Rsns Pd	322.293 mW	Power	Current Limit Sense Resistor Power Dissipation
49.	Snubber Pd	302.608 mW	Power	Snubber Power Dissipation
50.	T1 Pd	1.179 W	Power	Estimated Losses in Transformer

#	Name	Value	Category	Description
51.	Total Pd	0.0 W	Power	Total Power Dissipation
52.	Vout Tolerance	1.272 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
53.	Vout pp percentage	411.093 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	Iout1	1.0	Output Current #1
3.	Iout2	1.0	Output Current #2
4.	Iout3	2.0	Output Current #3
5.	VinMax	40.0	Maximum input voltage
6.	VinMin	35.0	Minimum input voltage
7.	Vout	17.0	Output Voltage
8.	Vout1	17.0	Output Voltage #1
9.	Vout2	3.0	Output Voltage #2
10.	Vout3	2.0	Output Voltage #3
11.	base_pn	UCC28C40	Texas Instruments Base Part Number
12.	source	DC	Input Source Type
13.	ta	30.0	Ambient temperature

Design Assistance

1. UCC28C40 Product Folder : <http://www.ti.com/product/UCC28C40> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).