


WEBENCH® Design Report

Design : 4596974/70 UCC28C44DR
UCC28C44DR 24.0V-25.0V to 12.00V @ 2.0A



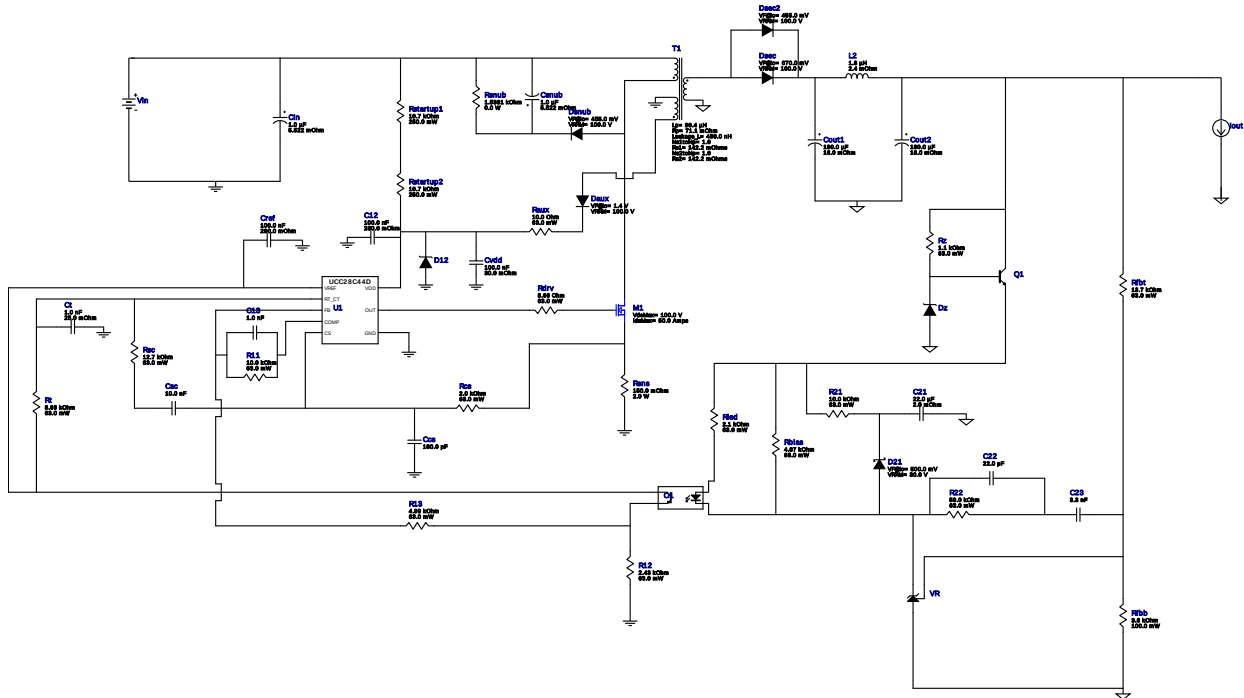


My Comments


aaaaaaa



Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	C21	MuRata	GRM32ER61E226KE15L Series= X5R	Cap= 22.0 uF ESR= 2.0 mOhm VDC= 25.0 V IRMS= 3.67 A	1	\$0.16	1210 15 mm ²
4.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	C23	MuRata	GRM216R71E332KA01D Series= X7R	Cap= 3.3 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
7.	Cin	TDK	C1608X7R1V105K080AC Series= X7R	Cap= 1.0 uF ESR= 5.522 mOhm VDC= 35.0 V IRMS= 2.2162 A	1	\$0.05	0603 5 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Cout1	Panasonic	25SVPF180M Series= ?	Cap= 180.0 uF ESR= 16.0 mOhm VDC= 25.0 V IRMS= 4.65 A	1	\$0.61	 CAPSMT_62_E12 106 mm ²
9.	Cout2	Panasonic	25SVPF180M Series= ?	Cap= 180.0 uF ESR= 16.0 mOhm VDC= 25.0 V IRMS= 4.65 A	1	\$0.61	 CAPSMT_62_E12 106 mm ²
10.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
11.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csnub	TDK	C1608X7R1V105K080AC Series= X7R	Cap= 1.0 uF ESR= 5.522 mOhm VDC= 35.0 V IRMS= 2.2162 A	1	\$0.05	 0603 5 mm ²
13.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
14.	Cvdd	MuRata	GRM188R71E104KA01D Series= X7R	Cap= 100.0 nF ESR= 30.0 mOhm VDC= 25.0 V IRMS= 1.51 A	1	\$0.01	 0603 5 mm ²
15.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
16.	D21	Bourns	CD214A-B130LF	VF@Io= 500.0 mV VRRM= 30.0 V	1	\$0.08	 SMA 37 mm ²
17.	Daux	NXP Semiconductor	BAS316,115	VF@Io= 1.4 V VRRM= 100.0 V	1	\$0.02	 SOD-323 9 mm ²
18.	Dsec	Fairchild Semiconductor	FSV8100V	VF@Io= 670.0 mV VRRM= 100.0 V	1	\$0.21	 TO-277A 56 mm ²
19.	Dsec2	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
20.	Dsnub	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
21.	Dz	ON Semiconductor	BZX84C9V1LT1G	Zener	1	\$0.02	 SOT-23 14 mm ²
22.	L2	Coilcraft	SER1360-182KLB	L= 1.8 uH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
23.	M1	Texas Instruments	CSD19537Q3	VdsMax= 100.0 V IdsMax= 50.0 Amps	1	\$0.75	 TRANS_NexFET_Q3 18 mm ²
24.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
25.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
26.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
27.	R12	Vishay-Dale	CRCW04022K43FKED Series= CRCW..e3	Res= 2.43 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
28.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
29.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
30.	R22	Vishay-Dale	CRCW040259K0FKED Series= CRCW..e3	Res= 59.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
31.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
32.	Rbias	Vishay-Dale	CRCW04024K87FKED Series= CRCW..e3	Res= 4.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
33.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
34.	Rdrv	Vishay-Dale	CRCW04028R66FKED Series= CRCW..e3	Res= 8.66 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
35.	Rfbb	Yageo America	RC0603FR-073K6L Series= ?	Res= 3.6 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
36.	Rfbt	Vishay-Dale	CRCW040213K7FKED Series= CRCW..e3	Res= 13.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
37.	Rled	Vishay-Dale	CRCW04022K10FKED Series= CRCW..e3	Res= 2.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
38.	Rsc	Vishay-Dale	CRCW040212K7FKED Series= CRCW..e3	Res= 12.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
39.	Rsns	Stackpole Electronics Inc	CSRN2512FKR150 Series= ?	Res= 150.0 mOhm Power= 2.0 W Tolerance= 1.0%	1	\$0.13	 2512 43 mm ²
40.	Rsnu	CUSTOM	CUSTOM Series= ?	Res= 1.5381 kOhm Power= 0.0 W Tolerance= 0.0%	1	NA	CUSTOM 0 mm ²
41.	Rstartup1	Panasonic	ERJ-8ENF1072V Series= ERJ-8E	Res= 10.7 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
42.	Rstartup2	Panasonic	ERJ-8ENF1072V Series= ERJ-8E	Res= 10.7 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
43.	Rt	Vishay-Dale	CRCW04028K66FKED Series= CRCW..e3	Res= 8.66 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
44.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW..e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
45.	T1	Würth Elektronik	749196541	Lp= 30.4 µH Rp= 71.1 mOhm Leakage_L= 480.0 nH Ns1toNp= 1.0 Rs1= 142.2 mOhms Ns2toNp= 1.0 Rs2= 142.2 mOhms	1	\$8.80	 EFD20 724 mm ²
46.	U1	Texas Instruments	UCC28C44DR	Switcher	1	\$0.60	 D0008A 57 mm ²
47.	VR	Texas Instruments	TL431AIDBVR	Voltage References	1	\$0.07	 R-PDSO-G3 16 mm ²





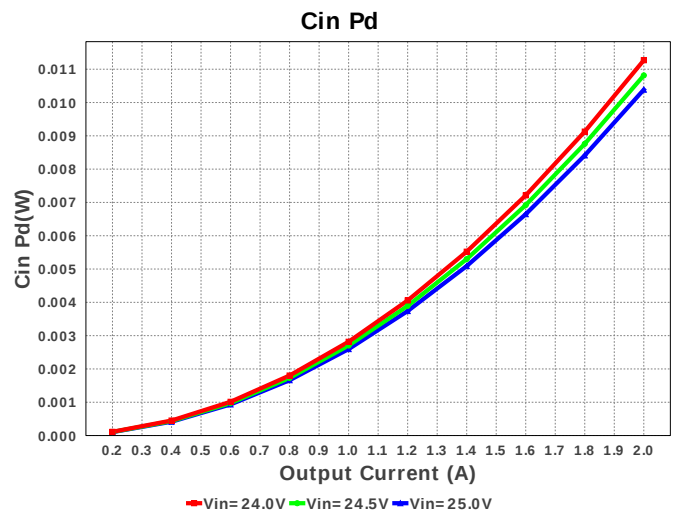
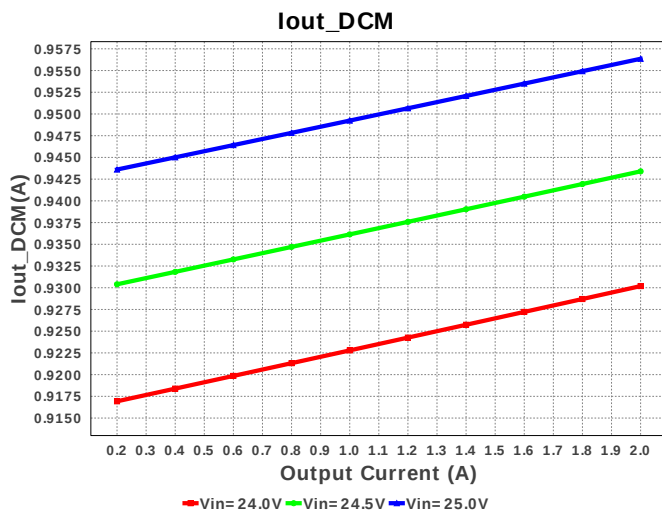


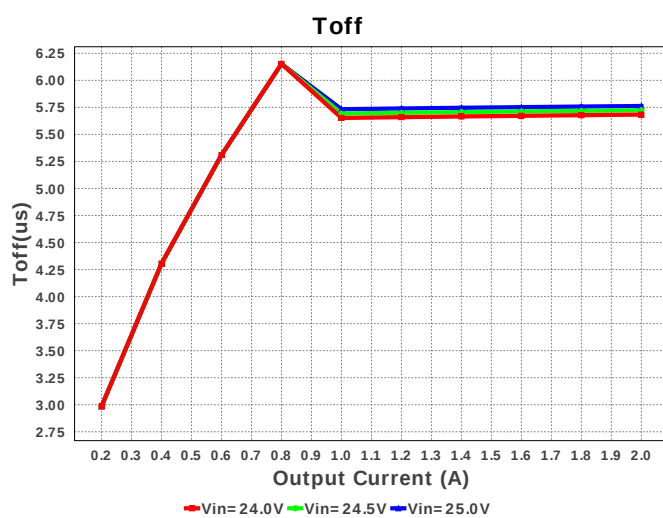
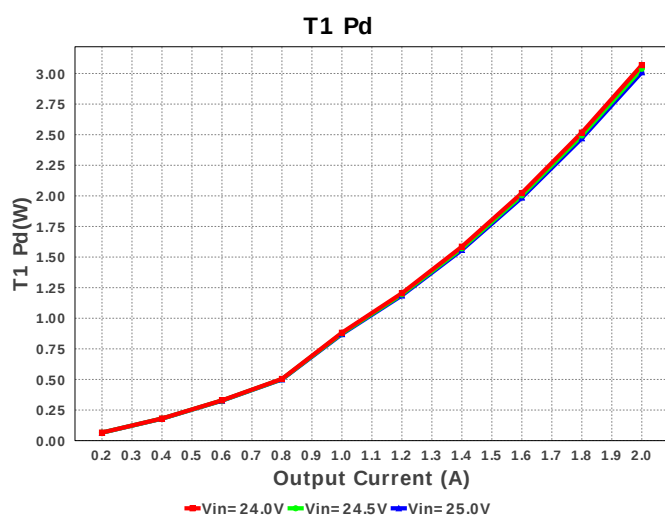
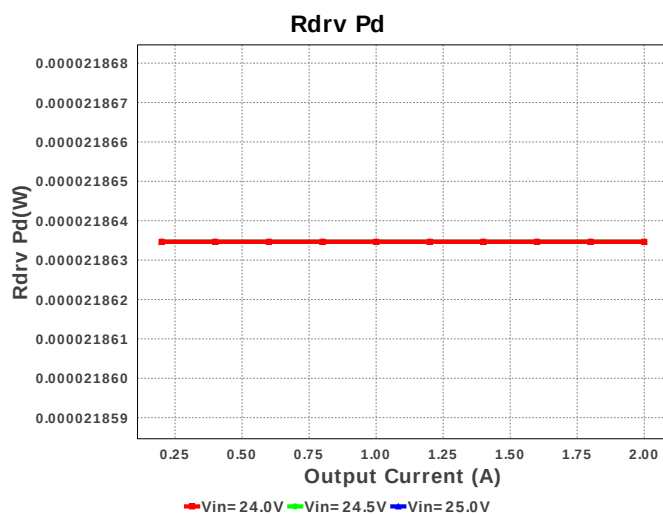
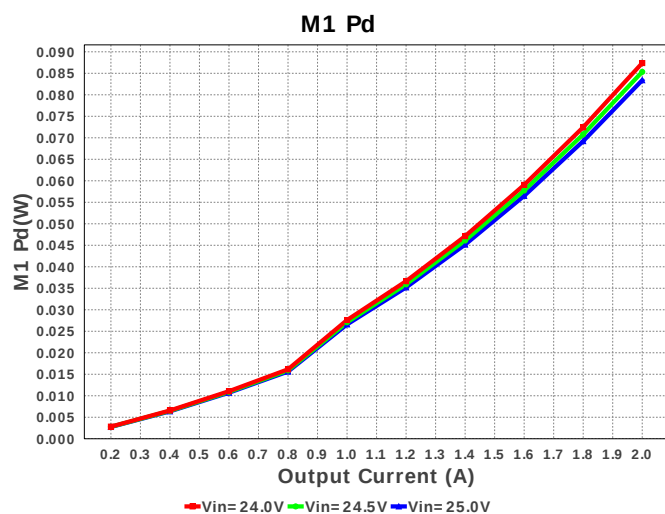
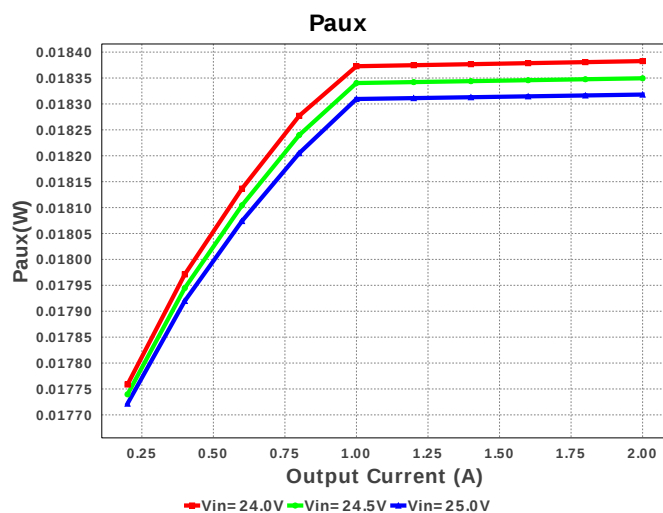
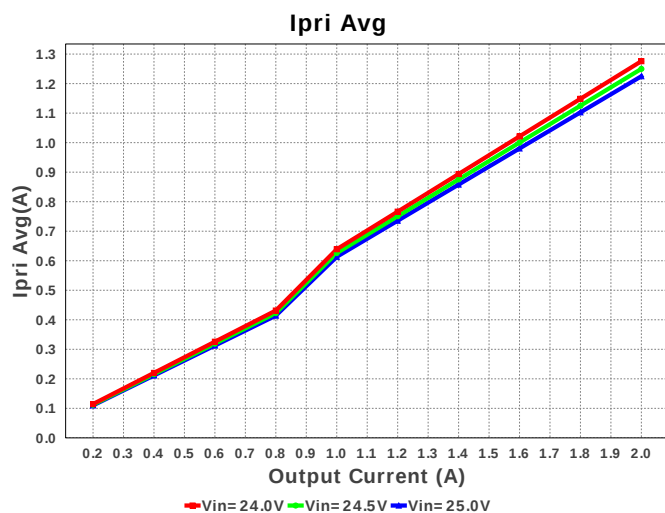


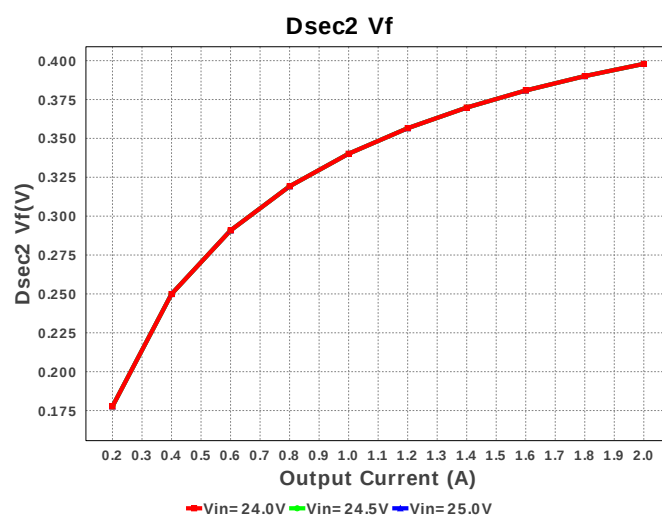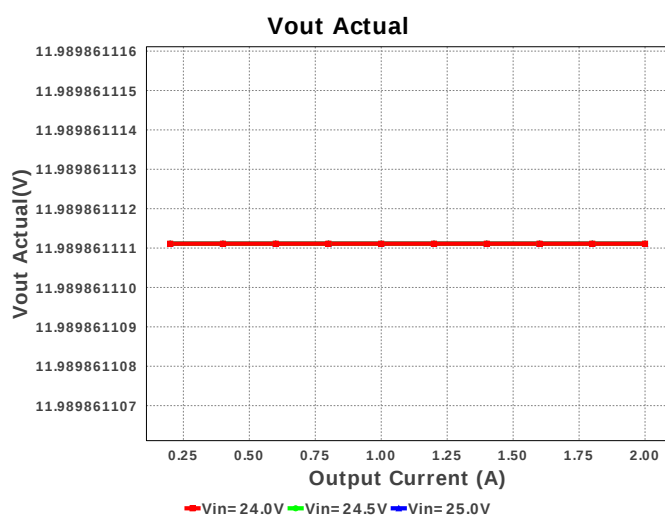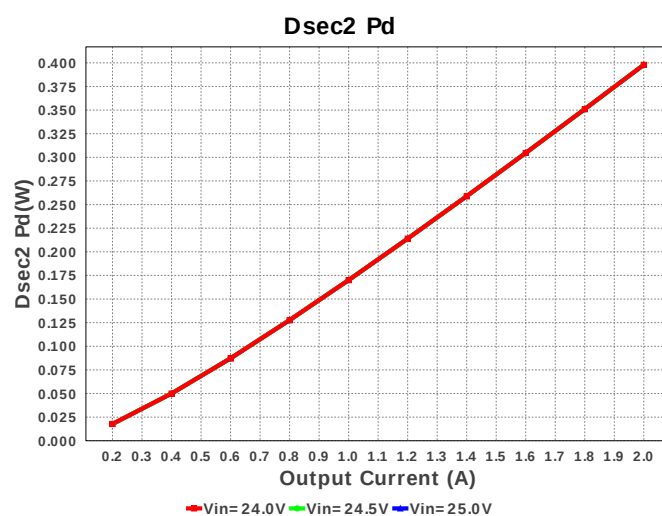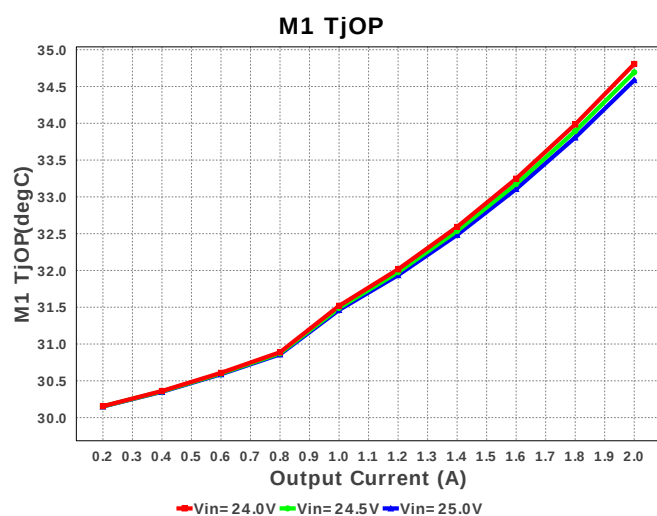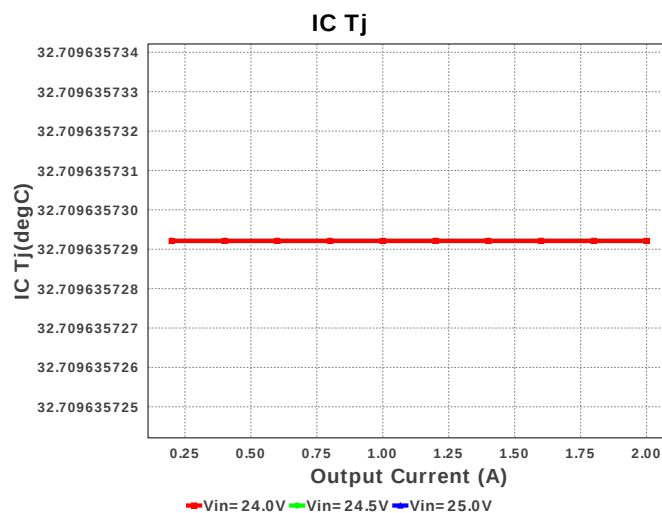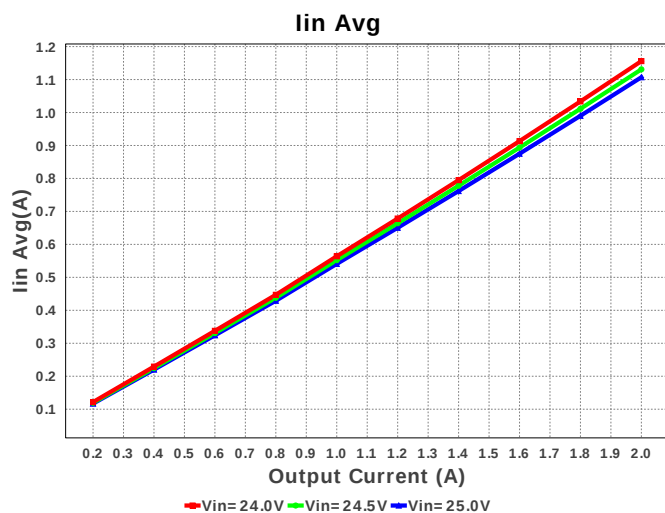


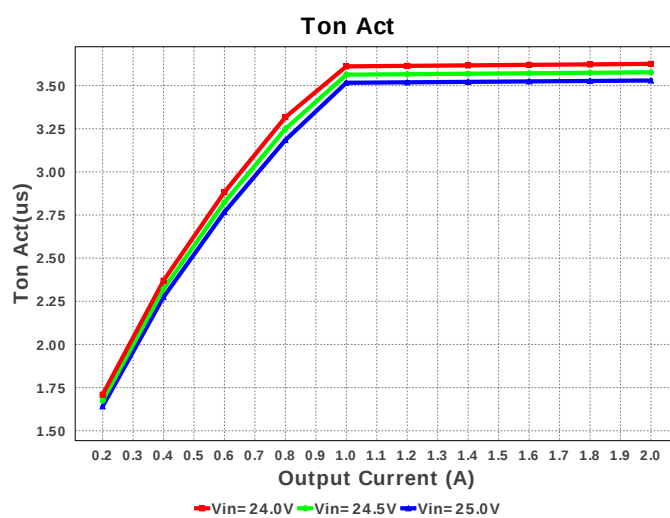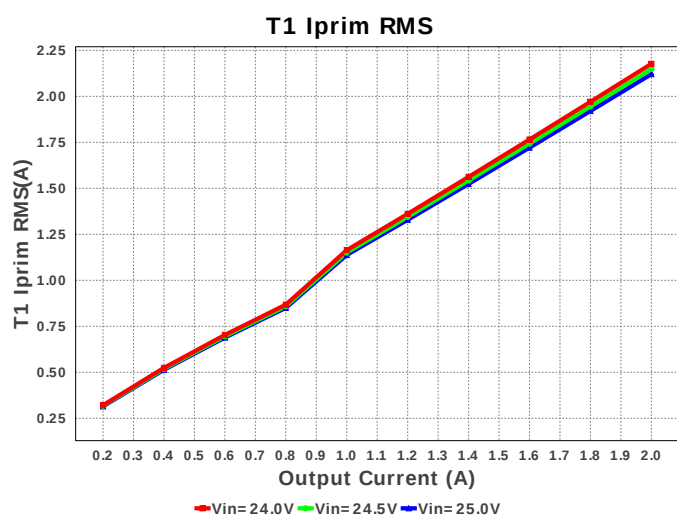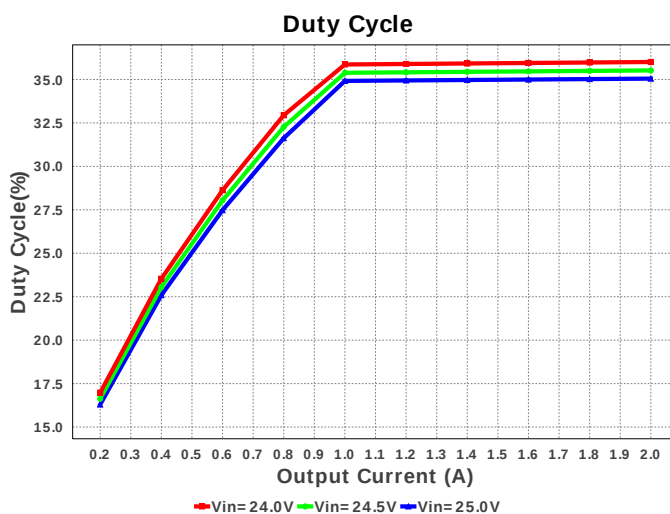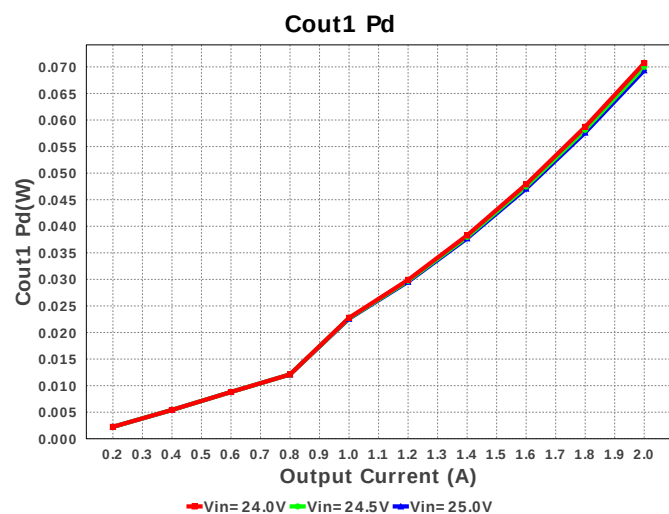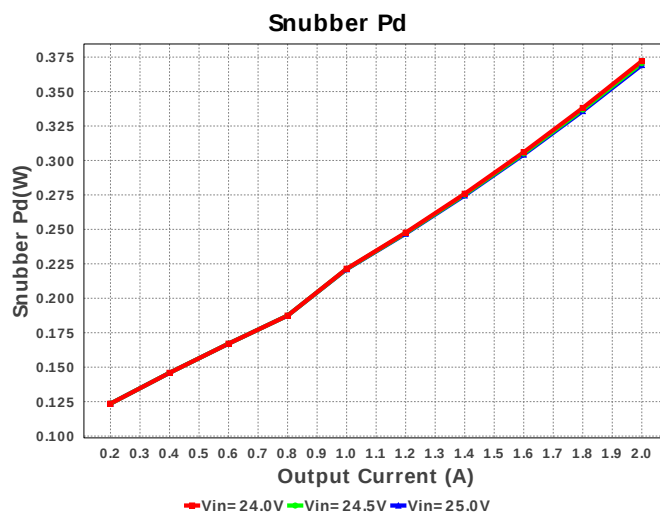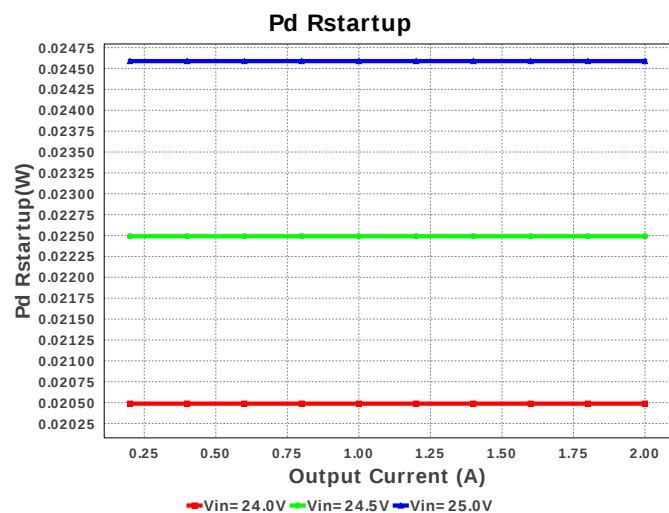

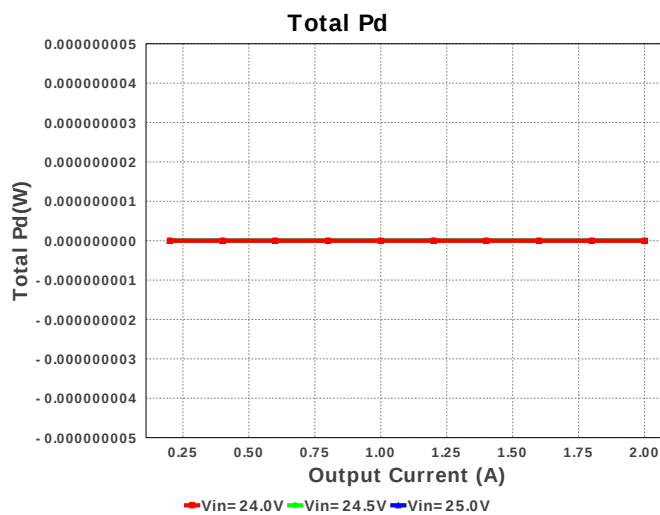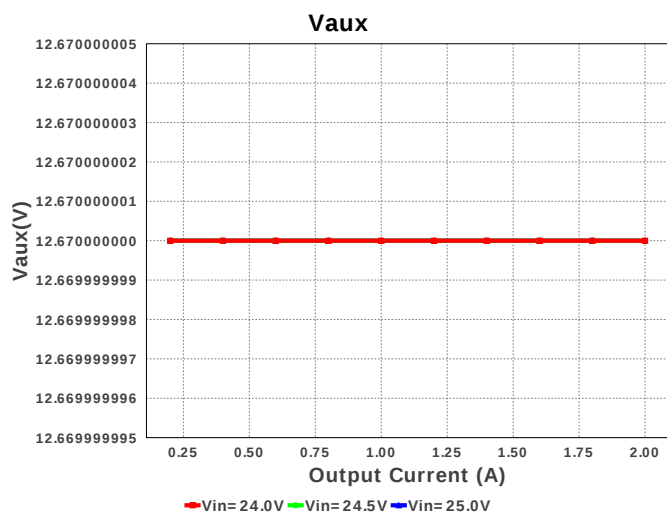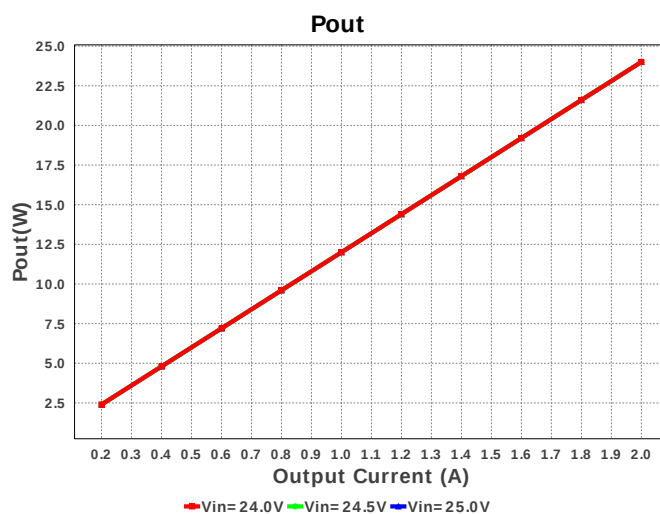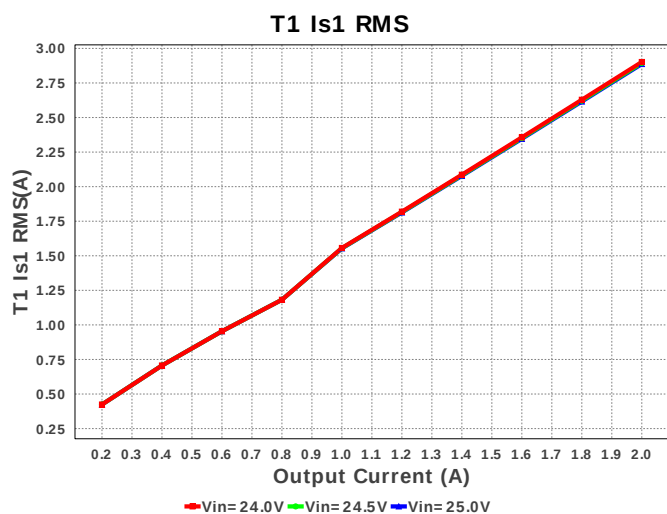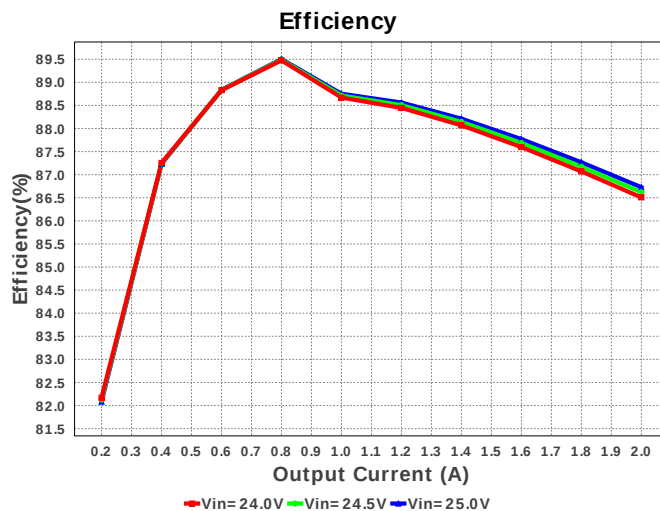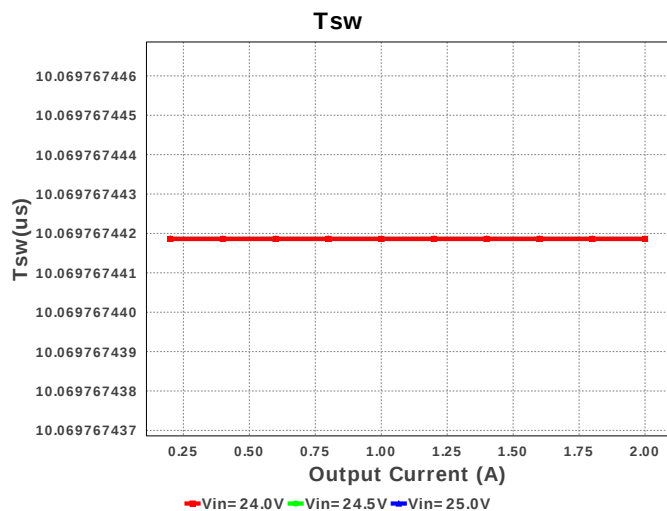

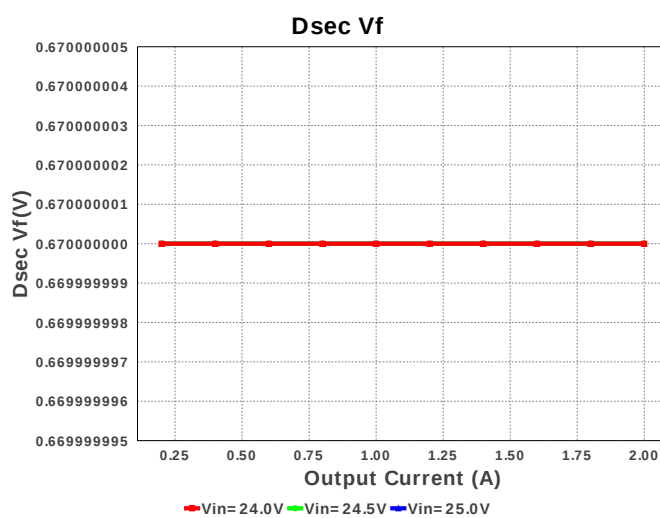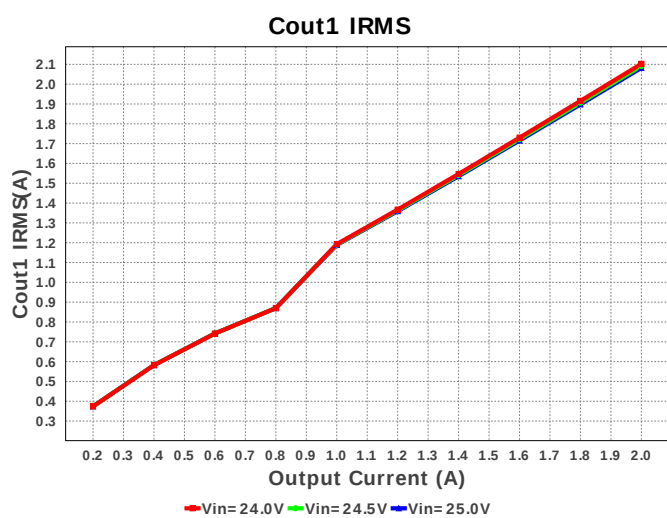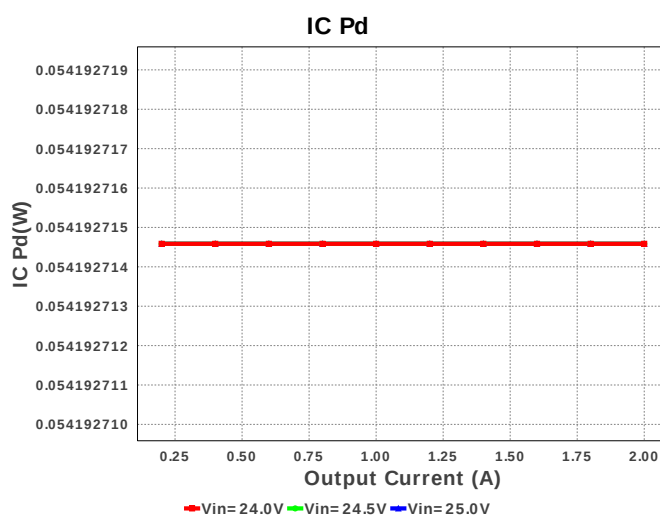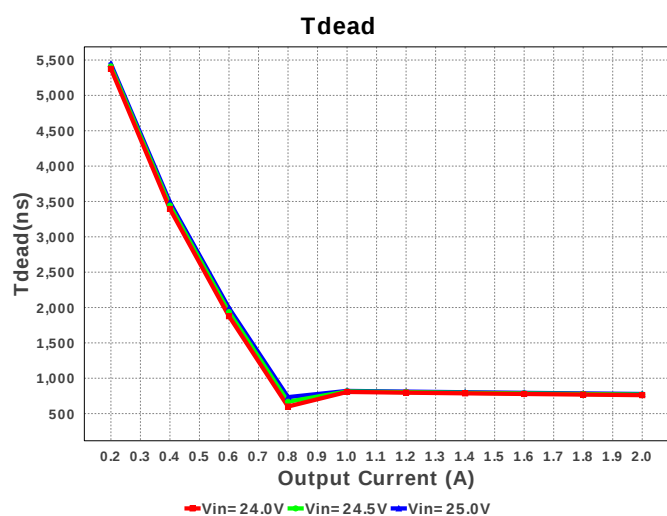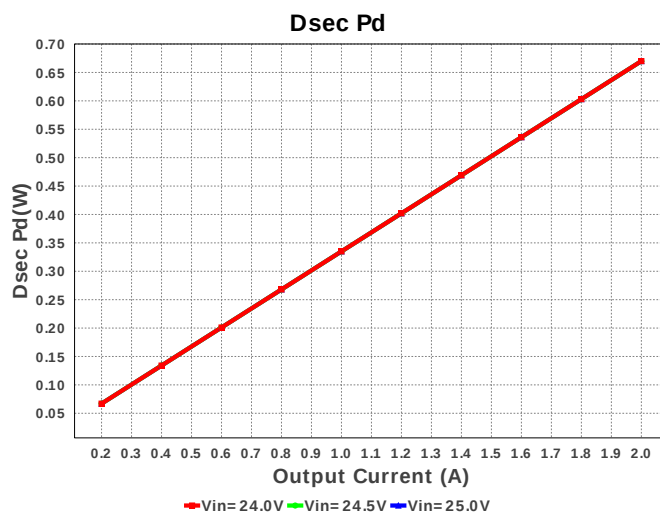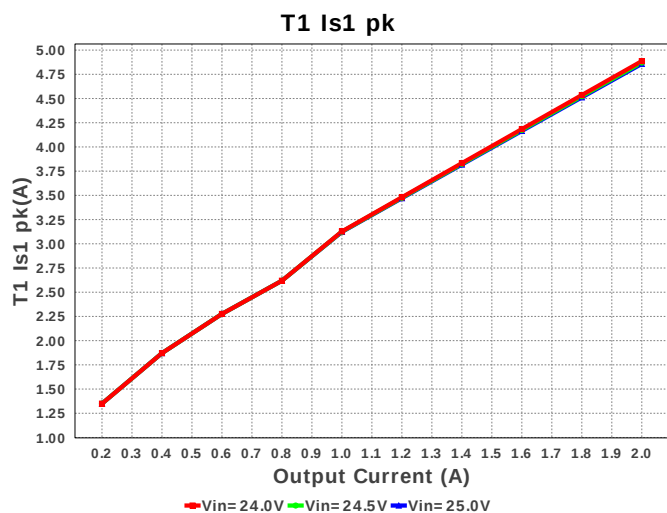

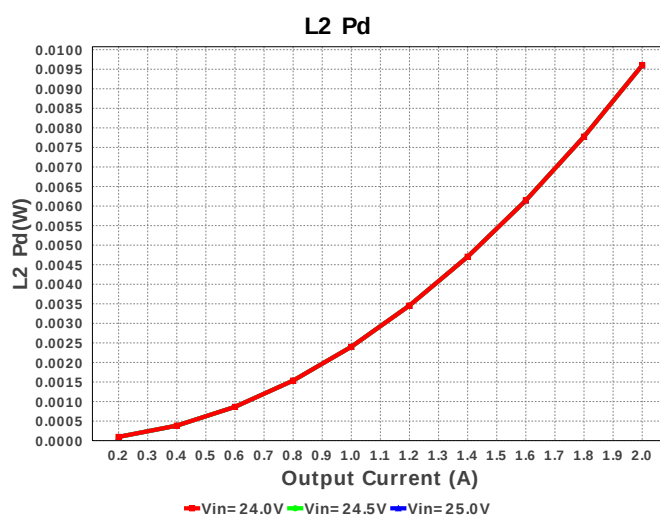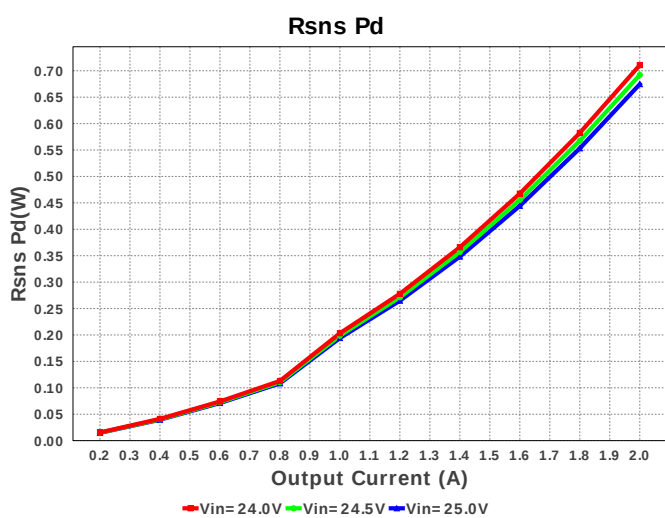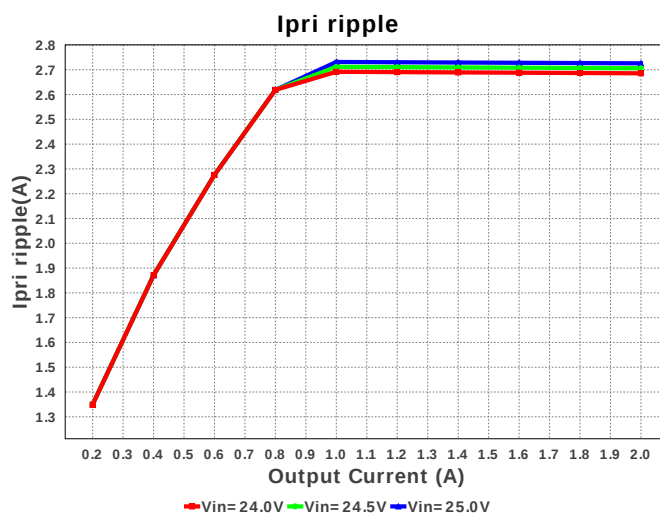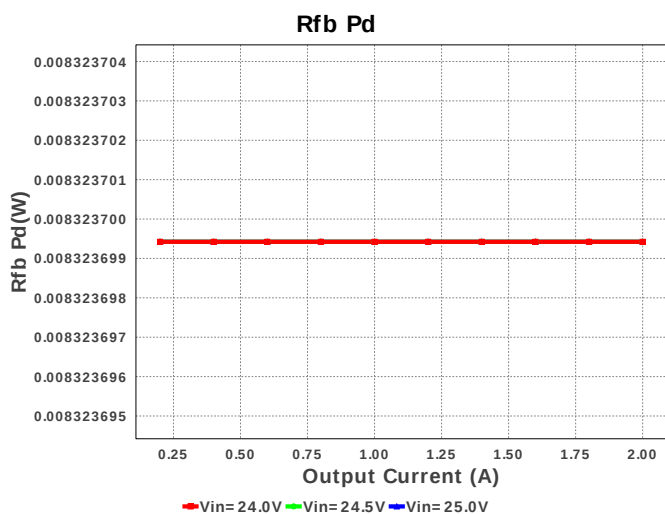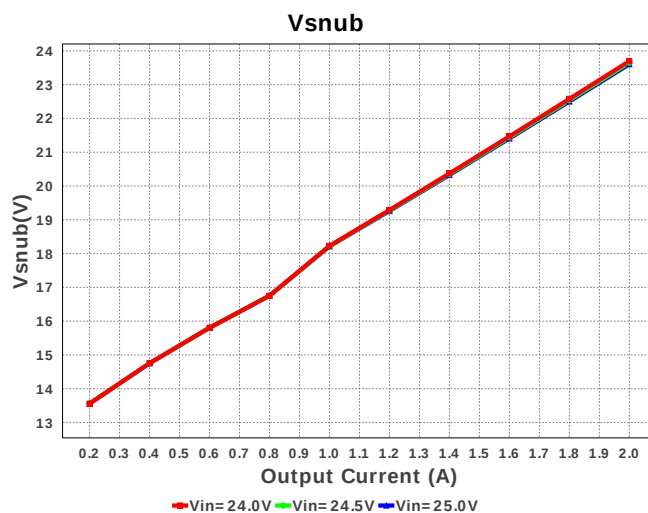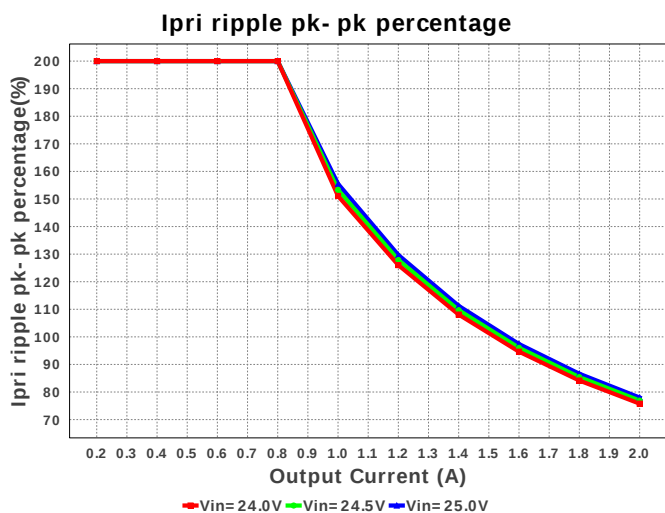

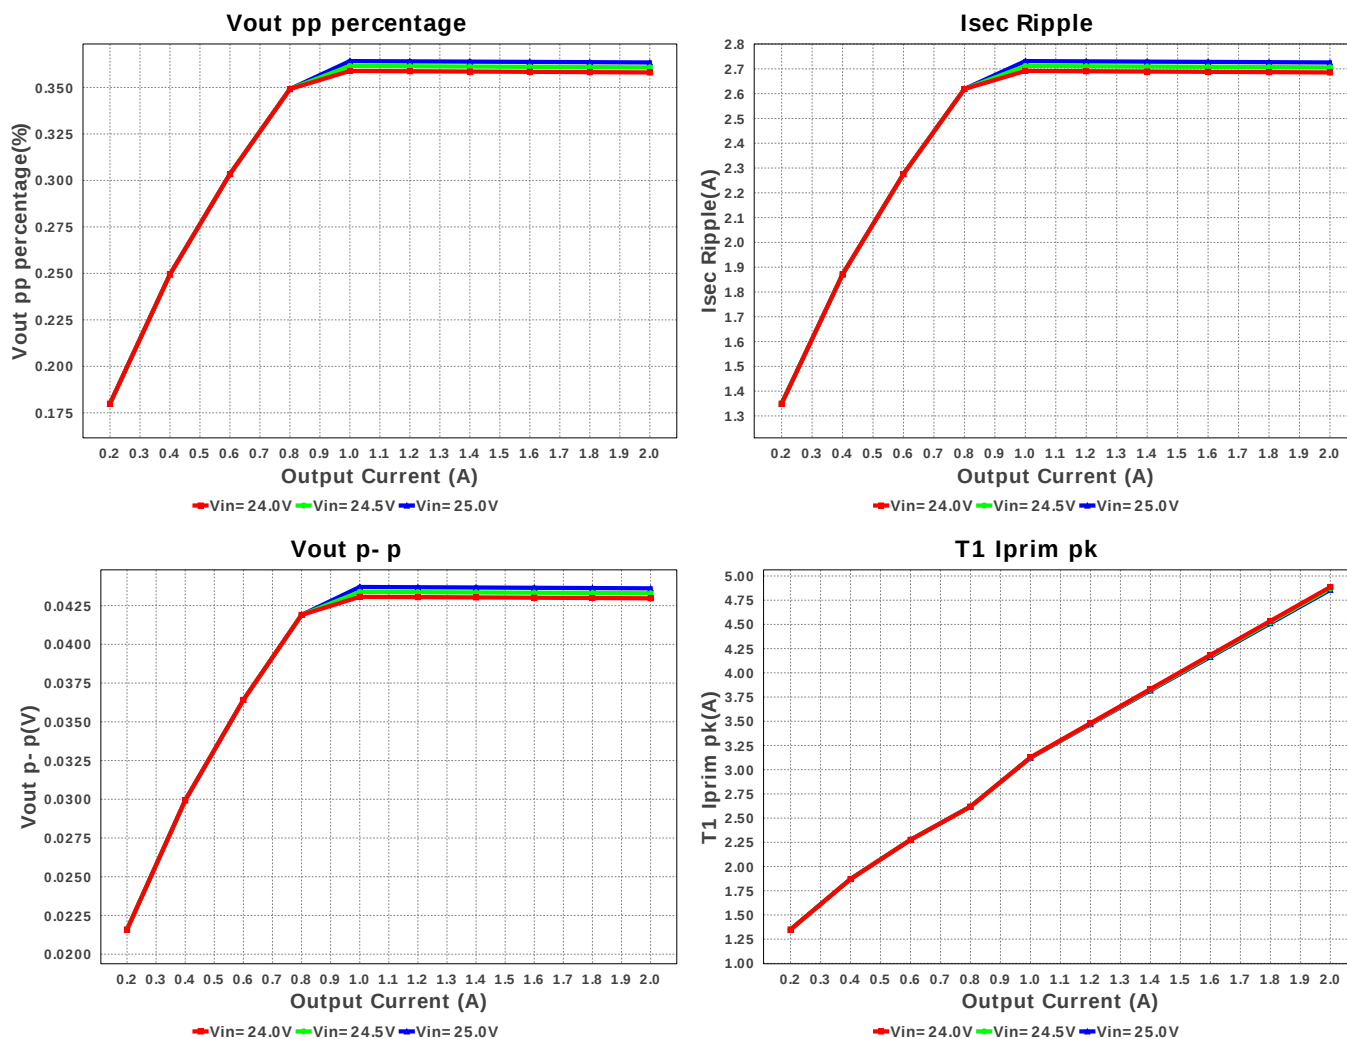

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	2.102 A	Current	Output capacitor1 RMS ripple current
2.	Iin Avg	1.156 A	Current	Average input current
3.	Iout_DCM	930.189 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	1.276 A	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	2.686 A	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	75.791 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	2.686 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	2.177 A	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	4.886 A	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	2.902 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	4.886 A	Current	Transformer Secondary1 Peak Current
12.	BOM Count	47	General	Total Design BOM count
13.	Daux trr	4.0 ns	General	Auxiliary Diode Reverse Recovery Time
14.	Dsec Vf	670.0 mV	General	Effective Forward Voltage Drop at the Operating Current
15.	Dsec trr	19.64 ns	General	Output Diode Reverse Recovery Time
16.	Dsec2 Vf	397.923 mV	General	Effective Forward Voltage Drop at the Operating Current
17.	Dsnub trr	0.0 ns	General	Snubber Diode Reverse Recovery Time
18.	FootPrint	2.059 k mm ²	General	Total Foot Print Area of BOM components
19.	Frequency	99.307 kHz	General	Switching frequency
20.	Pout	24.0 W	General	Total output power
21.	Tdead	760.553 ns	General	Approximate Dead Time of the Regulator
22.	Toff	5.683 us	General	Approximate Converter Off Time
23.	Ton Act	3.626 us	General	Approximate Converter On Time
24.	Total BOM	\$0.0	General	Total BOM Cost
25.	Tsw	10.07 us	General	Switching Time Period
26.	Vaux	12.67 V	General	Auxiliary Voltage
27.	Vsnub	23.697 V	General	Voltage Across the Snubber
28.	Vout Actual	11.99 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
29.	Vout OP	12.0 V	Op_Point	Operational Output Voltage

#	Name	Value	Category	Description
30.	Duty Cycle	36.007 %	Op_point	Duty cycle
31.	Efficiency	86.508 %	Op_point	Steady state efficiency
32.	IC Tj	32.71 degC	Op_point	IC junction temperature
33.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
34.	IOUT_OP	2.0 A	Op_point	Iout operating point
35.	M1 TjOP	34.806 degC	Op_point	M1 MOSFET junction temperature
36.	Vout p-p	42.971 mV	Op_point	Peak-to-peak output ripple voltage
37.	Cin Pd	11.269 mW	Power	Input capacitor power dissipation
38.	Cout1 Pd	70.723 mW	Power	Output capacitor1 power dissipation
39.	Dsec Pd	670.0 mW	Power	Secondary Diode Power Dissipation
40.	Dsec2 Pd	397.923 mW	Power	Secondary Diode Power Dissipation
41.	IC Pd	54.193 mW	Power	IC power dissipation
42.	L2 Pd	9.6 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
43.	M1 Pd	87.384 mW	Power	M1 MOSFET total power dissipation
44.	Paux	18.383 mW	Power	Power Dissipation in Raux and Daux
45.	Pd Rstartup	20.488 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
46.	Rdrv Pd	21.863 μW	Power	Power Dissipation in Gate Drive Resistor
47.	Rfb Pd	8.324 mW	Power	Rfb Power Dissipation
48.	Rsns Pd	710.658 mW	Power	Current Limit Sense Resistor Power Dissipation
49.	Snubber Pd	372.099 mW	Power	Snubber Power Dissipation
50.	T1 Pd	3.068 W	Power	Estimated Losses in Transformer
51.	Total Pd	0.0 W	Power	Total Power Dissipation
52.	Vout Tolerance	1.926 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
53.	Vout pp percentage	358.093 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	Iout1	2.0	Output Current #1
3.	Iout2	1.0	Output Current #2
4.	VinMax	25.0	Maximum input voltage
5.	VinMin	24.0	Minimum input voltage
6.	Vout	12.0	Output Voltage
7.	Vout1	12.0	Output Voltage #1
8.	Vout2	5.0	Output Voltage #2
9.	base_pn	UCC28C44	Base Product Number
10.	source	DC	Input Source Type
11.	Ta	30.0	Ambient temperature

Design Assistance

1. **UCC28C44** Product Folder : <http://www.ti.com/product/UCC28C44> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).