


WEBENCH® Design Report


Design : 906020/2255 TPS43061RTER
TPS43061RTER 15.0V-18.0V to 36.00V @ 2.0A






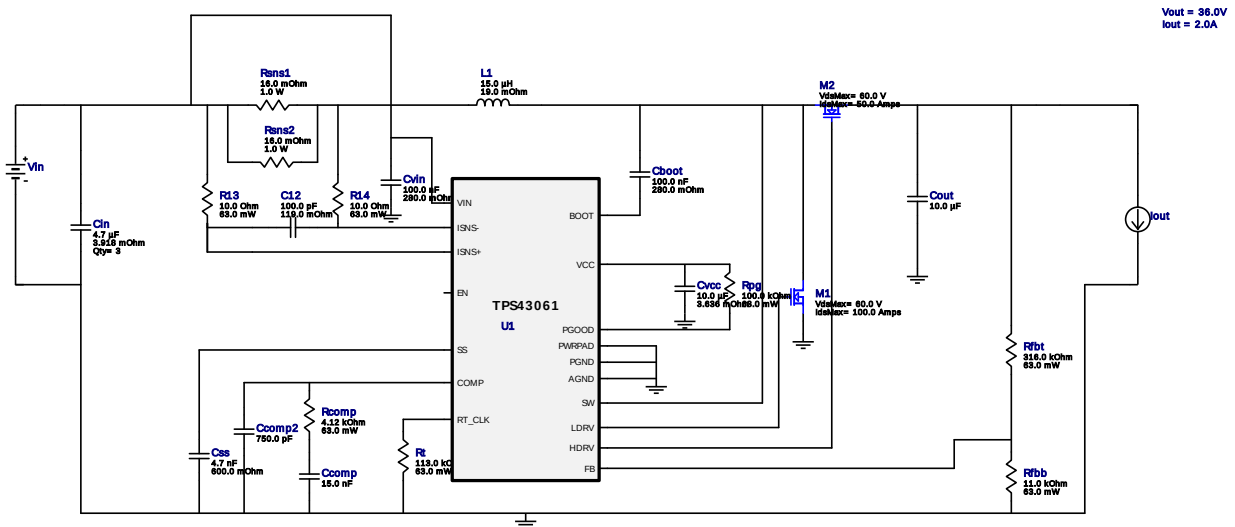








1. The pulse skip mode in the device has not been modeled. Efficiency and operational parameters of the model in pulse skip mode is not valid.







Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C12	AVX	06035A101JAT2A Series= C0G/NP0	Cap= 100.0 pF ESR= 119.0 mOhm VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm ²
2.	Cboot	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	Ccomp	Yageo America	CC0805KRX7R9BB153 Series= X7R	Cap= 15.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
4.	Ccomp2	Samsung Electro-Mechanics	CL21C751JBCNNNC Series= C0G/NP0	Cap= 750.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.03	0805 7 mm ²
5.	Cin	TDK	C3216JB1V475K Series= JB	Cap= 4.7 uF ESR= 3.918 mOhm VDC= 35.0 V IRMS= 0.0 A	3	\$0.13	1206 11 mm ²
6.	Cout	MuRata	GRM32ER71J106KA12L Series= X7R	Cap= 10.0 uF VDC= 63.0 V IRMS= 0.0 A	1	\$0.27	1210_280 15 mm ²
7.	Css	MuRata	GRM188R71E472KA01D Series= X7R	Cap= 4.7 nF ESR= 600.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0603 5 mm ²
8.	Cvcc	MuRata	GRM188R61C106MA73D Series= X5R	Cap= 10.0 uF ESR= 3.636 mOhm VDC= 16.0 V IRMS= 2.8889 A	1	\$0.07	0603 5 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Cvin	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
10.	L1	Coilcraft	MSS1210-153MEB	L= 15.0 µH DCR= 19.0 mOhm	1	\$0.81	 MSS1210 204 mm ²
11.	M1	Texas Instruments	CSD18563Q5A	VdsMax= 60.0 V IdsMax= 100.0 Amps	1	\$0.68	 TRANS_NexFET_Q5A 55 mm ²
12.	M2	Texas Instruments	CSD18537NQ5A	VdsMax= 60.0 V IdsMax= 50.0 Amps	1	\$0.46	 TRANS_NexFET_Q5A 55 mm ²
13.	R13	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
14.	R14	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
15.	Rcomp	Vishay-Dale	CRCW04024K12FKED Series= CRCW..e3	Res= 4.12 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
16.	Rfbb	Vishay-Dale	CRCW040211K0FKED Series= CRCW..e3	Res= 11.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
17.	Rfbt	Vishay-Dale	CRCW0402316KFKED Series= CRCW..e3	Res= 316.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
18.	Rpg	Vishay-Dale	CRCW0402100KFKED Series= CRCW..e3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
19.	Rsns1	Susumu Co Ltd	PRL1632-R016-F-T1 Series= PRL1632	Res= 16.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.19	 0612 11 mm ²
20.	Rsns2	Susumu Co Ltd	PRL1632-R016-F-T1 Series= PRL1632	Res= 16.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.19	 0612 11 mm ²
21.	Rt	Vishay-Dale	CRCW0402113KFKED Series= CRCW..e3	Res= 113.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
22.	U1	Texas Instruments	TPS43061RTER	Switcher	1	\$1.40	 S-PVQFN-N16 17 mm ²

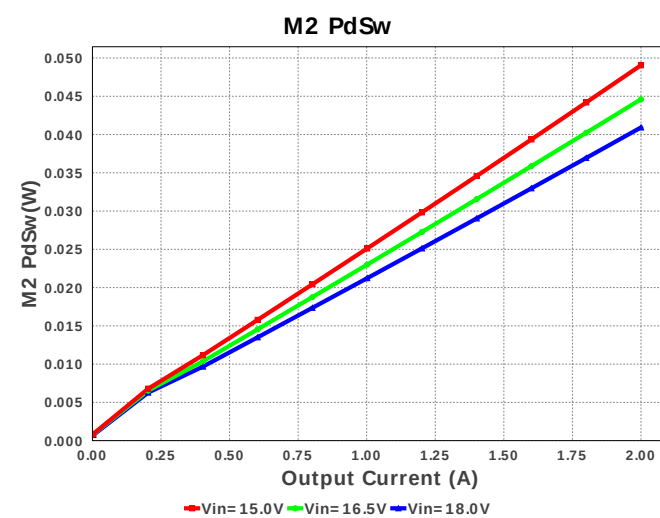
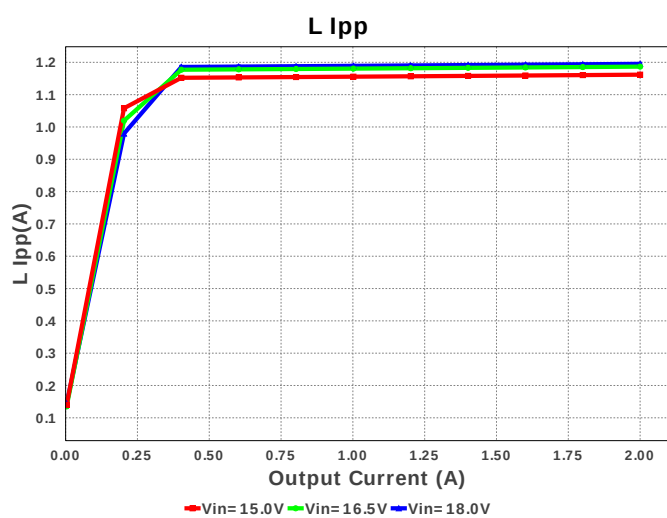
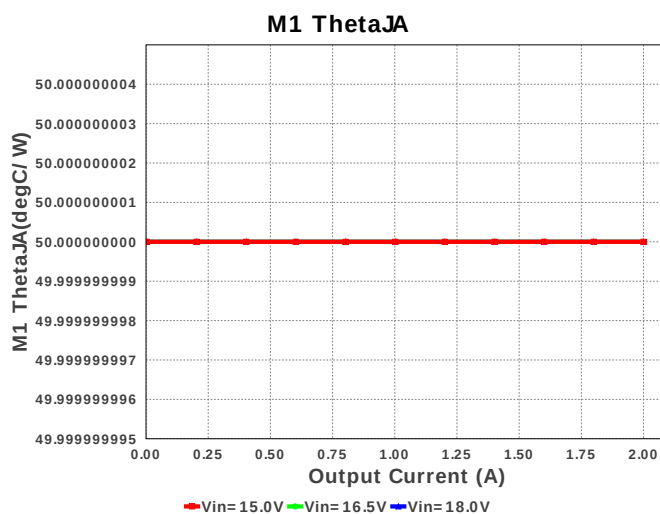
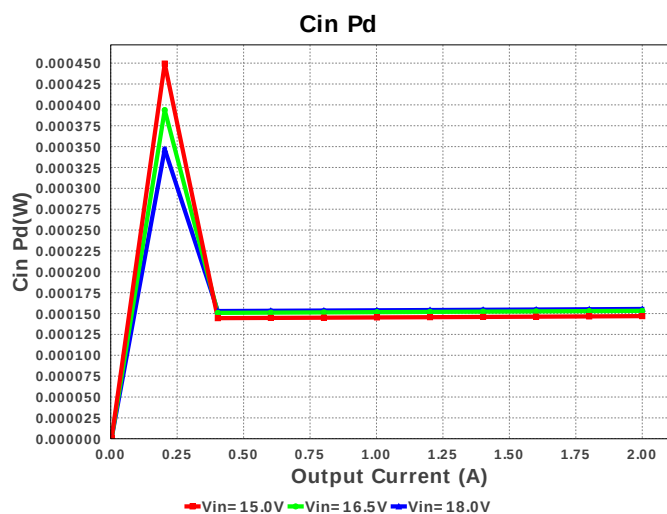
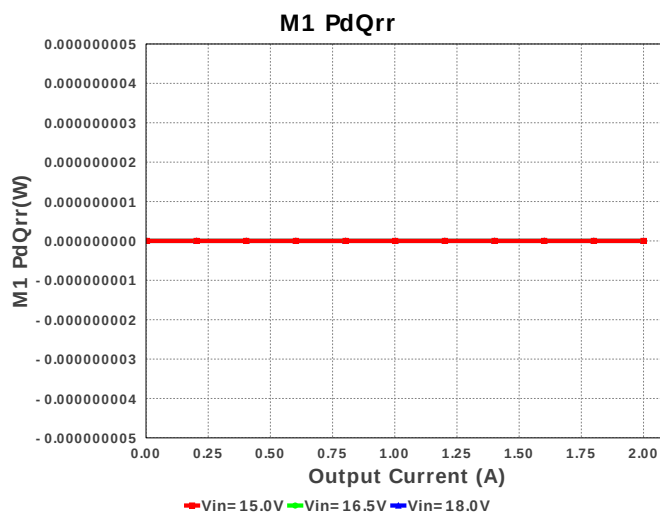
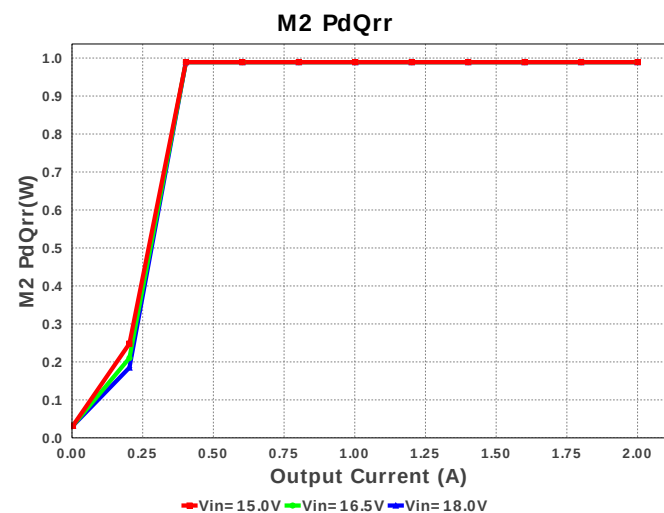


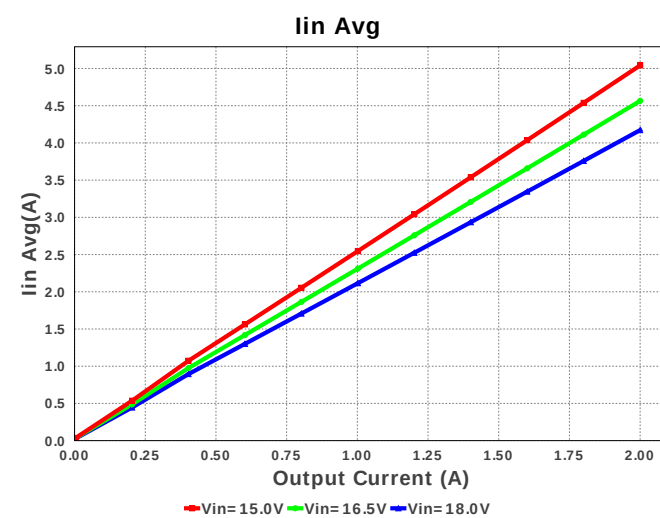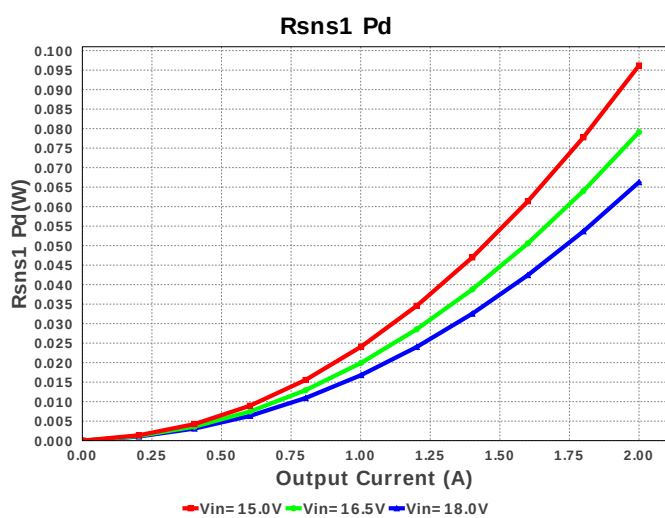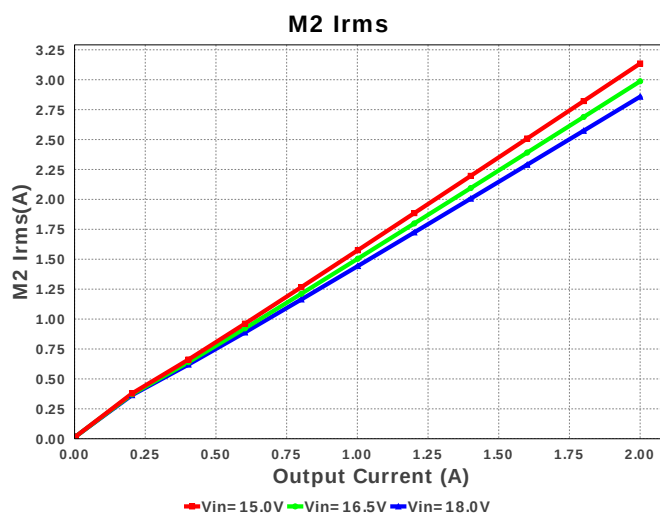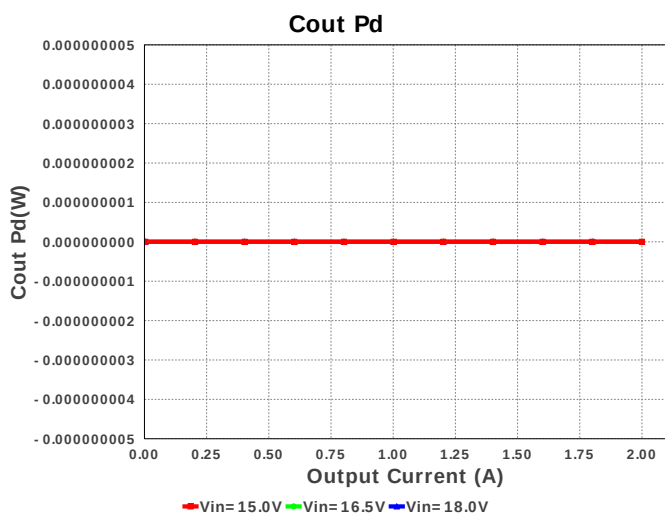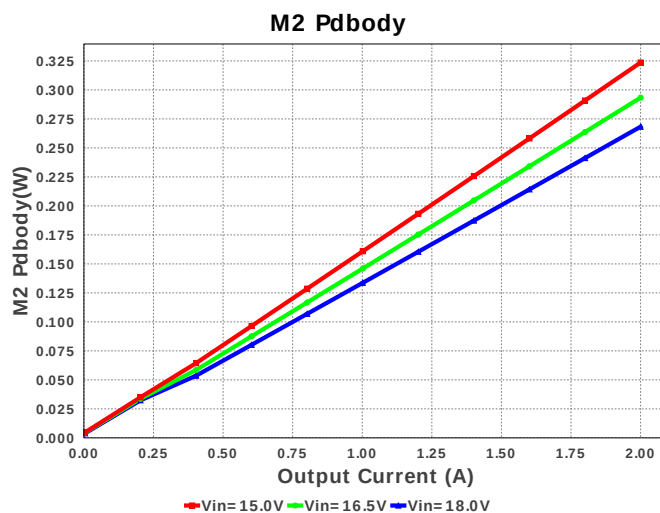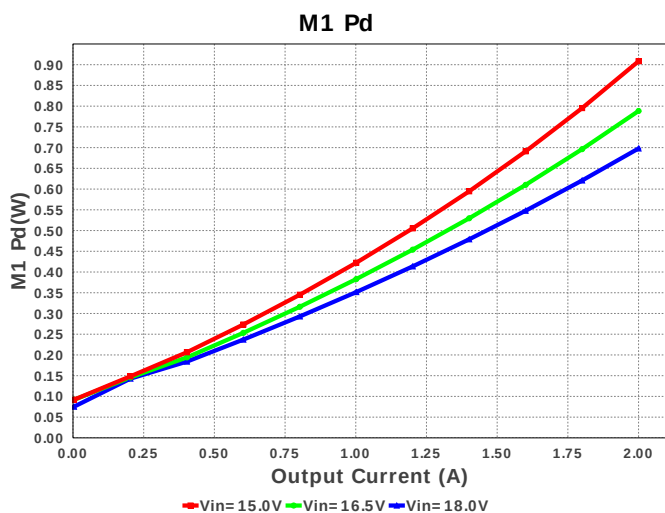


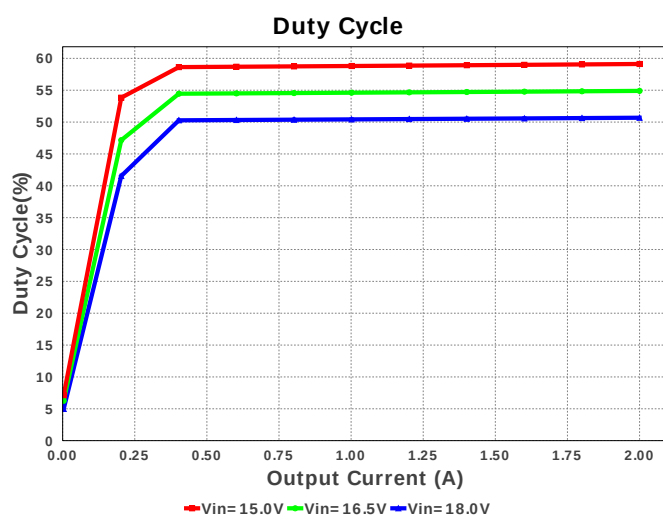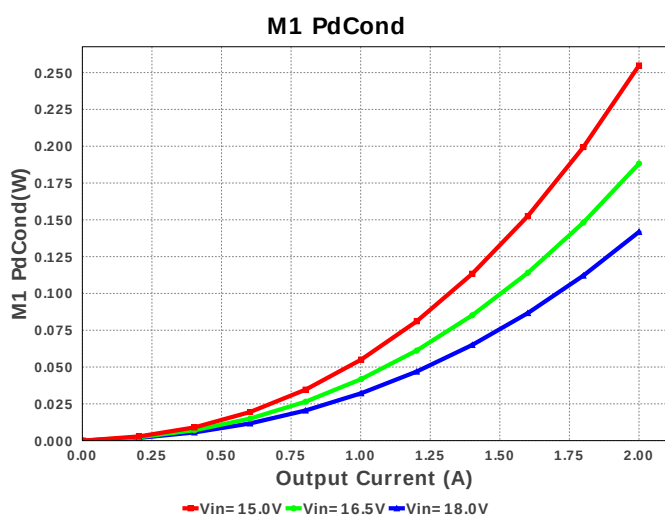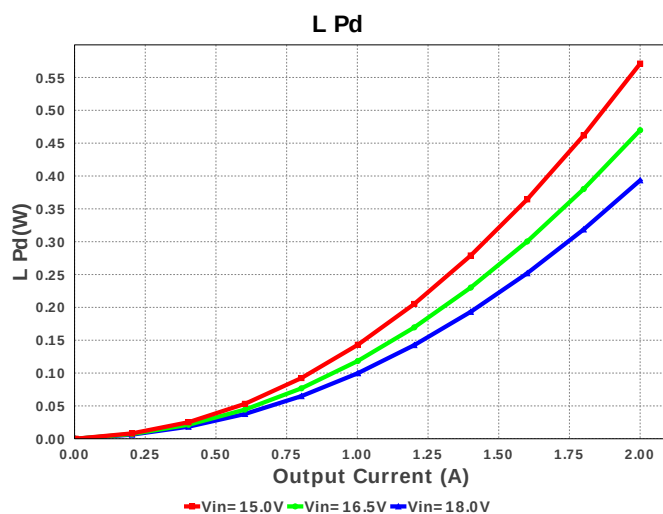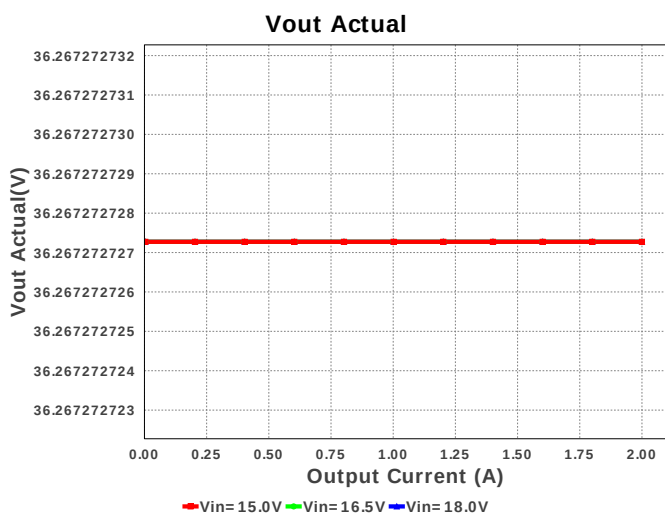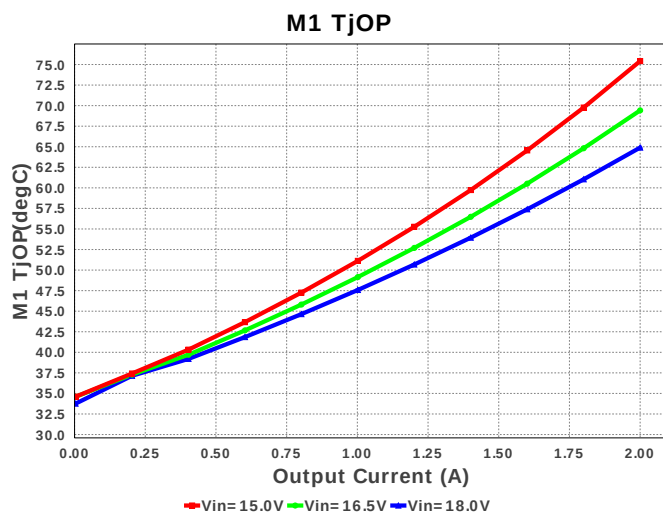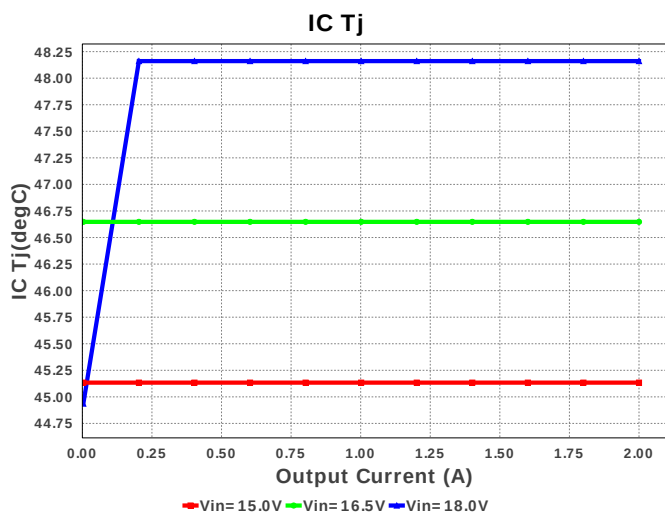

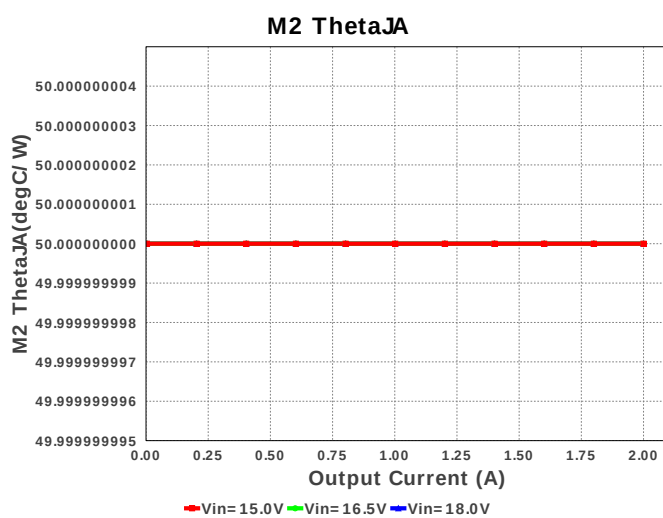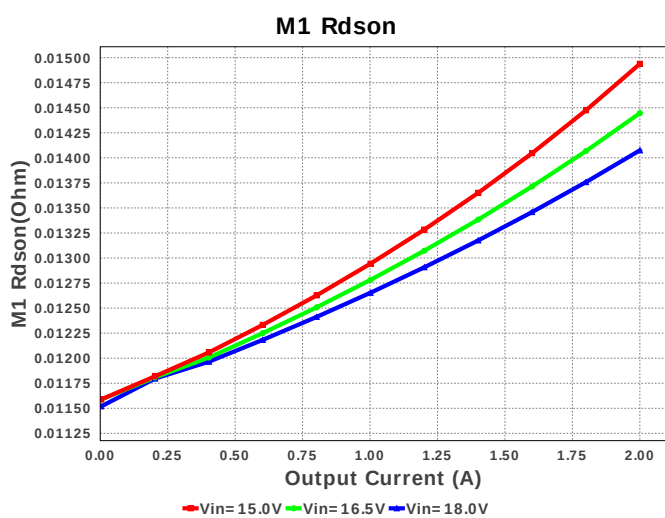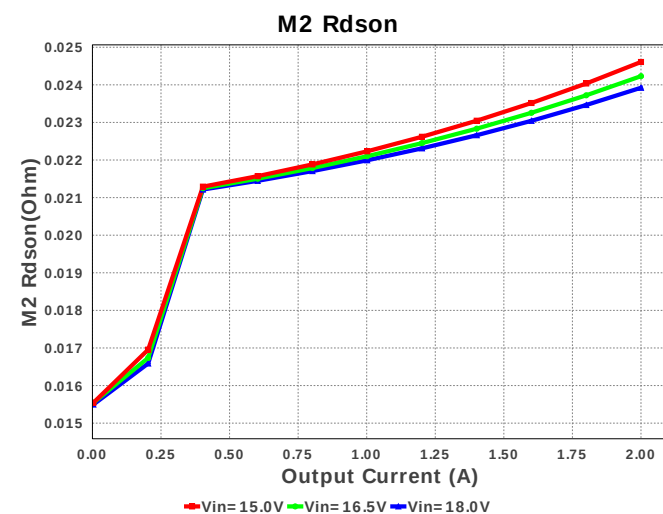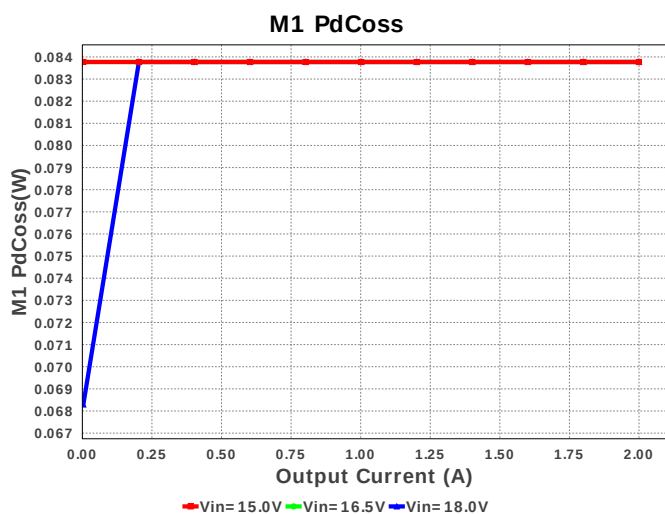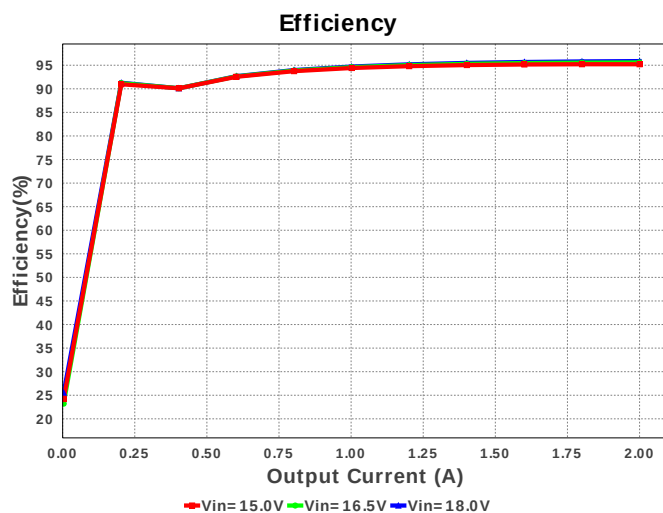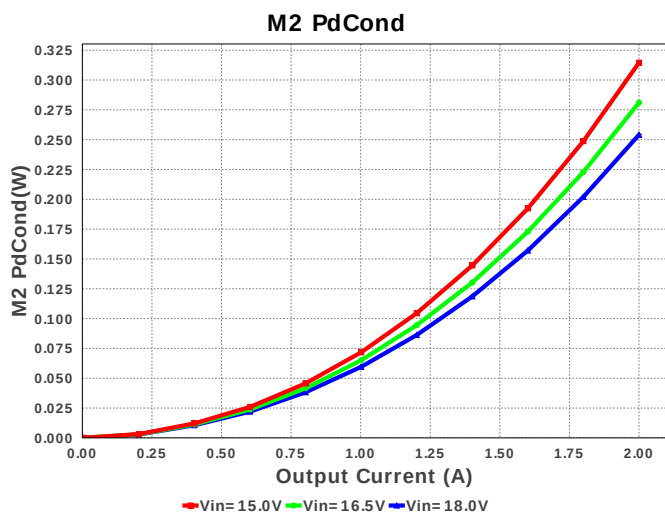

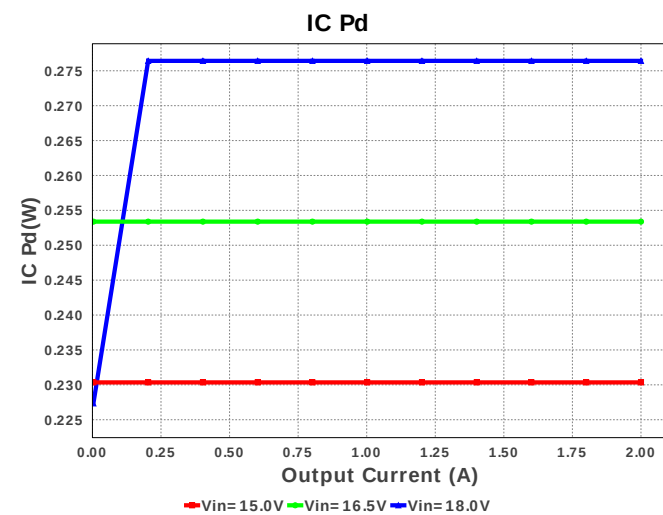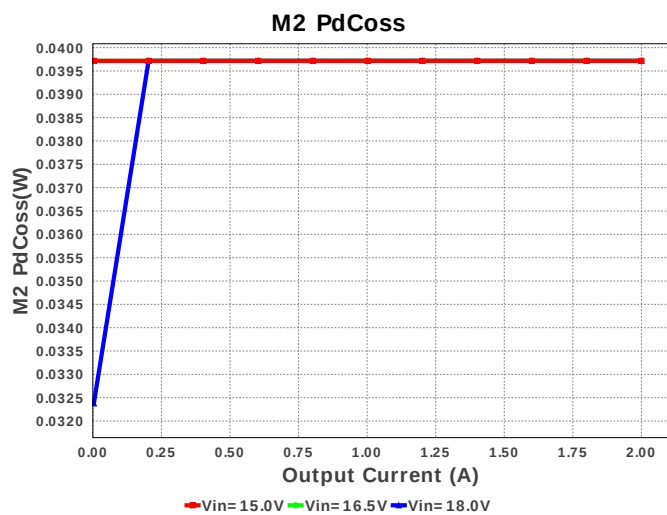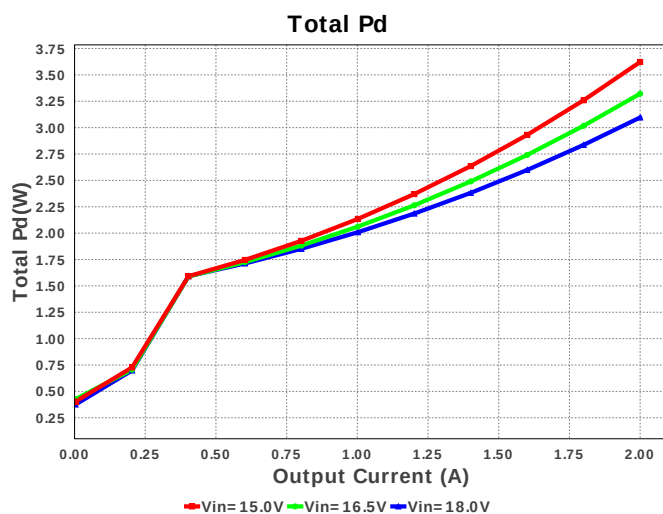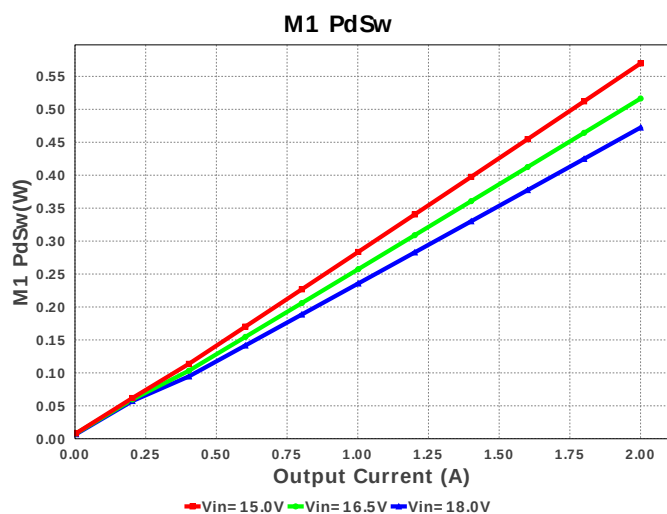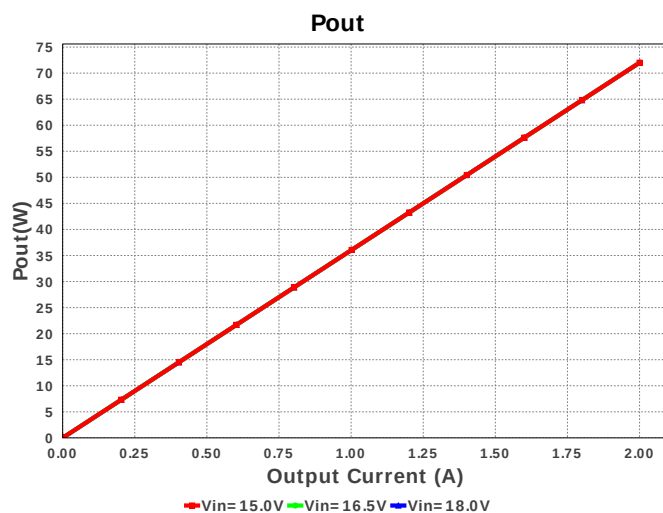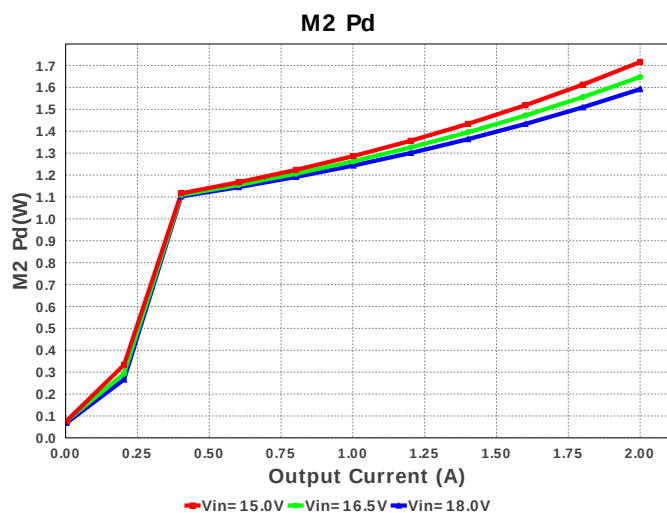

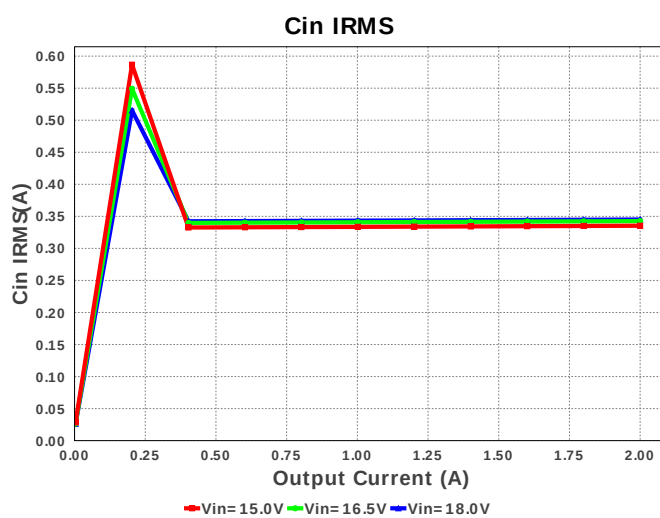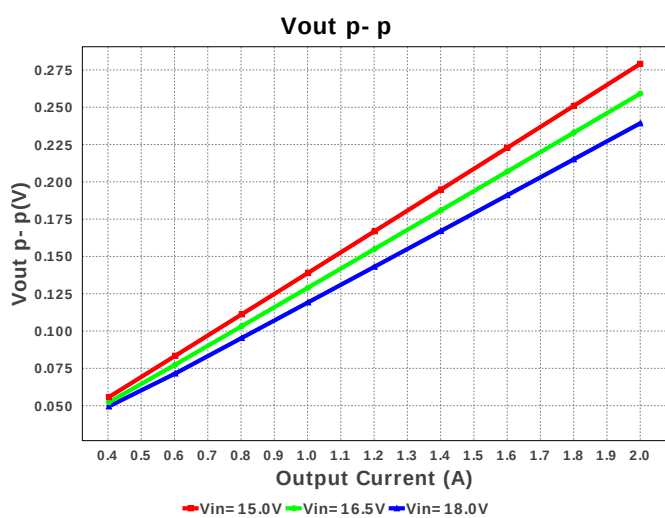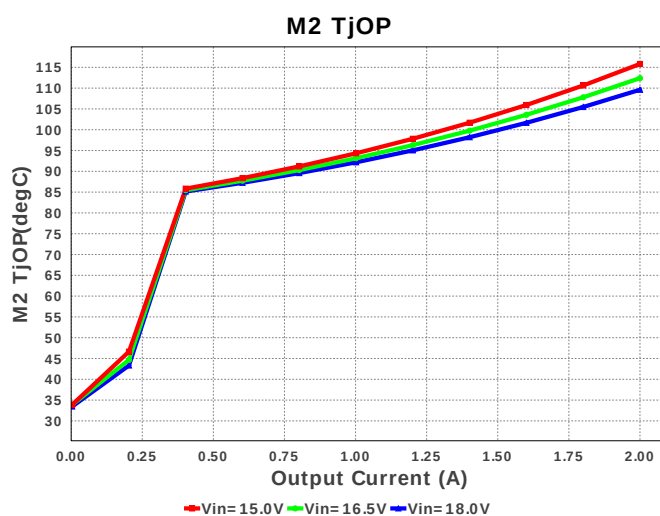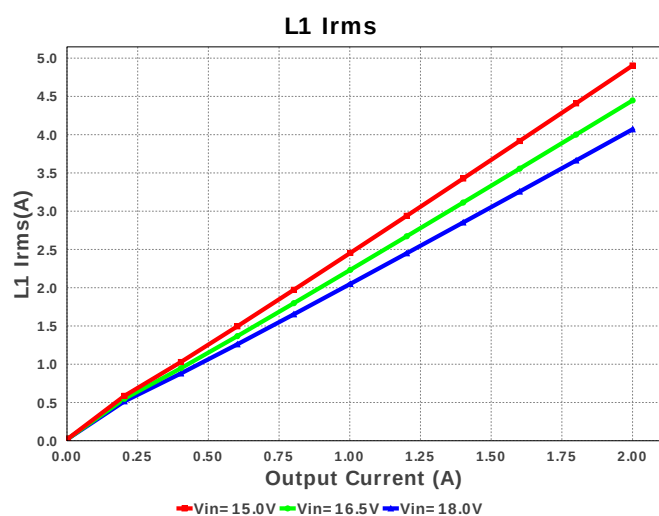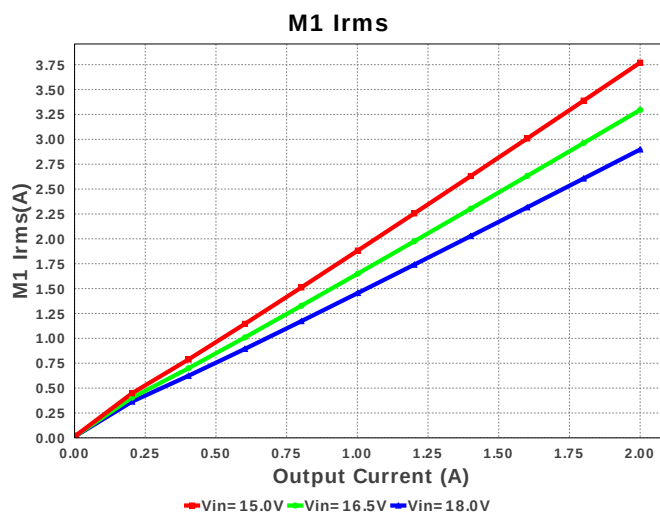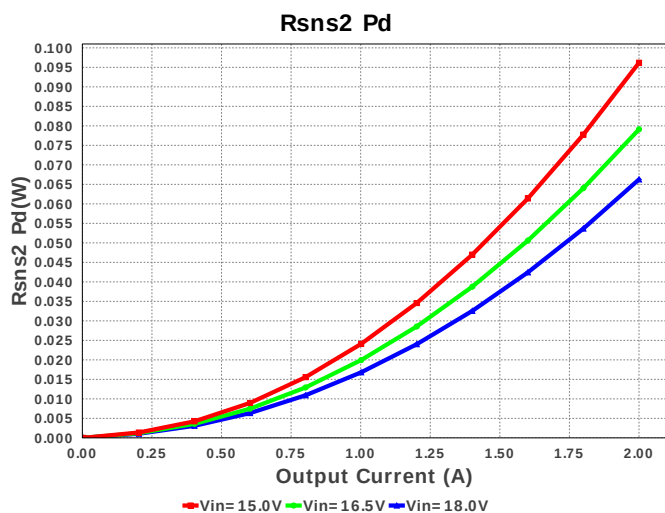

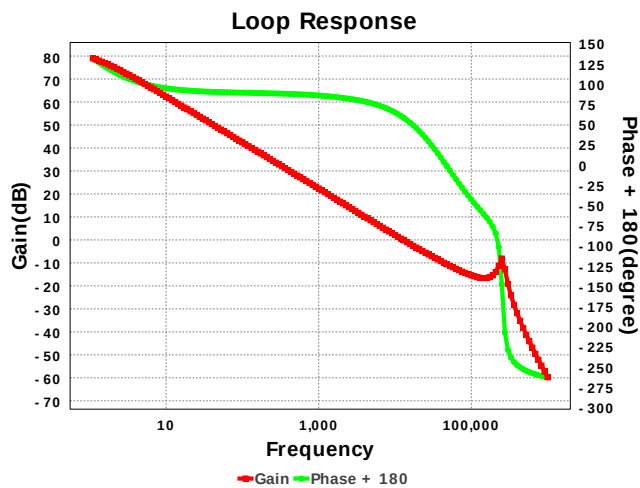

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	335.39 mA	Current	Input capacitor RMS ripple current
2.	Iin Avg	5.044 A	Current	Average input current
3.	L Ipp	1.162 A	Current	Peak-to-peak inductor ripple current
4.	L1 Irms	4.904 A	Current	Inductor ripple current
5.	M1 Irms	3.77 A	Current	MOSFET RMS ripple current
6.	M2 Irms	3.135 A	Current	MOSFET RMS ripple current
7.	BOM Count	24	General	Total Design BOM count
8.	FootPrint	463.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	508.85 kHz	General	Switching frequency
10.	M1 Rdson	14.938 mOhm	General	Drain-Source On-resistance
11.	M1 ThetaJA	50.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
12.	M2 Rdson	24.795 mOhm	General	Drain-Source On-resistance
13.	M2 ThetaJA	50.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
14.	Pout	72.0 W	General	Total output power
15.	Total BOM	\$4.61	General	Total BOM Cost
16.	Low Freq Gain	77.752 dB	Op_Point	Gain at 10Hz
17.	Vout Actual	36.267 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
18.	Vout OP	36.0 V	Op_Point	Operational Output Voltage
19.	Cross Freq	10.86 kHz	Op_point	Bode plot crossover frequency
20.	Duty Cycle	59.119 %	Op_point	Duty cycle
21.	Efficiency	95.167 %	Op_point	Steady state efficiency
22.	Gain Marg	-9.212 dB	Op_point	Bode Plot Gain Margin
23.	IC Tj	45.134 degC	Op_point	IC junction temperature
24.	ICThetaJA	65.7 degC/W	Op_point	IC junction-to-ambient thermal resistance
25.	IOUT_OP	2.0 A	Op_point	Iout operating point
26.	M1 TjOP	75.417 degC	Op_point	M1 MOSFET junction temperature
27.	M2 TjOP	117.494 degC	Op_point	M2 MOSFET junction temperature
28.	Phase Marg	57.732 deg	Op_point	Bode Plot Phase Margin
29.	VIN_OP	15.0 V	Op_point	Vin operating point
30.	Vout p-p	279.055 mV	Op_point	Peak-to-peak output ripple voltage
31.	Cin Pd	146.908 μW	Power	Input capacitor power dissipation
32.	Cout Pd	0.0 W	Power	Output capacitor power dissipation
33.	IC Pd	230.35 mW	Power	IC power dissipation
34.	L Pd	571.12 mW	Power	Inductor power dissipation
35.	M1 Pd	908.336 mW	Power	MOSFET power dissipation
36.	M1 PdCond	254.844 mW	Power	M1 MOSFET conduction losses
37.	M1 PdCoss	83.772 mW	Power	M1 MOSFET Coss Losses
38.	M1 PdQrr	0.0 W	Power	M1 MOSFET switching losses
39.	M1 PdSw	569.72 mW	Power	M1 MOSFET switching losses
40.	M2 Pd	1.75 W	Power	MOSFET power dissipation
41.	M2 PdCond	316.874 mW	Power	M2 MOSFET conduction losses
42.	M2 PdCoss	39.716 mW	Power	M2 MOSFET Coss Losses
43.	M2 PdQrr	1.021 W	Power	Synchronous Boost High Side Reverse Recovery
44.	M2 PdSw	49.058 mW	Power	M2 MOSFET switching losses
45.	M2 Pdbody	323.628 mW	Power	Power dissipation through lower FET
46.	Rsns1 Pd	96.189 mW	Power	Rsns1 Power Dissipation
47.	Rsns2 Pd	96.189 mW	Power	Rsns2 Power Dissipation
48.	Total Pd	3.656 W	Power	Total Power Dissipation
49.	Vout Tolerance	4.041 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	18.0	Maximum input voltage
3.	VinMin	15.0	Minimum input voltage
4.	Vout	36.0	Output Voltage
5.	base_pn	TPS43061	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. Feature Highlights: Low Quiescent Current Boost Controller, Wide Vin Range 4.5V to 38V Vin, 58V Vout, 5.5V Gate Drive optimized for Low Qg NexFETs Thermal Shutdown
2. **TPS43061** Product Folder : <http://www.ti.com/product/TPS43061> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).