


WEBENCH® Design Report





Design : 4748517/1 LM5576QMHX/NOPB
LM5576QMHX/NOPB 33.0V-66.0V to 3.30V @ 2.0A






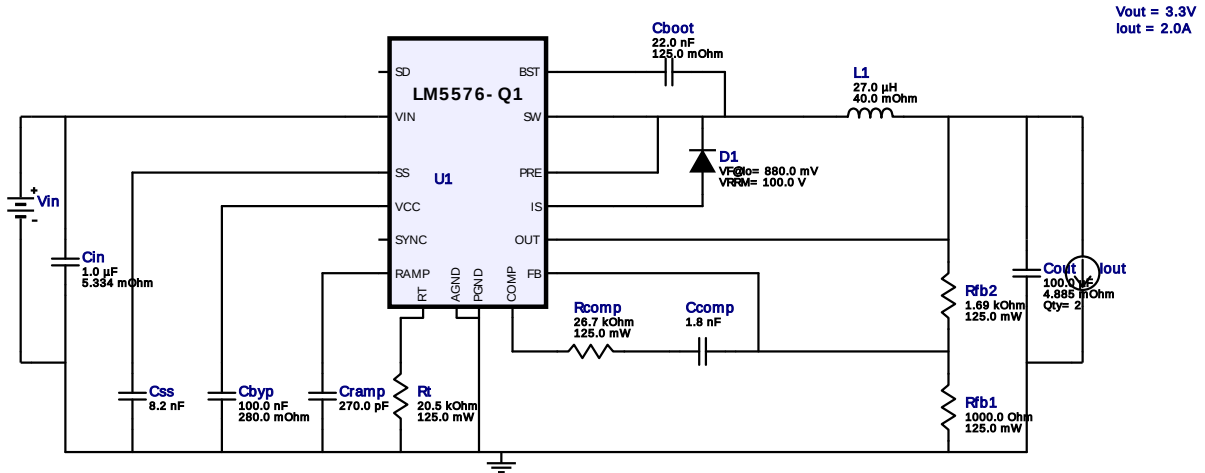








Electrical BOM


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	Kemet	C0805C223K5RACTU Series= X7R	Cap= 22.0 nF ESR= 125.0 mOhm VDC= 50.0 V IRMS= 645.0 mA	1	\$0.01	 0805 7 mm ²
2.	Cbyp	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	Ccomp	MuRata	GRM033R71C182KA88D Series= X7R	Cap= 1.8 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²
4.	Cin	MuRata	GRM31CR72A105KA01L Series= X7R	Cap= 1.0 uF ESR= 5.334 mOhm VDC= 100.0 V IRMS= 1.55432 A	1	\$0.11	 1206_190 11 mm ²
5.	Cout	MuRata	GRM31CR60J107ME39L Series= X5R	Cap= 100.0 uF ESR= 4.885 mOhm VDC= 6.3 V IRMS= 4.4118 A	2	\$0.14	 1206_190 11 mm ²
6.	Cramp	Yageo America	CC0805KRX7R9BB271 Series= X7R	Cap= 270.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
7.	Css	MuRata	GRM155R71E822KA01D Series= X7R	Cap= 8.2 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
8.	D1	Vishay-Semiconductor	SS10PH10-M3/86A	Vf@Io= 880.0 mV VRRM= 100.0 V	1	\$0.29	 TO-277A 56 mm ²
9.	L1	Bourns	SRR1210-270M	L= 27.0 uH DCR= 40.0 mOhm	1	\$0.44	 SRR1210 196 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
10.	Rcomp	Panasonic	ERJ-6ENF2672V Series= ERJ-6E	Res= 26.7 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
11.	Rfb1	Panasonic	ERJ-6ENF1001V Series= ERJ-6E	Res= 1000.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
12.	Rfb2	Panasonic	ERJ-6ENF1691V Series= ERJ-6E	Res= 1.69 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
13.	Rt	Panasonic	ERJ-6ENF2052V Series= ERJ-6E	Res= 20.5 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
14.	U1	Texas Instruments	LM5576QMHX/NOPB	Switcher	1	\$3.15	 MXA20A 71 mm ²

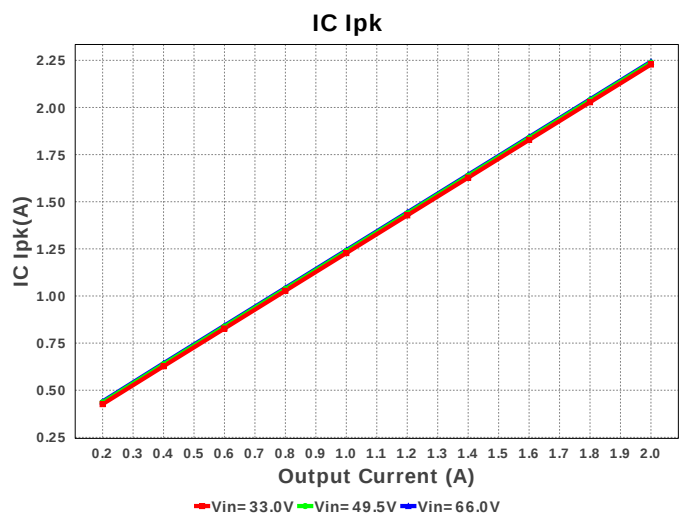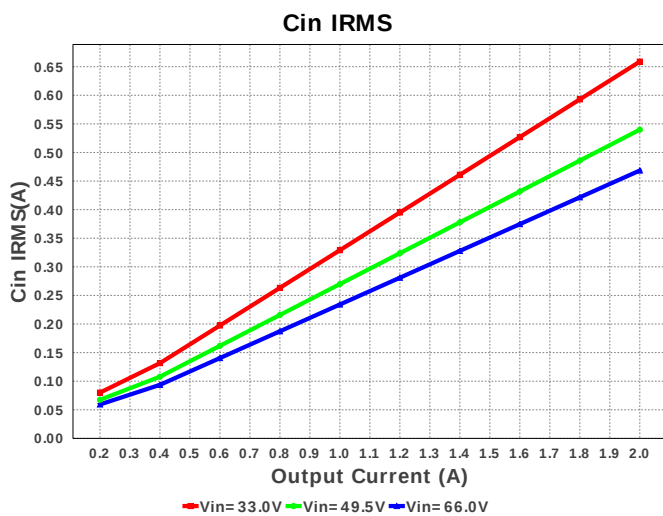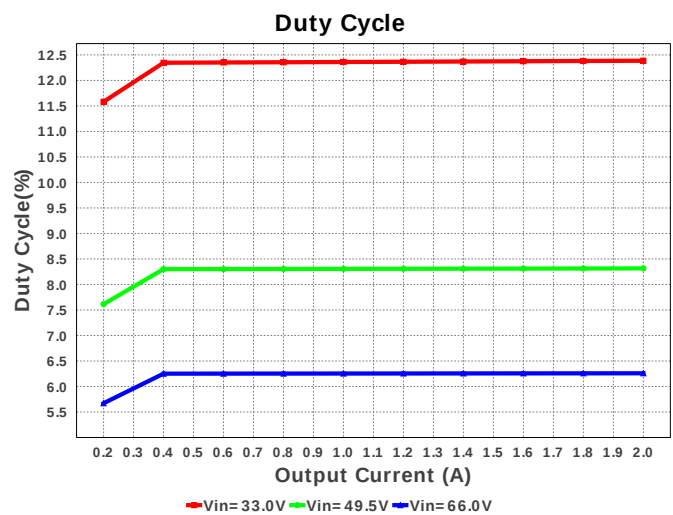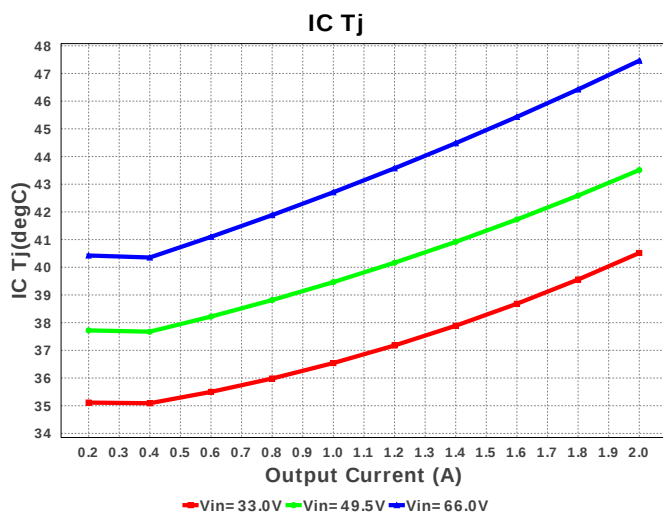

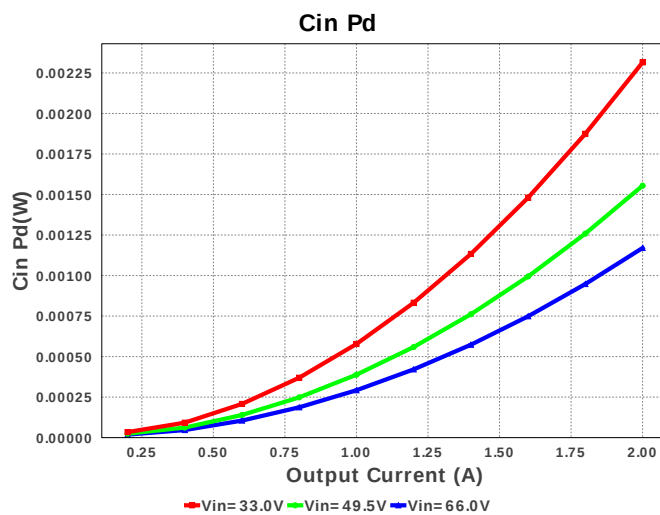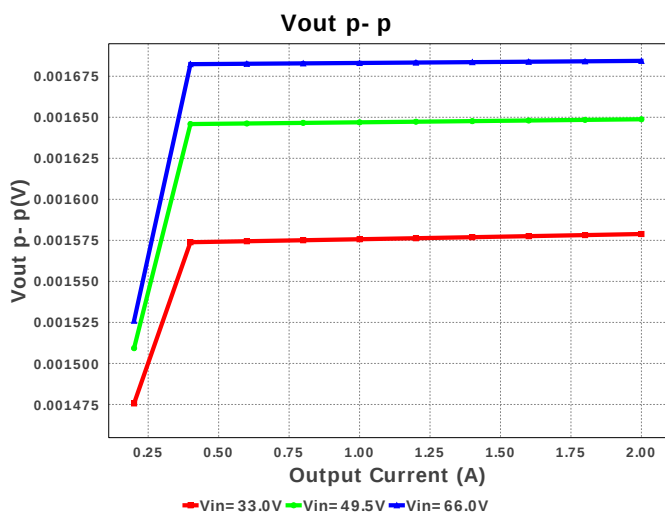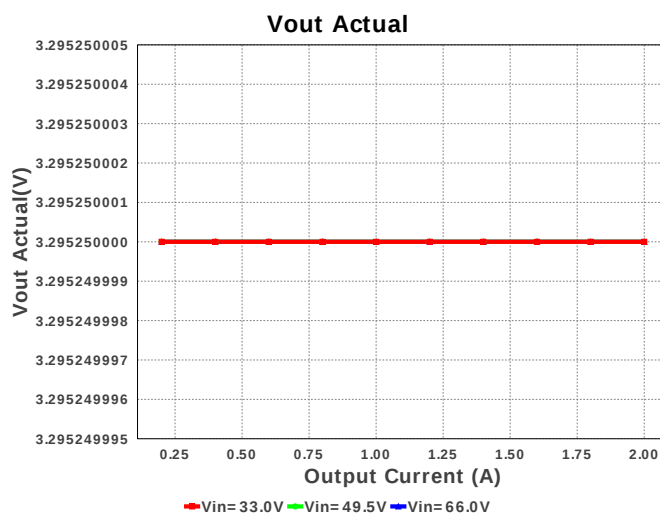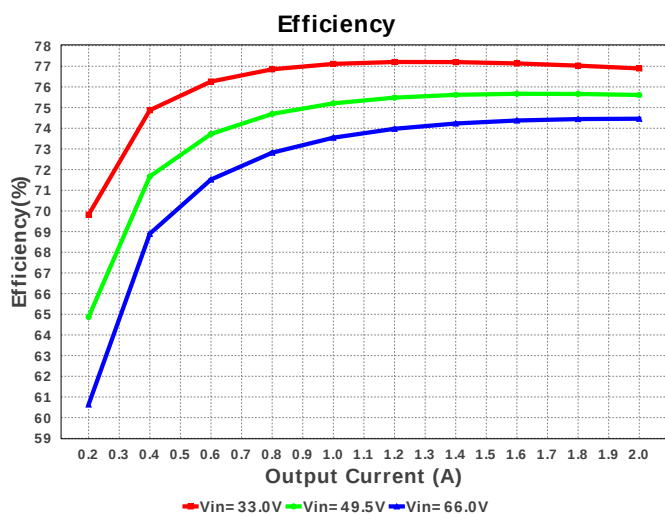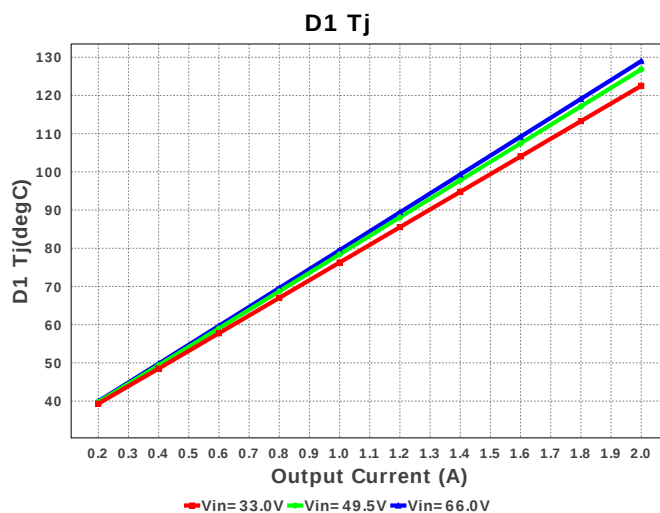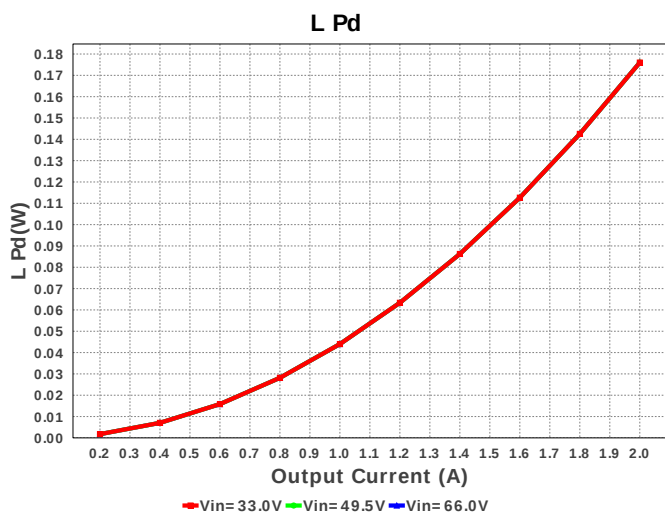

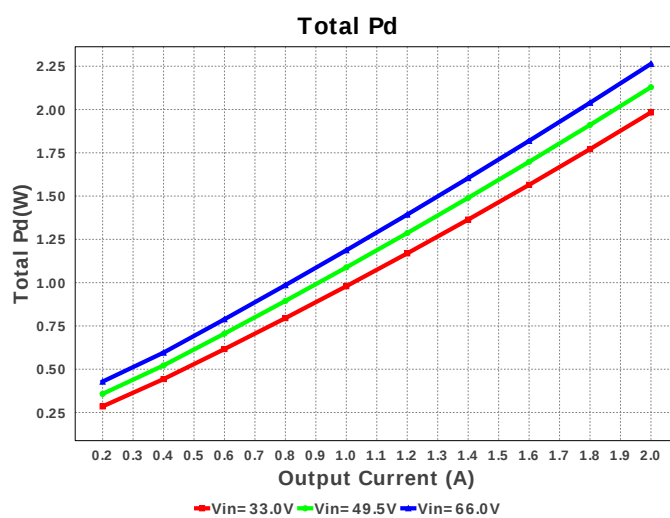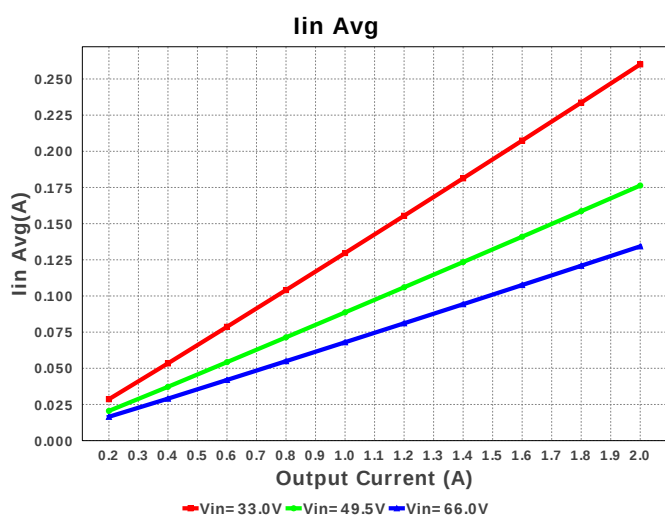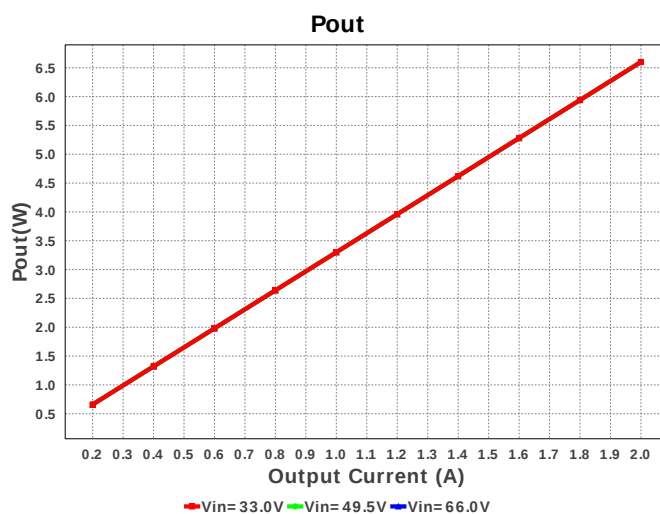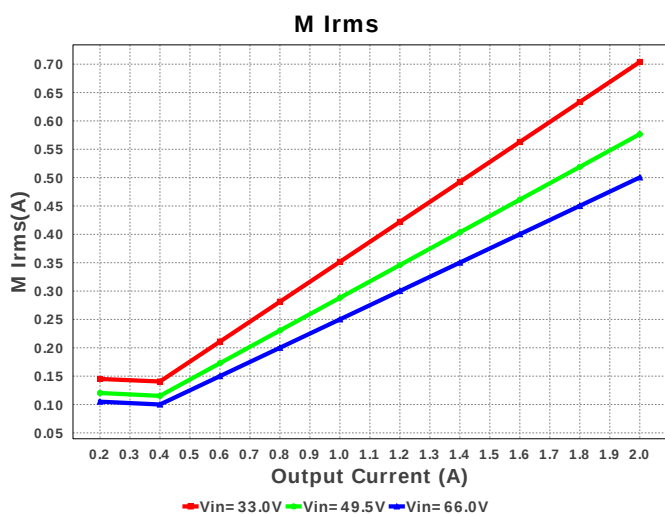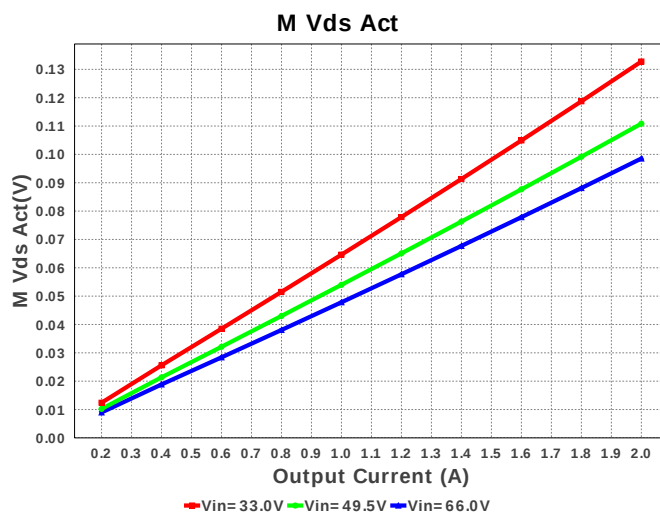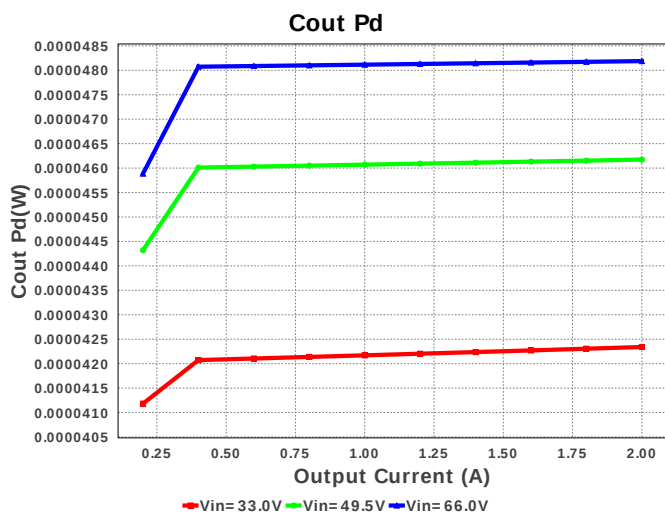

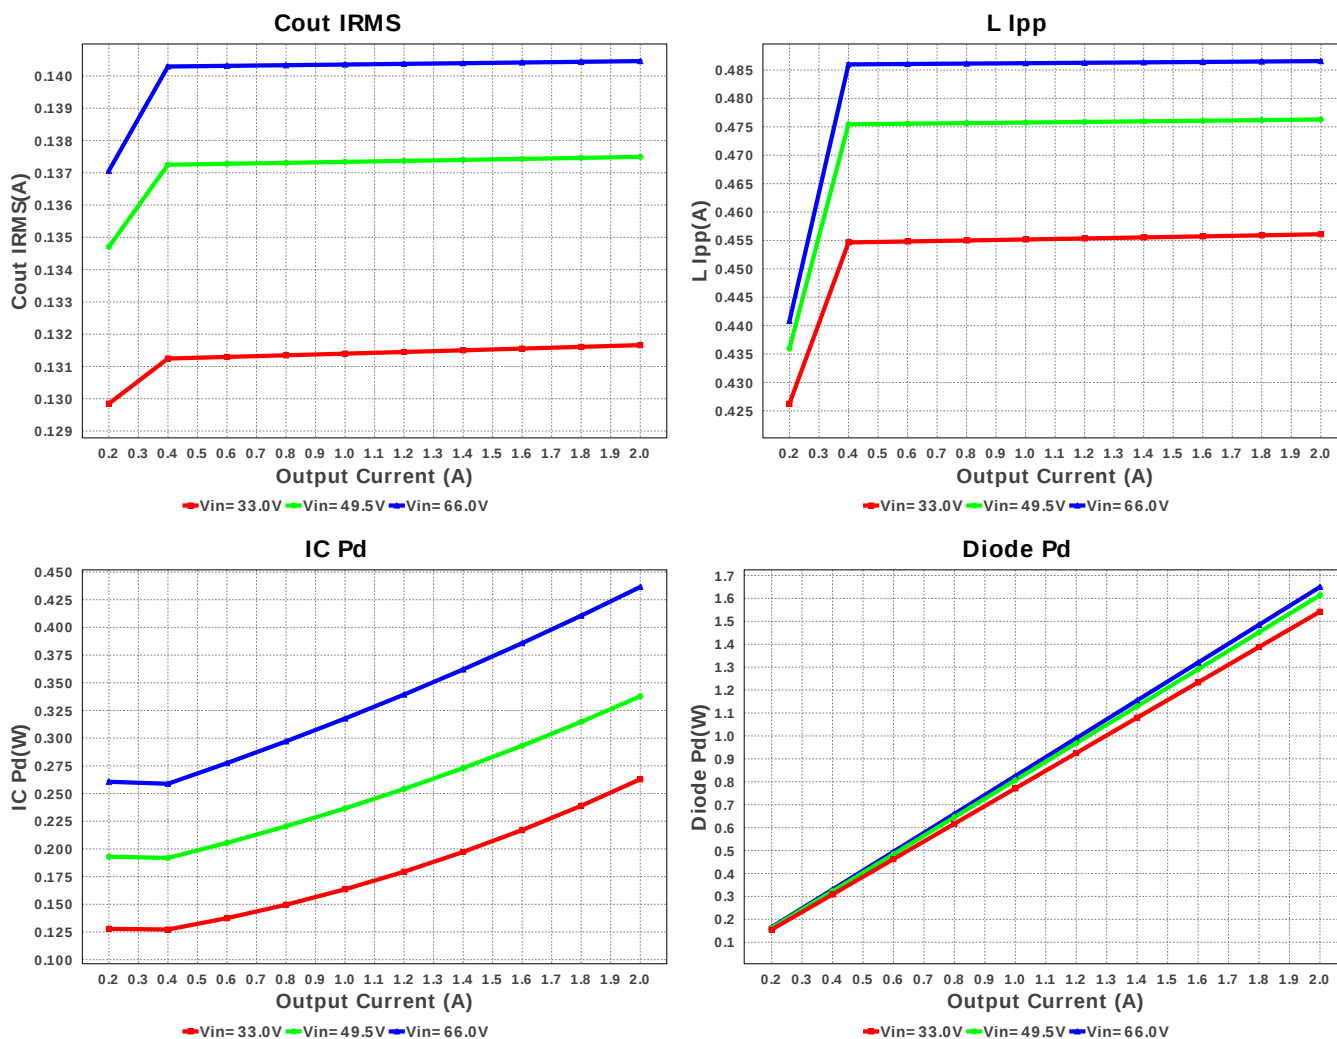

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	468.39 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	140.46 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	2.242 A	Current	Peak switch current in IC
4.	Iin Avg	134.3 mA	Current	Average input current
5.	L Ipp	486.57 mA	Current	Peak-to-peak inductor ripple current
6.	M1 Irms	500.369 mA	Current	Q lavg
7.	BOM Count	15	General	Total Design BOM count
8.	FootPrint	409.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	298.73 kHz	General	Switching frequency
10.	IC Tolerance	18.0 mV	General	IC Feedback Tolerance
11.	M Vds Act	98.548 mV	General	Voltage drop across the MosFET
12.	Pout	6.6 W	General	Total output power
13.	Total BOM	\$4.36	General	Total BOM Cost
14.	D1 Tj	128.99 degC	Op_Point	D1 junction temperature
15.	Vout Actual	3.295 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
16.	Vout OP	3.3 V	Op_Point	Operational Output Voltage
17.	Duty Cycle	6.259 %	Op_point	Duty cycle
18.	Efficiency	74.462 %	Op_point	Steady state efficiency
19.	IC Tj	47.46 degC	Op_point	IC junction temperature
20.	ICThetaJA	40.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
21.	IOUT_OP	2.0 A	Op_point	Iout operating point
22.	VIN_OP	66.0 V	Op_point	Vin operating point
23.	Vout p-p	1.684 mV	Op_point	Peak-to-peak output ripple voltage
24.	Cin Pd	1.17 mW	Power	Input capacitor power dissipation
25.	Cout Pd	48.188 μW	Power	Output capacitor power dissipation
26.	Diode Pd	1.65 W	Power	Diode power dissipation
27.	IC Pd	436.489 mW	Power	IC power dissipation
28.	L Pd	176.0 mW	Power	Inductor power dissipation
29.	Total Pd	2.264 W	Power	Total Power Dissipation
30.	Vout Tolerance	2.757 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	66.0	Maximum input voltage
3.	VinMin	33.0	Minimum input voltage
4.	Vout	3.3	Output Voltage
5.	base_pn	LM5576-Q1	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **LM5576-Q1** Product Folder : <http://www.ti.com/product/LM5576%2DQ1> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).