

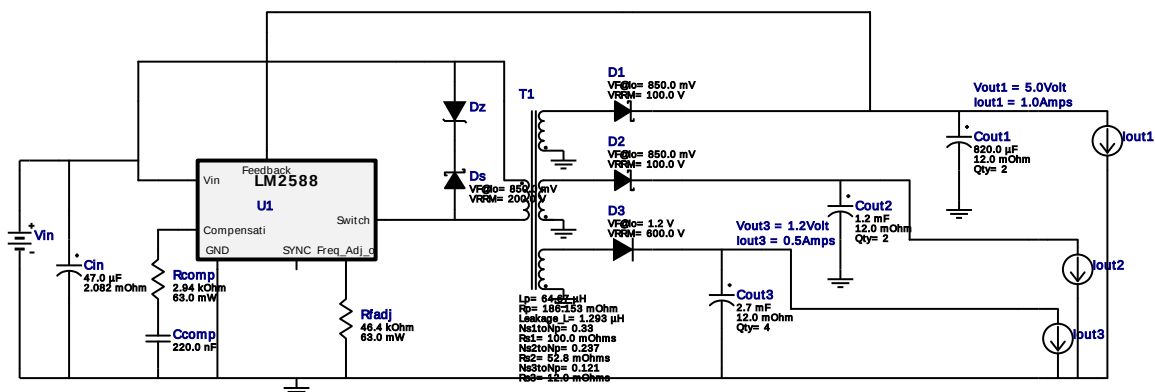








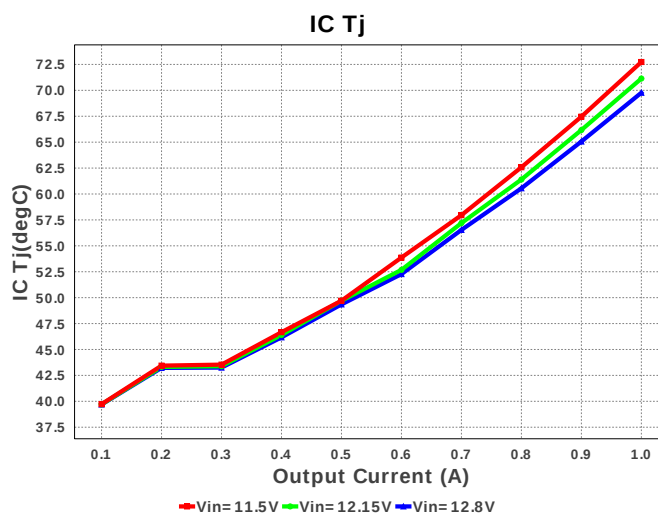








Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Ccomp	MuRata	GRM155C80G224KE01D Series= X6S	Cap= 220.0 nF VDC= 4.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
2.	Cin	TDK	C3216X5R1E476M160AC Series= X5R	Cap= 47.0 uF ESR= 2.082 mOhm VDC= 25.0 V IRMS= 5.0279 A	1	\$0.35	1206 11 mm ²
3.	Cout1	Panasonic	6SVPC820M Series= SVPC	Cap= 820.0 uF ESR= 12.0 mOhm VDC= 6.3 V IRMS= 4.7 A	2	\$0.72	SM_RADIAL_8MM 113 mm ²
4.	Cout2	Panasonic	4SVPC1200M Series= SVPC	Cap= 1.2 mF ESR= 12.0 mOhm VDC= 4.0 V IRMS= 4.7 A	2	\$0.72	SM_RADIAL_8MM 113 mm ²
5.	Cout3	Panasonic	2R5SVPC2700M Series= SVPC	Cap= 2.7 mF ESR= 12.0 mOhm VDC= 2.5 V IRMS= 5.07 A	4	\$0.85	SM_RADIAL_10AMM 160 mm ²
6.	D1	Micro Commercial Components	SK310A-TP	VF@Io= 850.0 mV VRRM= 100.0 V	1	\$0.10	SMA 37 mm ²
7.	D2	Micro Commercial Components	SK310A-TP	VF@Io= 850.0 mV VRRM= 100.0 V	1	\$0.10	SMA 37 mm ²
8.	D3	Bourns	CD214B-F3600	VF@Io= 1.2 V VRRM= 600.0 V	1	\$0.14	SMB 44 mm ²
9.	Ds	Diodes Inc.	DFLS1200-7	VF@Io= 850.0 mV VRRM= 200.0 V	1	\$0.21	PowerDI123 13 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
10.	Dz	Micro Commercial Components	3SMAJ5938B-TP	Zener	1	\$0.12	 SMA 37 mm ²
11.	Rcomp	Vishay-Dale	CRCW04022K94FKED Series= CRCW..e3	Res= 2.94 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
12.	Rfadj	Vishay-Dale	CRCW040246K4FKED Series= CRCW..e3	Res= 46.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
13.	T1	CUSTOM	CUSTOM	Lp= 64.67 µH Rp= 186.153 mOhm Leakage_L= 1.293 µH Ns1toNp= 0.33 Rs1= 100.0 mOhms Ns2toNp= 0.237 Rs2= 52.8 mOhms Ns3toNp= 0.121 Rs3= 12.0 mOhms	1	NA	CUSTOM 0 mm ²
14.	U1	Texas Instruments	LM2588S-5.0/NOPB	Switcher	1	\$5.10	 TS7B 199 mm ²

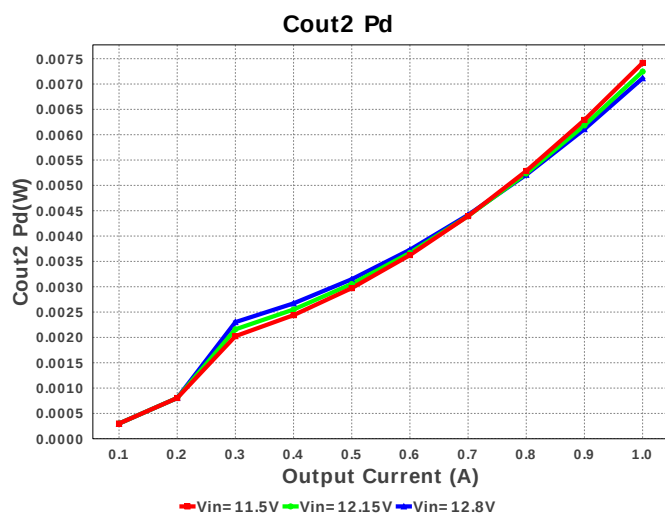


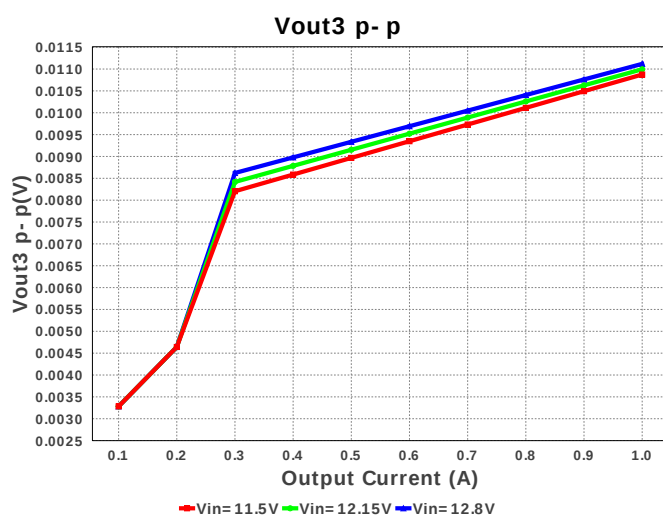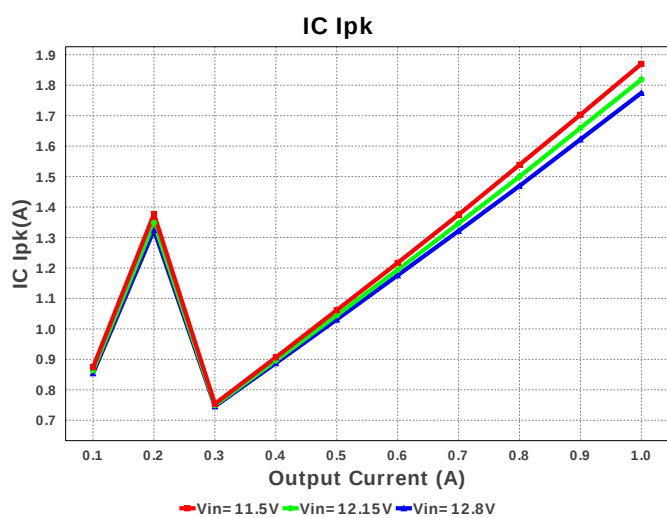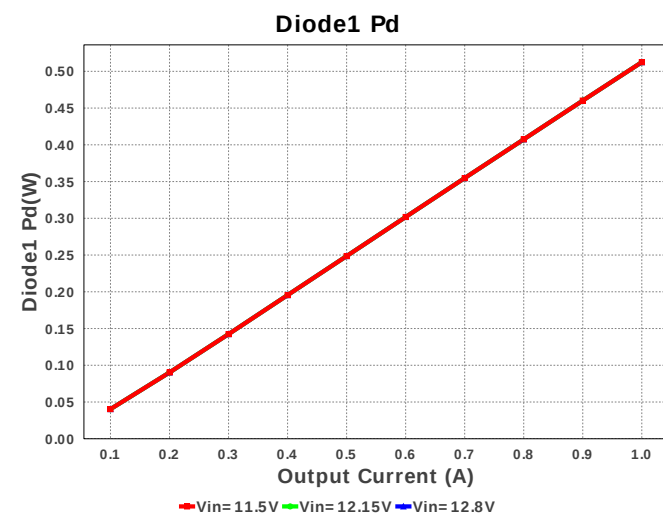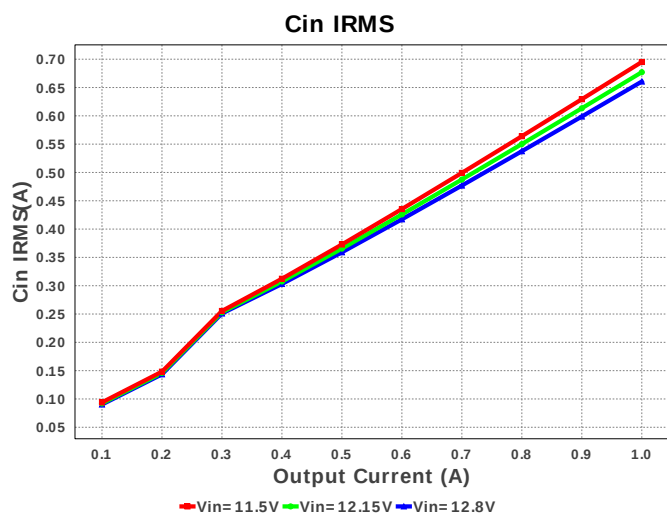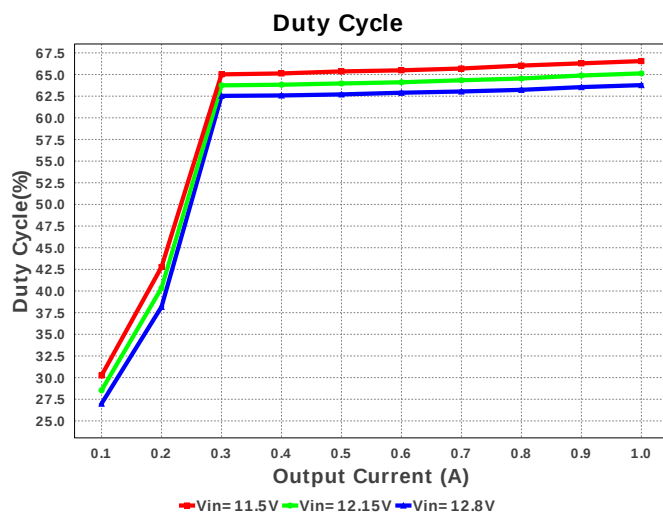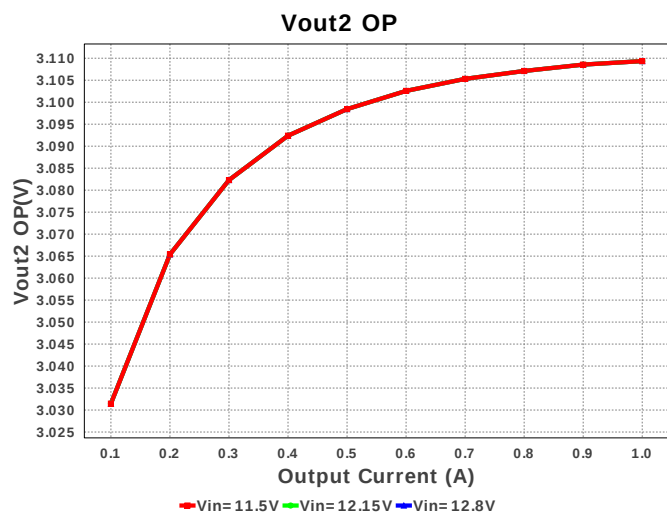

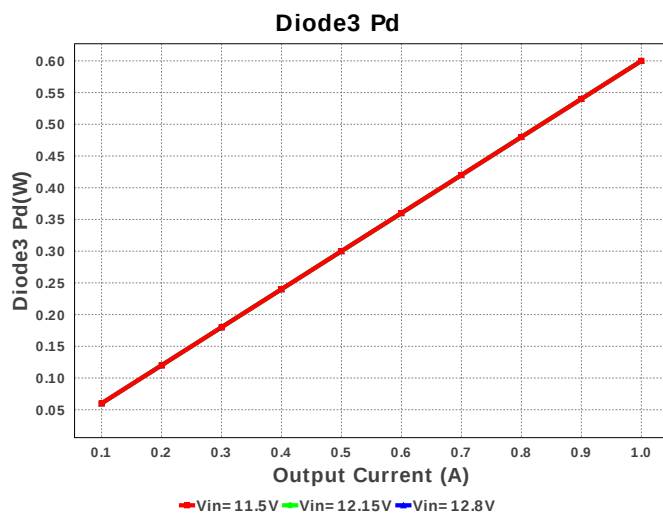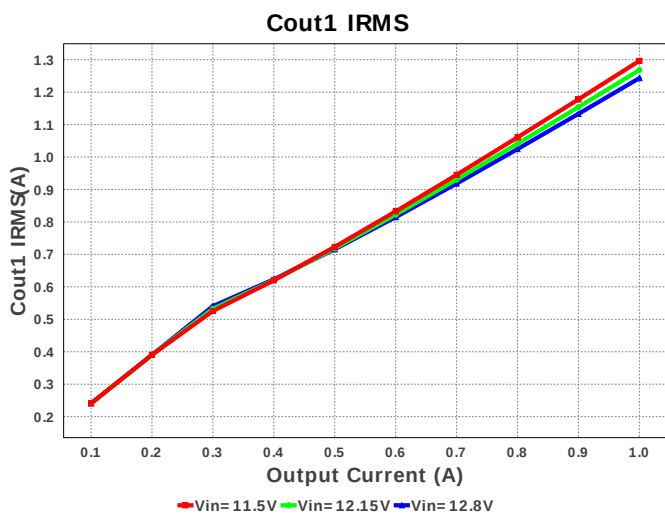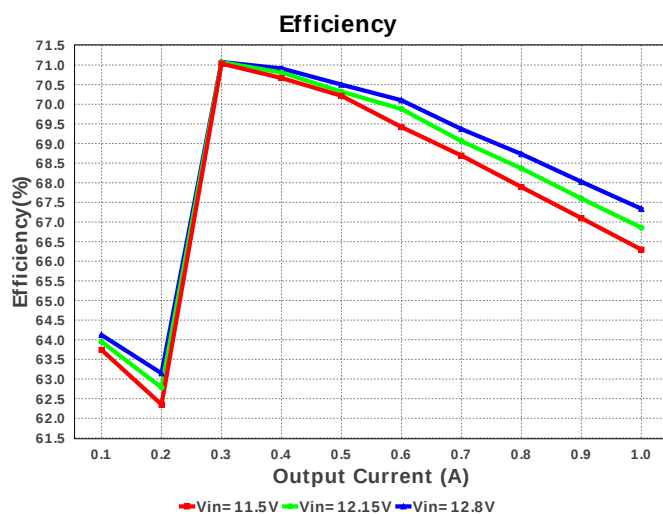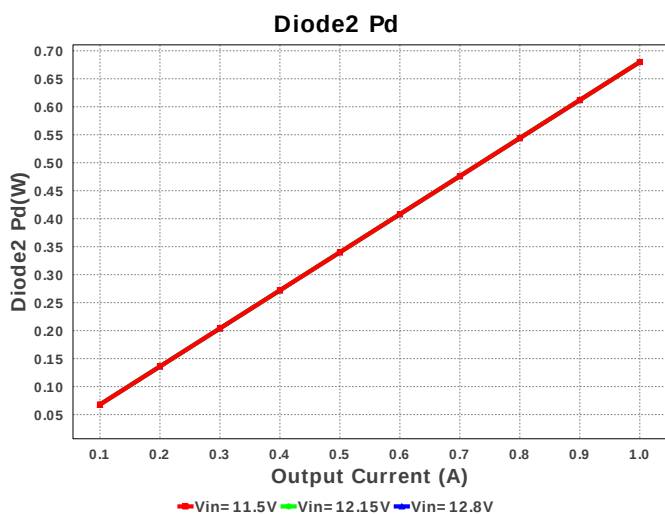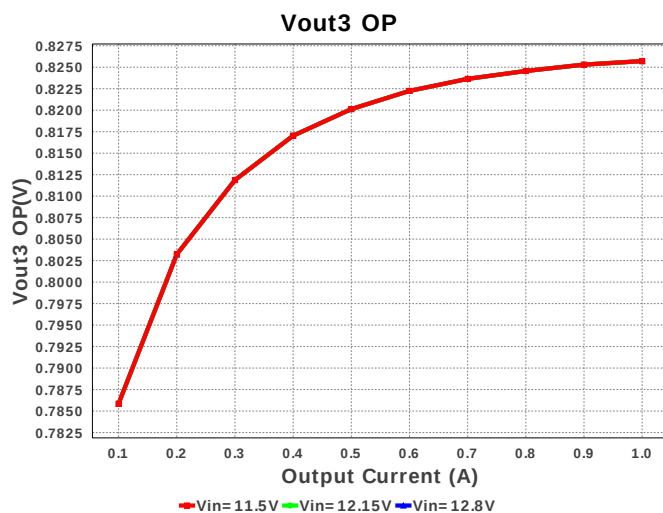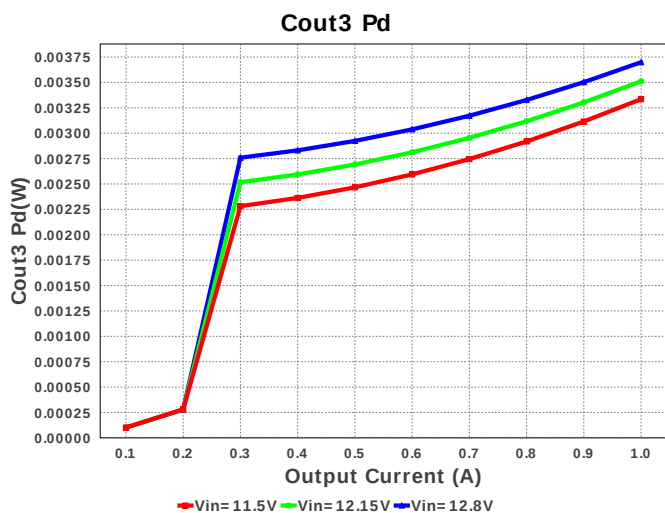

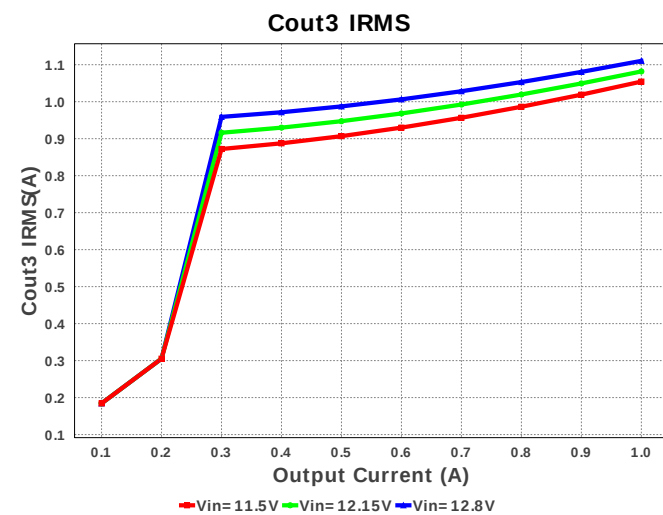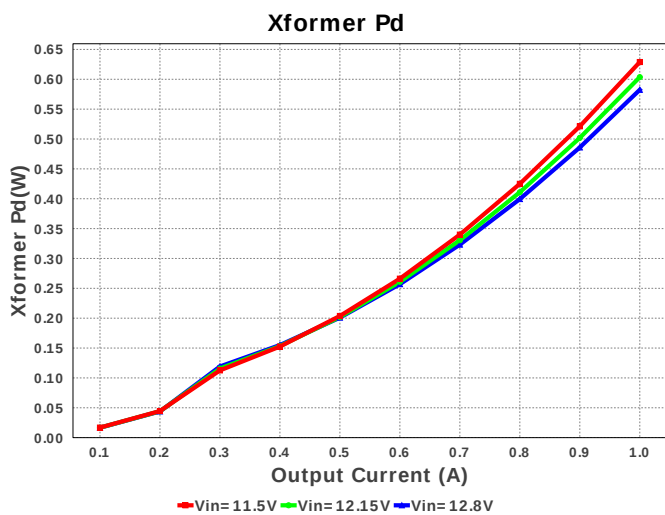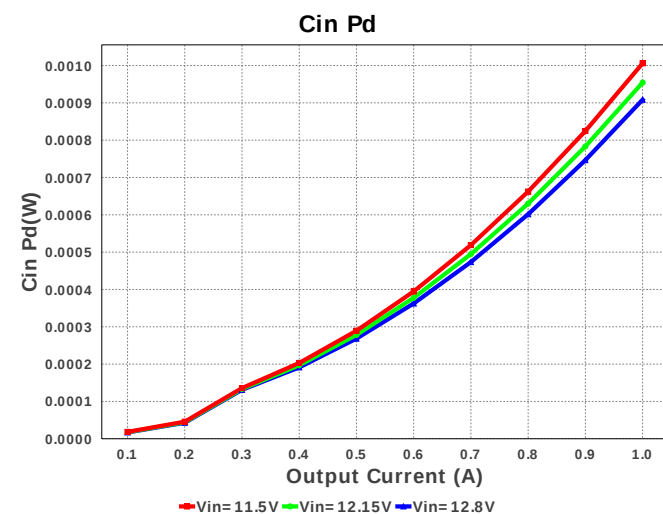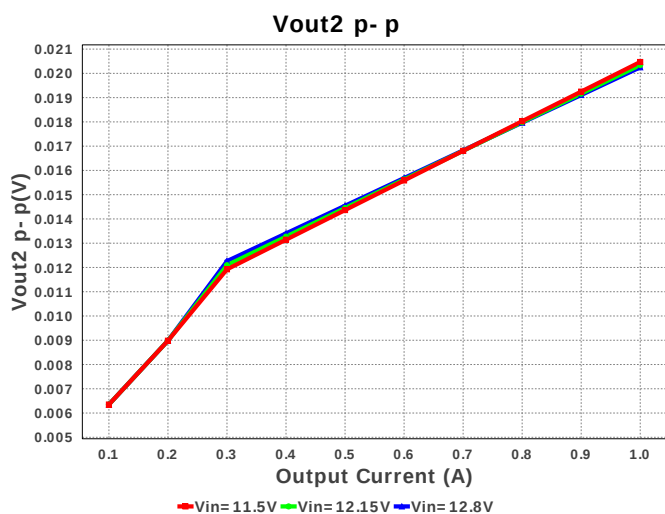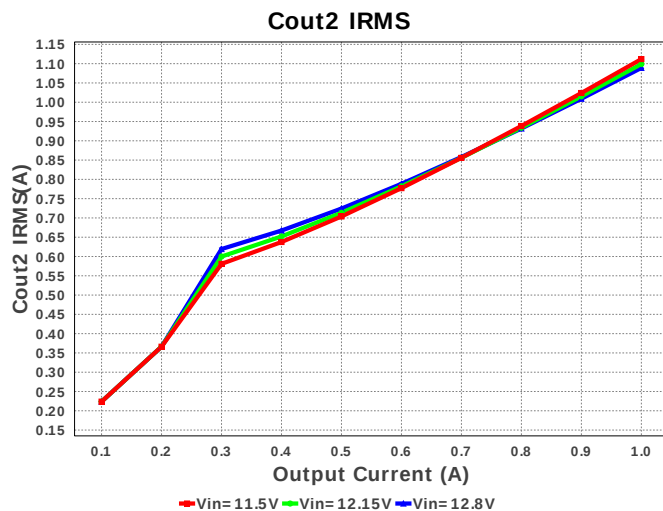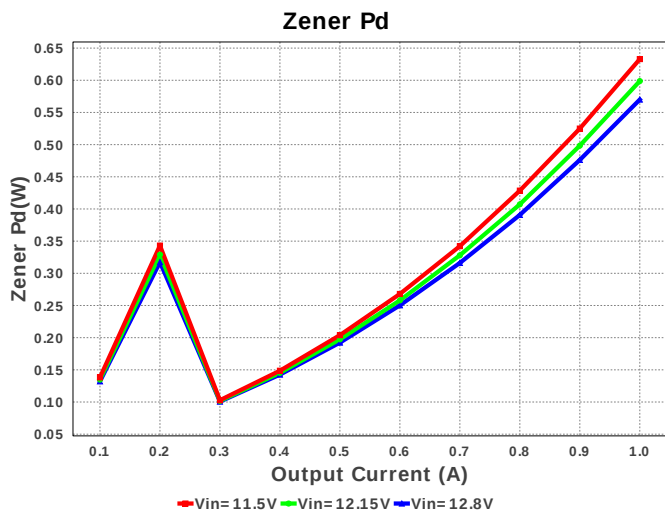

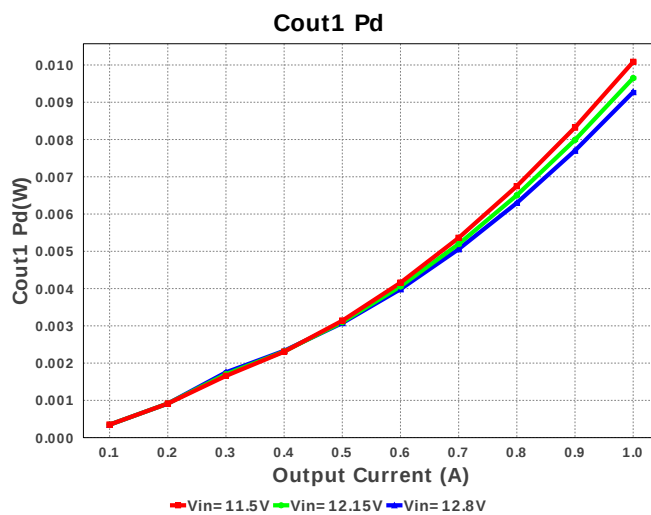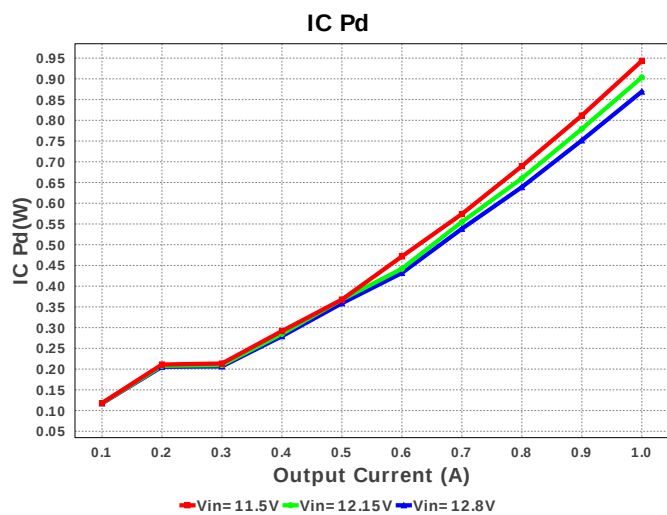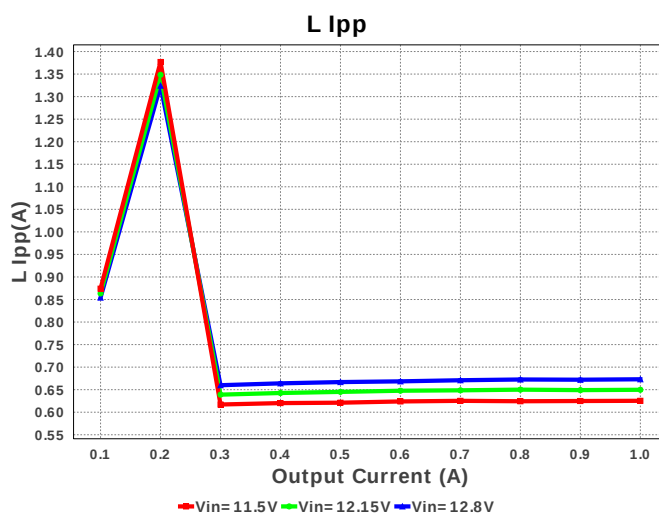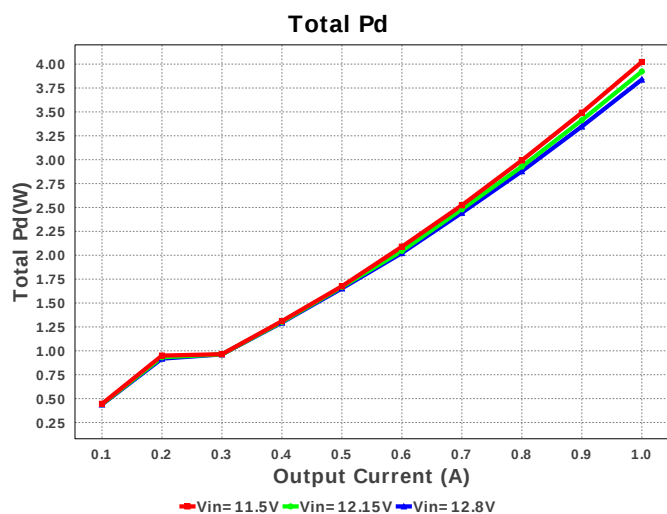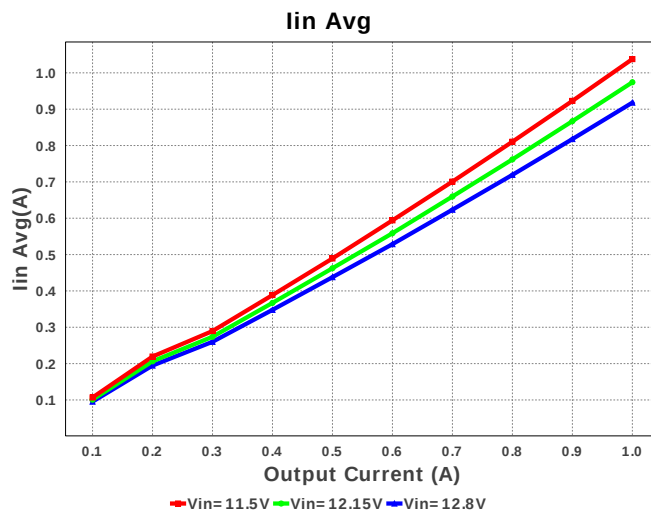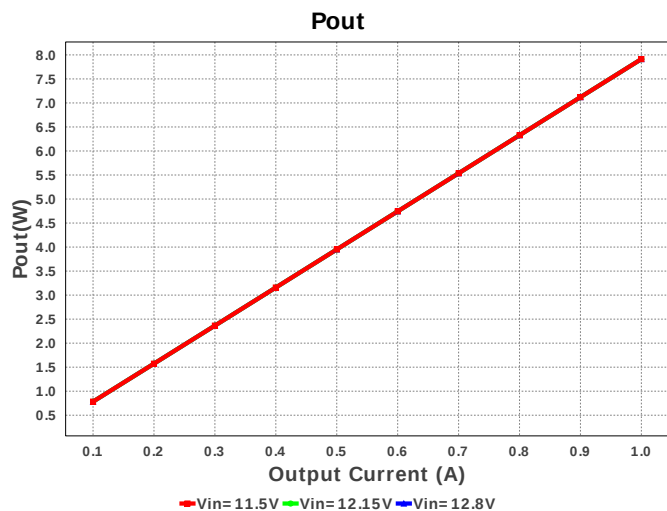

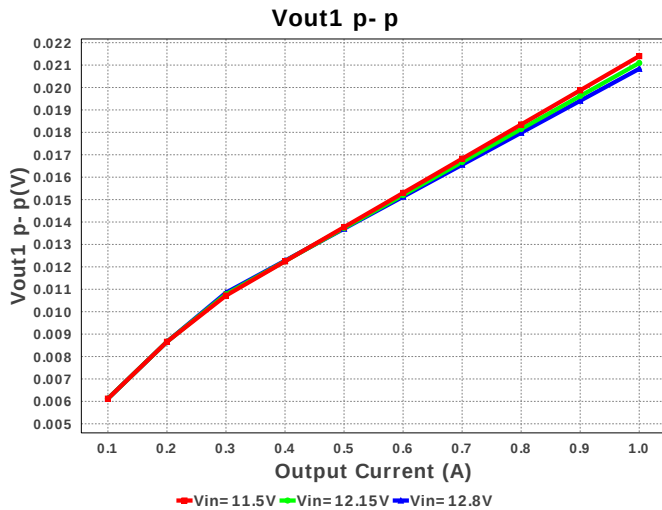

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	725.88 mA	Current	Input capacitor RMS ripple current
2.	Cout1 IRMS	1.349 A	Current	Output capacitor1 RMS ripple current
3.	Cout2 IRMS	1.16 A	Current	Output capacitor2 RMS ripple current
4.	Cout3 IRMS	1.2 A	Current	Output capacitor3 RMS ripple current
5.	IC Ipk	1.935 A	Current	Peak switch current
6.	Iin Avg	1.057 A	Current	Average input current
7.	L Ipp	680.81 mA	Current	Peak-to-peak inductor ripple current
8.	BOM Count	19	General	Total Design BOM count
9.	FootPrint	1.486 k mm ²	General	Total Foot Print Area of BOM components
10.	Frequency	151.071 kHz	General	Switching frequency
11.	IC Tolerance	87.0 mV	General	IC Feedback Tolerance
12.	Pout	8.183 W	General	Total output power
13.	Total BOM	\$0.0	General	Total BOM Cost
14.	Vout3 OP	825.712 mV	Op_Point	Operational Voltage 3
15.	Duty Cycle	66.207 %	Op_point	Duty cycle
16.	Efficiency	67.327 %	Op_point	Steady state efficiency
17.	IC Tj	74.522 degC	Op_point	IC junction temperature
18.	ICThetaJA	40.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
19.	IOUT_OP	1.0 A	Op_point	Iout operating point
20.	VIN_OP	11.5 V	Op_point	Vin operating point
21.	Vout1 OP	5.012 V	Op_point	Operational Voltage 1
22.	Vout1 p-p	22.406 mV	Op_point	Peak-to-peak output1 ripple voltage
23.	Vout2 OP	3.447 V	Op_point	Operational Voltage 2
24.	Vout2 p-p	21.678 mV	Op_point	Peak-to-peak output2 ripple voltage
25.	Vout3 p-p	12.622 mV	Op_point	Peak-to-peak output3 ripple voltage
26.	Cin Pd	1.097 mW	Power	Input capacitor power dissipation
27.	Cout1 Pd	10.924 mW	Power	Output capacitor1 power dissipation
28.	Cout1 Pd	10.924 mW	Power	Output capacitor1 power dissipation
29.	Cout2 Pd	8.067 mW	Power	Output capacitor2 power dissipation
30.	Cout3 Pd	4.323 mW	Power	Output capacitor3 power dissipation
31.	Diode1 Pd	512.419 mW	Power	Diode1 power dissipation
32.	Diode2 Pd	409.935 mW	Power	Diode2 power dissipation
33.	Diode3 Pd	605.461 mW	Power	Diode3 power dissipation
34.	IC Pd	988.053 mW	Power	IC power dissipation
35.	Total Pd	3.971 W	Power	Total Power Dissipation
36.	Xformer Pd	687.282 mW	Power	Transformer power dissipation
37.	Zener Pd	740.342 mW	Power	Zener power dissipation
38.	Vout Tolerance	1.74 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	Iout1	1.0	Output Current #1
3.	Iout2	800.0 m	Output Current #2
4.	Iout3	500.0 m	Output Current #3
5.	VinMax	12.8	Maximum input voltage
6.	VinMin	11.5	Minimum input voltage
7.	Vout	5.0	Output Voltage
8.	Vout1	5.0	Output Voltage #1
9.	Vout2	3.3	Output Voltage #2

#	Name	Value	Description
10.	Vout3	1.2	Output Voltage #3
11.	base_pn	LM2588	Texas Instruments Base Part Number
12.	source	DC	Input Source Type
13.	ta	35.0	Ambient temperature

Design Assistance

1. LM2588 Product Folder : <http://www.ti.com/product/LM2588> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).