



WEBENCH® Design Report




Design : 4372614/22 UC2843AN
UC2843AN 110.0V-240.0V to 24.00V @ 2.0A


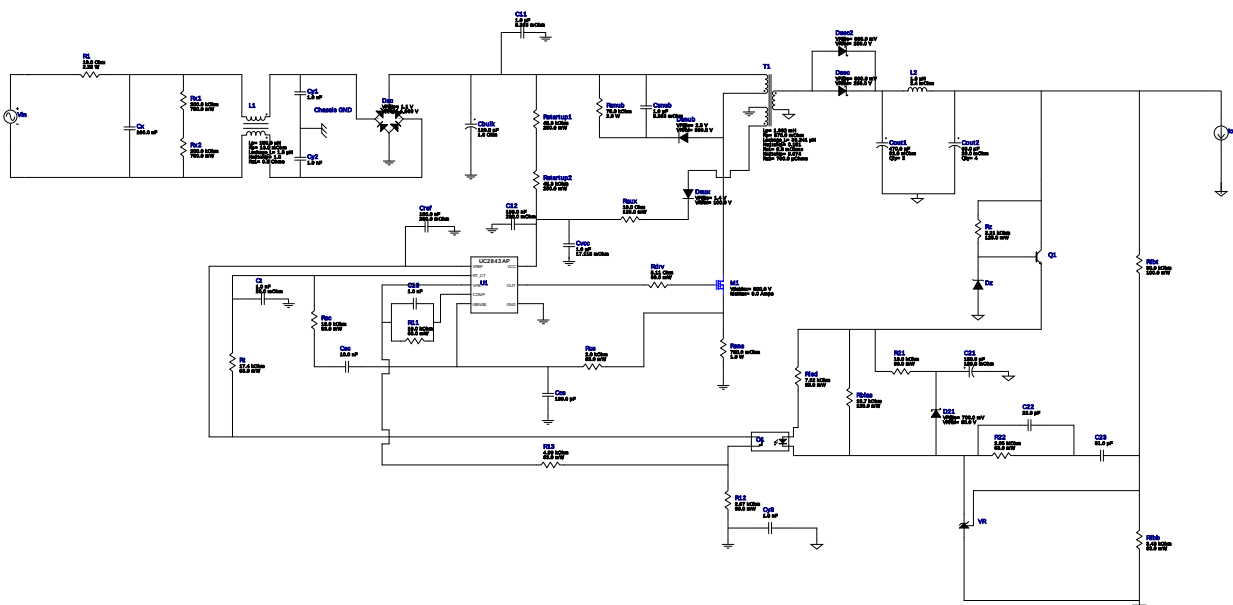



1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.


Electrical BOM



#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	Nichicon	UUD1H151MNL1GS Series= uD	Cap= 150.0 uF ESR= 180.0 mOhm VDC= 50.0 V IRMS= 670.0 mA	1	\$0.26	 SM_RADIAL_10BMM 160 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	Samsung Electro-Mechanics	CL21C510JBANNNNC Series= C0G/NP0	Cap= 51.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
7.	Cbulk	Vishay-Bccomponents	MAL215757121E3 Series= 2239	Cap= 120.0 uF ESR= 1.6 Ohm VDC= 450.0 V IRMS= 1.09 A	1	\$3.90	 157PUM-SI_2500x3000 729 mm ²
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
9.	Cout1	Panasonic	EEV-FK1J471M Series= FK	Cap= 470.0 uF ESR= 82.0 mOhm VDC= 63.0 V IRMS= 1.41 A	2	\$0.78	 SM_RADIAL_J16 399 mm ²
10.	Cout2	Panasonic	50SVPF68M Series= ?	Cap= 68.0 uF ESR= 20.0 mOhm VDC= 50.0 V IRMS= 4.3 A	4	\$0.92	 CAPSMT_62_F12 151 mm ²
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
13.	Csnub	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
14.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
15.	Cvcc	MuRata	GRM188R61E105KA12D Series= X5R	Cap= 1.0 uF ESR= 17.113 mOhm VDC= 25.0 V IRMS= 979.39 mA	1	\$0.01	 0603 5 mm ²
16.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm ²
17.	Cy1	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
18.	Cy2	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
19.	Cy3	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
20.	D21	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.09	 SMA 37 mm ²
21.	Dac	Vishay-Semiconductor	DF10SA	VF@Io= 1.1 V VRRM= 1,000.0 V	1	\$0.24	 DF-S 99 mm ²
22.	Daux	NXP Semiconductor	BAS316,115	VF@Io= 1.4 V VRRM= 100.0 V	1	\$0.02	 SOD-323 9 mm ²
23.	Dsec	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
24.	Dsec2	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
25.	Dsnub	Bourns	CD1408-FU1800	VF@Io= 2.5 V VRRM= 800.0 V	1	\$0.13	 Diode_1408 13 mm ²
26.	Dz	Diodes Inc.	MMSZ5250B-7-F	Zener	1	\$0.03	 SOD-123 13 mm ²
27.	L1	API Delevan	CM6296R-154	Lp= 150.0 µH Rp= 16.0 mOhm Leakage_L= 1.8 µH Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$5.95	 CM6296 833 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
28.	L2	Coilcraft	SER1360-182KLB	L= 1.8 µH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm²
29.	M1	STMicroelectronics	STF10N80K5	VdsMax= 800.0 V IdsMax= 9.0 Amps	1	\$2.52	 TO-220FP 79 mm²
30.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm²
31.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm²
32.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm²
33.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
34.	R12	Vishay-Dale	CRCW04022K67FKED Series= CRCW..e3	Res= 2.67 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
35.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
36.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
37.	R22	Vishay-Dale	CRCW04022M05FKED Series= CRCW..e3	Res= 2.05 MOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
38.	Raux	Vishay-Dale	CRCW080510R0FKEA Series= CRCW..e3	Res= 10.0 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
39.	Rbias	Panasonic	ERJ-6ENF1372V Series= ERJ-6E	Res= 13.7 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm²
40.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
41.	Rdrv	Vishay-Dale	CRCW04025R11FKED Series= CRCW..e3	Res= 5.11 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
42.	Rfbb	Vishay-Dale	CRCW04023K48FKED Series= CRCW..e3	Res= 3.48 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
43.	Rfbt	Yageo America	RC0603FR-0730KL Series= ?	Res= 30.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
44.	Rled	Vishay-Dale	CRCW04027K32FKED Series= CRCW..e3	Res= 7.32 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
45.	Rsc	Vishay-Dale	CRCW040216K9FKED Series= CRCW..e3	Res= 16.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
46.	Rsns	Stackpole Electronics Inc	CSRN2010FKR750 Series= ?	Res= 750.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.10	 2010 32 mm²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
47.	Rsnub	Vishay-Bccomponents	PR02000207502JR500 Series= ?	Res= 75.0 kOhm Power= 2.0 W Tolerance= 5.0%	1	\$0.05	PR02 113 mm ²
48.	Rstartup1	Panasonic	ERJ-8ENF4532V Series= ERJ-8E	Res= 45.3 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
49.	Rstartup2	Panasonic	ERJ-8ENF4532V Series= ERJ-8E	Res= 45.3 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
50.	Rt	Vishay-Dale	CRCW040217K4FKED Series= CRCW..e3	Res= 17.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
51.	Rx1	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
52.	Rx2	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
53.	Rz	Panasonic	ERJ-6ENF2211V Series= ERJ-6E	Res= 2.21 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
54.	T1	CUSTOM	CUSTOM	Lp= 1.962 mH Rp= 870.0 mOhm Leakage_L= 39.241 μH Ns1toNp= 0.151 Rs1= 8.6 mOhms Ns2toNp= 0.074 Rs2= 700.0 μOhms	1	NA	CUSTOM 0 mm ²
55.	U1	Texas Instruments	UC2843AN	Switcher	1	\$0.64	 P0008A 116 mm ²
56.	VR	Texas Instruments	TL431AIDBVR	Voltage References	1	\$0.07	 R-PDSO-G3 16 mm ²

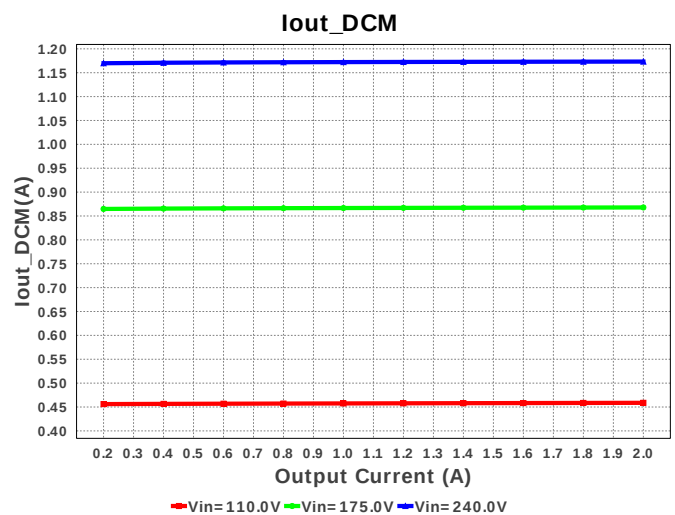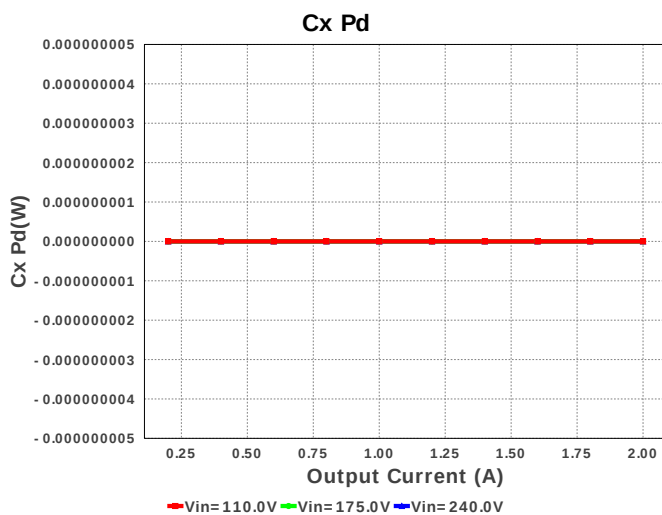

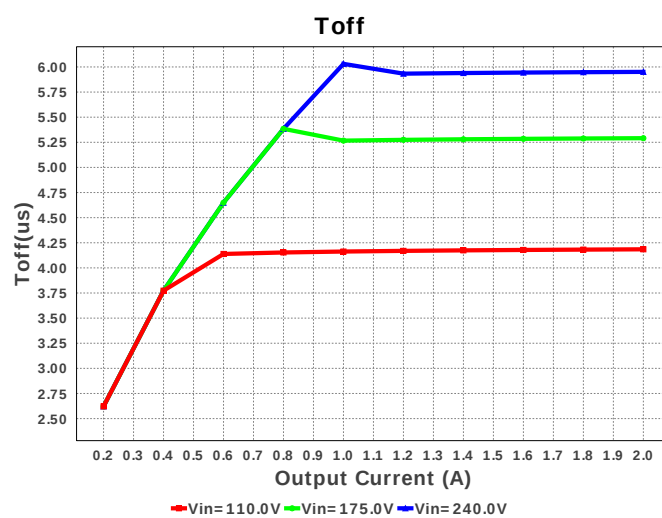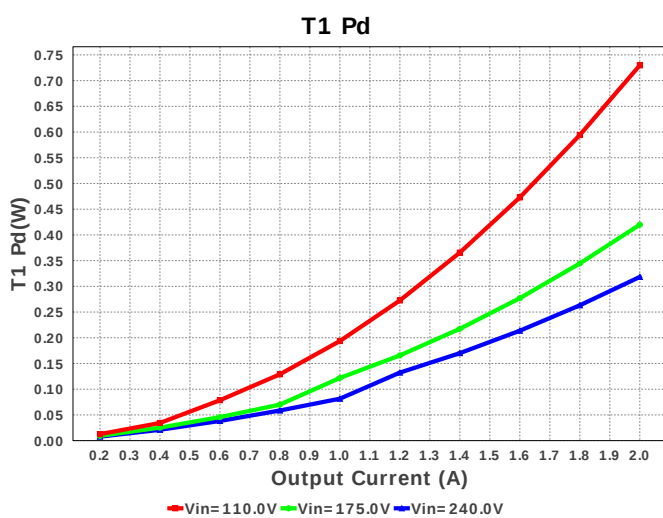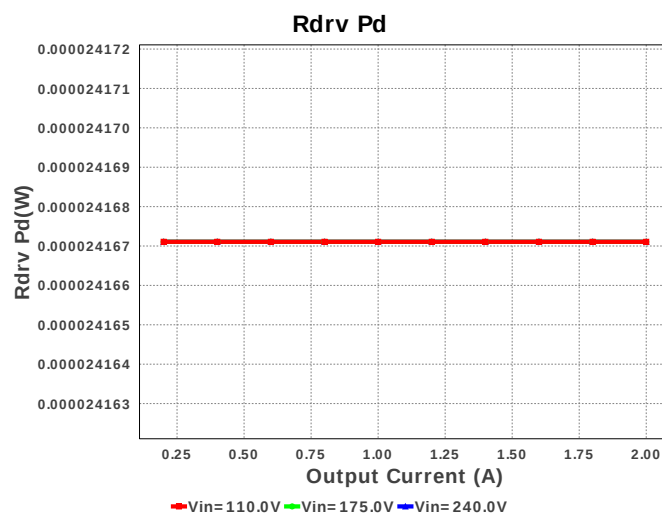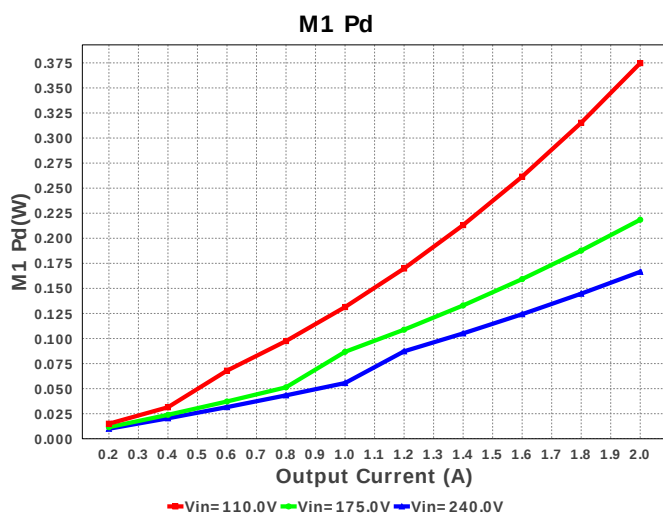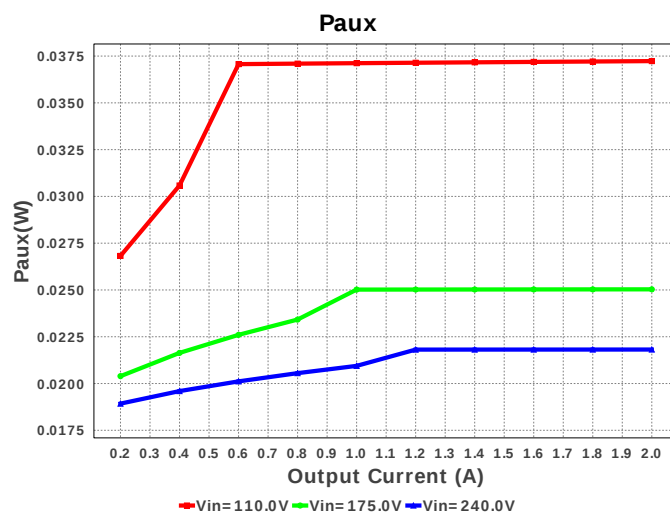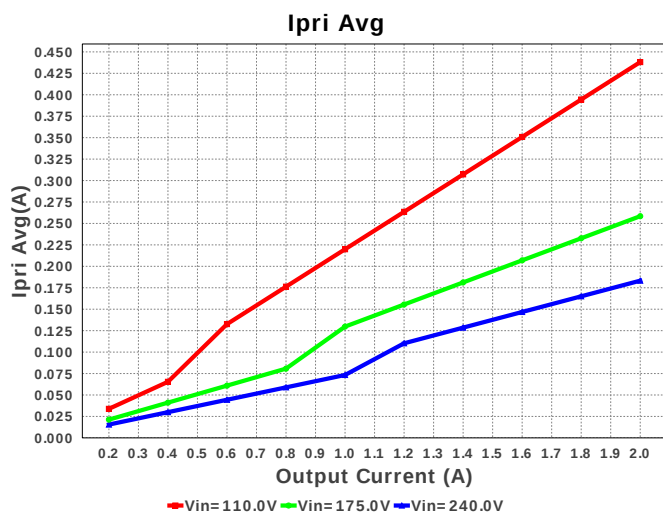


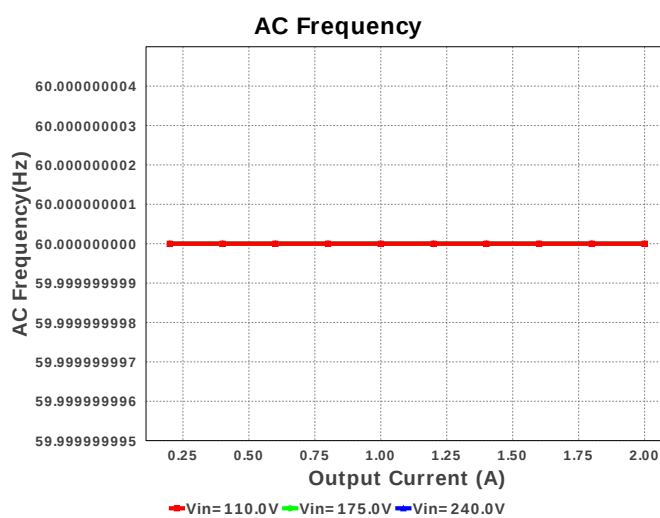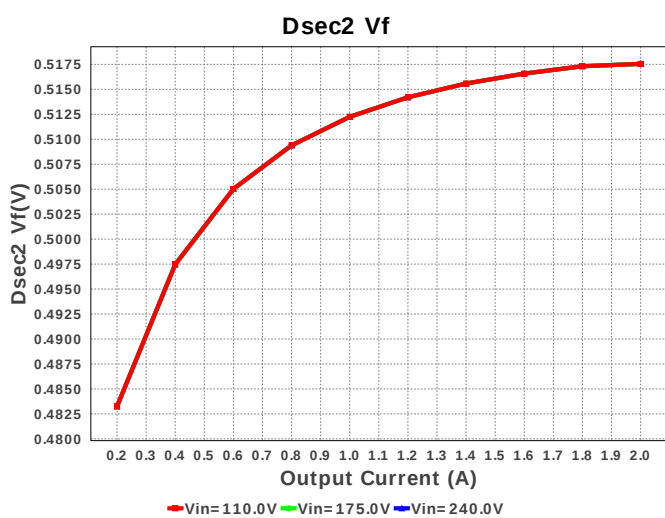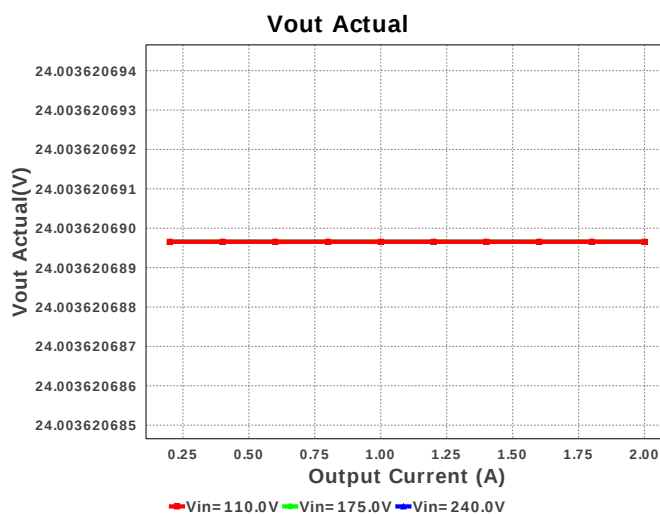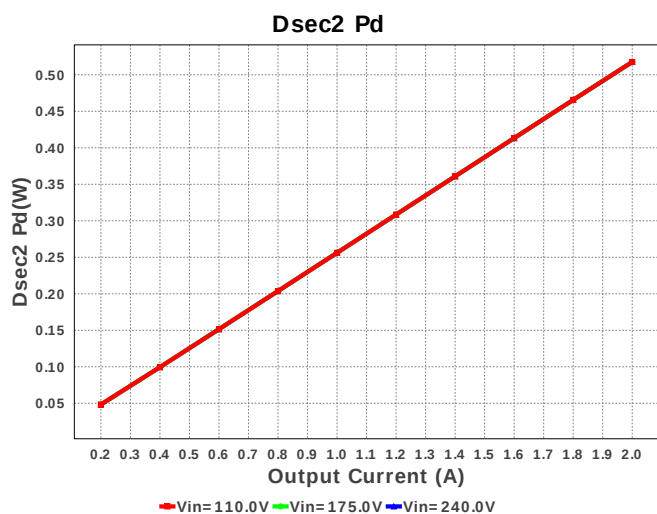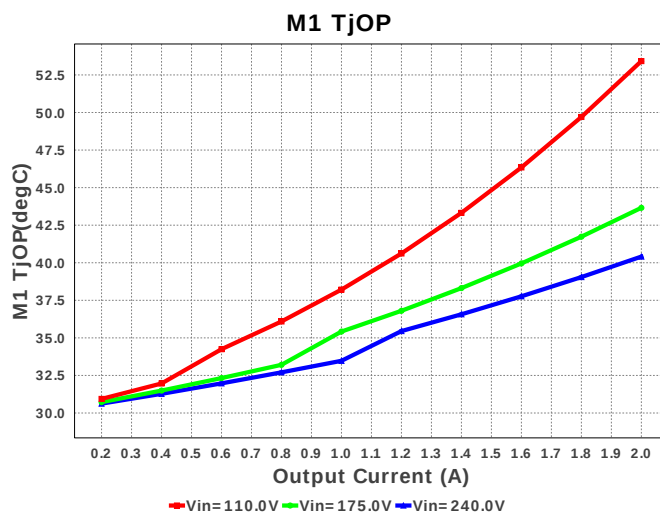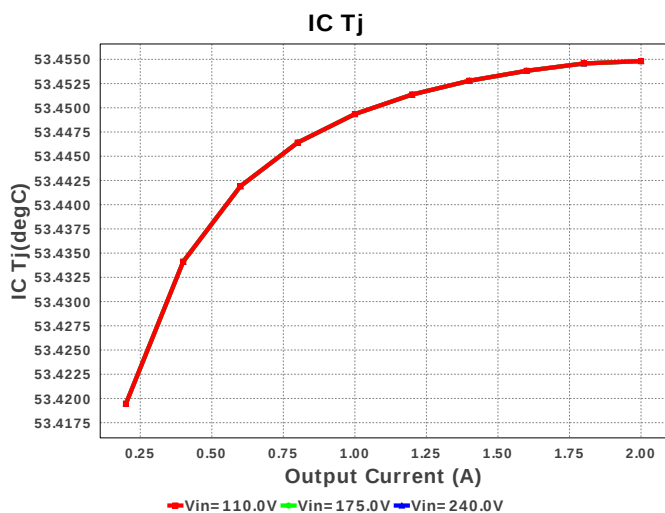

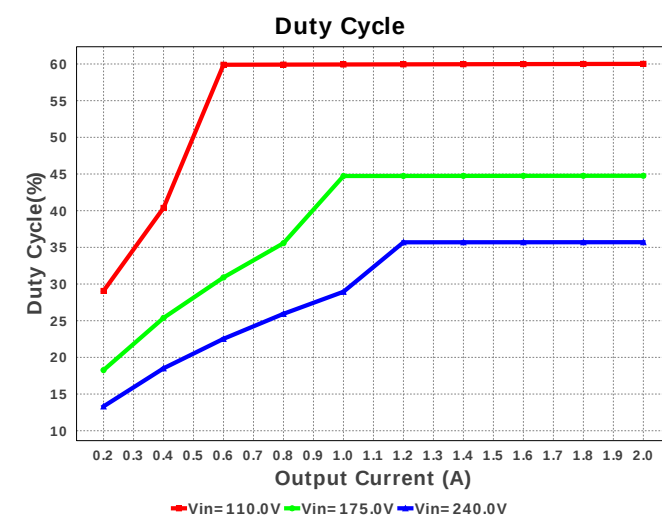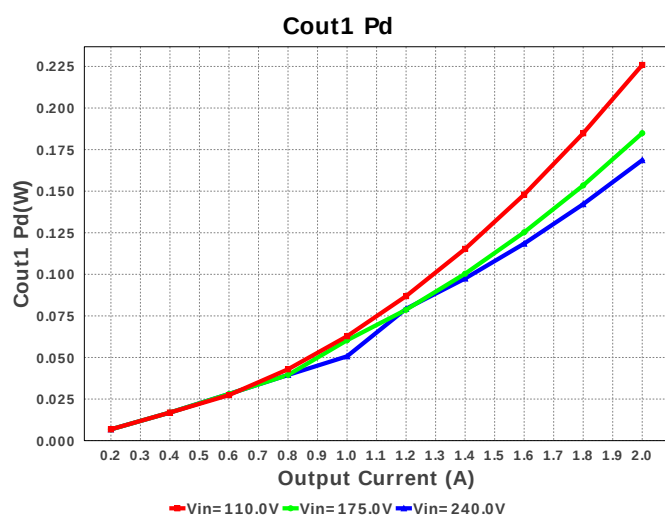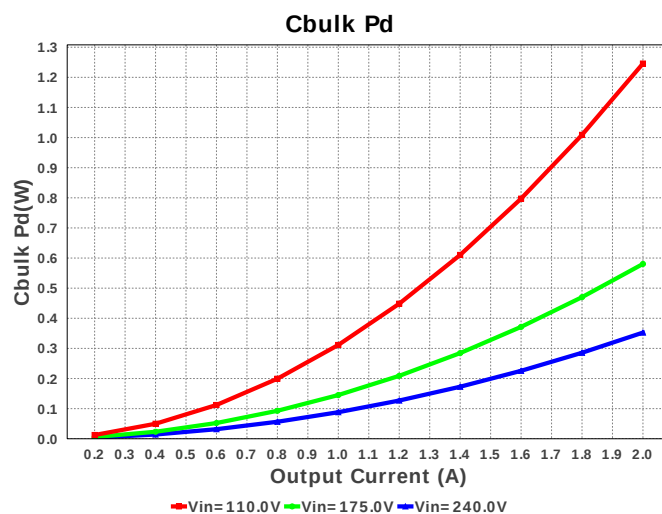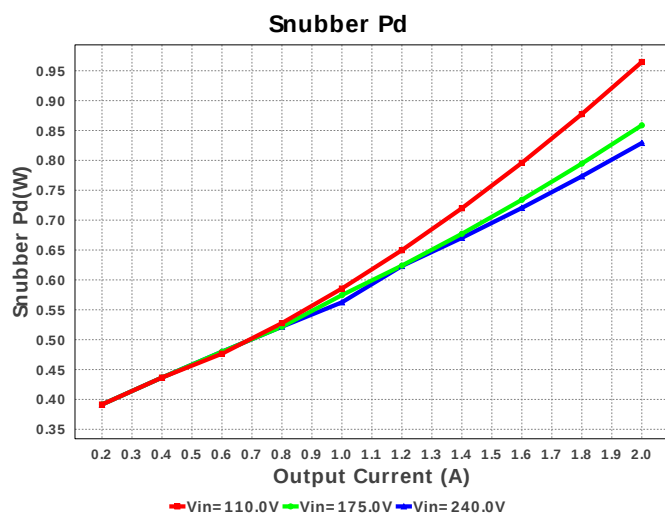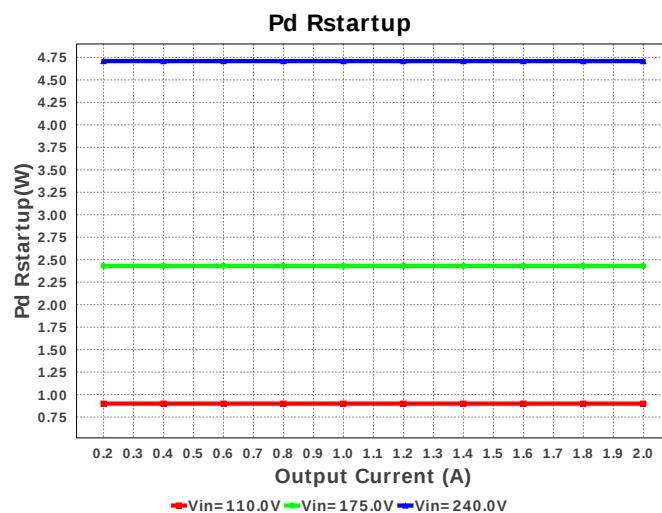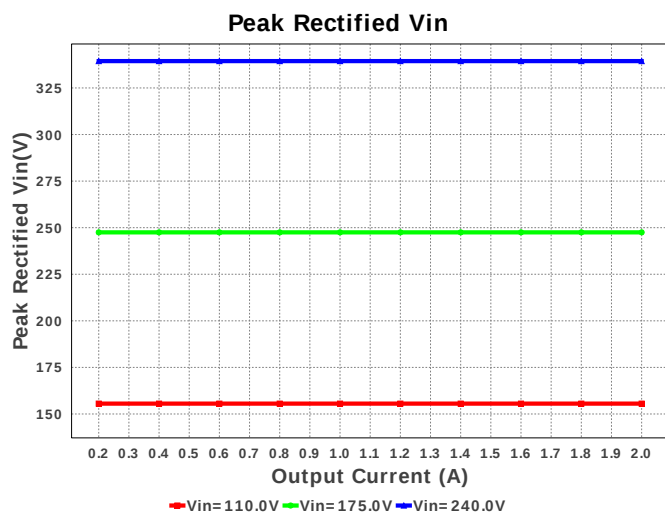


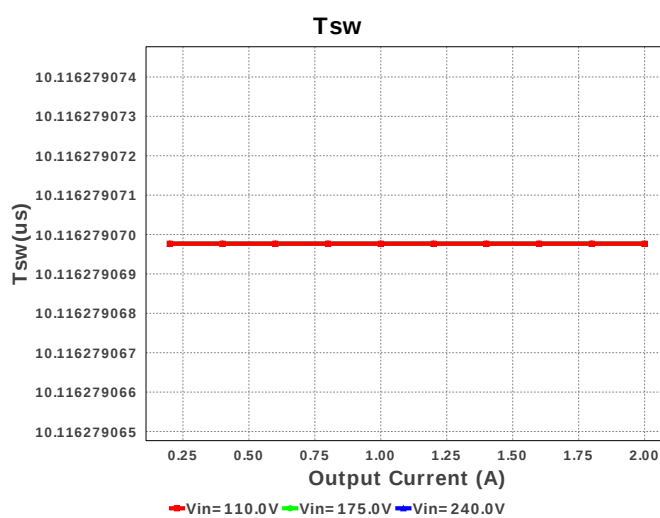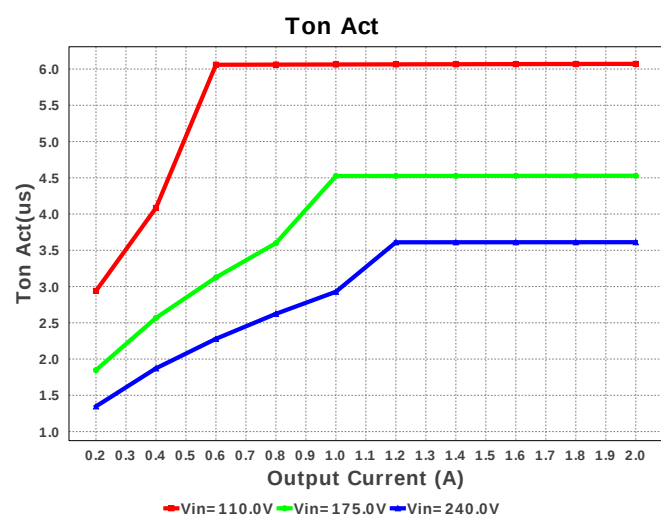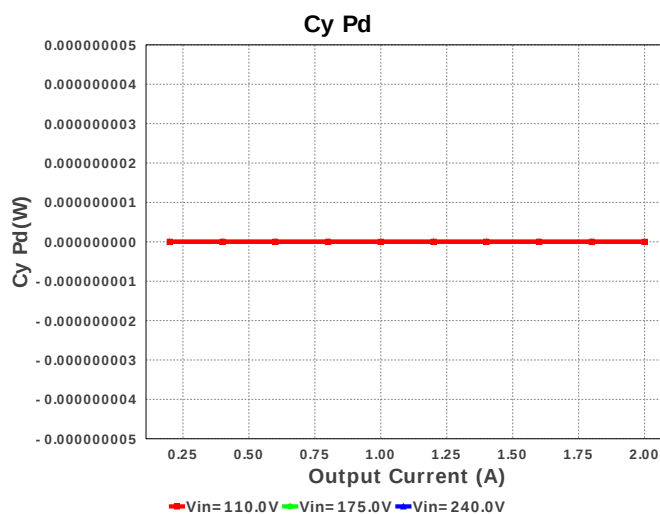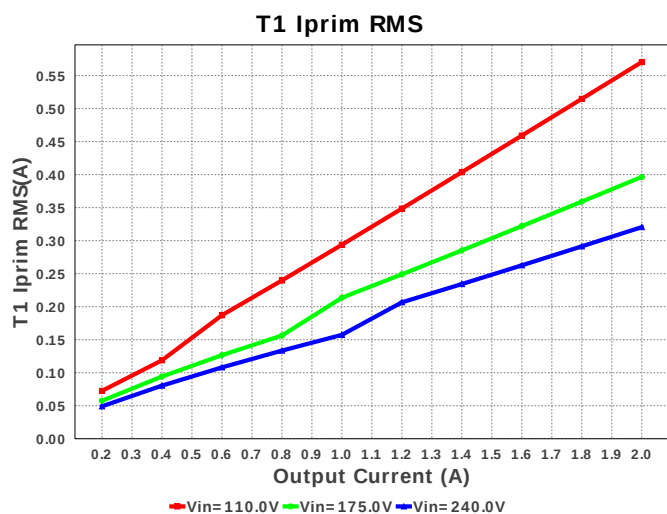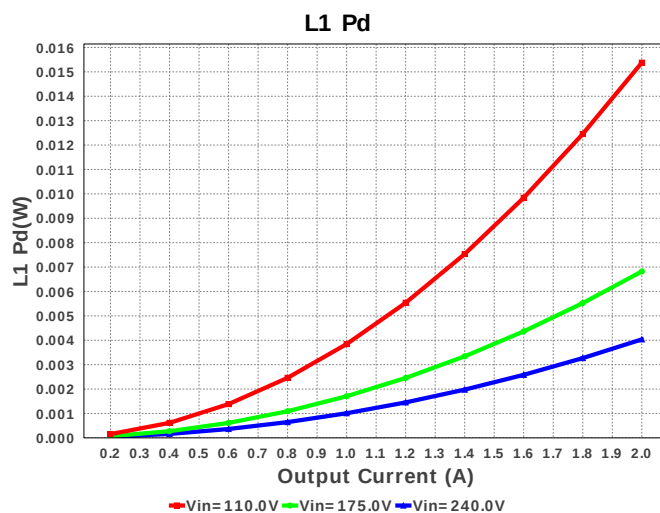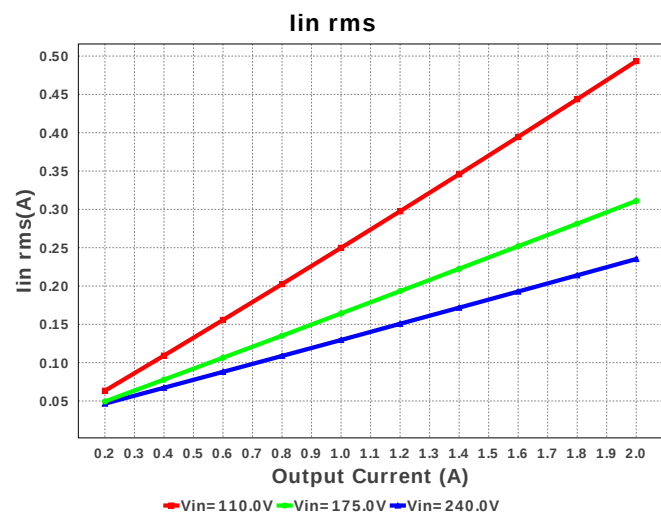


Efficiency

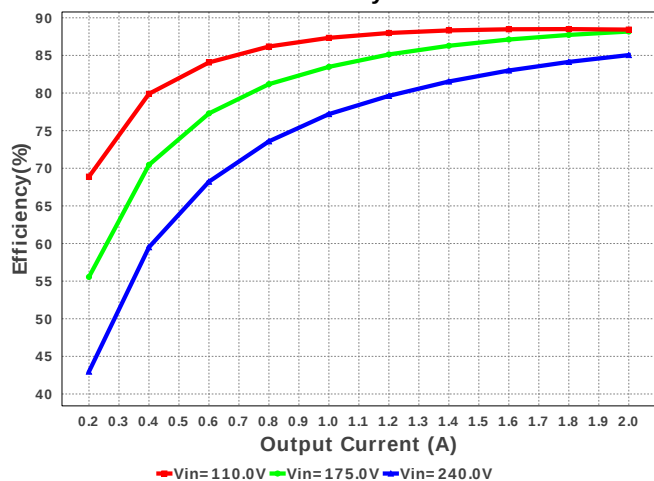


T1 Is1 RMS

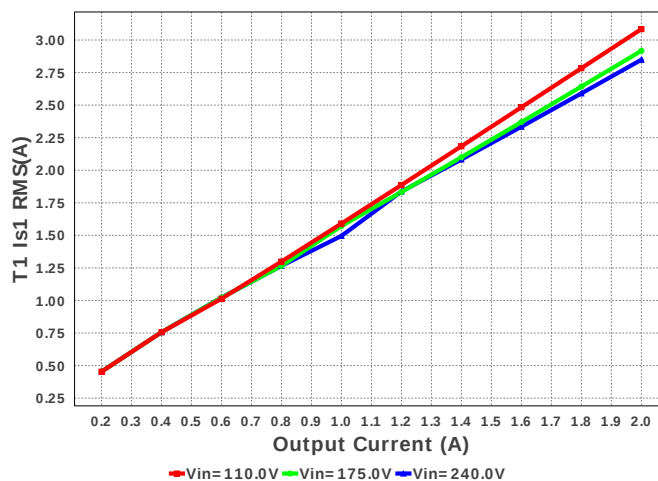


Pout

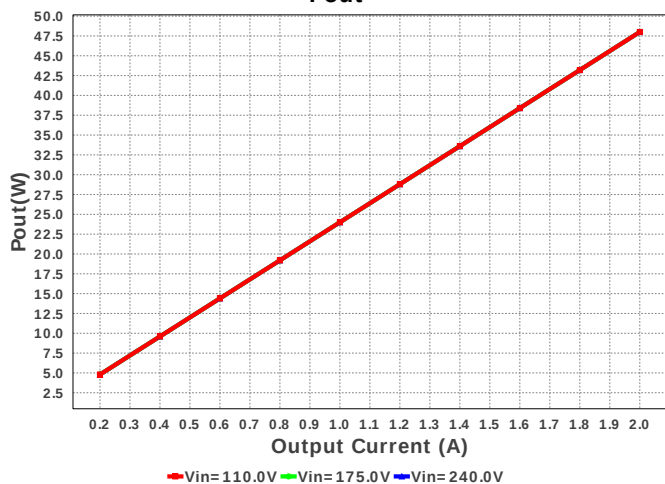


Vaux

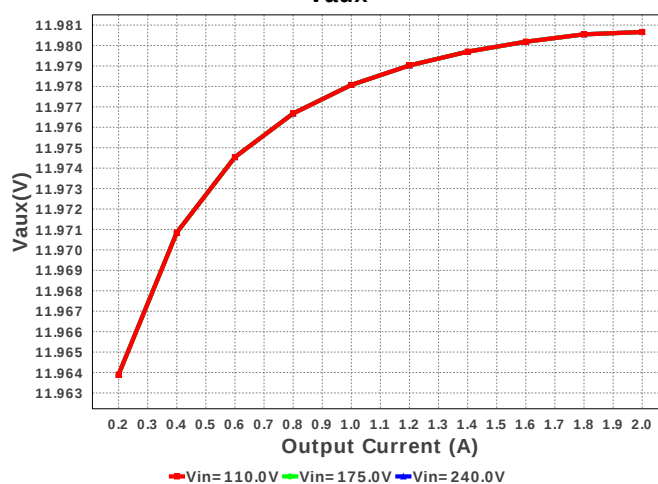


Total Pd

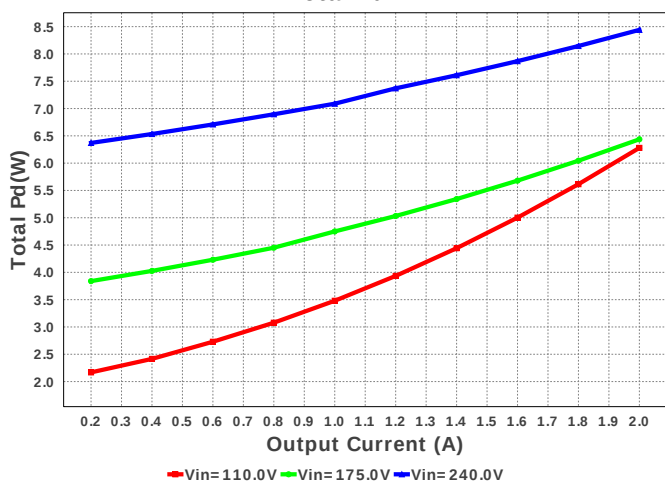


T1 Is1 pk

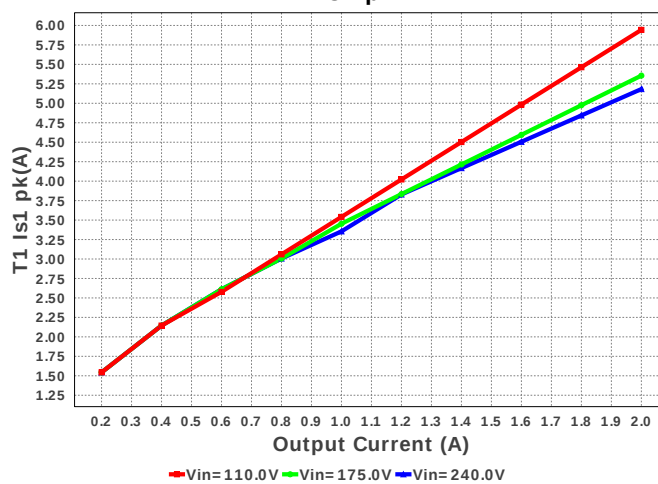


Dsec Pd

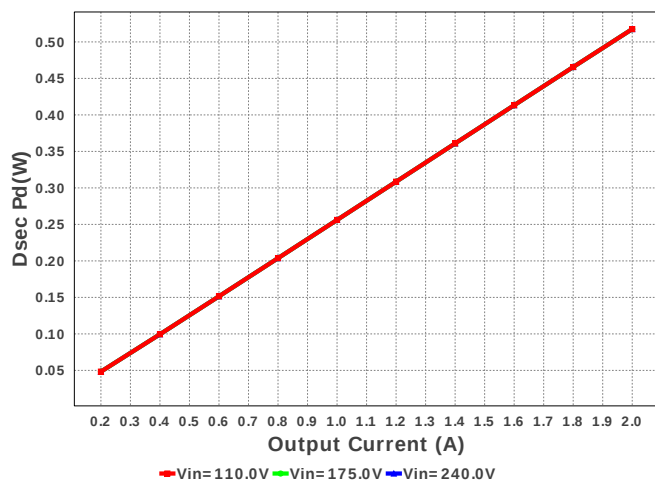


Tdead

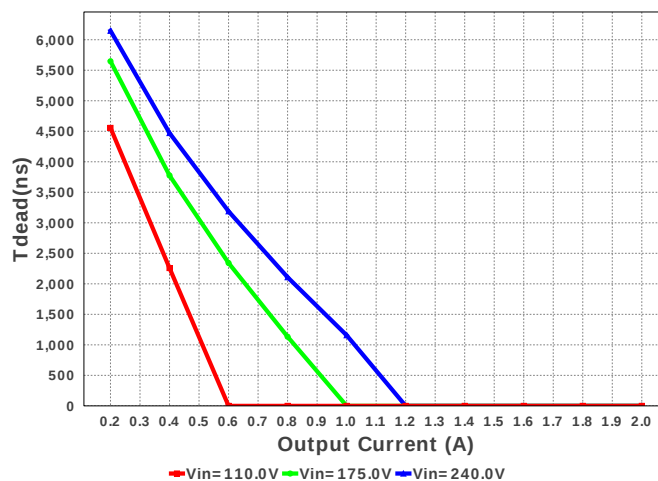


Cout1 IRMS

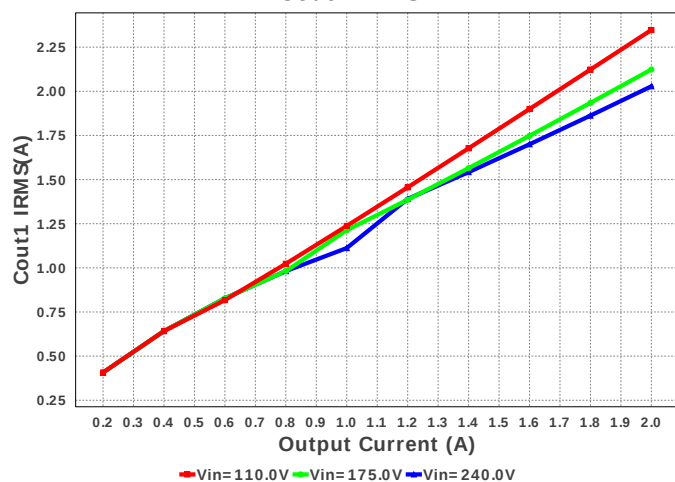


IC Pd






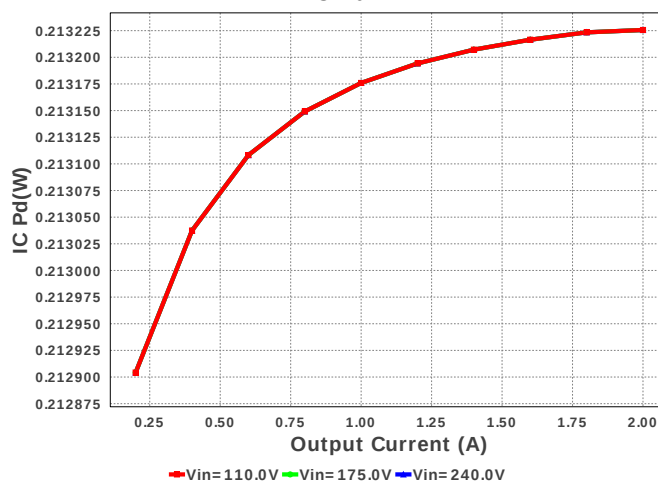








Ipri ripple pk- pk percentage

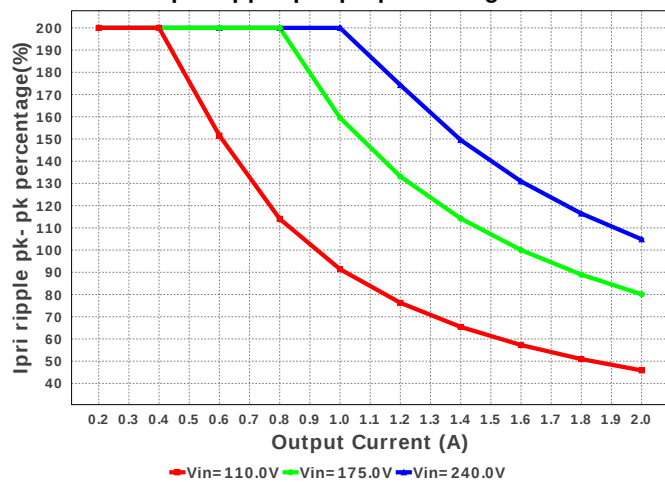


Power Factor

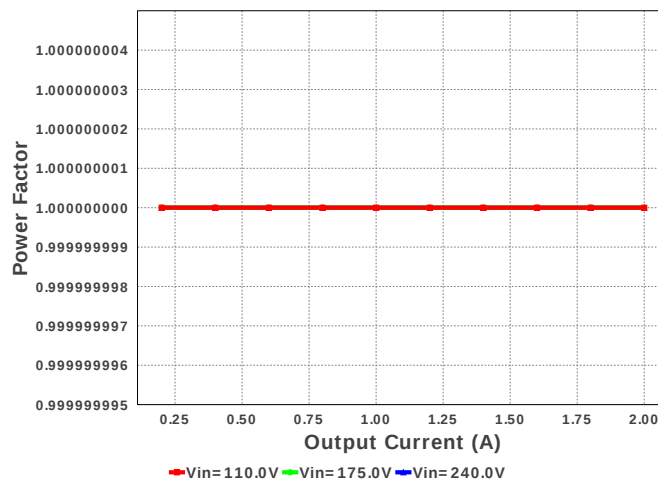

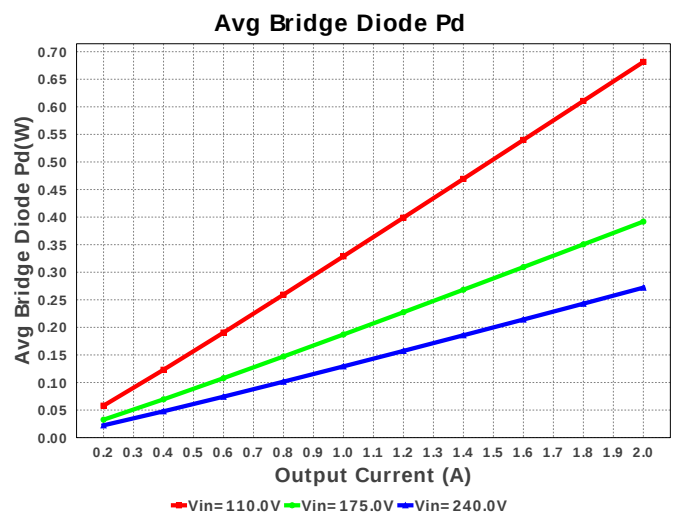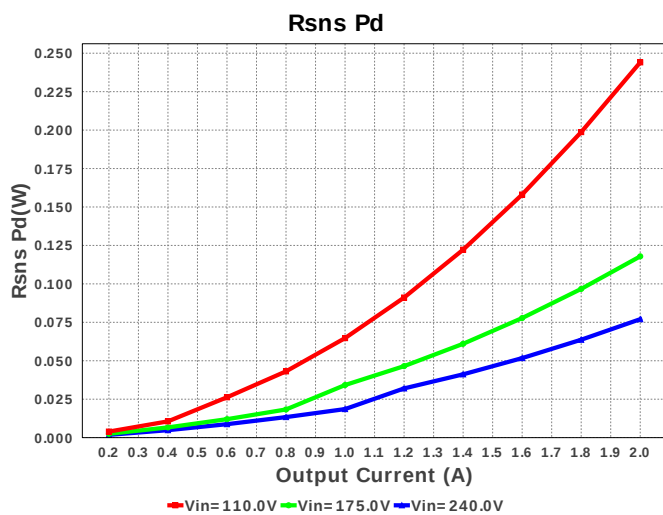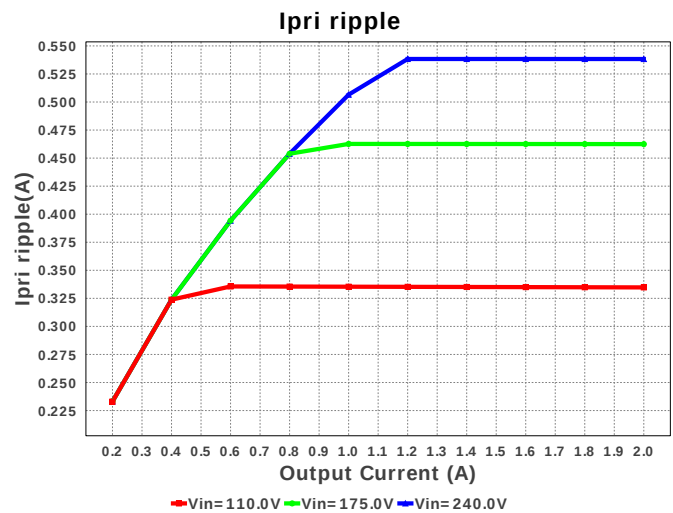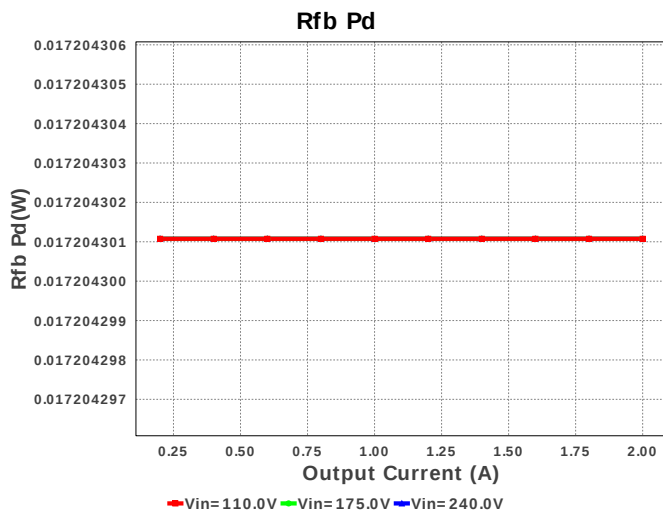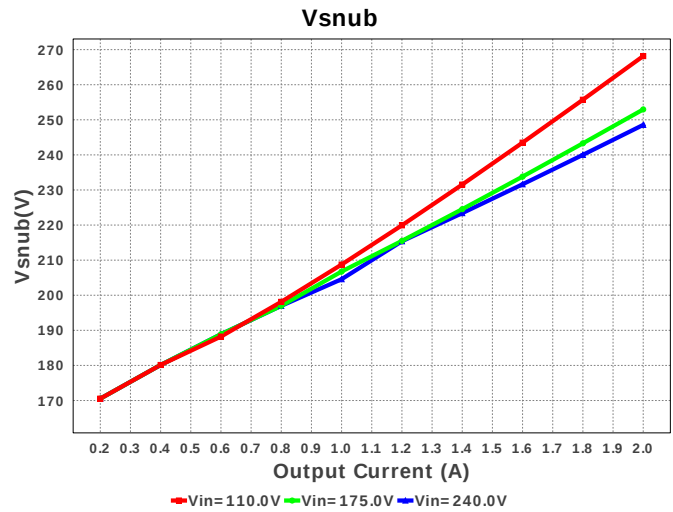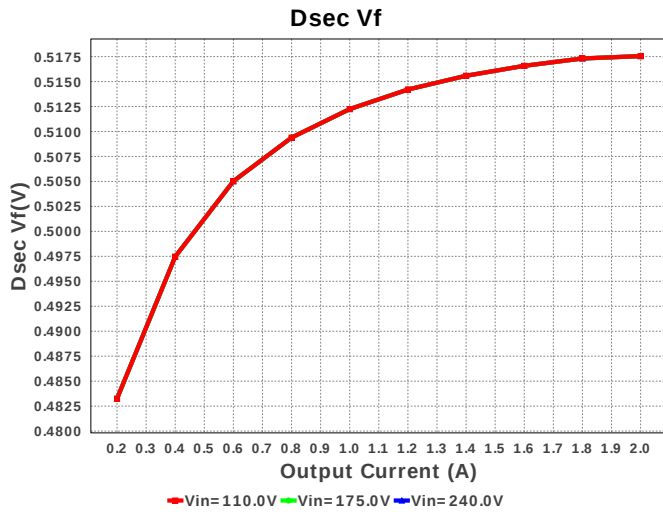

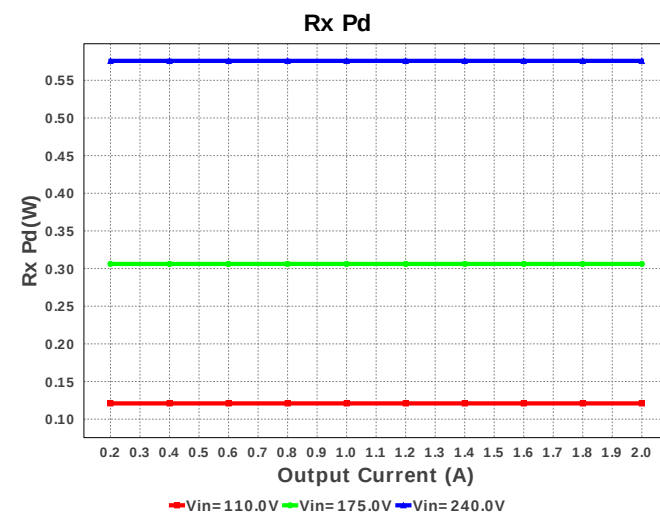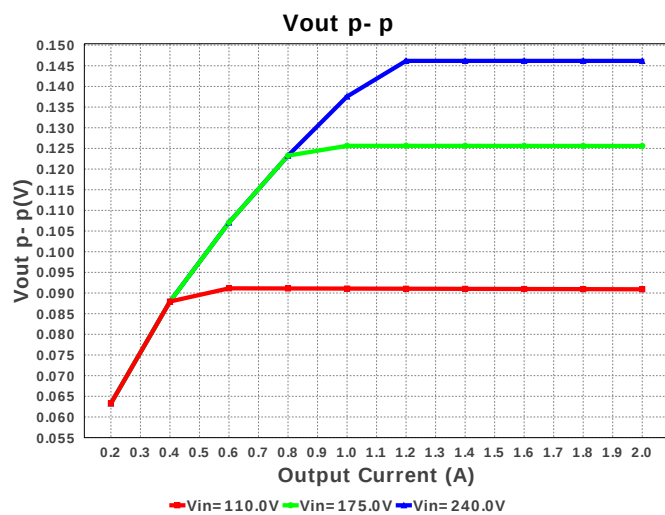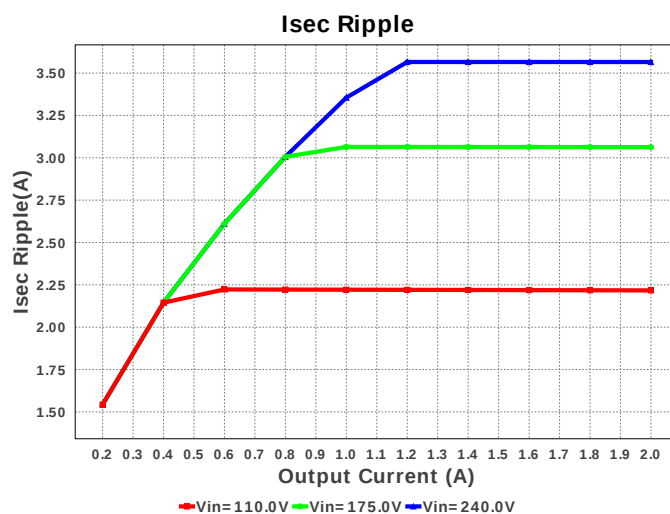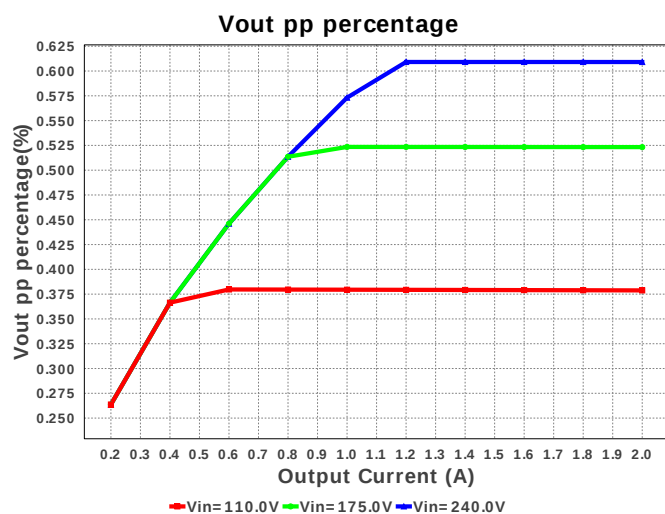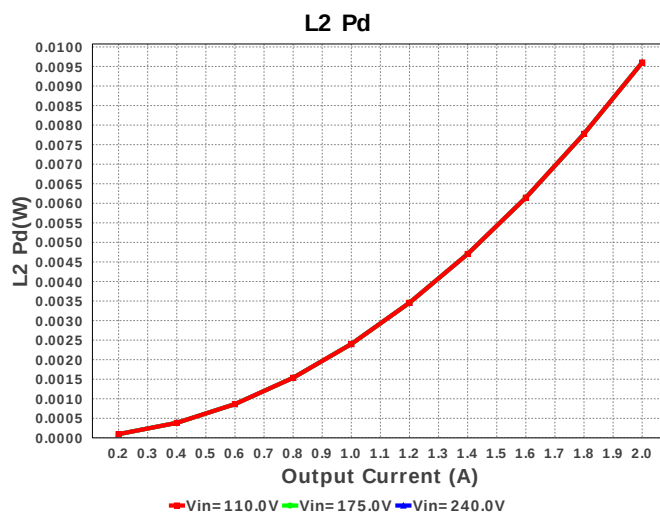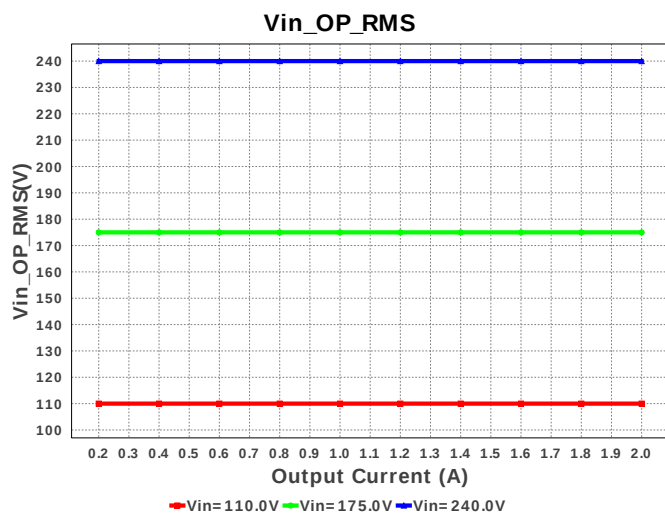

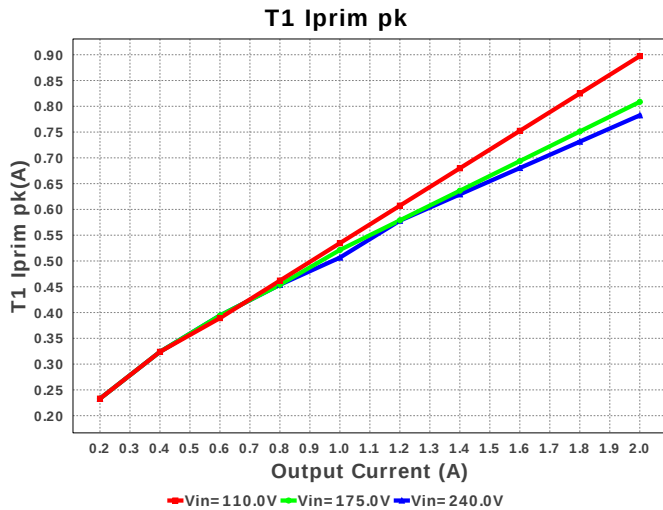

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	2.347 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	493.45 mA	Current	RMS Input Current
3.	Iout_DCM	458.775 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	438.093 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	334.76 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	45.86 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	2.217 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	570.434 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	897.341 mA	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	3.084 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	5.943 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	60	General	Total Design BOM count
14.	Daux trr	4.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	517.55 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	517.55 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	35.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	5.474 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	98.851 kHz	General	Switching frequency
21.	Pout	48.0 W	General	Total output power
22.	Power Factor	1.0	General	Assumed Power Factor for the Application
23.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
24.	Toff	4.185 us	General	Approximate Converter Off Time
25.	Ton Act	6.071 us	General	Approximate Converter On Time
26.	Total BOM	\$0.0	General	Total BOM Cost
27.	Tsw	10.116 us	General	Switching Time Period
28.	Vaux	11.981 V	General	Auxiliary Voltage
29.	Vsnub	268.155 V	General	Voltage Across the Snubber
30.	Vout Actual	24.004 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
31.	Vout OP	24.0 V	Op_Point	Operational Output Voltage
32.	Duty Cycle	60.016 %	Op_point	Duty cycle
33.	Efficiency	88.431 %	Op_point	Steady state efficiency
34.	IC Tj	53.455 degC	Op_point	IC junction temperature
35.	ICThetaJA	110.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
36.	IOUT_OP	2.0 A	Op_point	Iout operating point
37.	M1 TJOP	53.421 degC	Op_point	M1 MOSFET junction temperature
38.	Peak Rectified Vin	155.562 V	Op_point	Peak voltage seen at rectified input
39.	Vin_OP_RMS	110.0 V	Op_point	AC Input RMS Voltage
40.	Vout p-p	90.903 mV	Op_point	Peak-to-peak output ripple voltage
41.	Avg Bridge Diode Pd	681.457 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
42.	Cbulk Pd	1.246 W	Power	Bulk capacitor power dissipation
43.	Cout1 Pd	225.891 mW	Power	Output capacitor1 power dissipation
44.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
45.	Cy Pd	0.0 W	Power	Y-caps Power Dissipation
46.	Dsec Pd	517.55 mW	Power	Secondary Diode Power Dissipation
47.	Dsec2 Pd	517.55 mW	Power	Secondary Diode Power Dissipation
48.	IC Pd	213.226 mW	Power	IC power dissipation
49.	L1 Pd	15.376 mW	Power	Power Dissipation in the Inductor
50.	L2 Pd	9.6 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period

#	Name	Value	Category	Description
51.	M1 Pd	374.731 mW	Power	M1 MOSFET total power dissipation
52.	Paux	37.231 mW	Power	Power Dissipation in Raux and Daux
53.	Pd Rstartup	899.304 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
54.	Rdrv Pd	24.167 μ W	Power	Power Dissipation in Gate Drive Resistor
55.	Rfb Pd	17.204 mW	Power	Rfb Power Dissipation
56.	Rsns Pd	244.046 mW	Power	Current Limit Sense Resistor Power Dissipation
57.	Rx Pd	120.961 mW	Power	Total Power Dissipation in Rx1 and Rx2
58.	Snubber Pd	964.644 mW	Power	Snubber Power Dissipation
59.	T1 Pd	729.754 mW	Power	Estimated Losses in Transformer
60.	Total Pd	6.28 W	Power	Total Power Dissipation
61.	Vout Tolerance	2.137 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
62.	Vout pp percentage	378.764 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	240.0	Maximum input voltage
3.	VinMin	110.0	Minimum input voltage
4.	Vout	24.0	Output Voltage
5.	line_fsw	50.0	Light Output in Lumen
6.	base_pn	UC2843A	Base Product Number
7.	source	AC	Input Source Type
8.	Ta	30.0	Ambient temperature

Design Assistance

1. **UC2843A** Product Folder : <http://www.ti.com/product/UC2843A> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).