


WEBENCH® Design Report

Design : 4372614/36 LM3100MHX/NOPB
LM3100MHX/NOPB 5.0V-12.0V to 3.30V @ 0.5A

vout = 3.3V
Iout = 0.5A




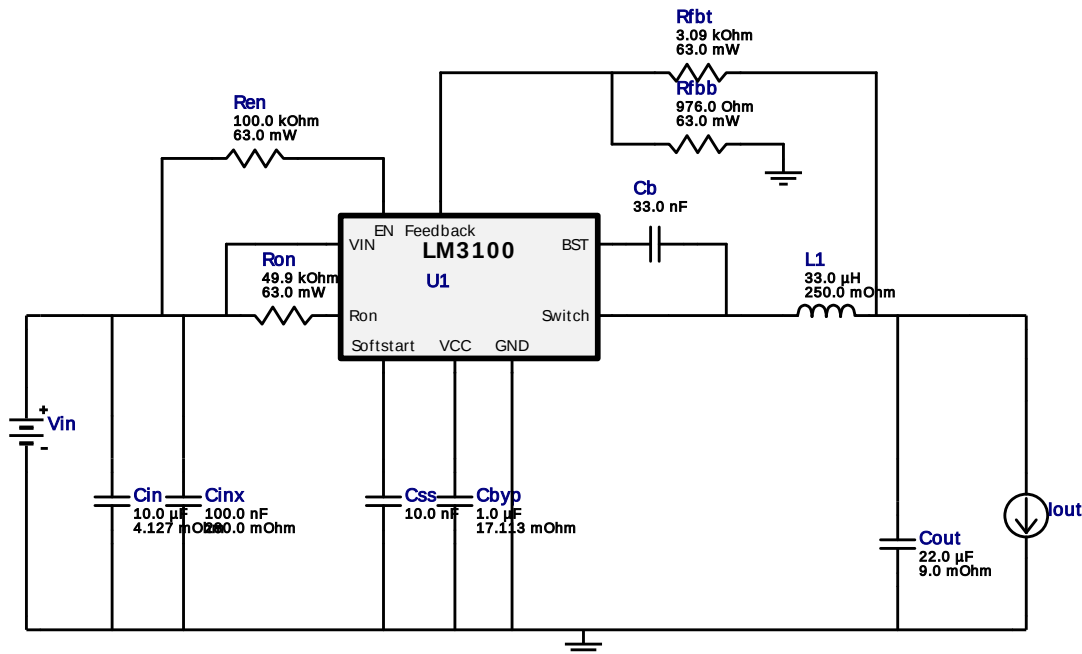








1. This regulator device is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application. View WEBENCH(R) Disclaimer.







Electrical BOM


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cb	MuRata	GRM155R71E333KA88D Series= X7R	Cap= 33.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
2.	Cbyp	MuRata	GRM188R61E105KA12D Series= X5R	Cap= 1.0 uF ESR= 17.113 mOhm VDC= 25.0 V IRMS= 979.39 mA	1	\$0.01	0603 5 mm ²
3.	Cin	MuRata	GRM21BR61C106KE15L Series= X5R	Cap= 10.0 uF ESR= 4.127 mOhm VDC= 16.0 V IRMS= 2.46634 A	1	\$0.03	0805 7 mm ²
4.	Cinx	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	Cout	MuRata	GRM21BR60J226ME39L Series= X5R	Cap= 22.0 uF ESR= 9.0 mOhm VDC= 6.3 V IRMS= 3.5 A	1	\$0.04	0805 7 mm ²
6.	Css	MuRata	GRM155R71E103KA01D Series= X7R	Cap= 10.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
7.	L1	Bourns	SDR0604-330KL	L= 33.0 uH DCR= 250.0 mOhm	1	\$0.18	SDR0604 61 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Ren	Vishay-Dale	CRCW0402100KFKED Series= CRCW..e3	Res= 100.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
9.	Rfbb	Vishay-Dale	CRCW0402976RFKED Series= CRCW..e3	Res= 976.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
10.	Rfbt	Vishay-Dale	CRCW04023K09FKED Series= CRCW..e3	Res= 3.09 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
11.	Ron	Vishay-Dale	CRCW040249K9FKED Series= CRCW..e3	Res= 49.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
12.	U1	Texas Instruments	LM3100MHX/NOPB	Switcher	1	\$1.85	 MXA20A 71 mm²

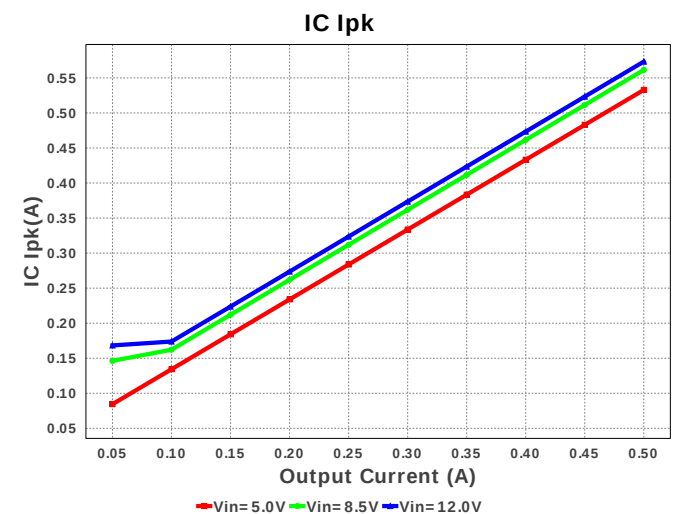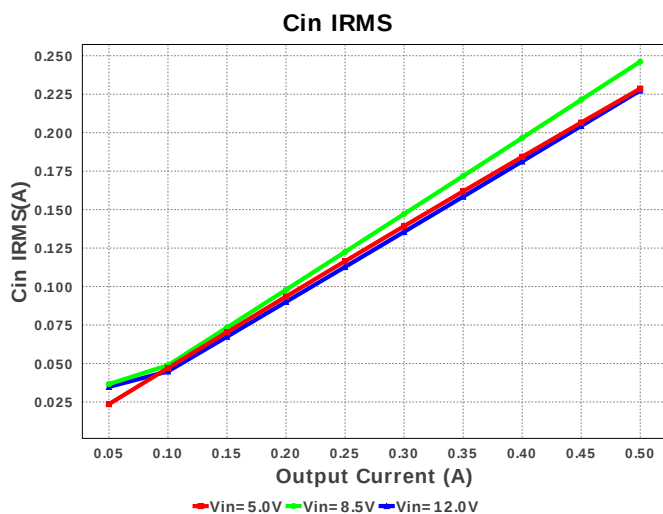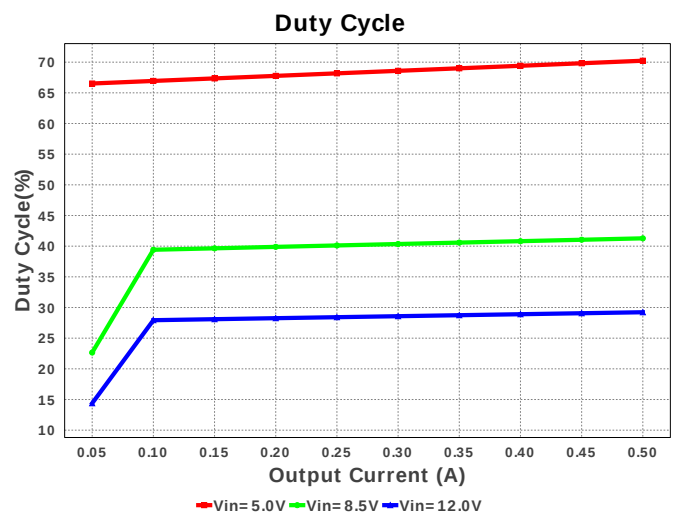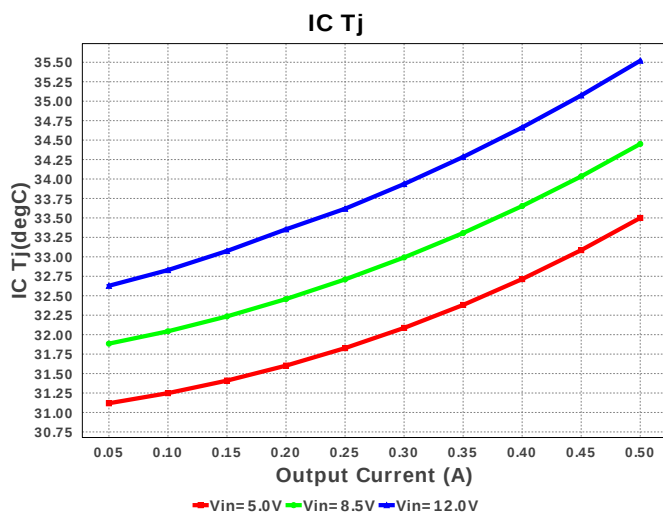

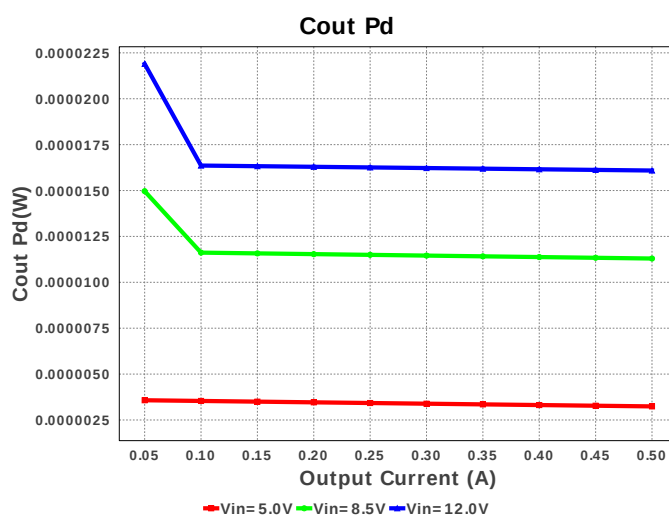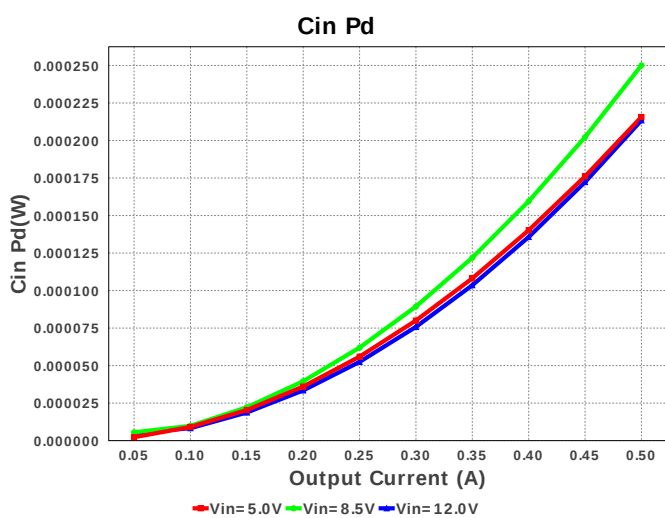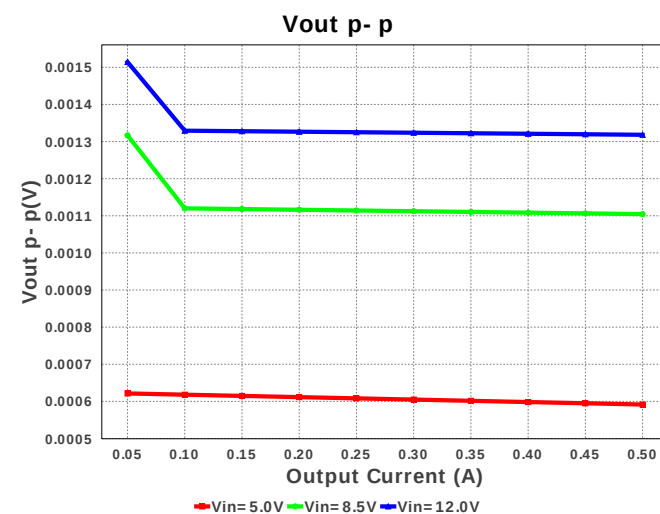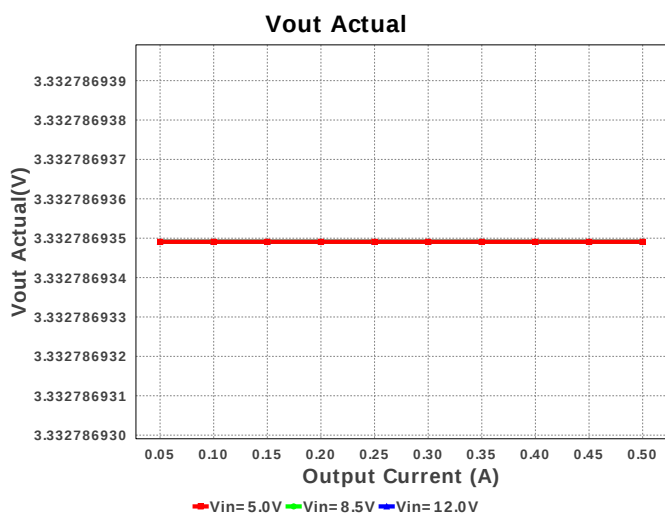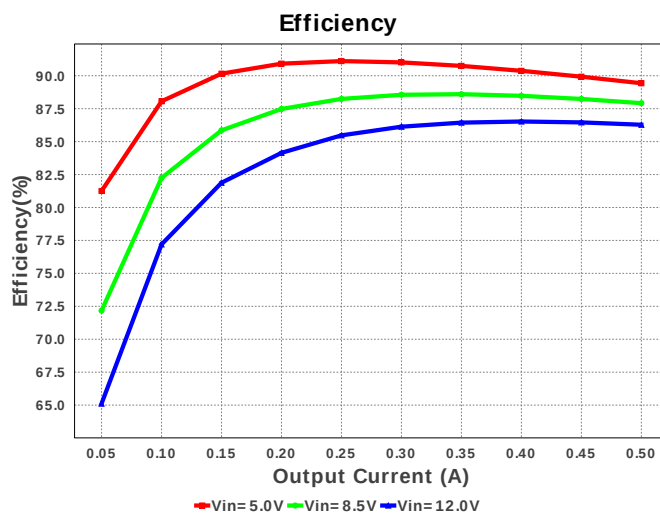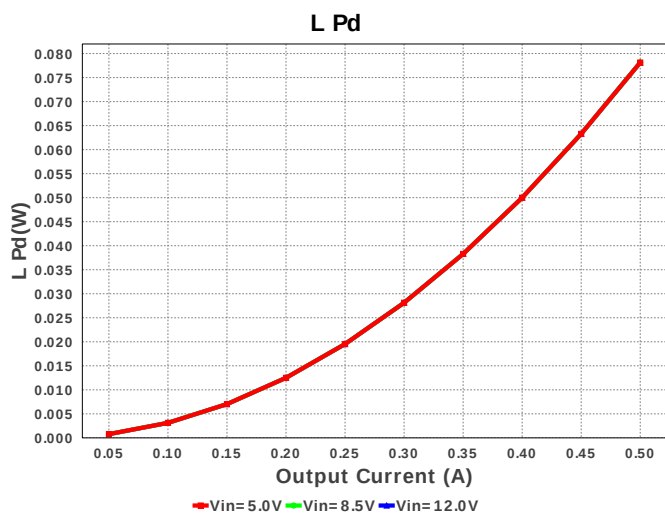

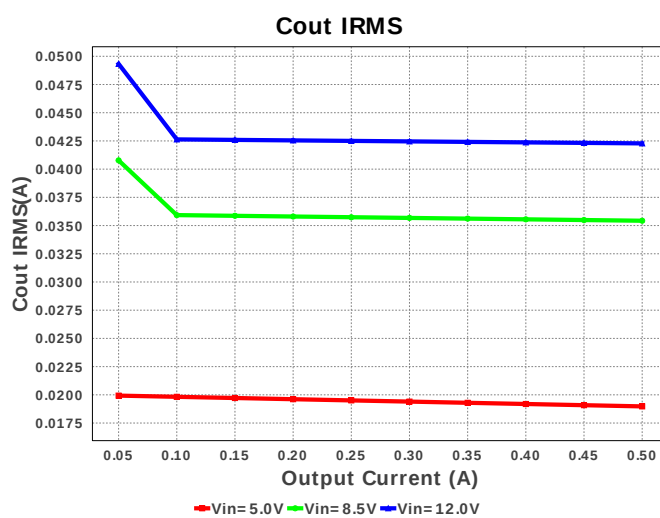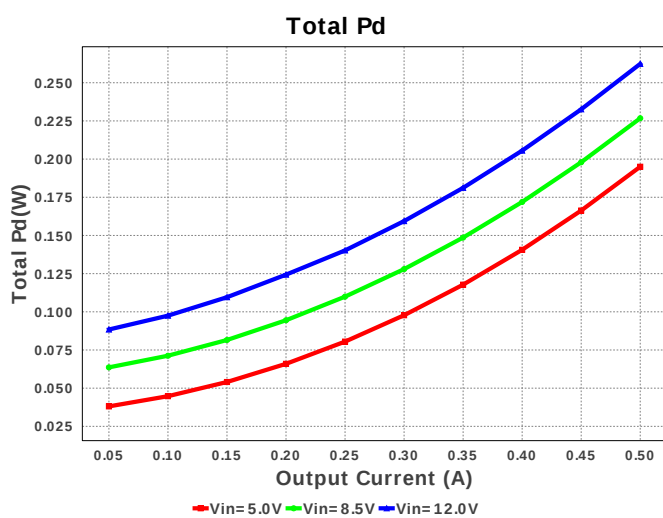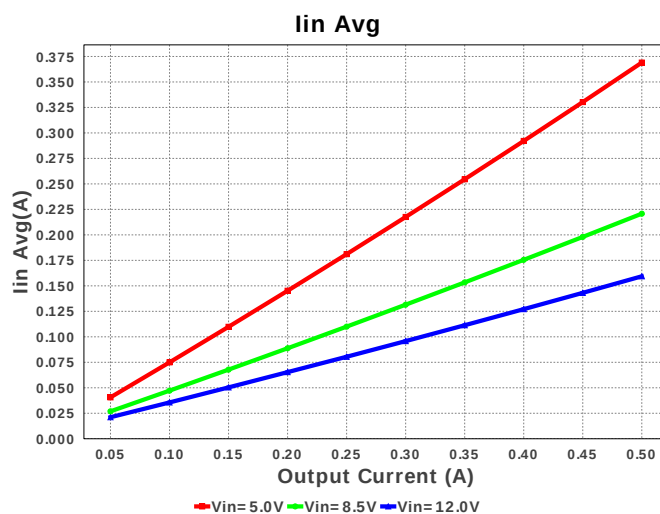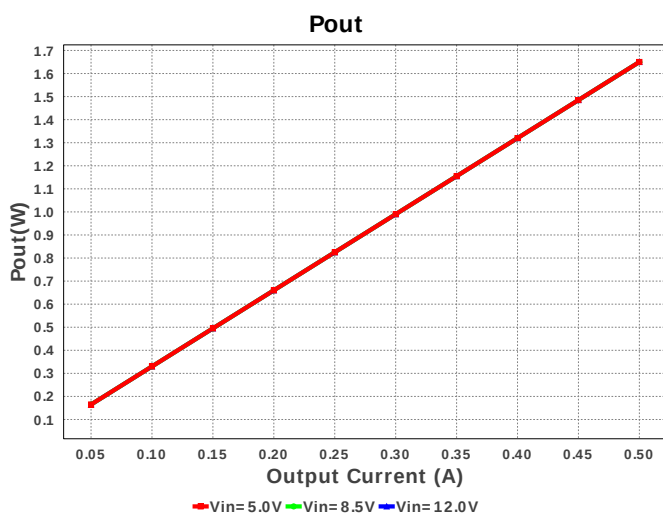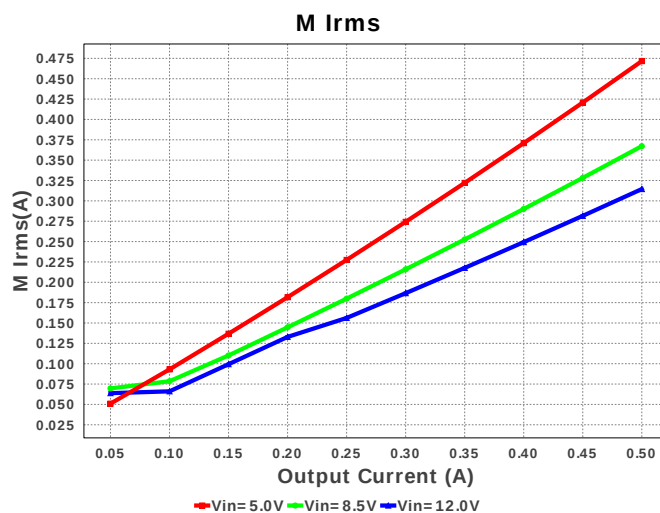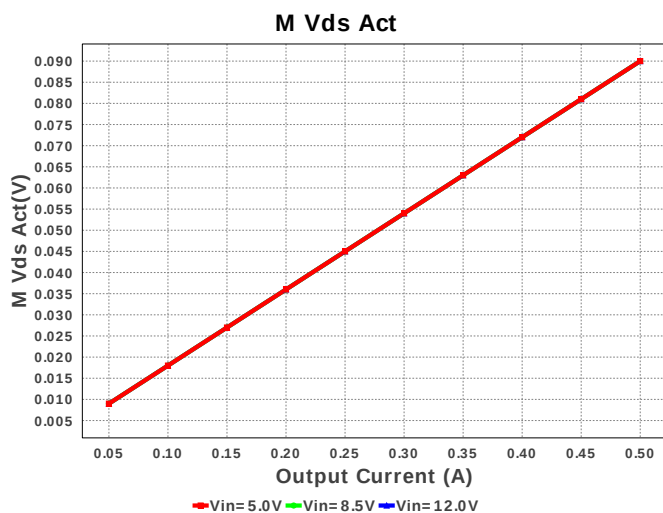

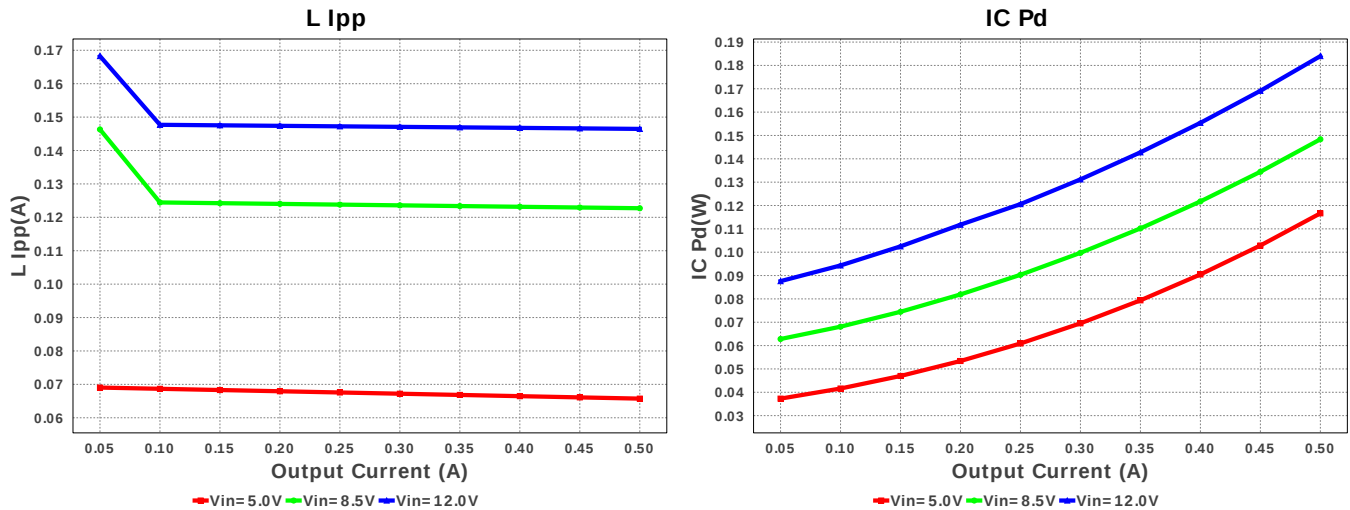

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	227.402 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	42.282 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	573.234 mA	Current	Peak switch current in IC
4.	Iin Avg	159.4 mA	Current	Average input current
5.	L Ipp	146.47 mA	Current	Peak-to-peak inductor ripple current
6.	M1 Irms	314.535 mA	Current	Q lavg
7.	BOM Count	12	General	Total Design BOM count
8.	FootPrint	175.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	489.869 kHz	General	Switching frequency
10.	IC Tolerance	16.0 mV	General	IC Feedback Tolerance
11.	M Vds Act	90.0 mV	General	Voltage drop across the MosFET
12.	Pout	1.65 W	General	Total output power
13.	Total BOM	\$2.18	General	Total BOM Cost
14.	Vout Actual	3.333 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
15.	Vout OP	3.3 V	Op_Point	Operational Output Voltage
16.	Duty Cycle	29.227 %	Op_point	Duty cycle
17.	Efficiency	86.263 %	Op_point	Steady state efficiency
18.	IC Tj	37.376 degC	Op_point	IC junction temperature
19.	ICThetaJA	40.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
20.	IOUT_OP	500.0 mA	Op_point	Iout operating point
21.	VIN_OP	12.0 V	Op_point	Vin operating point
22.	Vout p-p	1.318 mV	Op_point	Peak-to-peak output ripple voltage
23.	Cin Pd	213.414 μW	Power	Input capacitor power dissipation
24.	Cout Pd	16.09 μW	Power	Output capacitor power dissipation
25.	IC Pd	184.402 mW	Power	IC power dissipation
26.	L Pd	78.125 mW	Power	Inductor power dissipation
27.	Total Pd	262.761 mW	Power	Total Power Dissipation
28.	Vout Tolerance	3.566 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	500.0 m	Maximum Output Current
2.	VinMax	12.0	Maximum input voltage
3.	VinMin	5.0	Minimum input voltage
4.	Vout	3.3	Output Voltage
5.	base_pn	LM3100	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **LM3100** Product Folder : <http://www.ti.com/product/LM3100> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).