









WEBENCH® Design Report


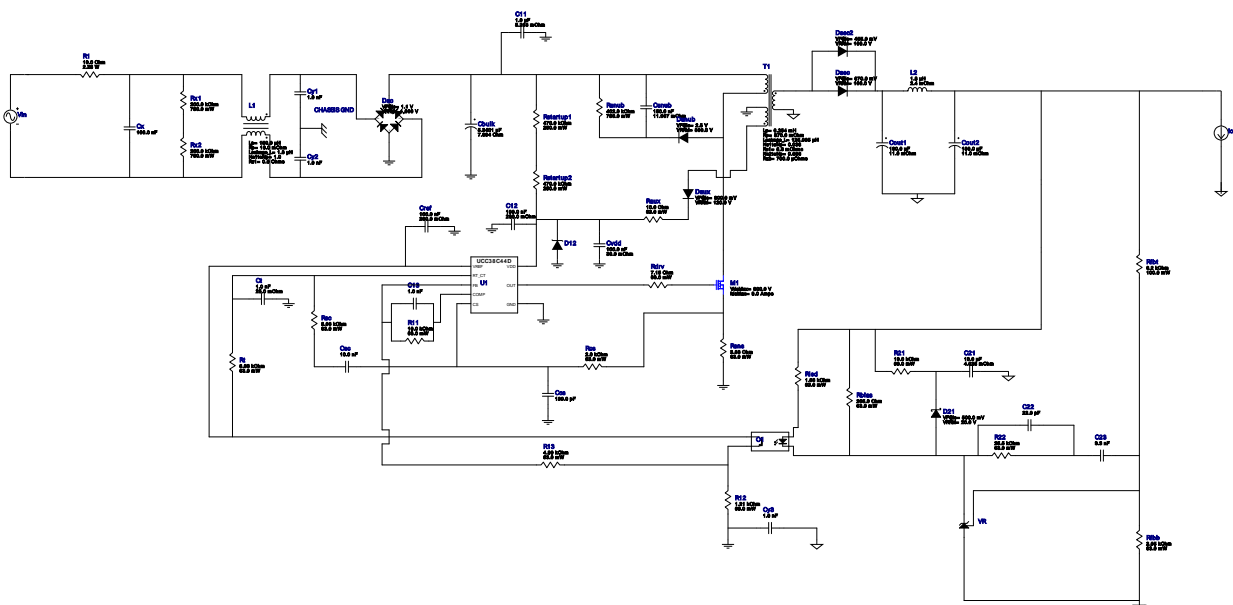








Design : 4466246/62 UCC38C44DR
UCC38C44DR 220.0V-220.0V to 5.00V @ 2.0A
























1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	MuRata	GRM21BR61A106KE19L Series= X5R	Cap= 10.0 uF ESR= 4.025 mOhm VDC= 10.0 V IRMS= 2.445 A	1	\$0.03	 0805 7 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	MuRata	GRM216R71E332KA01D Series= X7R	Cap= 3.3 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
7.	Cbulk	CUSTOM	CUSTOM Series= ?	Cap= 5.3401 uF ESR= 7.6943 Ohm VDC= 373.349 V IRMS= 110.3 mA	1	NA	CUSTOM 0 mm ²
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Cout1	Panasonic	16SVPE180M Series= SVPE	Cap= 180.0 uF ESR= 11.0 mOhm VDC= 16.0 V IRMS= 4.46 A	1	\$0.49	 CAPSMT_62_C10 74 mm²
10.	Cout2	Panasonic	16SVPE180M Series= SVPE	Cap= 180.0 uF ESR= 11.0 mOhm VDC= 16.0 V IRMS= 4.46 A	1	\$0.49	 CAPSMT_62_C10 74 mm²
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm²
12.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm²
13.	Csnub	TDK	C3225X7T2J154K Series= X7T	Cap= 150.0 nF ESR= 11.907 mOhm VDC= 630.0 V IRMS= 0.0 A	1	\$0.19	 1210 15 mm²
14.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm²
15.	Cvdd	MuRata	GRM188R71E104KA01D Series= X7R	Cap= 100.0 nF ESR= 30.0 mOhm VDC= 25.0 V IRMS= 1.51 A	1	\$0.01	 0603 5 mm²
16.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm²
17.	Cy1	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm²
18.	Cy2	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
19.	Cy3	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
20.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
21.	D21	Vishay-Semiconductor	SS12-E3/61T	VF@Io= 500.0 mV VRRM= 20.0 V	1	\$0.08	 SMA 37 mm ²
22.	Dac	Vishay-Semiconductor	DF10SA	VF@Io= 1.1 V VRRM= 1,000.0 V	1	\$0.24	 DF-S 99 mm ²
23.	Daux	Fairchild Semiconductor	FSV10120V	VF@Io= 800.0 mV VRRM= 120.0 V	1	\$0.21	 TO-277A 56 mm ²
24.	Dsec	Fairchild Semiconductor	FSV8100V	VF@Io= 670.0 mV VRRM= 100.0 V	1	\$0.21	 TO-277A 56 mm ²
25.	Dsec2	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
26.	Dsnub	Bourns	CD1408-FU1800	VF@Io= 2.5 V VRRM= 800.0 V	1	\$0.13	 Diode_1408 13 mm ²
27.	L1	API Delevan	CM6296R-154	Lp= 150.0 µH Rp= 16.0 mOhm Leakage_L= 1.8 µH Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$5.95	 CM6296 833 mm ²
28.	L2	Coilcraft	SER1360-182KLB	L= 1.8 µH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm ²
29.	M1	STMicroelectronics	STF10N80K5	VdsMax= 800.0 V IdsMax= 9.0 Amps	1	\$2.52	 TO-220FP 79 mm ²
30.	O1	Vishay-Semiconductor	TCMT1109	Optocoupler	1	\$0.21	 SOP-4 44 mm ²





#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
31.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm²
32.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
33.	R12	Vishay-Dale	CRCW04021K21FKED Series= CRCW..e3	Res= 1.21 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
34.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
35.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
36.	R22	Vishay-Dale	CRCW040225K5FKED Series= CRCW..e3	Res= 25.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
37.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
38.	Rbias	Vishay-Dale	CRCW0402205RFBKED Series= CRCW..e3	Res= 205.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
39.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
40.	Rdrv	Vishay-Dale	CRCW04027R15FKED Series= CRCW..e3	Res= 7.15 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
41.	Rfbb	Vishay-Dale	CRCW04022K05FKED Series= CRCW..e3	Res= 2.05 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
42.	Rfbb	Yageo America	RC0603FR-076K2L Series= ?	Res= 6.2 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
43.	Rled	Vishay-Dale	CRCW04021K58FKED Series= CRCW..e3	Res= 1.58 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
44.	Rsc	Vishay-Dale	CRCW04028K06FKED Series= CRCW..e3	Res= 8.06 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
45.	Rsns	Vishay-Dale	CRCW04023R83FKED Series= CRCW..e3	Res= 3.83 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
46.	Rsnub	Vishay-Dale	CRCW2010402KFKEF Series= CRCW..e3	Res= 402.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²
47.	Rstartup1	Yageo America	RC1206FR-07470KL Series= ?	Res= 470.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
48.	Rstartup2	Yageo America	RC1206FR-07470KL Series= ?	Res= 470.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
49.	Rt	Vishay-Dale	CRCW04028K66FKED Series= CRCW..e3	Res= 8.66 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
50.	Rx1	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²
51.	Rx2	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
52.	T1	CUSTOM	CUSTOM	Lp= 6.254 mH Rp= 870.0 mOhm Leakage_L= 125.085 μ H Ns1toNp= 0.038 Rs1= 8.6 mOhms Ns2toNp= 0.096 Rs2= 700.0 μ Ohms	1	NA	CUSTOM 0 mm ²

53.	U1	Texas Instruments	UCC38C44DR	Switcher	1	\$0.60	
-----	----	-------------------	------------	----------	---	--------	--


D0008A 57 mm²

54.	VR	Texas Instruments	LMV431CM5/NOPB	Voltage References	1	\$0.16	
-----	----	-------------------	----------------	--------------------	---	--------	--

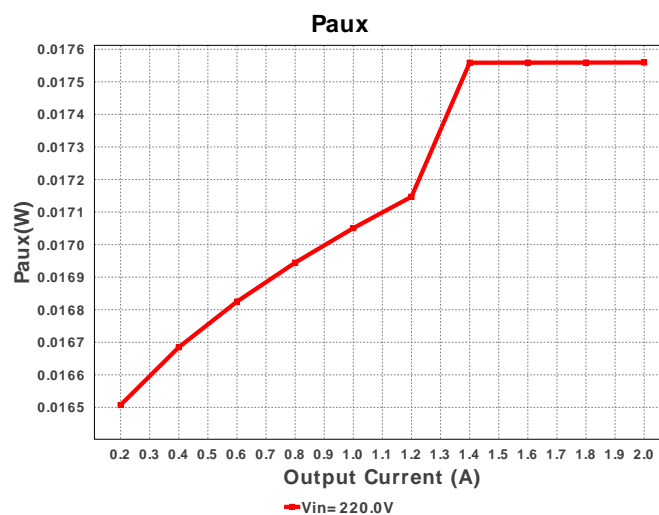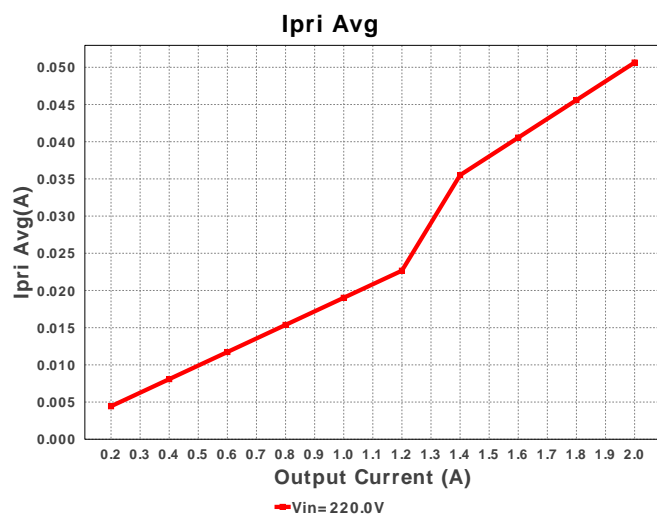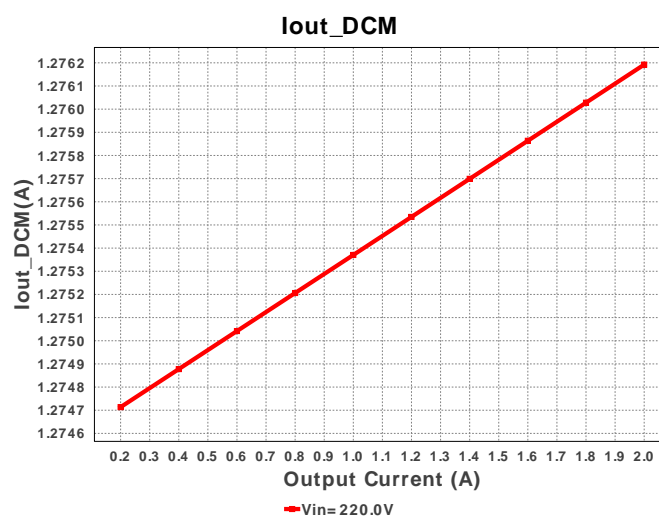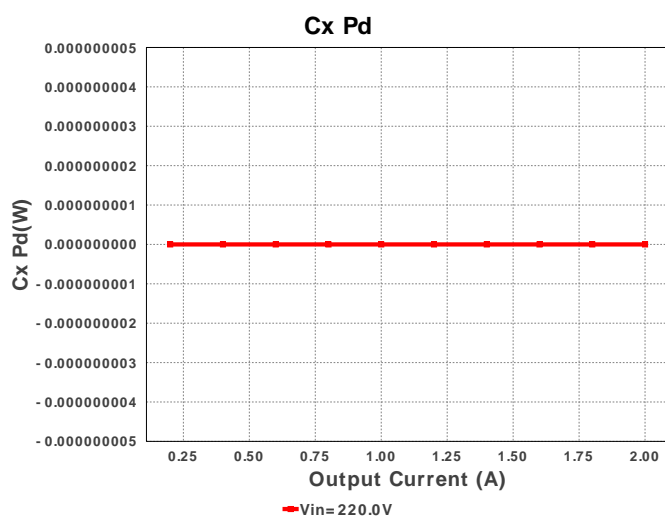
R-PDSO-G3 16 mm²

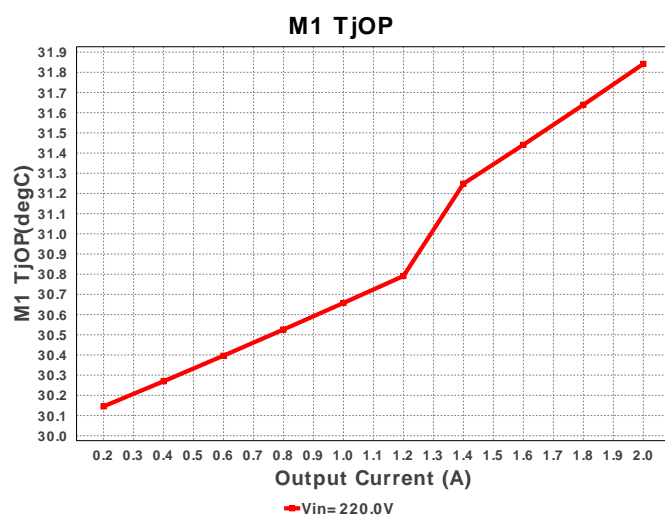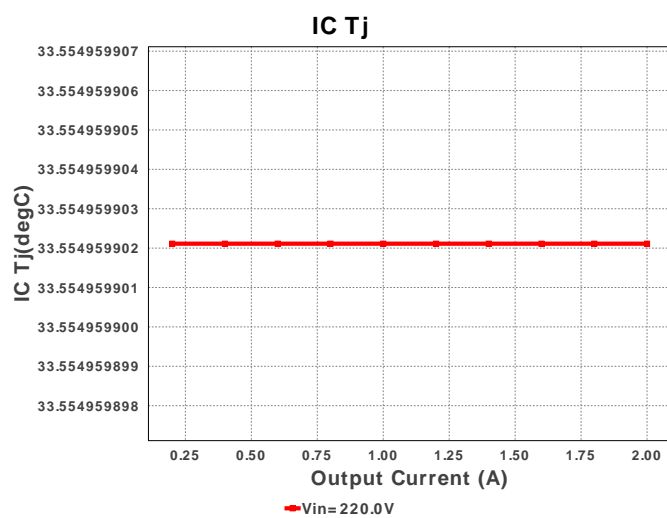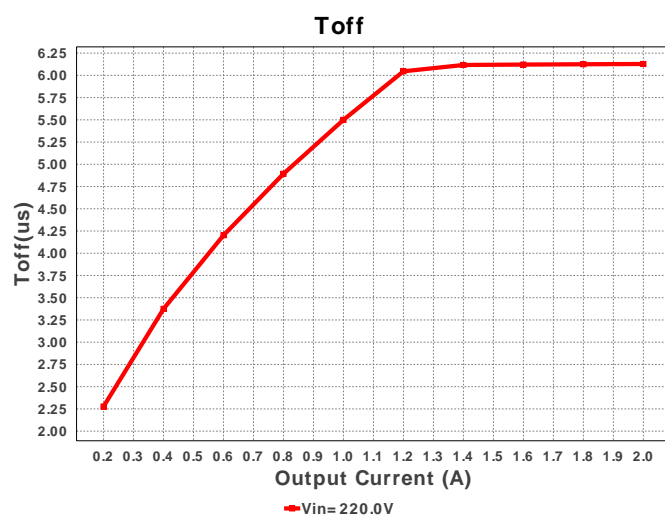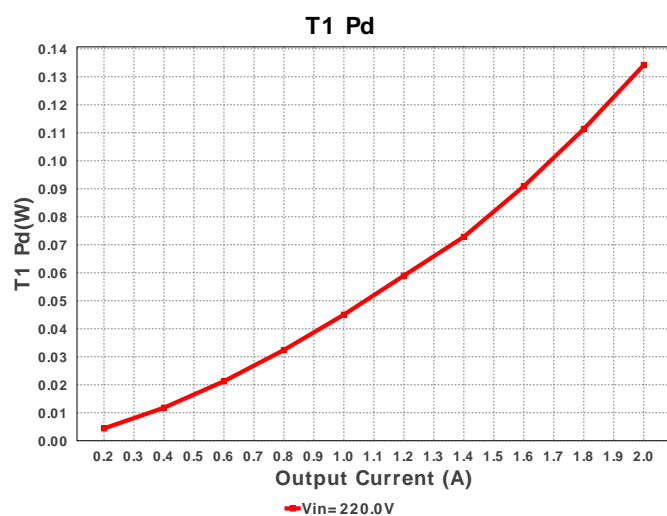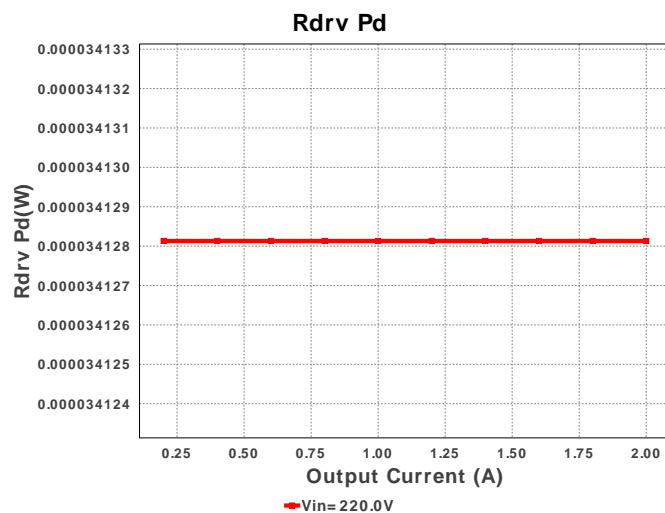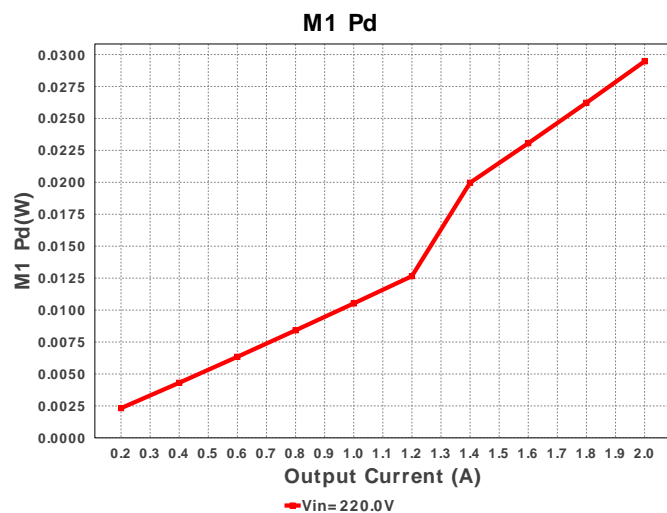


Dsec2 Pd

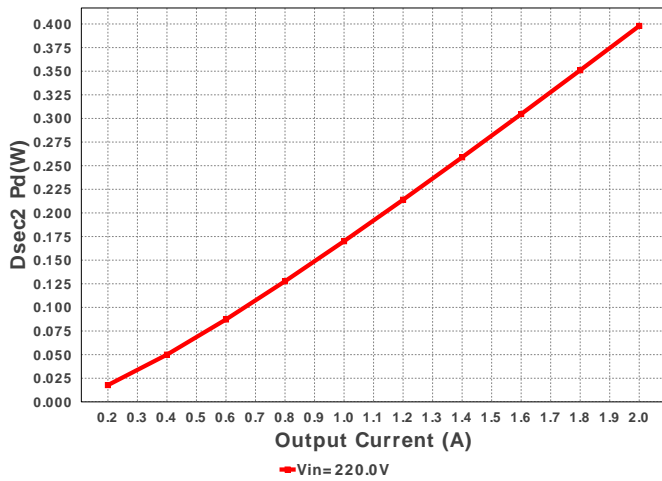


Vout Actual

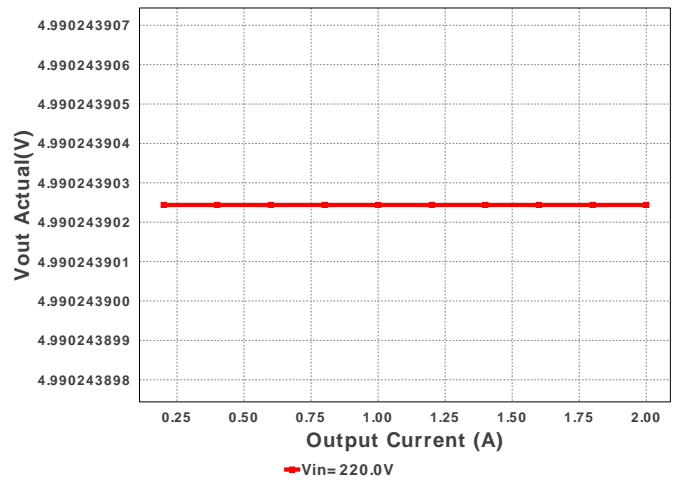


Dsec2 Vf

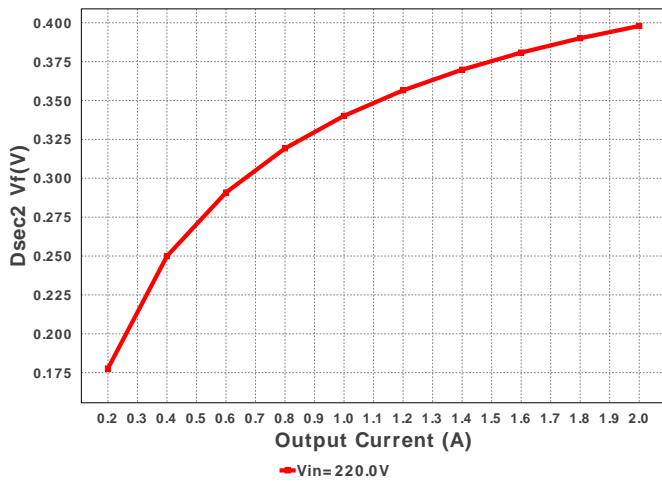


AC Frequency






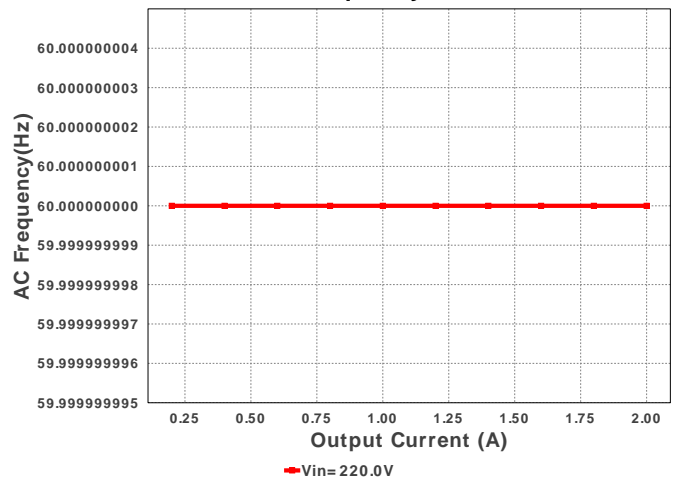








Peak Rectified Vin

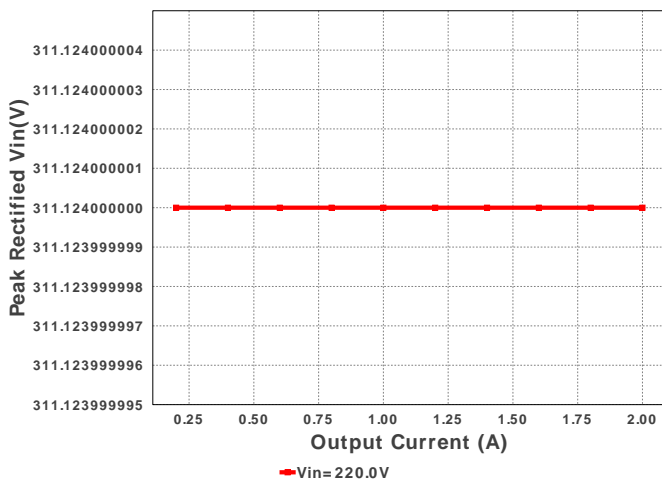


Pd Rstartup

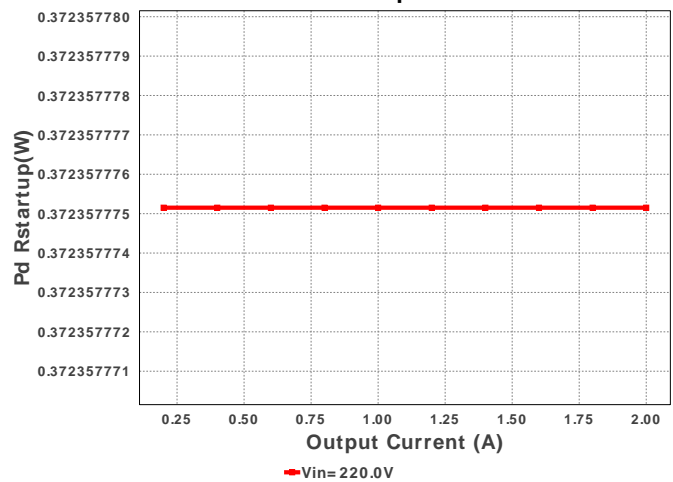


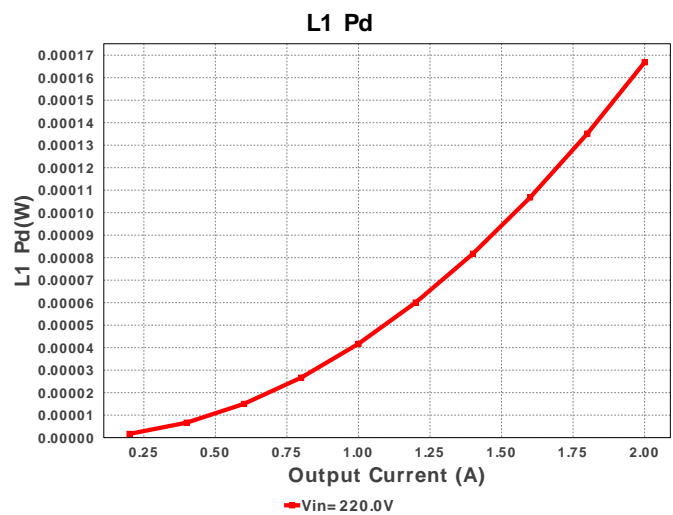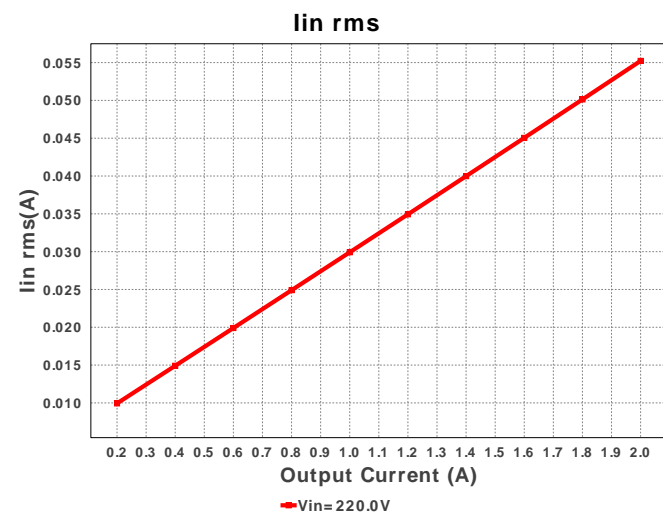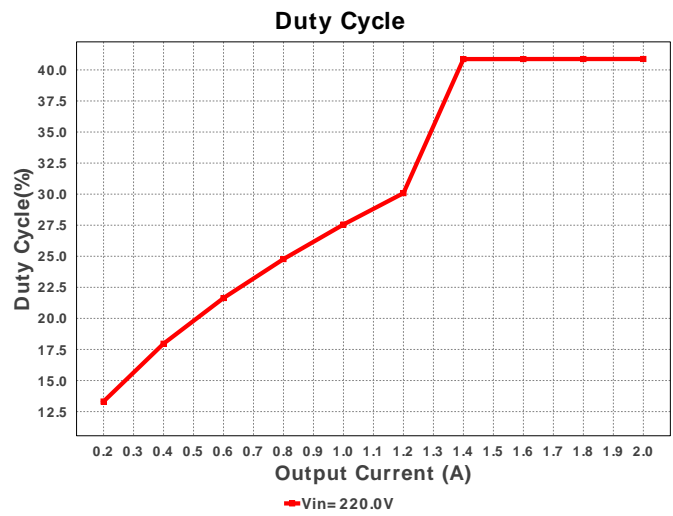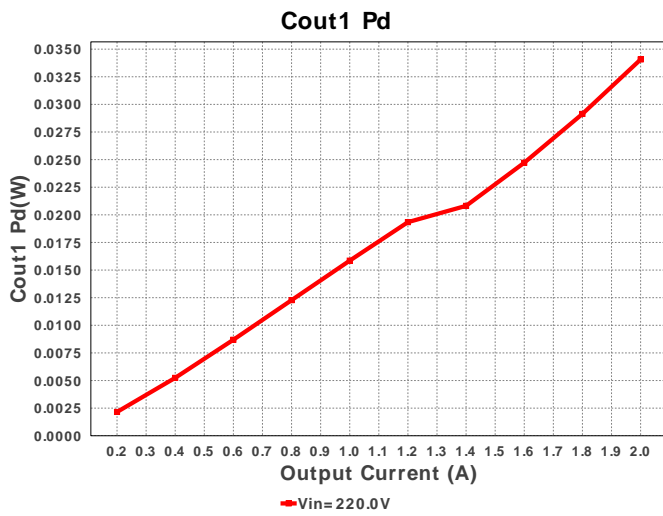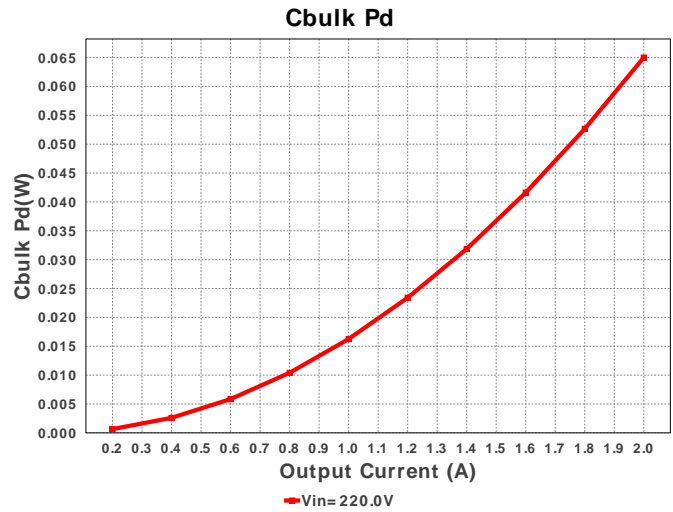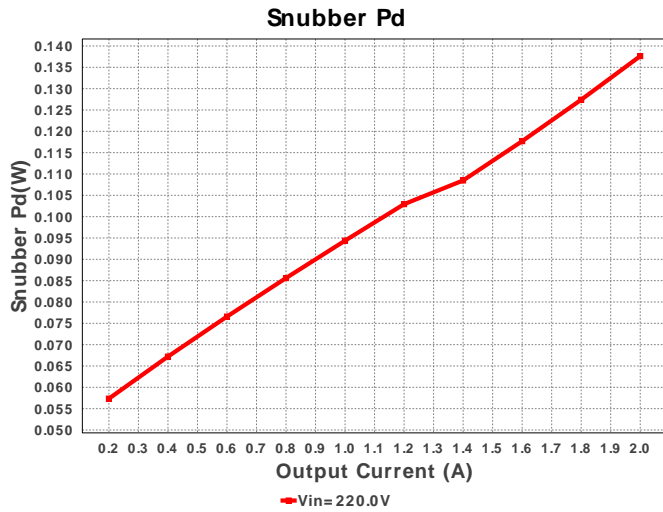

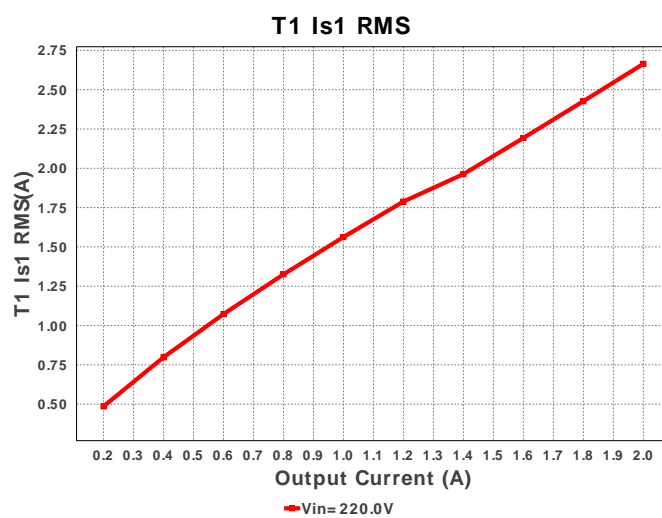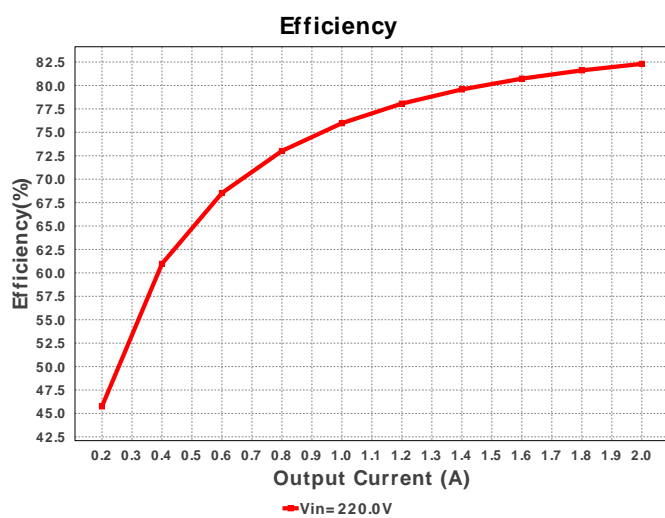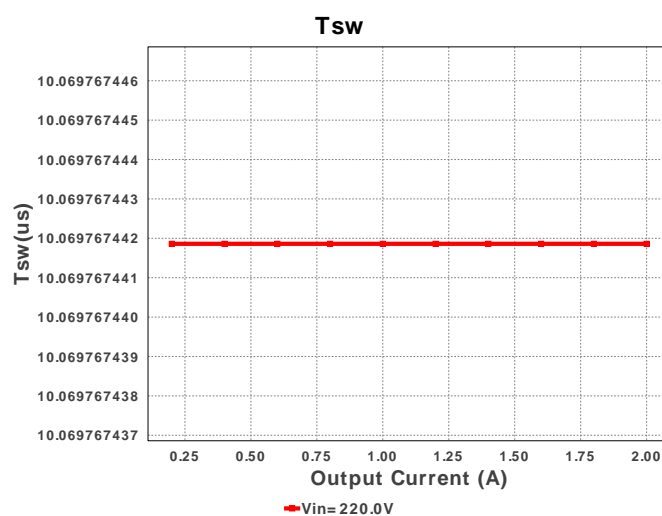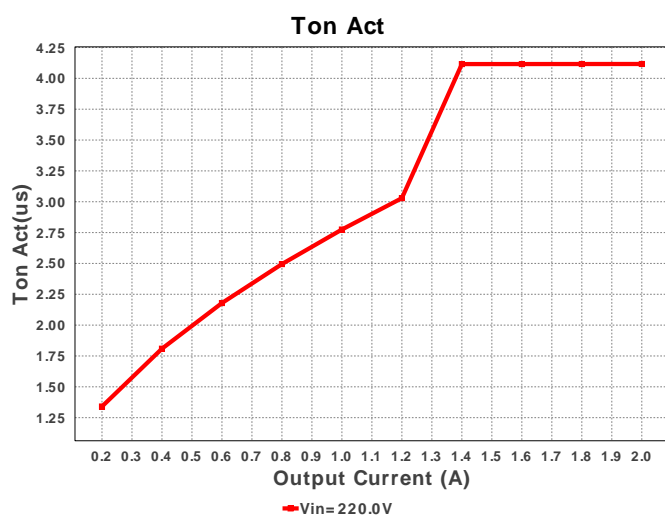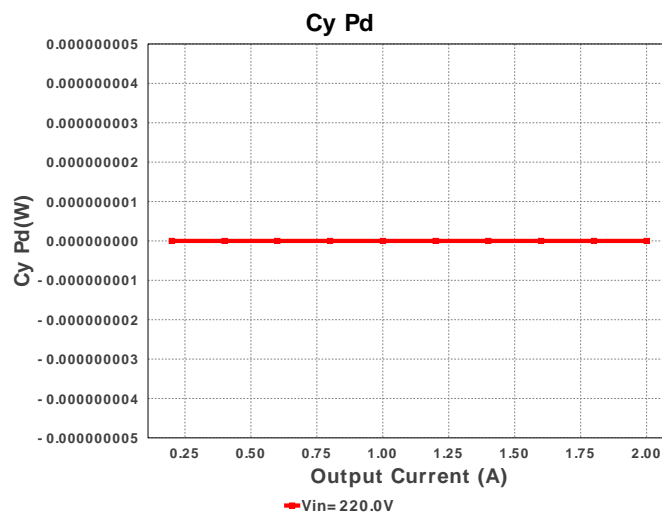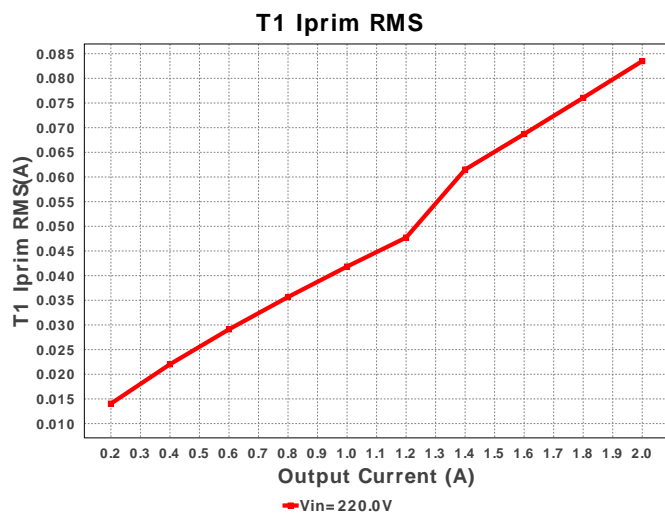


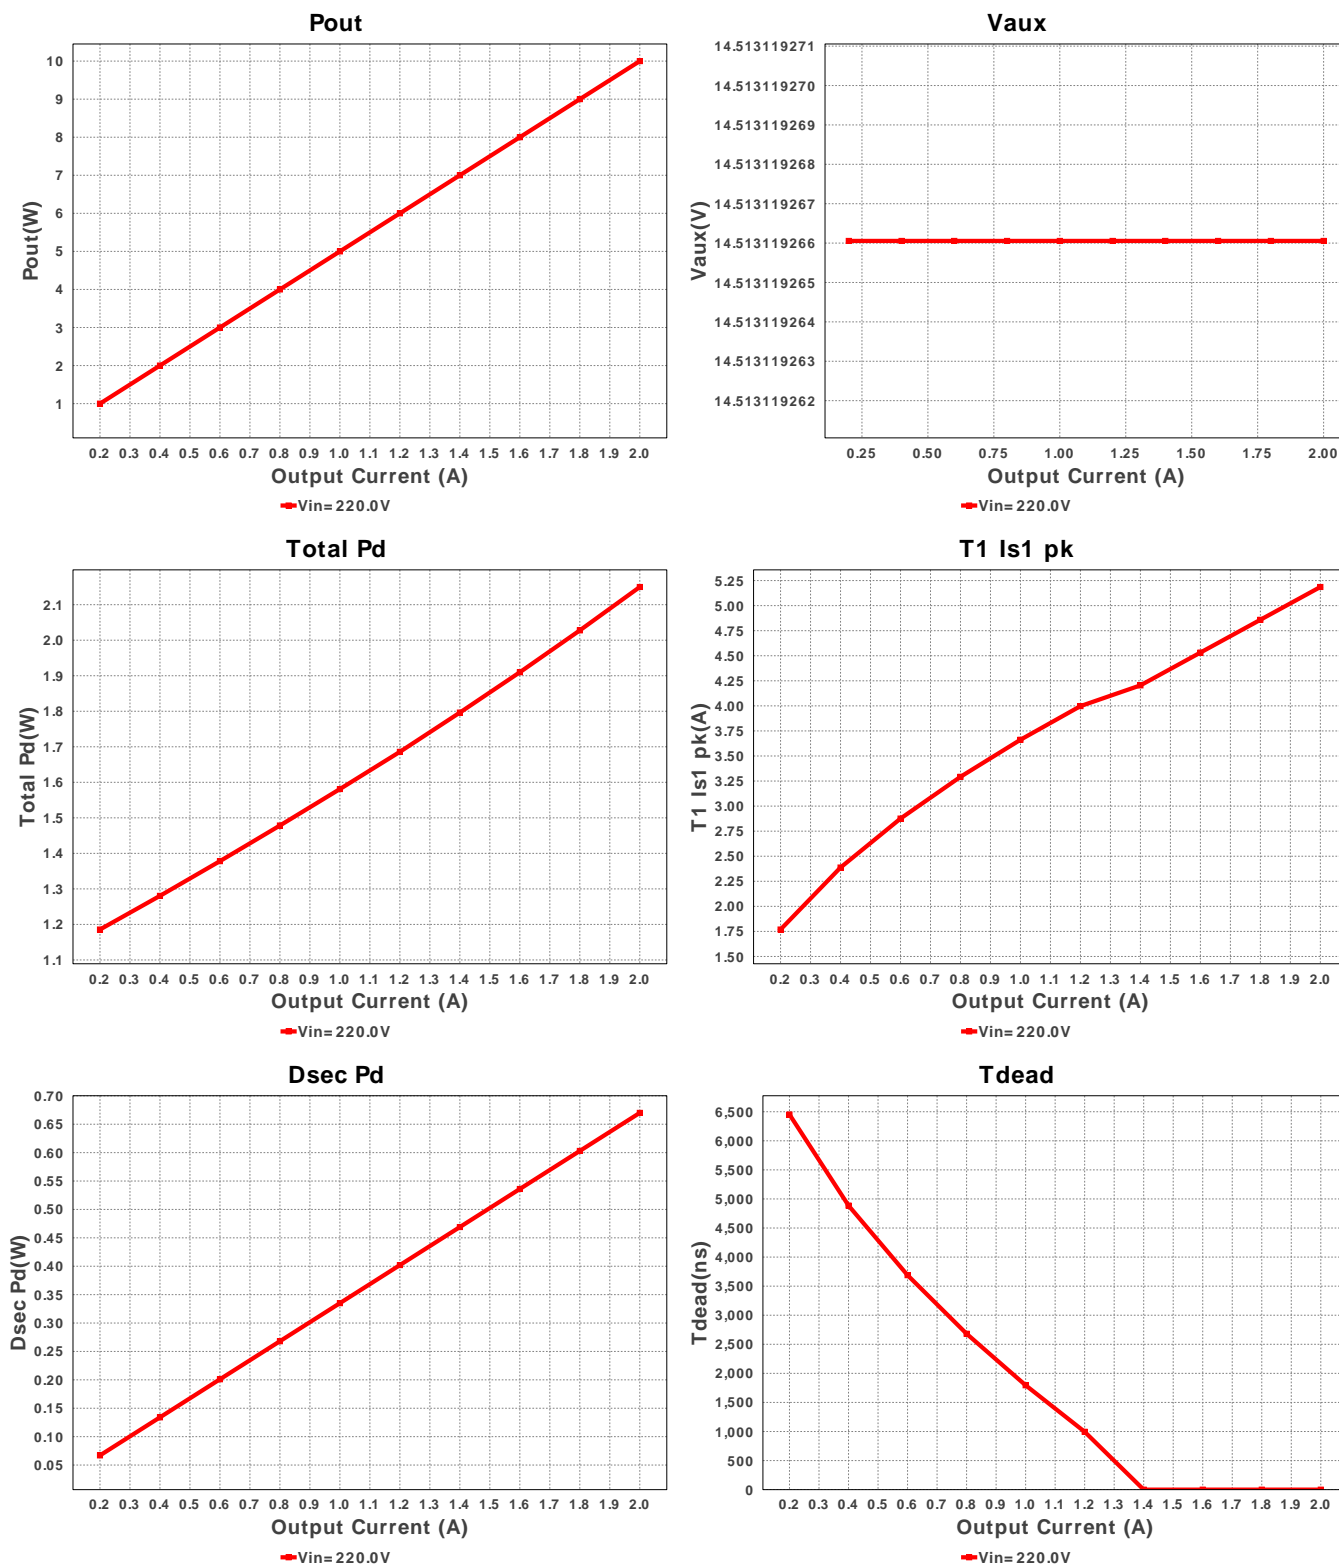


Cout1 IRMS

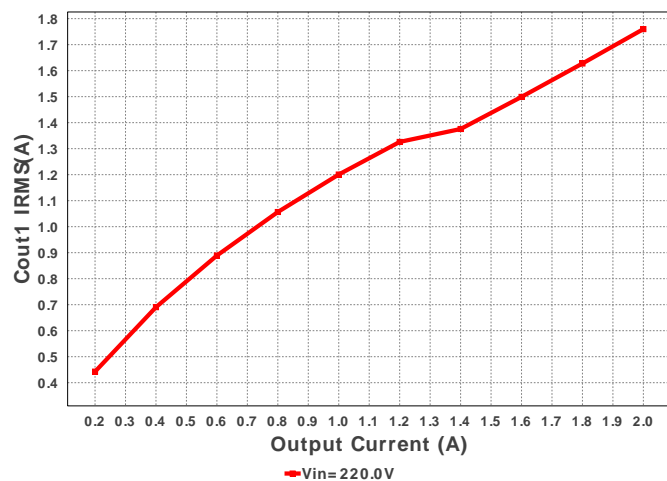


IC Pd

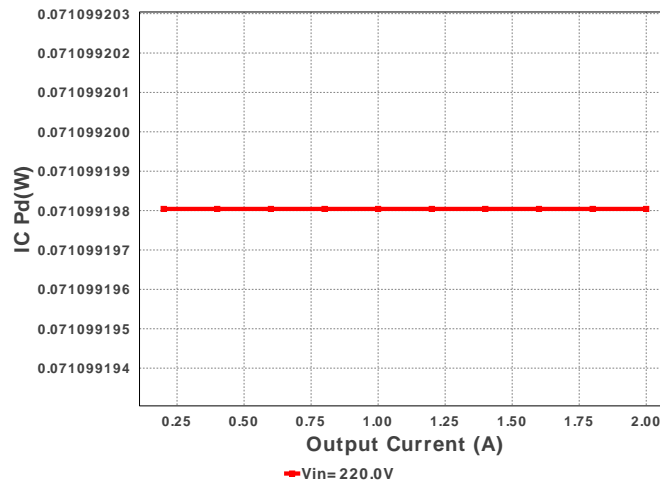


Ipri ripple pk- pk percentage

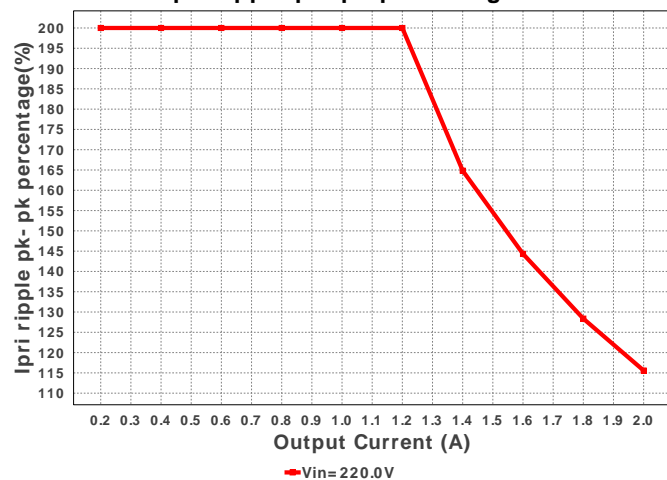


Power Factor






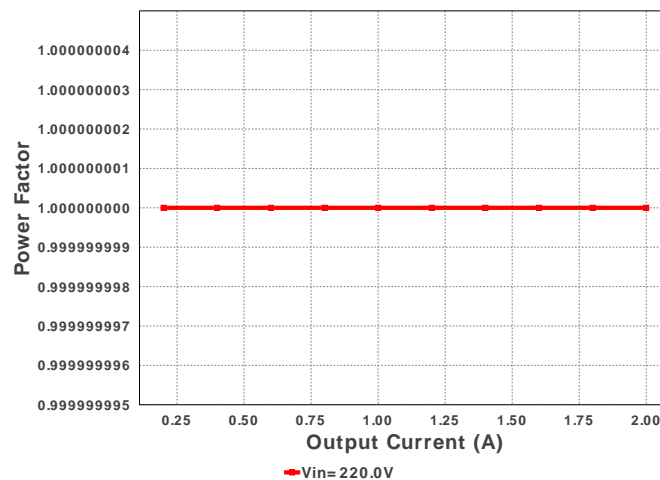







Dsec Vf

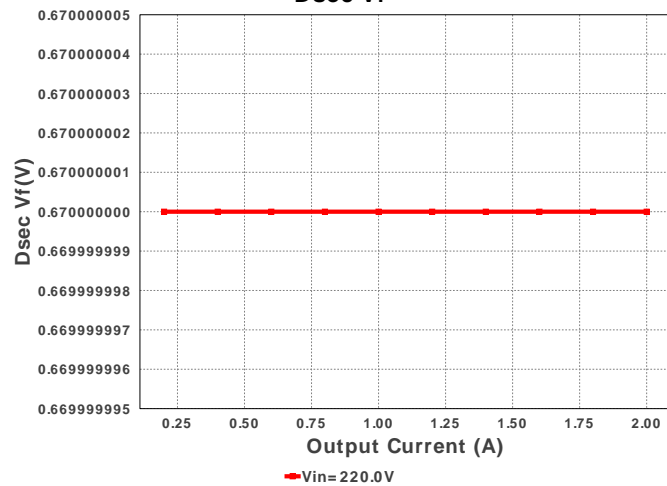

Vsnub

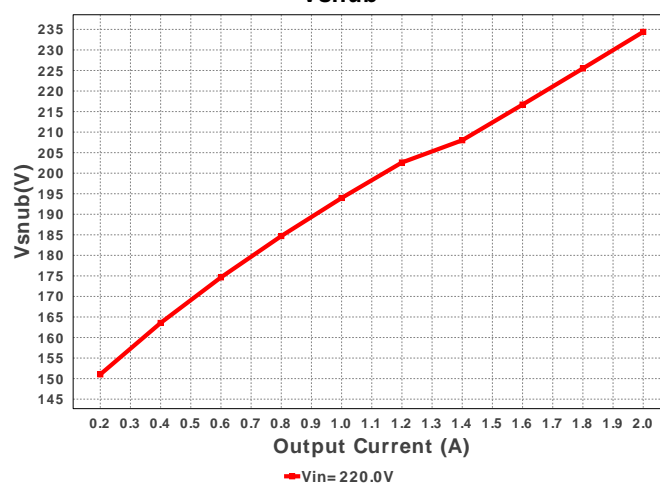

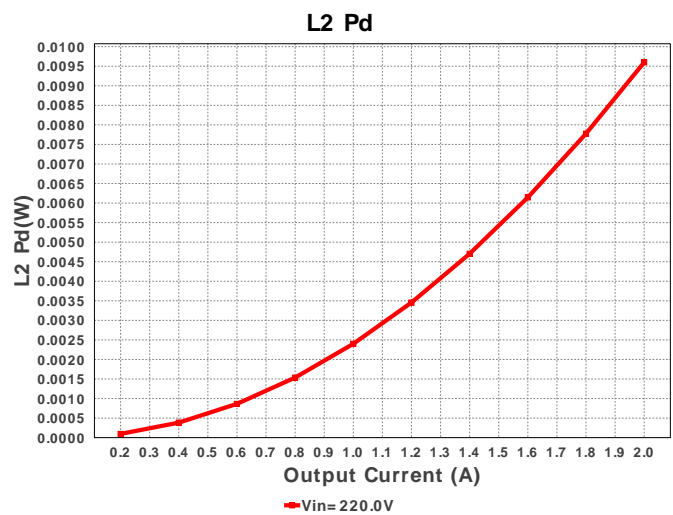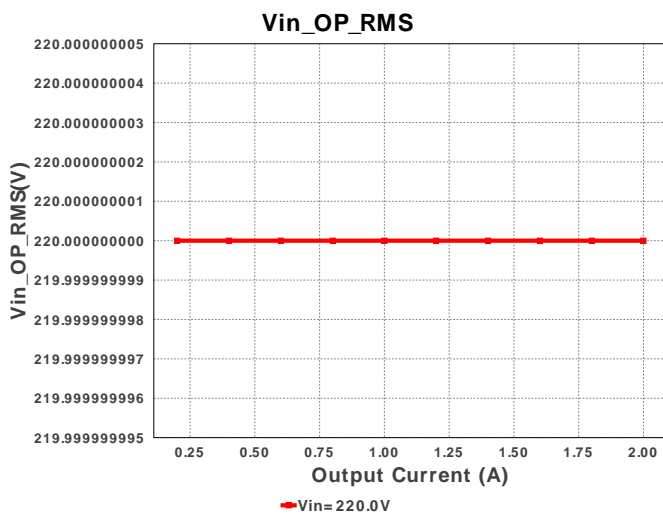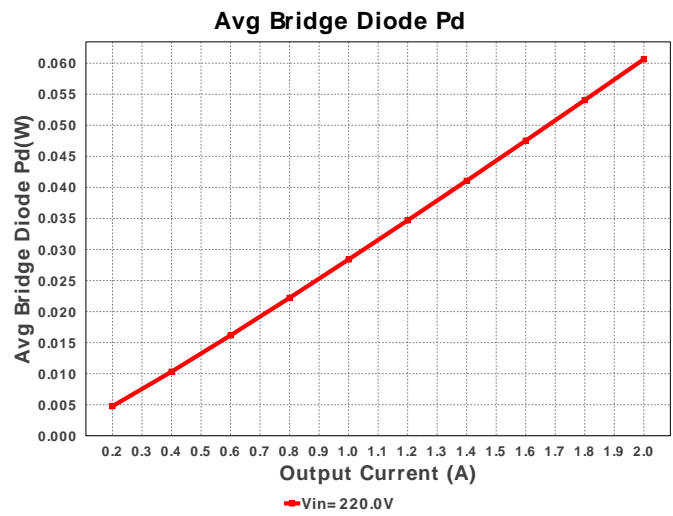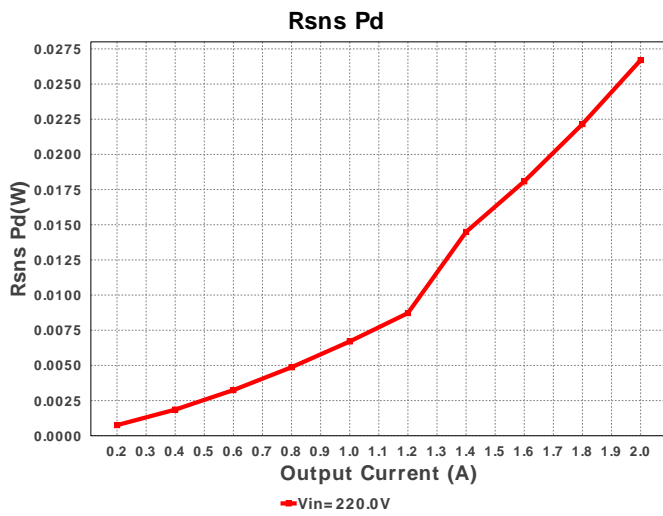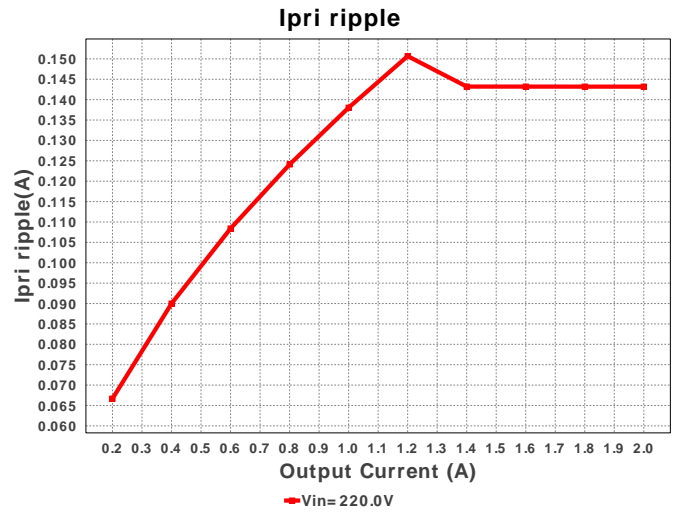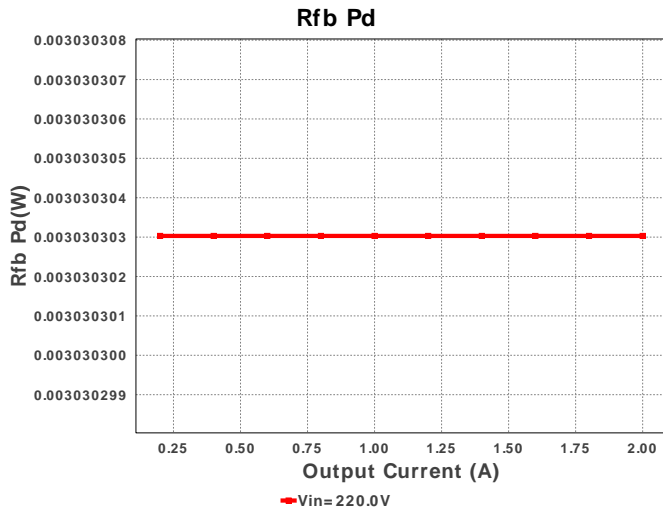

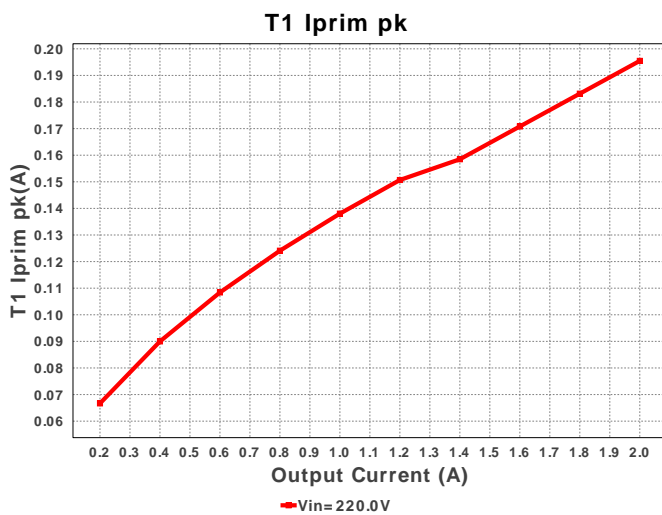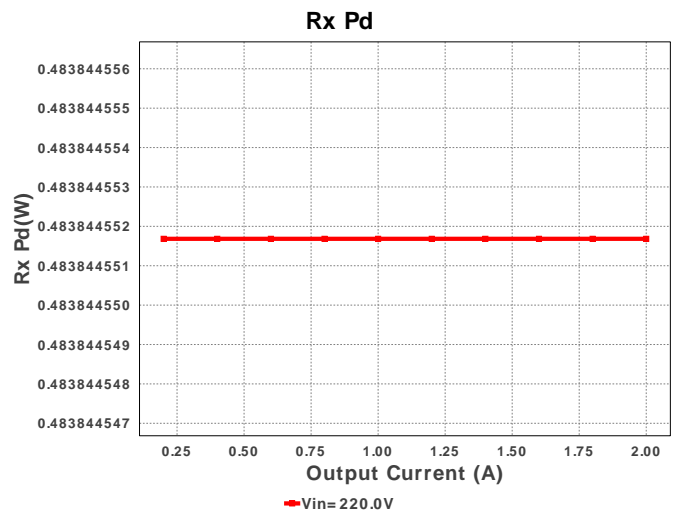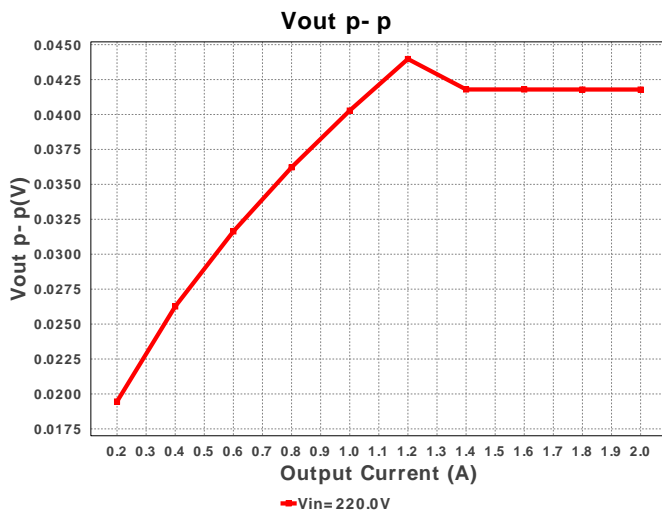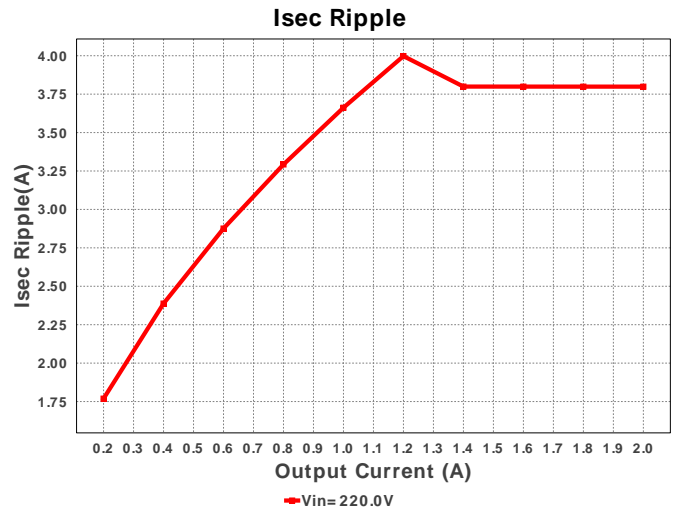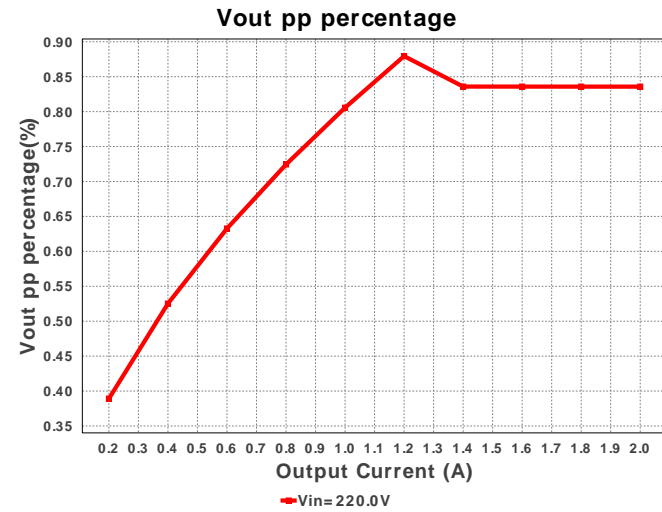

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	1.76 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	55.227 mA	Current	RMS Input Current
3.	Iout_DCM	1.276 A	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	50.641 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	143.188 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	115.586 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	3.799 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	83.498 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	195.474 mA	Current	Transformer Primary Peak Current

#	Name	Value	Category	Description
10.	T1 Is1 RMS	2.664 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	5.186 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	54	General	Total Design BOM count
14.	Daux trr	16.7 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	670.0 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	19.64 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	397.923 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	35.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	2.999 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	99.307 kHz	General	Switching frequency
21.	Pout	10.0 W	General	Total output power
22.	Power Factor	1.0	General	Assumed Power Factor for the Application
23.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
24.	Toff	6.128 us	General	Approximate Converter Off Time
25.	Ton Act	4.116 us	General	Approximate Converter On Time
26.	Total BOM	\$0.0	General	Total BOM Cost
27.	Tsw	10.07 us	General	Switching Time Period
28.	Vaux	14.513 V	General	Auxiliary Voltage
29.	Vsnub	234.401 V	General	Voltage Across the Snubber
30.	Vout Actual	4.99 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
31.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
32.	Duty Cycle	40.879 %	Op_point	Duty cycle
33.	Efficiency	82.306 %	Op_point	Steady state efficiency
34.	IC Tj	33.555 degC	Op_point	IC junction temperature
35.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
36.	IOUT_OP	2.0 A	Op_point	Iout operating point
37.	M1 TjOP	31.842 degC	Op_point	M1 MOSFET junction temperature
38.	Peak Rectified Vin	311.124 V	Op_point	Peak voltage seen at rectified input
39.	Vin_OP_RMS	220.0 V	Op_point	AC Input RMS Voltage
40.	Vout p-p	41.787 mV	Op_point	Peak-to-peak output ripple voltage
41.	Avg Bridge Diode Pd	60.646 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
42.	Cbulk Pd	65.004 mW	Power	Bulk capacitor power dissipation
43.	Cout1 Pd	34.065 mW	Power	Output capacitor1 power dissipation
44.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
45.	Cy Pd	0.0 W	Power	Y-caps Power Dissipation
46.	Dsec Pd	670.0 mW	Power	Secondary Diode Power Dissipation
47.	Dsec2 Pd	397.923 mW	Power	Secondary Diode Power Dissipation
48.	IC Pd	71.099 mW	Power	IC power dissipation
49.	L1 Pd	166.838 μW	Power	Power Dissipation in the Inductor
50.	L2 Pd	9.6 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
51.	M1 Pd	29.469 mW	Power	M1 MOSFET total power dissipation
52.	Paux	17.559 mW	Power	Power Dissipation in Raux and Daux
53.	Pd Rstartup	372.358 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
54.	Rdrv Pd	34.128 μW	Power	Power Dissipation in Gate Drive Resistor
55.	Rfb Pd	3.03 mW	Power	Rfb Power Dissipation
56.	Rsns Pd	26.702 mW	Power	Current Limit Sense Resistor Power Dissipation
57.	Rx Pd	483.845 mW	Power	Total Power Dissipation in Rx1 and Rx2
58.	Snubber Pd	137.628 mW	Power	Snubber Power Dissipation
59.	T1 Pd	134.197 mW	Power	Estimated Losses in Transformer
60.	Total Pd	2.15 W	Power	Total Power Dissipation
61.	Vout Tolerance	2.173 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
62.	Vout pp percentage	835.731 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	220.0	Maximum input voltage
3.	VinMin	220.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	line_fsw	50.0	Light Output in Lumen
6.	base_pn	UCC38C44	Base Product Number
7.	source	AC	Input Source Type
8.	Ta	30.0	Ambient temperature

Design Assistance

1. **UCC38C44** Product Folder : <http://www.ti.com/product/UCC38C44> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).