


WEBENCH® Design Report





Design : 4728729/13 TPS54233DR
TPS54233DR 10.0V-19.0V to 3.00V @ 1.0A






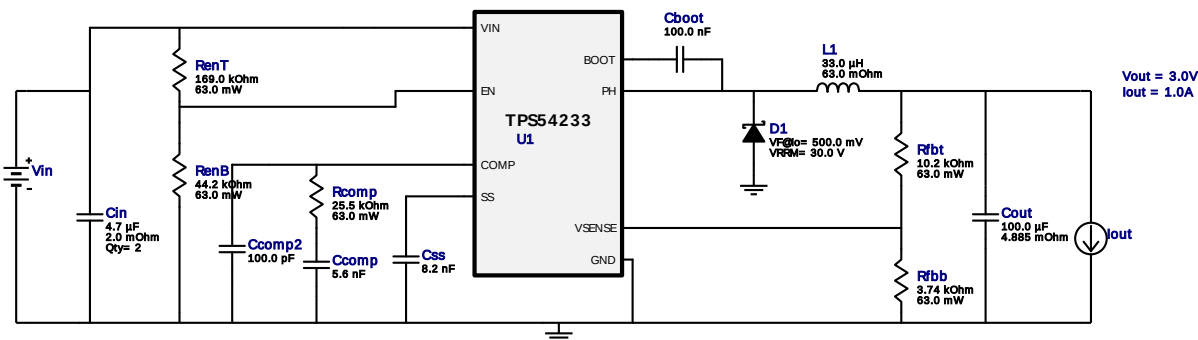








Electrical BOM






#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	MuRata	GRM155R61A104KA01D Series= X5R	Cap= 100.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
2.	Ccomp	Yageo America	CC0805KRX7R9BB562 Series= X7R	Cap= 5.6 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	Ccomp2	Yageo America	CC0805JRNPO9BN101 Series= C0G/NP0	Cap= 100.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	Cin	MuRata	GRM32ER71H475KA88L Series= X7R	Cap= 4.7 uF ESR= 2.0 mOhm VDC= 50.0 V IRMS= 5.35 A	2	\$0.19	 1210 15 mm ²
5.	Cout	MuRata	GRM31CR60J107ME39L Series= X5R	Cap= 100.0 uF ESR= 4.885 mOhm VDC= 6.3 V IRMS= 4.4118 A	1	\$0.14	 1206_190 11 mm ²
6.	CSS	MuRata	GRM033R61A822KA01D Series= X5R	Cap= 8.2 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	 0201 2 mm ²
7.	D1	Diodes Inc.	B230A-13-F	VF@Io= 500.0 mV VRRM= 30.0 V	1	\$0.09	 SMA 37 mm ²
8.	L1	Bourns	SRU1048-330Y	L= 33.0 uH DCR= 63.0 mOhm	1	\$0.33	 SRU1048 144 mm ²
9.	Rcomp	Vishay-Dale	CRCW040225K5FKED Series= CRCW..e3	Res= 25.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
10.	RenB	Vishay-Dale	CRCW040244K2FKED Series= CRCW..e3	Res= 44.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
11.	RenT	Vishay-Dale	CRCW0402169KFKED Series= CRCW..e3	Res= 169.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
12.	Rfbb	Vishay-Dale	CRCW04023K74FKED Series= CRCW..e3	Res= 3.74 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
13.	Rfbt	Vishay-Dale	CRCW040210K2FKED Series= CRCW..e3	Res= 10.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
14.	U1	Texas Instruments	TPS54233DR	Switcher	1	\$0.55	

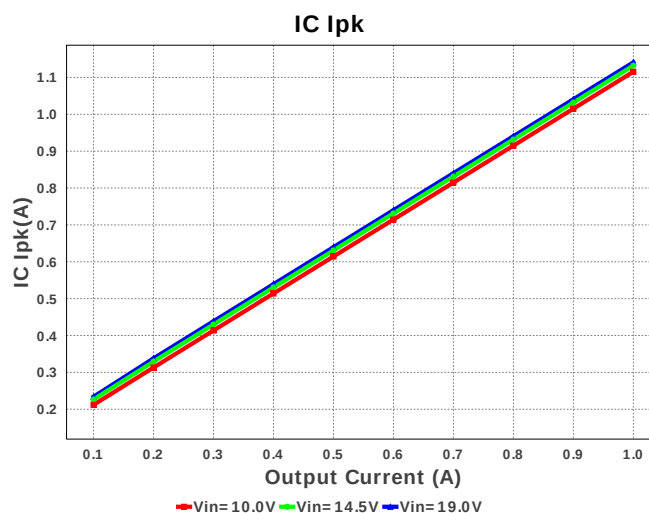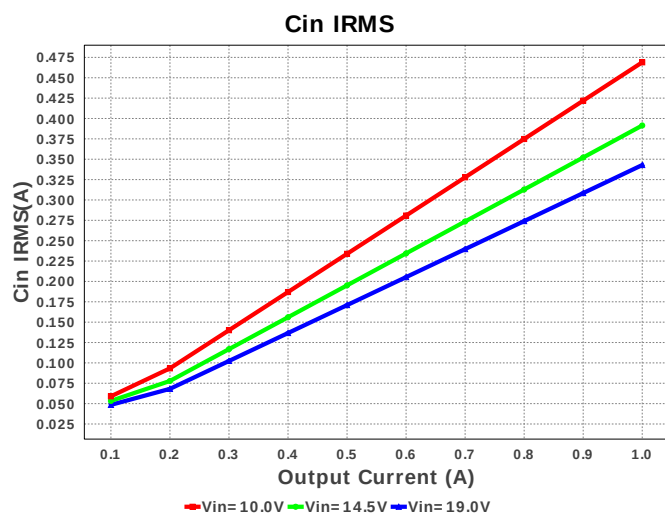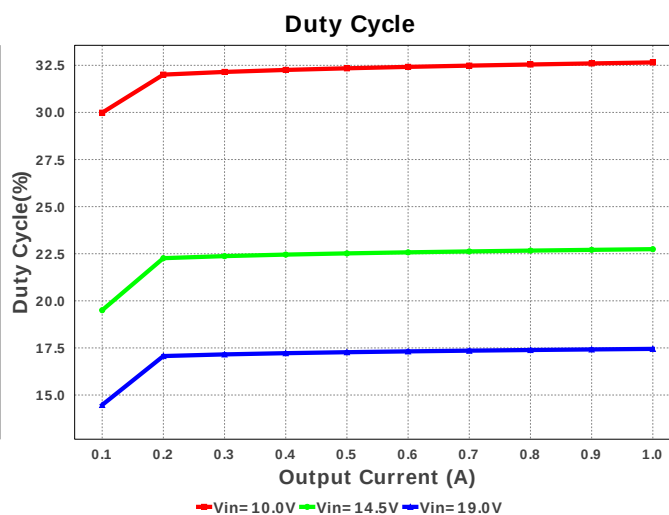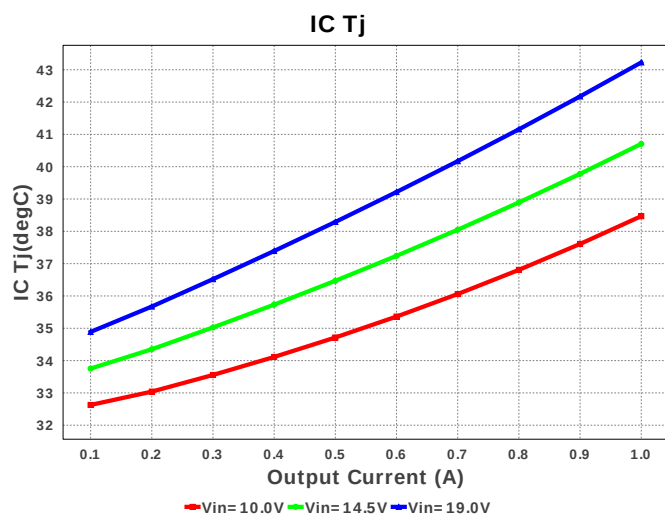D0008A 57 mm²

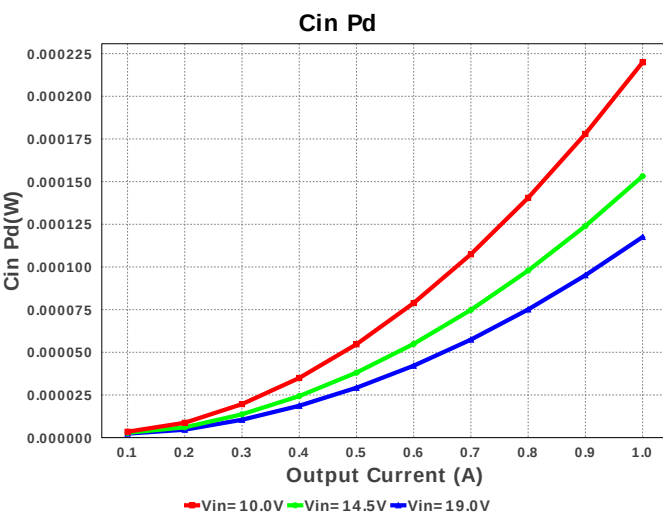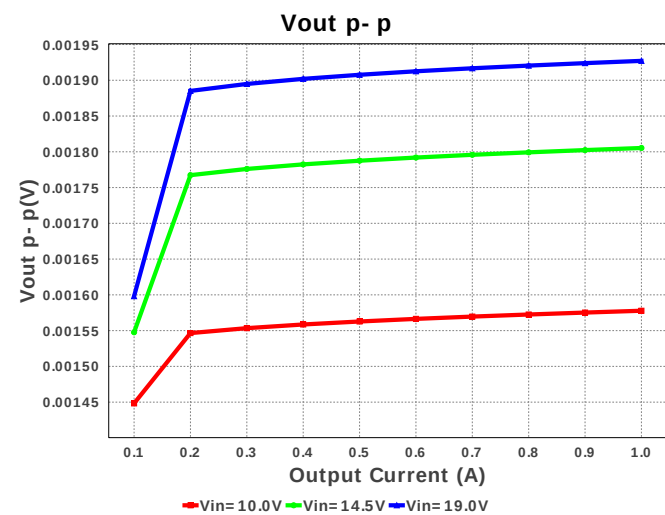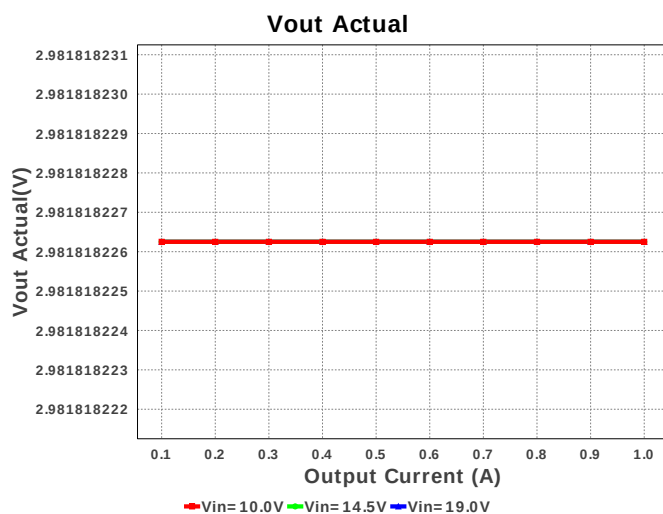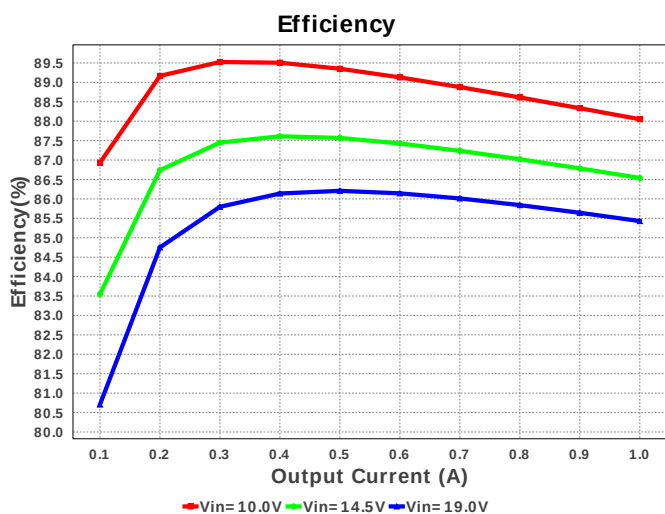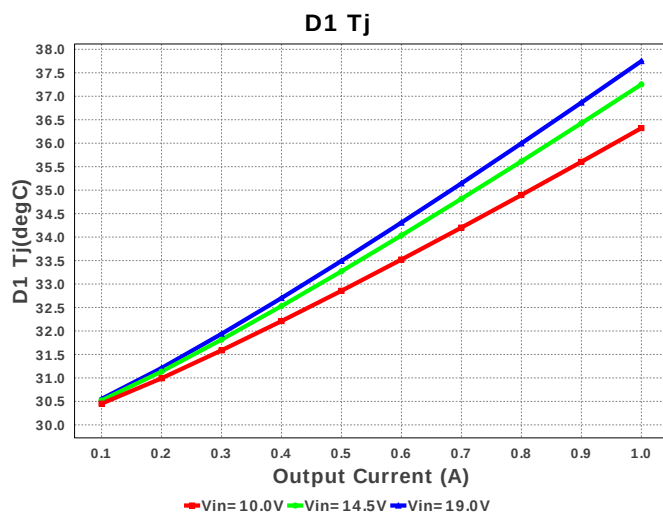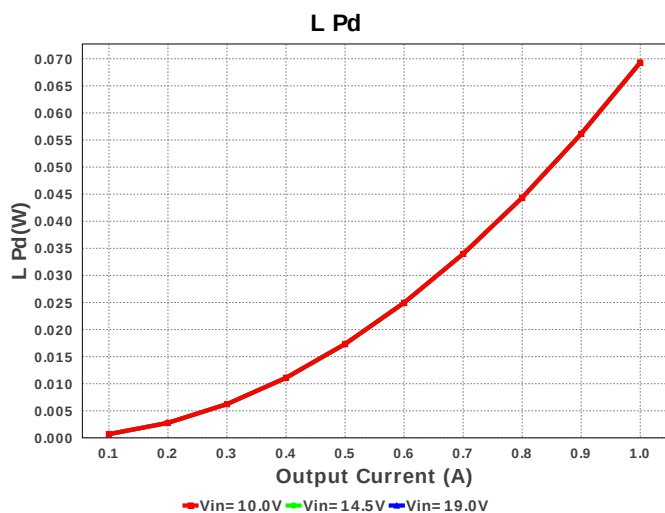

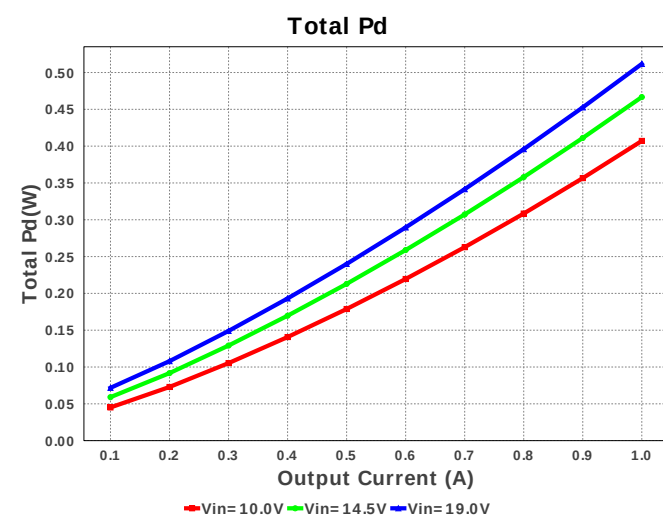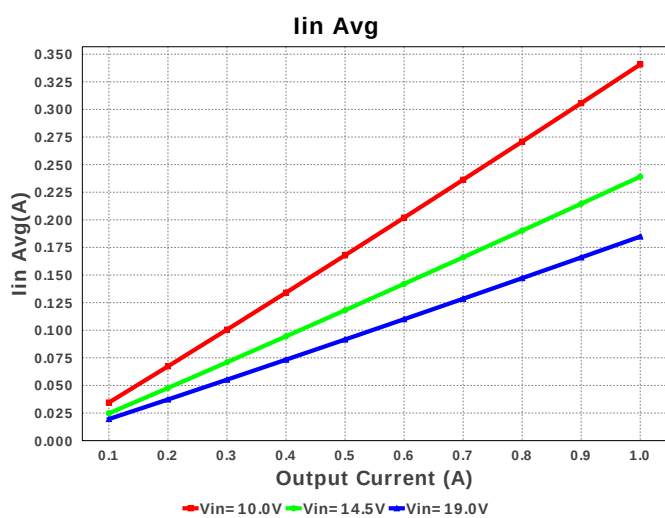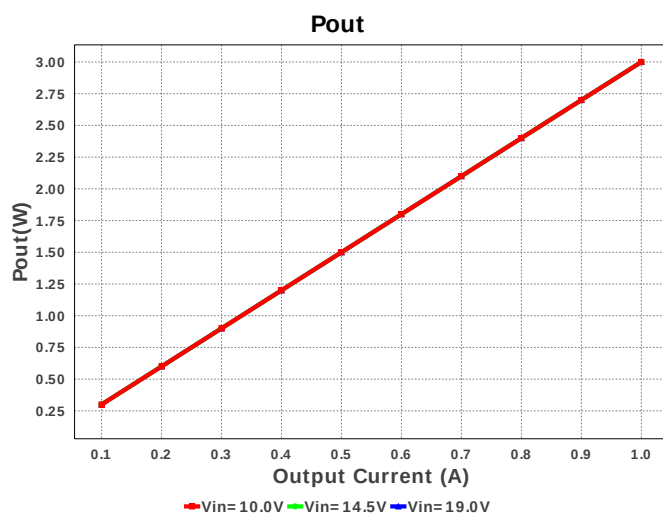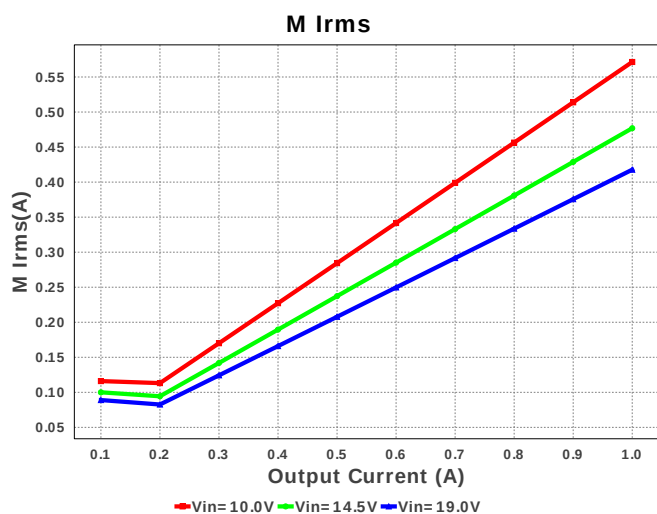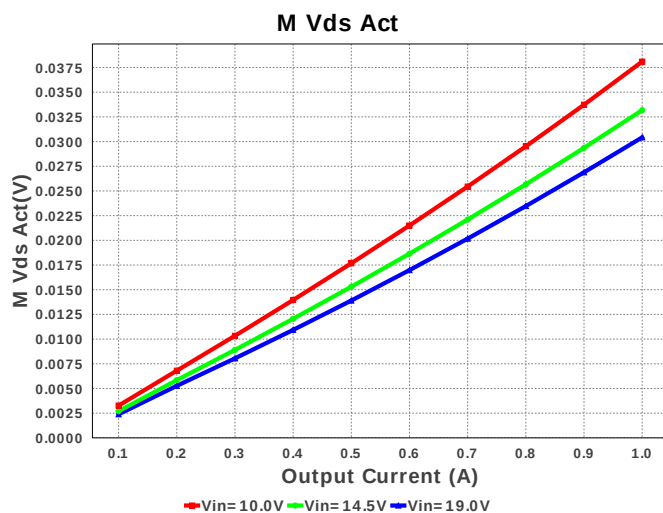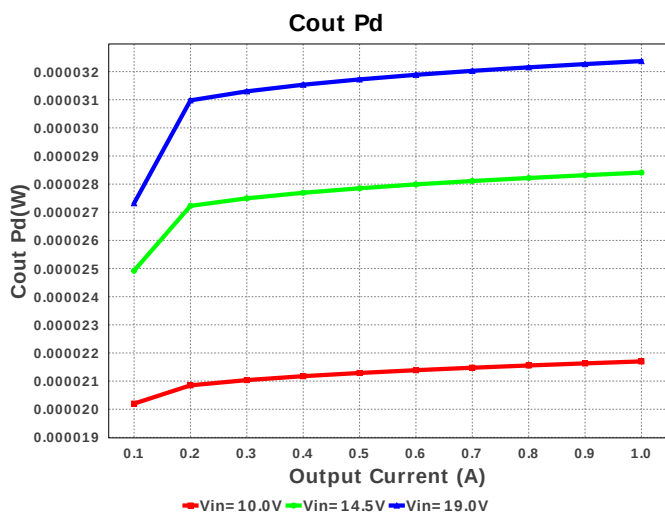

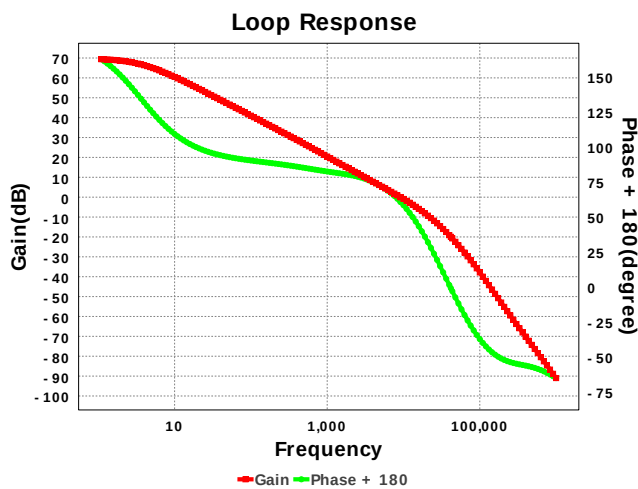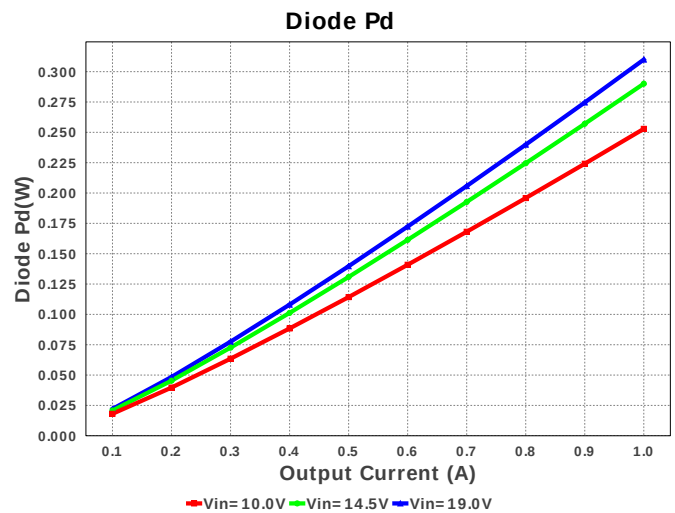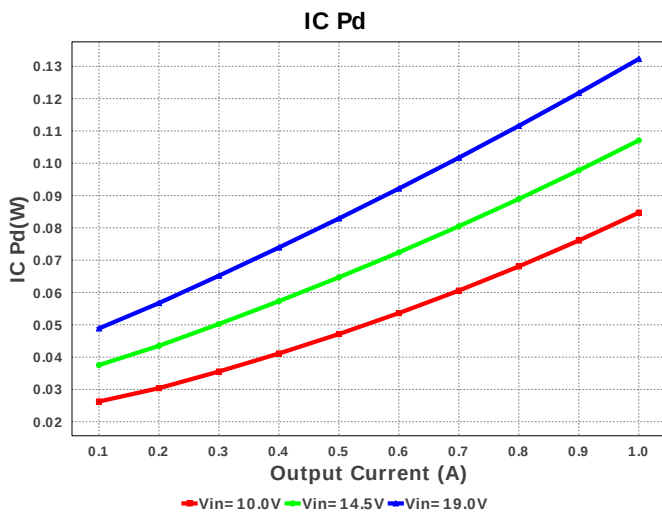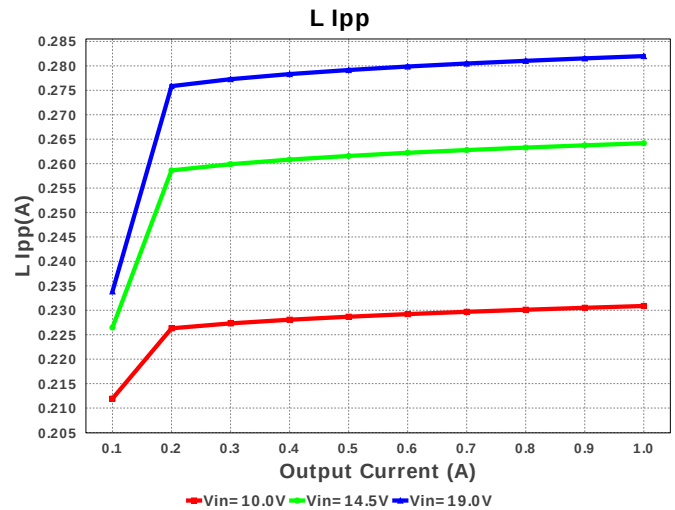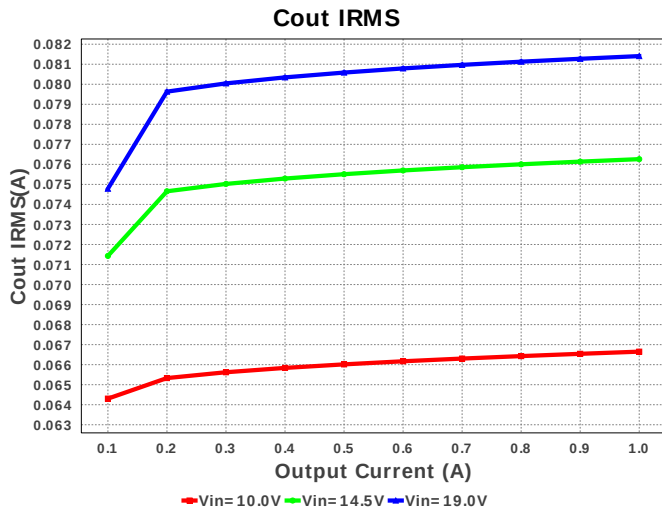

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	342.862 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	81.406 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	1.141 A	Current	Peak switch current in IC
4.	Iin Avg	184.82 mA	Current	Average input current
5.	L Ipp	282.0 mA	Current	Peak-to-peak inductor ripple current
6.	M Irms	417.717 mA	Current	MOSFET RMS current
7.	BOM Count	15	General	Total Design BOM count
8.	FootPrint	312.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	300.0 kHz	General	Switching frequency
10.	M Vds Act	30.422 mV	General	Voltage drop across the MosFET
11.	Pout	3.0 W	General	Total output power

#	Name	Value	Category	Description
12.	Total BOM	\$1.58	General	Total BOM Cost
13.	D1 Tj	37.749 degC	Op_Point	D1 junction temperature
14.	Low Freq Gain	69.393 dB	Op_Point	Gain at 10Hz
15.	Vout Actual	2.982 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
16.	Vout OP	3.0 V	Op_Point	Operational Output Voltage
17.	Cross Freq	9.139 kHz	Op_point	Bode plot crossover frequency
18.	Duty Cycle	17.449 %	Op_point	Duty cycle
19.	Efficiency	85.429 %	Op_point	Steady state efficiency
20.	Gain Marg	-19.953 dB	Op_point	Bode Plot Gain Margin
21.	IC Tj	43.227 degC	Op_point	IC junction temperature
22.	ICThetaJA	100.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
23.	IOUT_OP	1.0 A	Op_point	Iout operating point
24.	Phase Marg	61.489 deg	Op_point	Bode Plot Phase Margin
25.	VIN_OP	19.0 V	Op_point	Vin operating point
26.	Vout p-p	1.927 mV	Op_point	Peak-to-peak output ripple voltage
27.	Cin Pd	117.554 µW	Power	Input capacitor power dissipation
28.	Cout Pd	32.373 µW	Power	Output capacitor power dissipation
29.	Diode Pd	309.955 mW	Power	Diode power dissipation
30.	IC Pd	132.265 mW	Power	IC power dissipation
31.	L Pd	69.3 mW	Power	Inductor power dissipation
32.	Total Pd	511.672 mW	Power	Total Power Dissipation
33.	Vout Tolerance	5.03 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	VinMax	19.0	Maximum input voltage
3.	VinMin	10.0	Minimum input voltage
4.	Vout	3.0	Output Voltage
5.	base_pn	TPS54233	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. [TPS54233 Product Folder](http://www.ti.com/product/TPS54233) : <http://www.ti.com/product/TPS54233> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).