


WEBENCH® Design Report





Design : 1194016/2114 TPS55330RTER
TPS55330RTER 4.5V-6.5V to 12.00V @ 1.0A






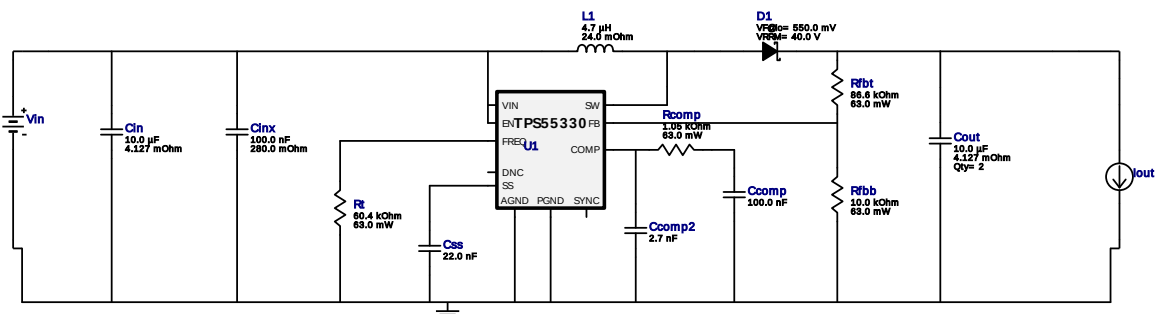








Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Ccomp	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	Ccomp2	Yageo America	CC0805KRX7R9BB272 Series= X7R	Cap= 2.7 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	Cin	MuRata	GRM21BR61C106KE15L Series= X5R	Cap= 10.0 uF ESR= 4.127 mOhm VDC= 16.0 V IRMS= 2.46634 A	1	\$0.03	0805 7 mm ²
4.	Cinx	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
5.	Cout	MuRata	GRM21BR61C106KE15L Series= X5R	Cap= 10.0 uF ESR= 4.127 mOhm VDC= 16.0 V IRMS= 2.46634 A	2	\$0.03	0805 7 mm ²
6.	Css	MuRata	GRM033C80J2223KE01D Series= X6S	Cap= 22.0 nF VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	0201 2 mm ²
7.	D1	Diodes Inc.	B540C-13-F	VF@Io= 550.0 mV VRRM= 40.0 V	1	\$0.17	SMC 83 mm ²
8.	L1	Bourns	SRN8040-4R7Y	L= 4.7 uH DCR= 24.0 mOhm	1	\$0.22	SRN8040 100 mm ²
9.	Rcomp	Vishay-Dale	CRCW04021K05FKED Series= CRCW..e3	Res= 1.05 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
10.	Rfbb	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
11.	Rfbb	Vishay-Dale	CRCW040286K6FKED Series= CRCW..e3	Res= 86.6 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²



#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
12.	Rt	Vishay-Dale	CRCW040260K4FKED Series= CRCW..e3	Res= 60.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
13.	U1	Texas Instruments	TPS55330RTER	Switcher	1	\$1.75	S-PWQFN-N16 17 mm ²

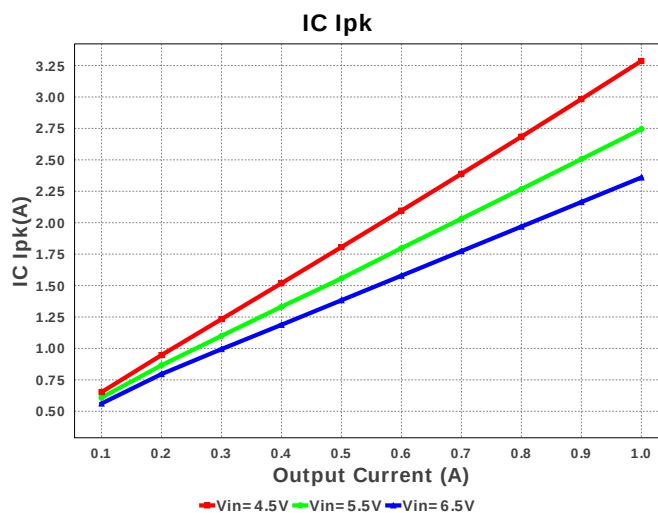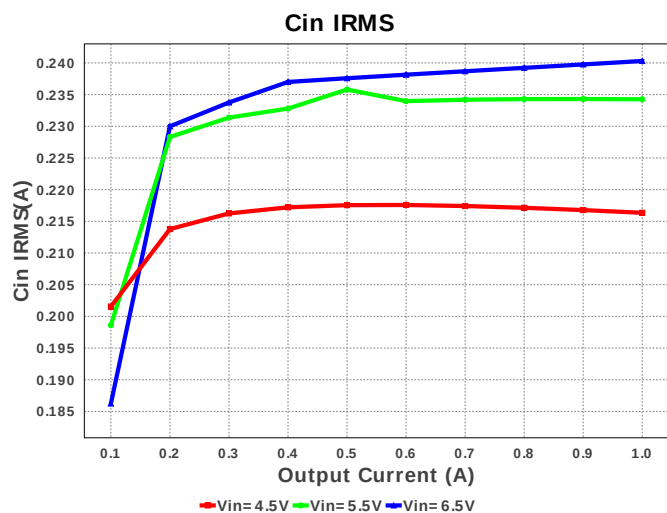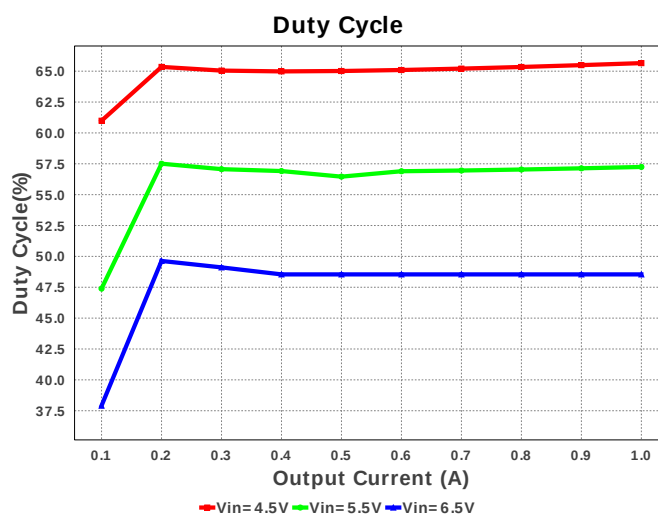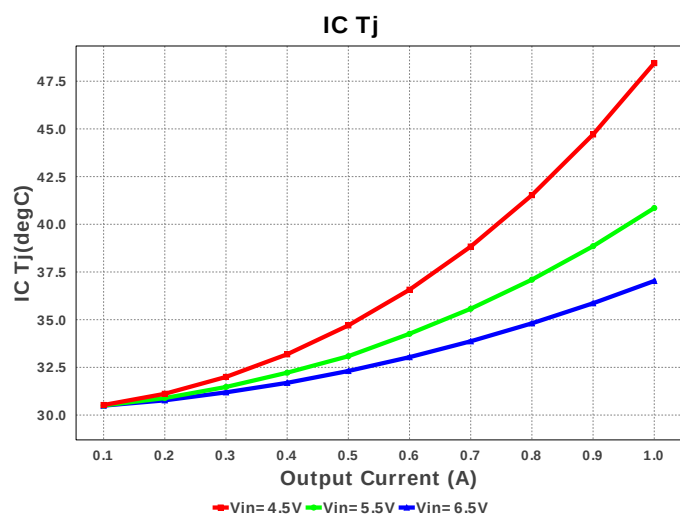

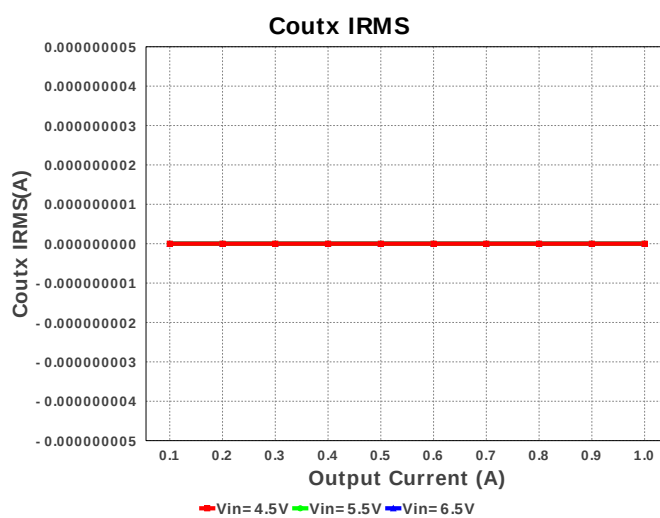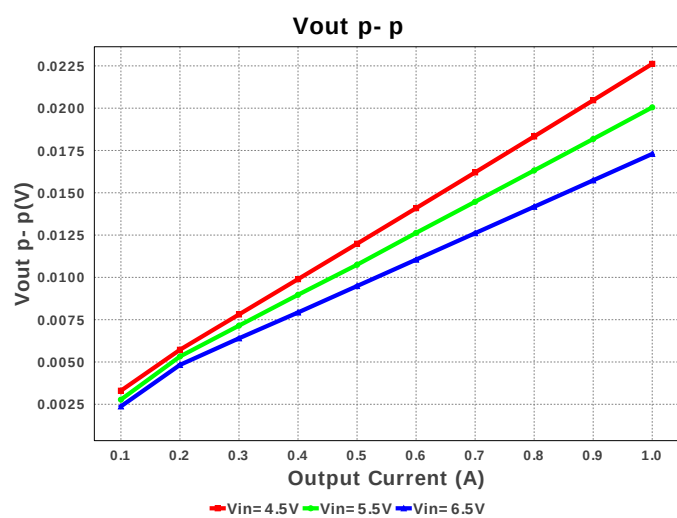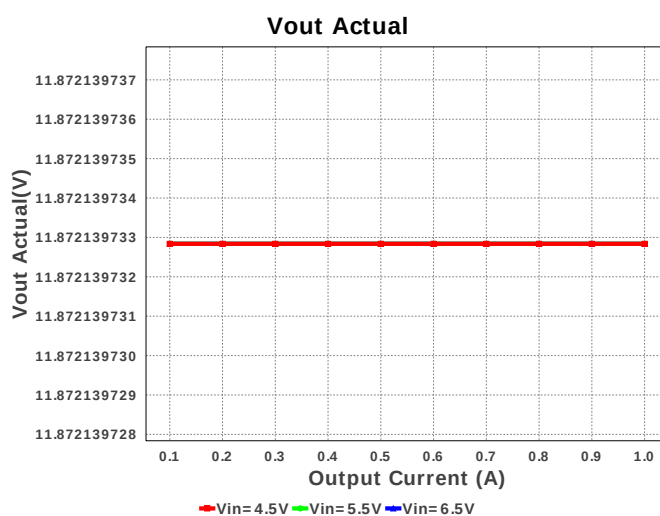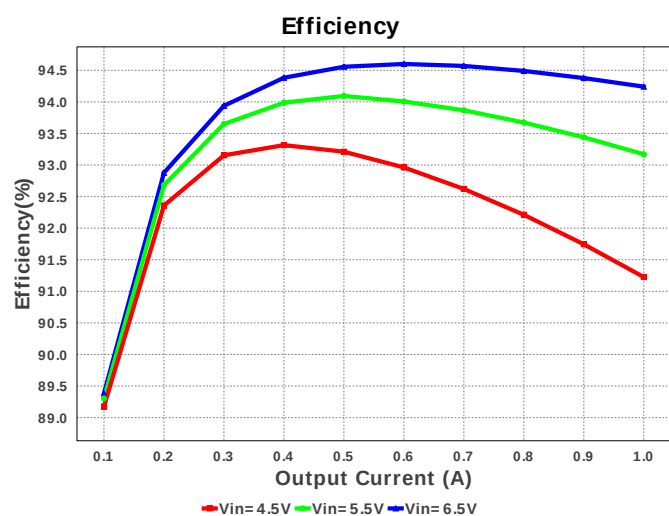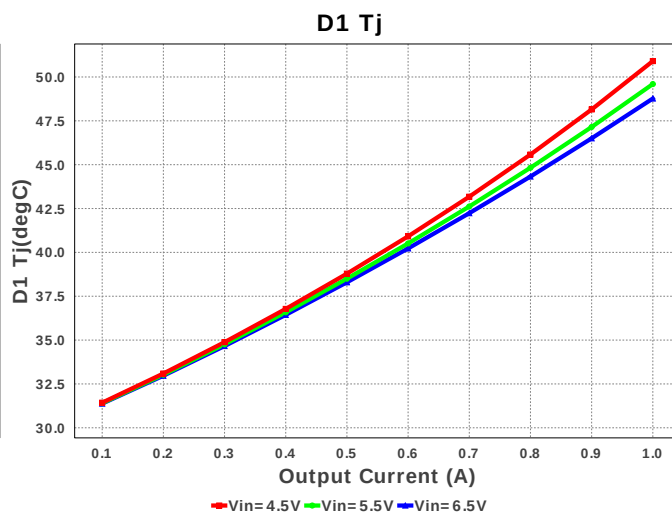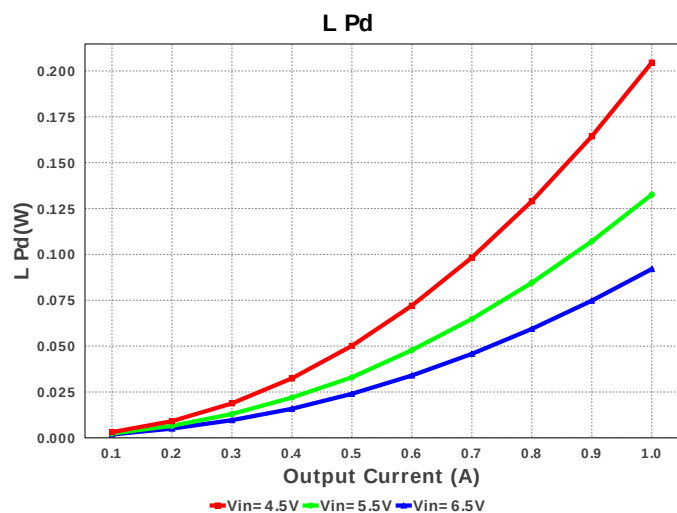

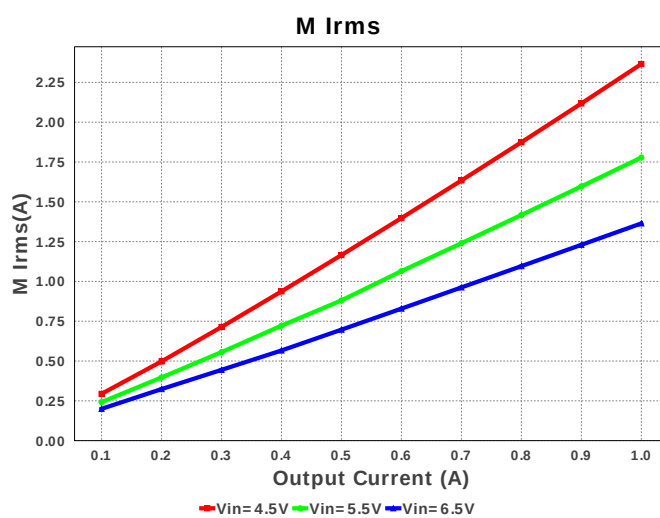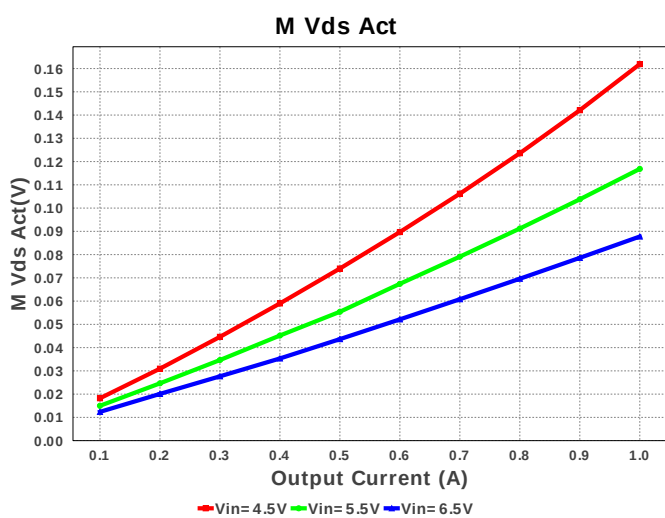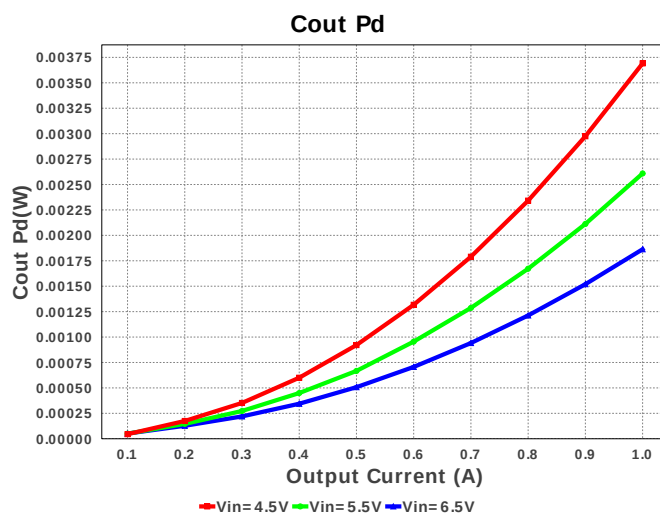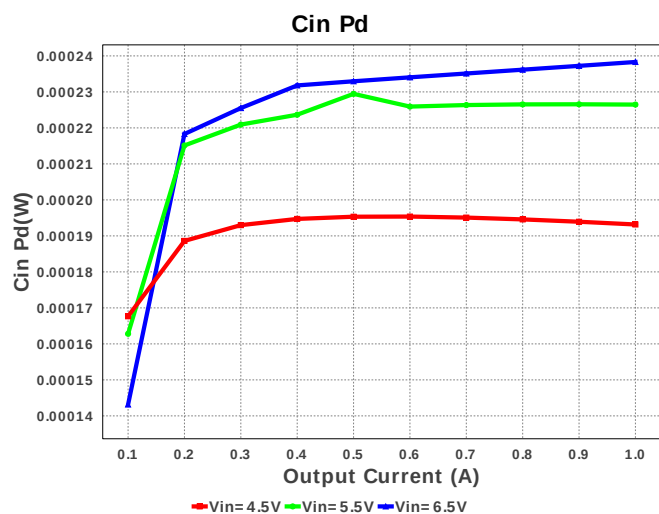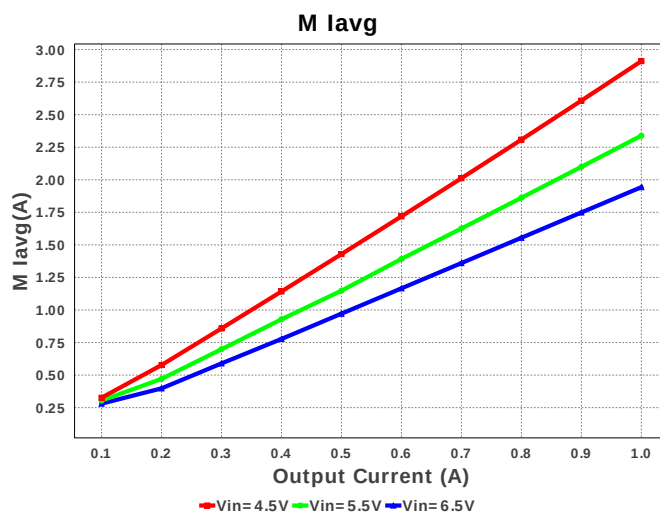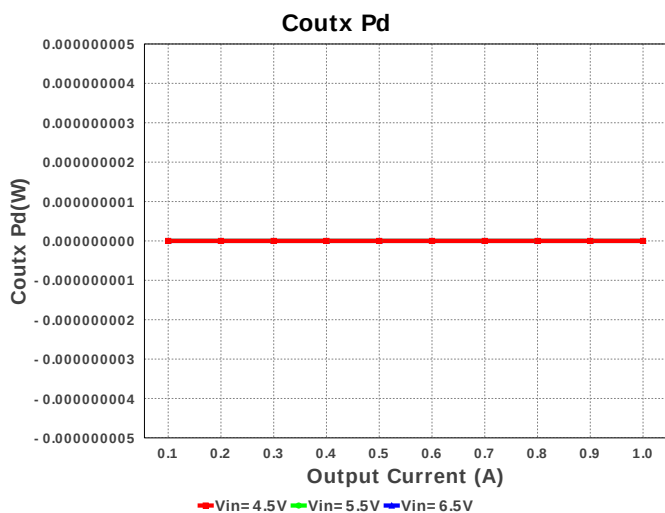

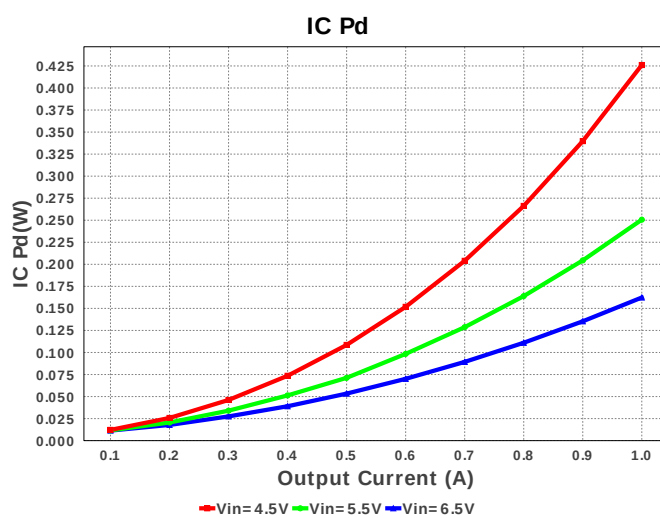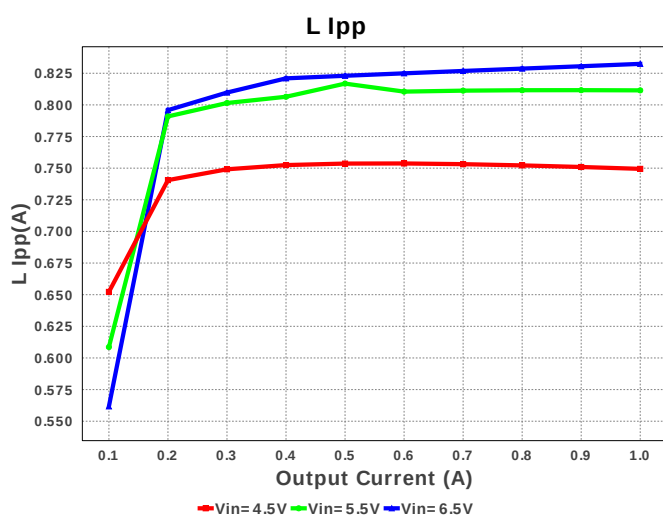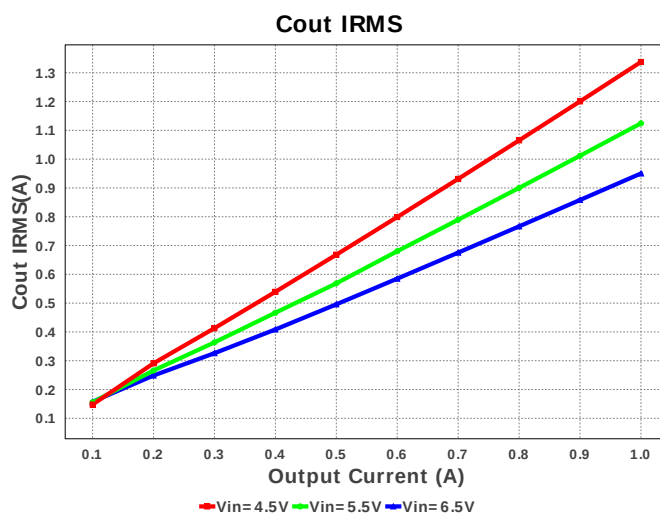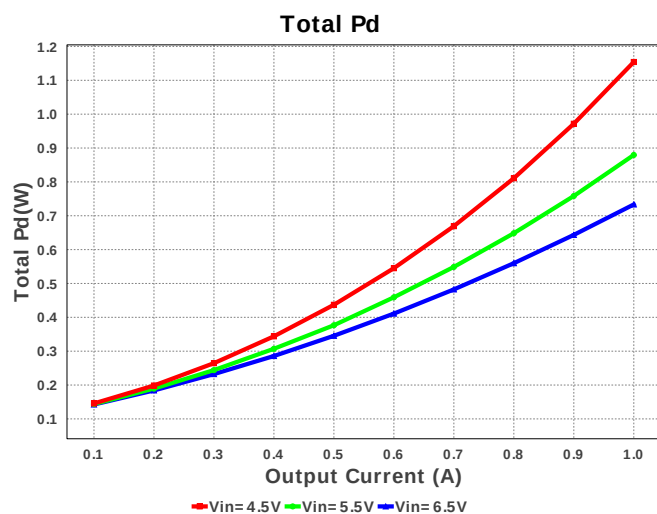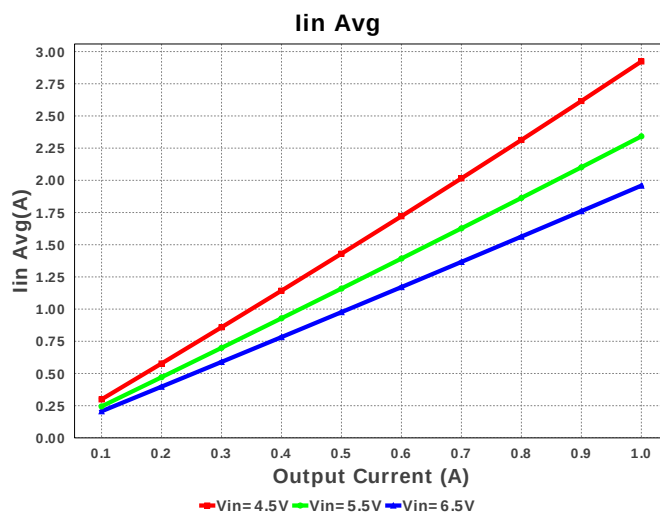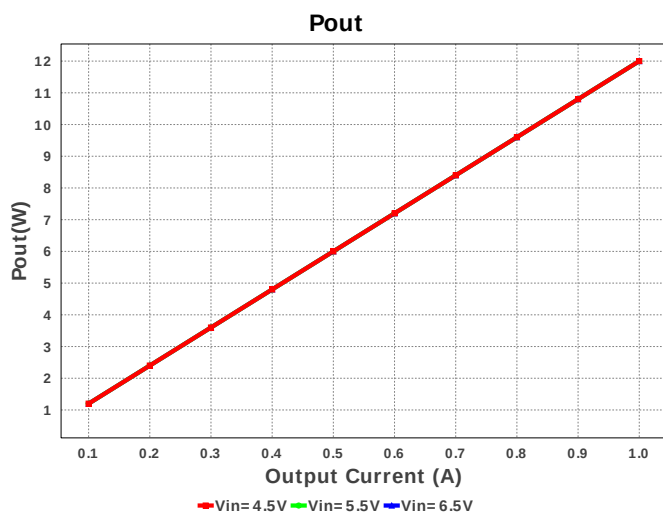

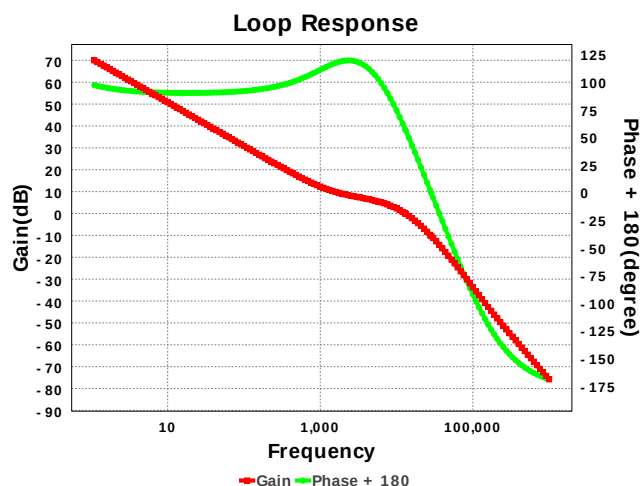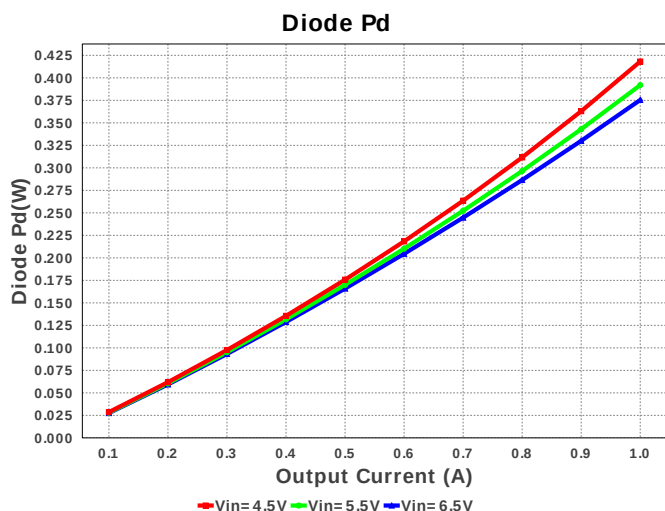

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	216.348 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	1.322 A	Current	Output capacitor RMS ripple current
3.	Coutx IRMS	0.0 A	Current	Output capacitor_x RMS ripple current
4.	IC Ipk	3.286 A	Current	Peak switch current in IC
5.	Iin Avg	2.923 A	Current	Average input current
6.	L Ipp	749.45 mA	Current	Peak-to-peak inductor ripple current
7.	M Iavg	2.911 A	Current	MOSFET Average current
8.	M1 Irms	2.366 A	Current	Q Iavg
9.	BOM Count	15	General	Total Design BOM count
10.	FootPrint	260.0 mm ²	General	Total Foot Print Area of BOM components
11.	Frequency	778.91 kHz	General	Switching frequency
12.	IC Tolerance	9.0 mV	General	IC Feedback Tolerance
13.	M Vds Act	161.9 mV	General	Voltage drop across the MosFET
14.	Pout	12.0 W	General	Total output power
15.	Total BOM	\$2.32	General	Total BOM Cost
16.	D1 Tj	50.905 degC	Op_Point	D1 junction temperature
17.	Low Freq Gain	69.599 dB	Op_Point	Gain at 10Hz
18.	Vout Actual	11.872 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
19.	Vout OP	12.0 V	Op_Point	Operational Output Voltage
20.	Cross Freq	9.089 kHz	Op_point	Bode plot crossover frequency
21.	Duty Cycle	65.653 %	Op_point	Duty cycle
22.	Efficiency	91.227 %	Op_point	Steady state efficiency
23.	Gain Marg	-9.648 dB	Op_point	Bode Plot Gain Margin
24.	IC Tj	48.448 degC	Op_point	IC junction temperature
25.	ICThetaJA	43.3 degC/W	Op_point	IC junction-to-ambient thermal resistance
26.	IOUT_OP	1.0 A	Op_point	Iout operating point
27.	Phase Marg	58.941 deg	Op_point	Bode Plot Phase Margin
28.	VIN_OP	4.5 V	Op_point	Vin operating point
29.	Vout p-p	29.758 mV	Op_point	Peak-to-peak output ripple voltage
30.	Cin Pd	193.171 μ W	Power	Input capacitor power dissipation
31.	Cout Pd	3.604 mW	Power	Output capacitor power dissipation
32.	Coutx Pd	0.0 W	Power	Output capacitor_x power loss
33.	Diode Pd	418.106 mW	Power	Diode power dissipation
34.	IC Pd	426.051 mW	Power	IC power dissipation
35.	L Pd	204.559 mW	Power	Inductor power dissipation
36.	Total Pd	1.154 W	Power	Total Power Dissipation
37.	Vout Tolerance	2.557 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	VinMax	6.5	Maximum input voltage
3.	VinMin	4.5	Minimum input voltage
4.	Vout	12.0	Output Voltage
5.	base_pn	TPS55330	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **TPS55330** Product Folder : <http://www.ti.com/product/TPS55330> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).