


WEBENCH® Design Report

Design : 4742013/180 LMR14030SQDPRRQ1
LMR14030SQDPRRQ1 4.5V-5.5V to 3.00V @ 0.5002250000000001A




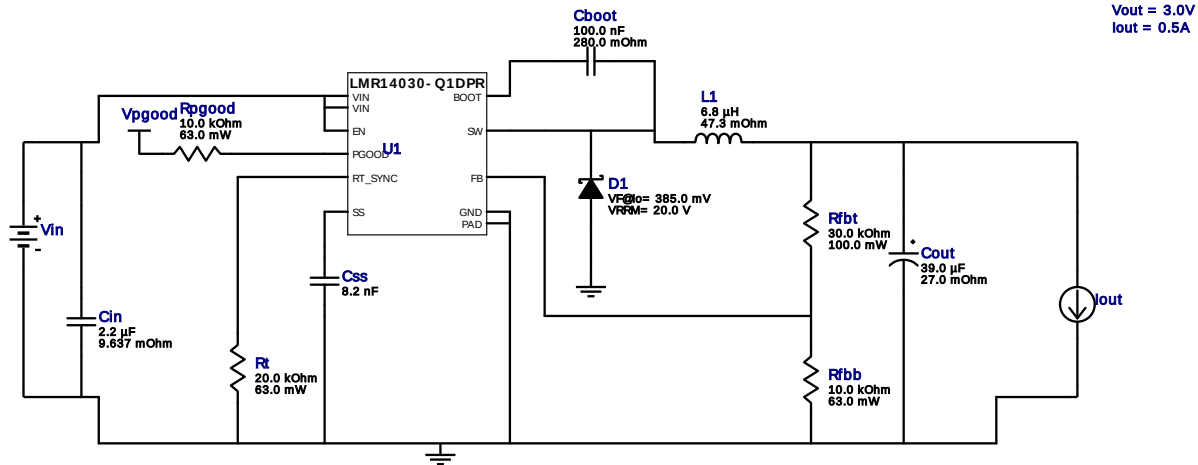








1. This regulator device is qualified for Automotive applications. All passives and other components selected in this design may not be qualified for Automotive applications. The user is required to verify that all components in the design meet the qualification and safety requirements for their specific application. View WEBENCH(R) Disclaimer.







Electrical BOM






#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	Cin	MuRata	GRM188R61A225KE34D Series= X5R	Cap= 2.2 uF ESR= 9.637 mOhm VDC= 10.0 V IRMS= 1.24283 A	1	\$0.02	0603 5 mm ²
3.	Cout	Panasonic	16SVPC39MV Series= SVPC	Cap= 39.0 uF ESR= 27.0 mOhm VDC= 16.0 V IRMS= 2.35 A	1	\$0.28	SM_RADIAL_5MM 58 mm ²
4.	Css	MuRata	GRM155R71C822KA01D Series= X7R	Cap= 8.2 nF VDC= 16.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
5.	D1	ON Semiconductor	MBR0520LT1G	VF@Io= 385.0 mV VRRM= 20.0 V	1	\$0.06	SOD-123 13 mm ²
6.	L1	Bourns	SRN6045-6R8Y	L= 6.8 µH DCR= 47.3 mOhm	1	\$0.16	SRN6045 64 mm ²
7.	Rfbb	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
8.	Rfbt	Yageo America	RC0603FR-0730KL Series= ?	Res= 30.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	0603 5 mm ²
9.	Rpgood	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
10.	Rt	Vishay-Dale	CRCW040220K0FKED Series= CRCW..e3	Res= 20.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
11.	U1	Texas Instruments	LMR14030SQDPRRQ1	Switcher	1	\$1.98	 DPR0010A 25 mm ²

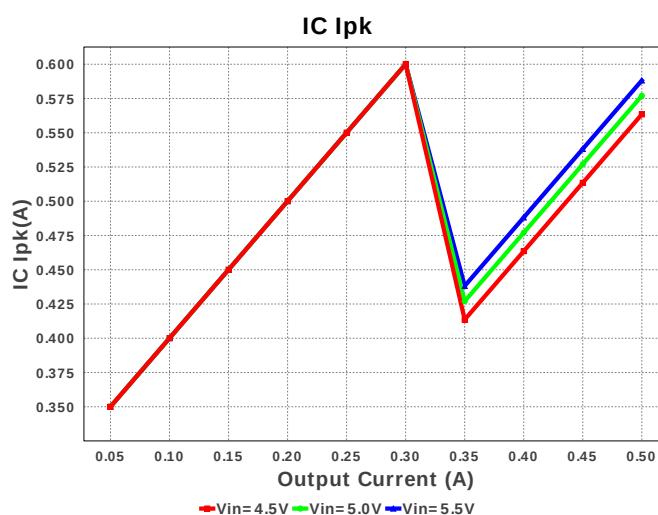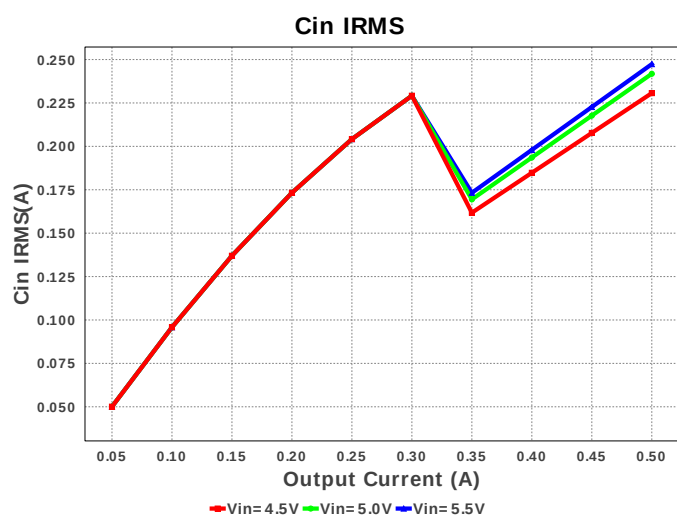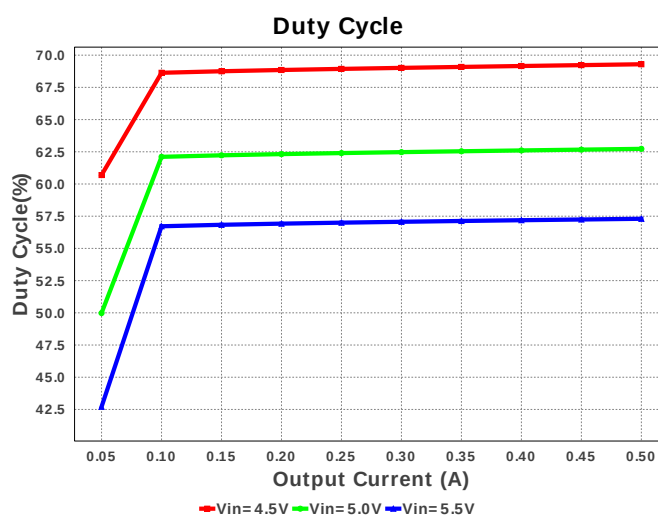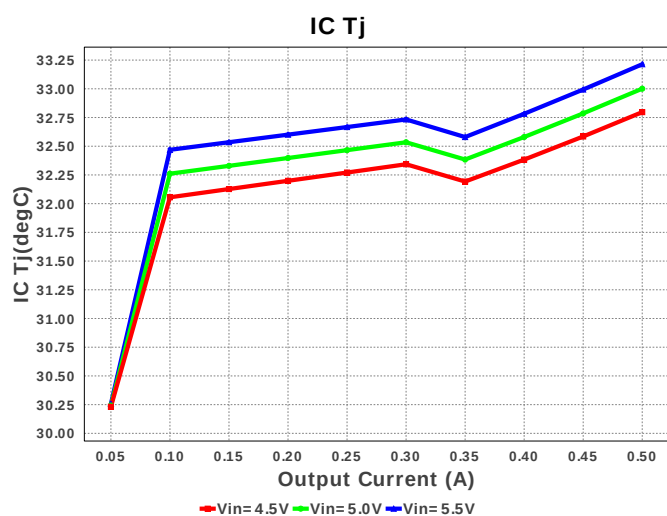

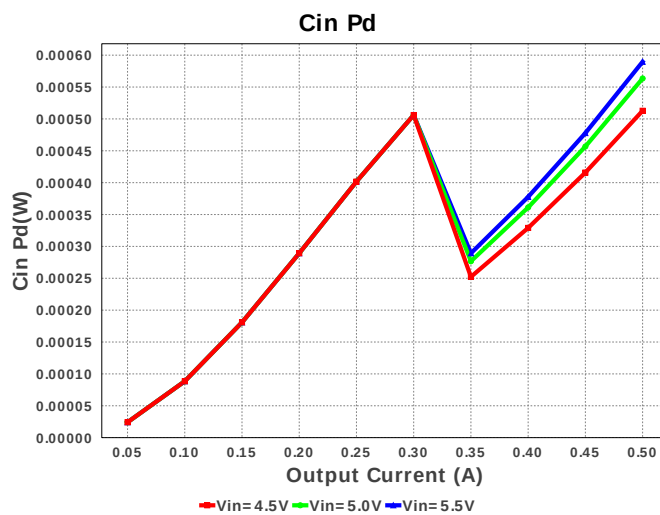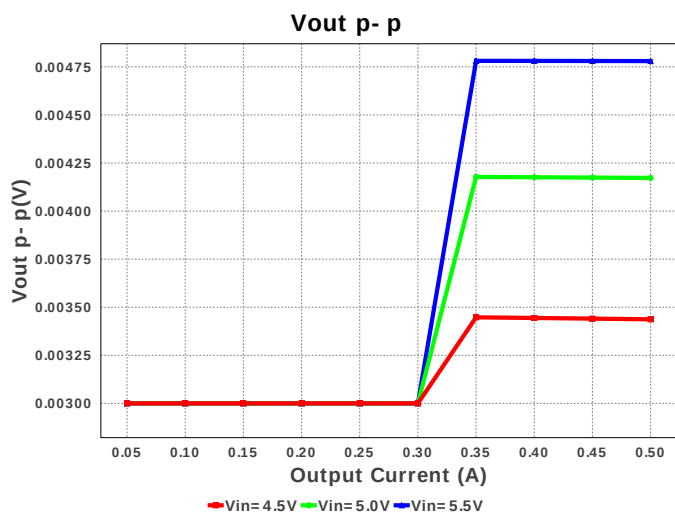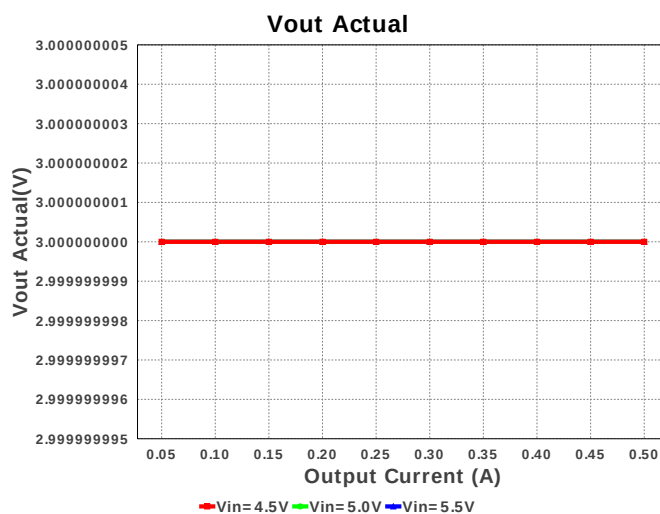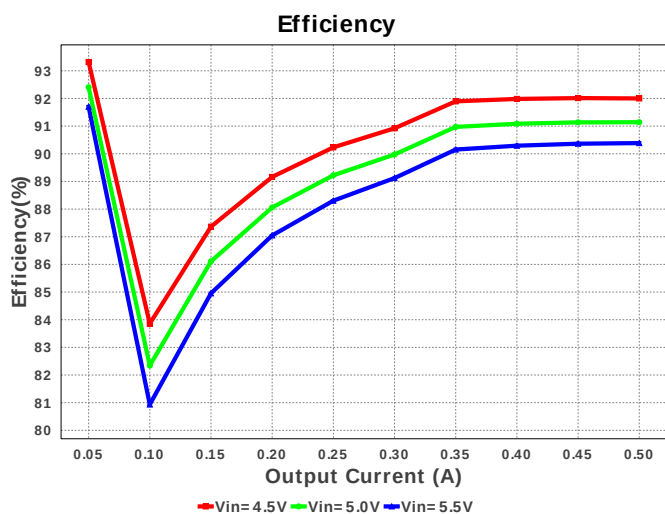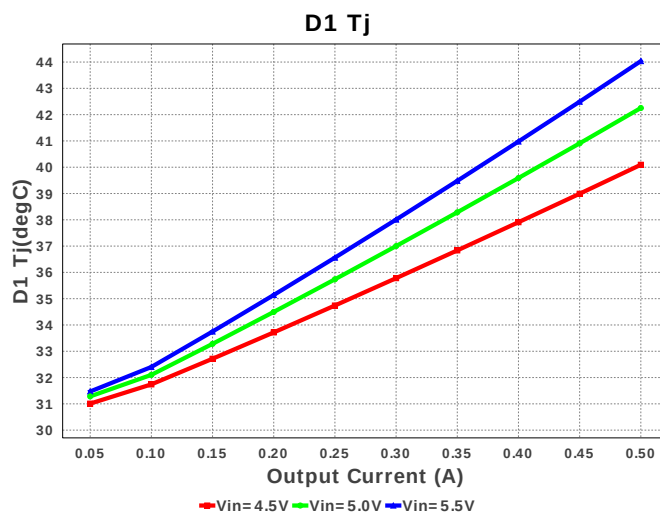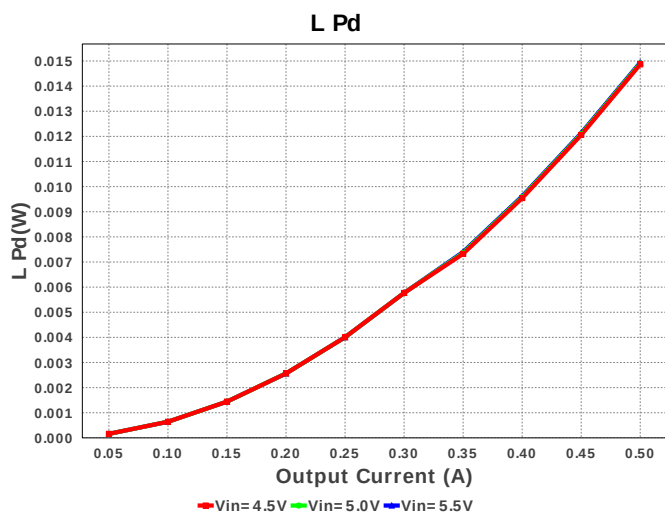

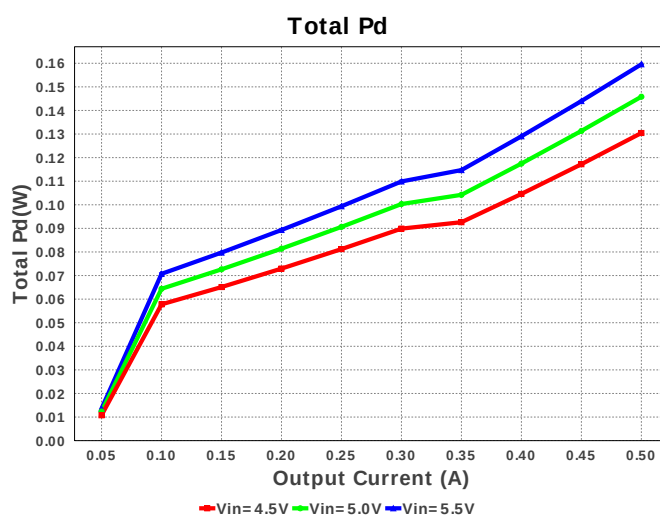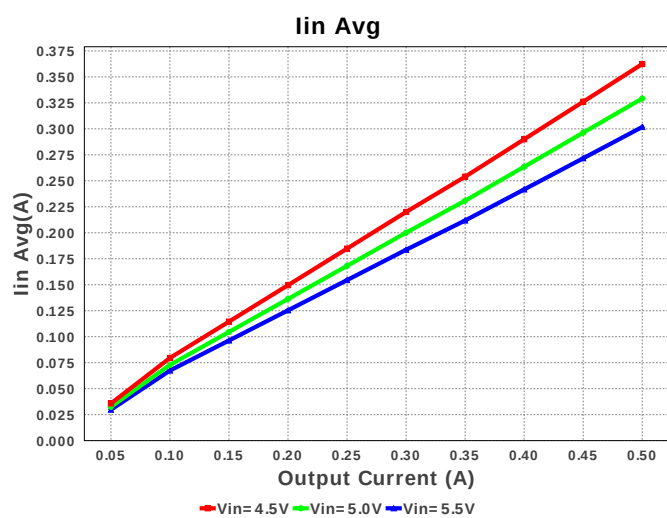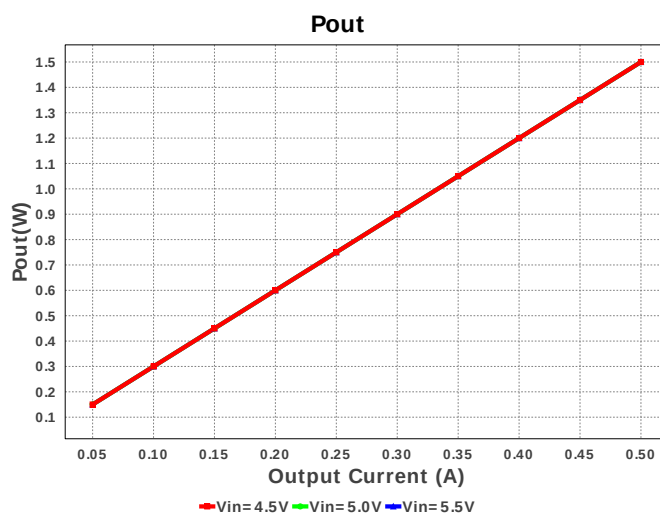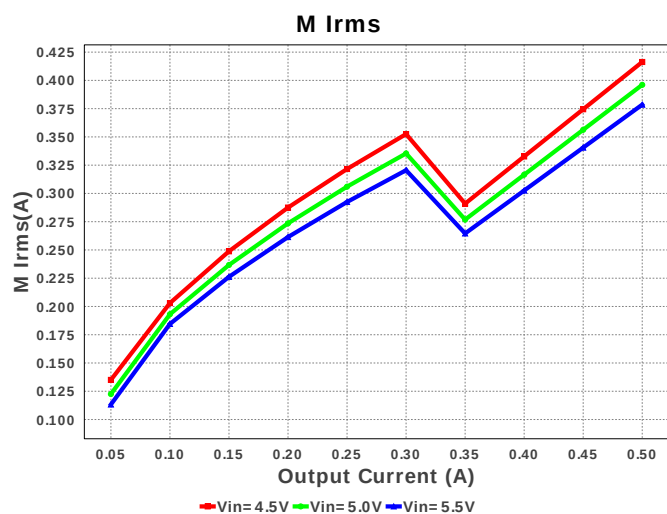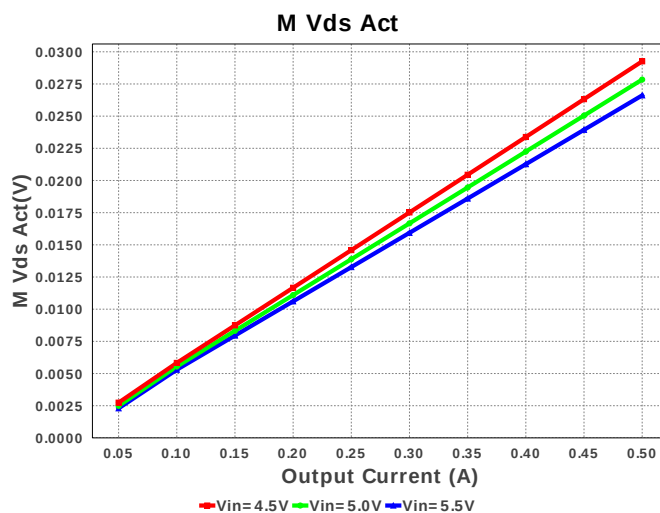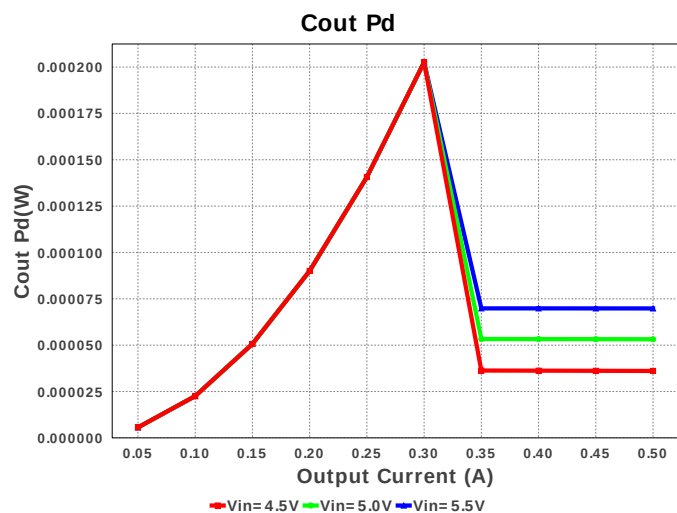

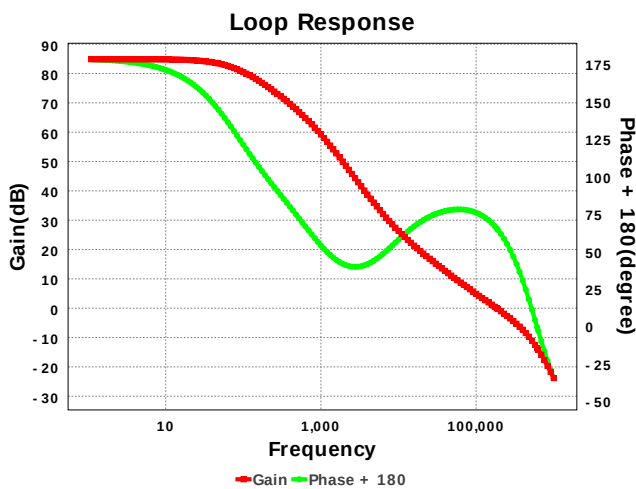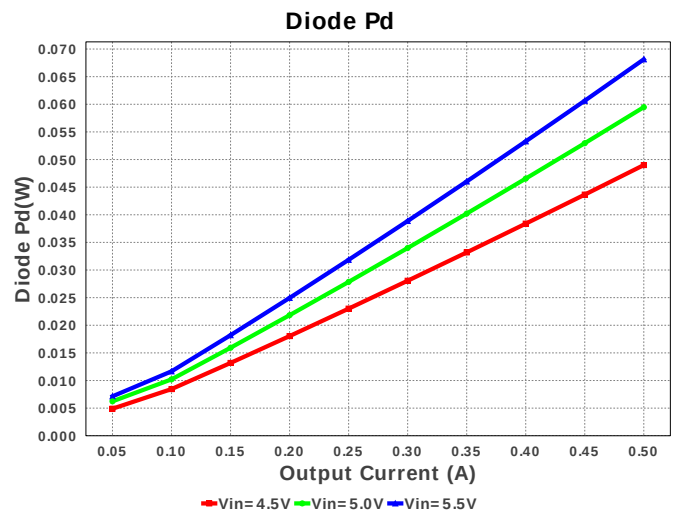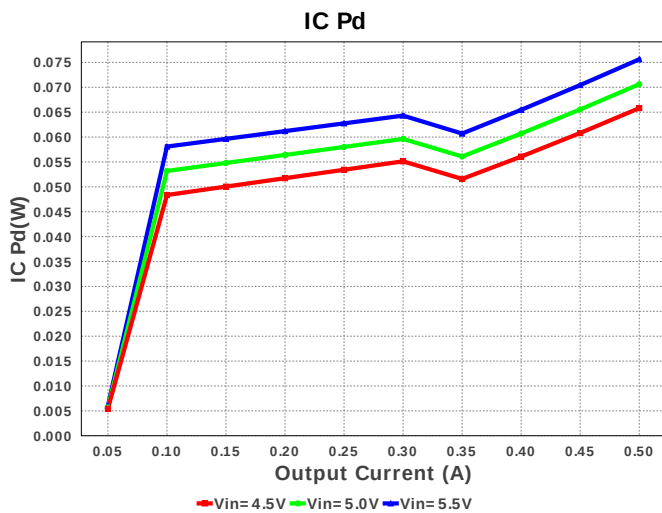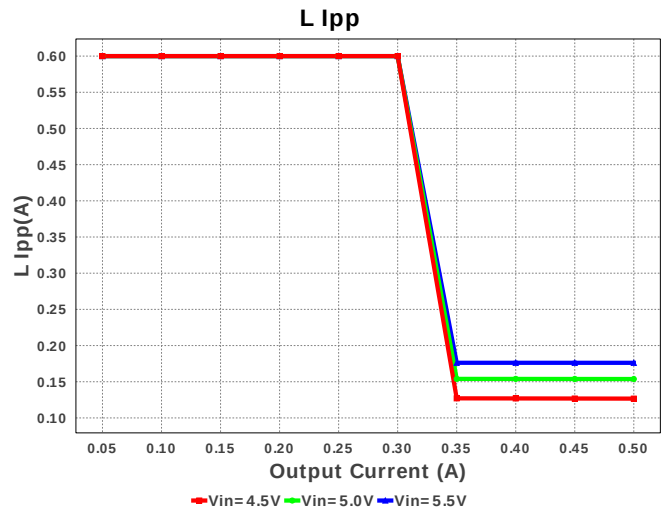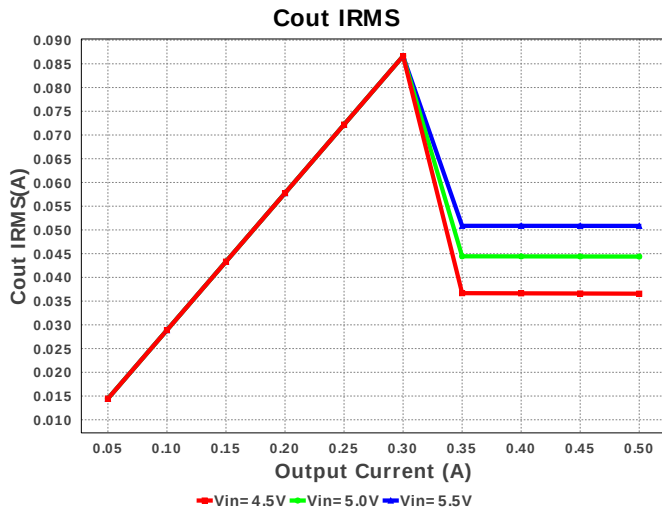

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	247.358 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	50.85 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	588.15 mA	Current	Peak switch current in IC
4.	Iin Avg	301.78 mA	Current	Average input current
5.	L Ipp	176.15 mA	Current	Peak-to-peak inductor ripple current
6.	M1 Irms	378.54 mA	Current	Q lavg
7.	BOM Count	11	General	Total Design BOM count
8.	FootPrint	189.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	1.183 MHz	General	Switching frequency
10.	IC Tolerance	18.0 mV	General	IC Feedback Tolerance
11.	M Vds Act	26.595 mV	General	Voltage drop across the MosFET

#	Name	Value	Category	Description
12.	Pout	1.5 W	General	Total output power
13.	Total BOM	\$2.56	General	Total BOM Cost
14.	D1 Tj	44.036 degC	Op_Point	D1 junction temperature
15.	Vout Actual	3.0 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
16.	Vout OP	3.0 V	Op_Point	Operational Output Voltage
17.	Cross Freq	184.26 kHz	Op_point	Bode plot crossover frequency
18.	Duty Cycle	57.3 %	Op_point	Duty cycle
19.	Efficiency	90.386 %	Op_point	Steady state efficiency
20.	IC Tj	31.966 degC	Op_point	IC junction temperature
21.	ICThetaJA	26.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
22.	IOUT_OP	500.08 mA	Op_point	Iout operating point
23.	Phase Marg	66.071 deg	Op_point	Bode Plot Phase Margin
24.	VIN_OP	5.5 V	Op_point	Vin operating point
25.	Vout p-p	4.78 mV	Op_point	Peak-to-peak output ripple voltage
26.	Cin Pd	589.651 μW	Power	Input capacitor power dissipation
27.	Cout Pd	69.814 μW	Power	Output capacitor power dissipation
28.	Diode Pd	68.138 mW	Power	Diode power dissipation
29.	IC Pd	75.61 mW	Power	IC power dissipation
30.	L Pd	14.939 mW	Power	Inductor power dissipation
31.	Total Pd	159.572 mW	Power	Total Power Dissipation
32.	Vout Tolerance	3.952 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	500.0 m	Maximum Output Current
2.	VinMax	5.5	Maximum input voltage
3.	VinMin	4.5	Minimum input voltage
4.	Vout	3.0	Output Voltage
5.	base_pn	LMR14030DPR-Q1	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **LMR14030DPR-Q1** Product Folder : <http://www.ti.com/product/LMR14030%2DQ1> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).