


WEBENCH® Design Report

Design : 4077713/61 BQ25890RTWR
BQ25890RTWR 5.0V-6.0V to 4.19V @ 2.944A

VinMin = 5.0V
VinMax = 6.0V
Vout = 3.3V
Iout = 2.0A
Ichg = 2.94A

Device = BQ25890RTWR
Topology = BMS_BUCK
Created = 7/20/16 9:05:21 AM
BOM Cost = \$3.34
BOM Count = 13
Total Pd = 1.25W

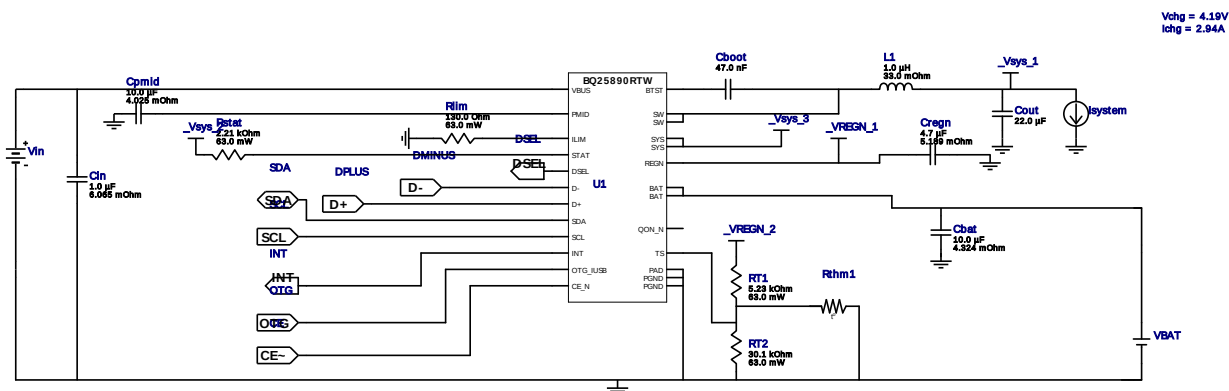


My Comments


No comments

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbat	MuRata	GRM219R60J106KE19D Series= X5R	Cap= 10.0 uF ESR= 4.324 mOhm VDC= 6.3 V IRMS= 2.8728 A	1	\$0.02	0805 7 mm ²
2.	Cboot	MuRata	GRM155R61A473KA01D Series= X5R	Cap= 47.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
3.	Cin	MuRata	GRM188R61A105KA61D Series= X5R	Cap= 1.0 uF ESR= 6.065 mOhm VDC= 10.0 V IRMS= 1.30675 A	1	\$0.01	0603 5 mm ²
4.	Cout	Taiyo Yuden	LMK212BJ226MG-T Series= X5R	Cap= 22.0 uF VDC= 10.0 V IRMS= 0.0 A	1	\$0.12	0805 7 mm ²
5.	Cpmid	MuRata	GRM21BR61A106KE19L Series= X5R	Cap= 10.0 uF ESR= 4.025 mOhm VDC= 10.0 V IRMS= 2.445 A	1	\$0.03	0805 7 mm ²
6.	Cregn	MuRata	GRM21BR61E475KA12L Series= X5R	Cap= 4.7 uF ESR= 5.189 mOhm VDC= 25.0 V IRMS= 2.03531 A	1	\$0.02	0805 7 mm ²
7.	L1	Vishay-Dale	IHLP1212AEER1R0M11	L= 1.0 uH DCR= 33.0 mOhm	1	\$0.56	IHLP-1212AE 19 mm ²
8.	RT1	Vishay-Dale	CRCW04025K23FKED Series= CRCW..e3	Res= 5.23 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
9.	RT2	Vishay-Dale	CRCW040230K1FKED Series= CRCW..e3	Res= 30.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
10.	Rlim	Vishay-Dale	CRCW0402130RFKED Series= CRCW..e3	Res= 130.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
11.	Rstat	Vishay-Dale	CRCW04022K21FKED Series= CRCW..e3	Res= 2.21 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
12.	Rthm1	MuRata	NCP15XH103E03RC Series= NCP15	Thermistor	1	\$0.03	0402 3 mm ²
13.	U1	Texas Instruments	BQ25890RTWR	Switcher	1	\$2.50	RTW0024H 25 mm ²

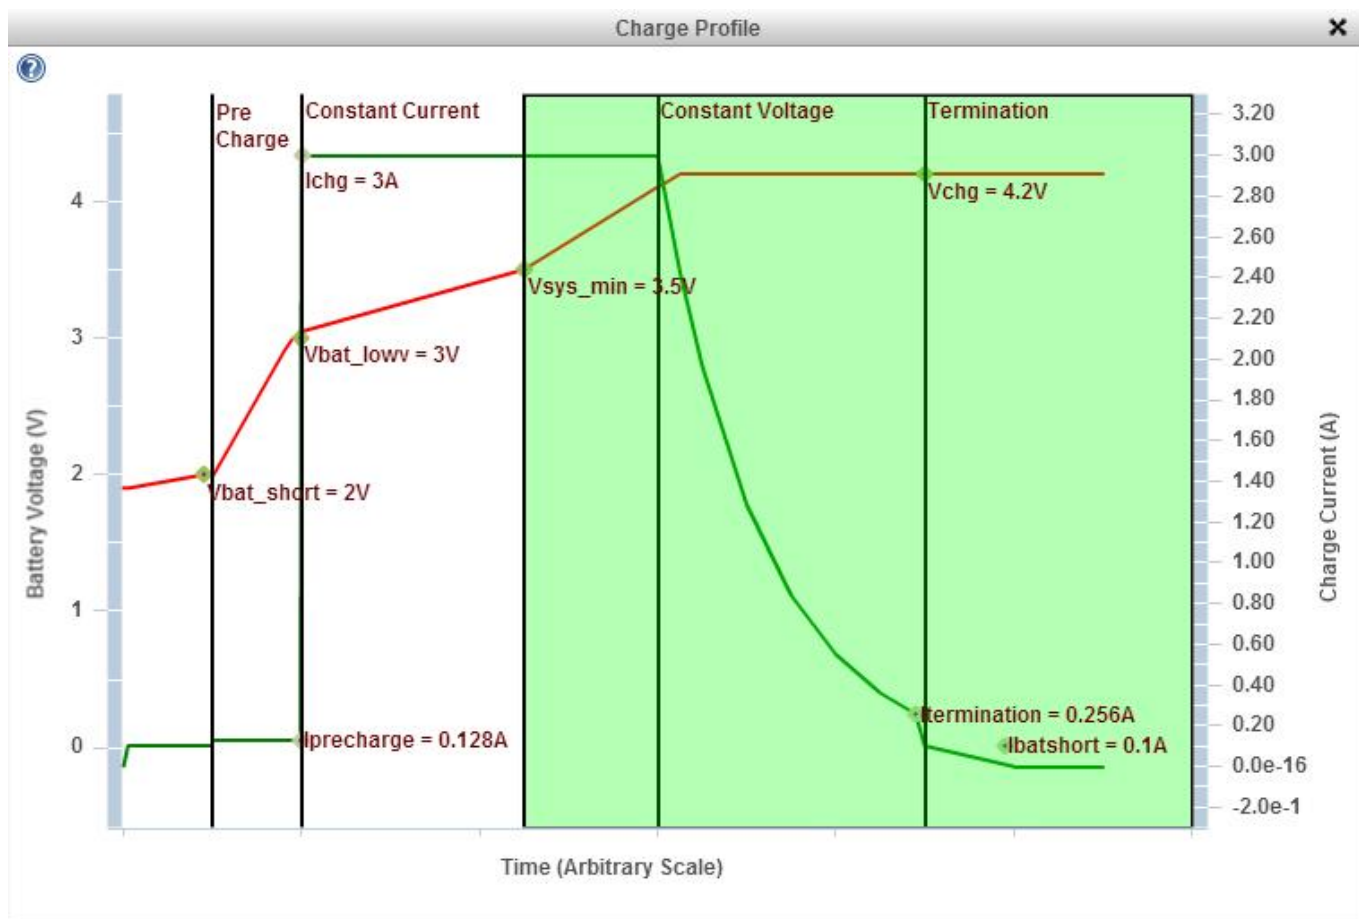

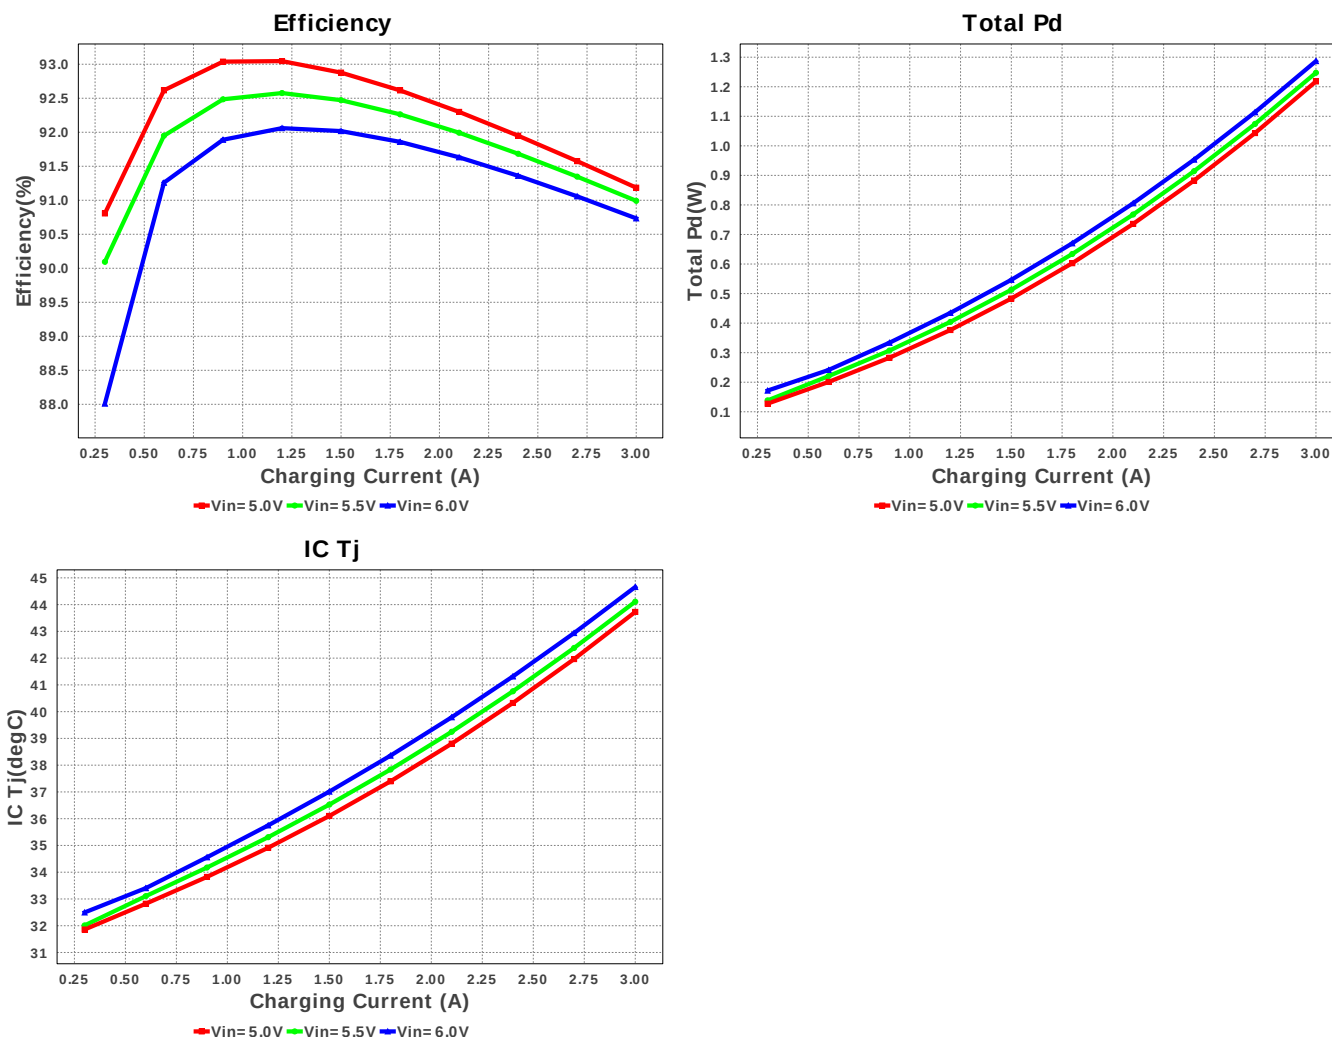

Operating Values

#	Name	Value	Category	Description
1.	BOM Count	13	General	Total Design BOM count
2.	Cell Capacity	2.0 000mAh	General	Cell Capacity
3.	Cells in Parallel	1.0	General	Cells in Parallel
4.	Cells in Series	1.0	General	Cells in Series
5.	FootPrint	94.0 mm ²	General	Total Foot Print Area of BOM components
6.	Frequency	1.5 MHz	General	Switching frequency
7.	Total BOM	\$3.34	General	Total BOM Cost
8.	Total Battery Capacity	2.0 000mAh	General	Total Battery Capacity
9.	IBAT_SHORT	100.0 mA	Op_Point	Source current for BAT pin short-circuit detection
10.	ICThetaJA Effective	15.0 degC/W	Op_Point	Effective IC Junction-to-Ambient Thermal Resistance
11.	Ichg_OP	2.944 A	Op_Point	Battery charging current
12.	Ichg_Sch	2.944 A	Op_Point	Charge current selected
13.	IinMax_Sch	3.0 A	Op_Point	Maximum input current selected
14.	Iprecharge	128.0 mA	Op_Point	Pre-charge Current
15.	Itermination	256.0 mA	Op_Point	Termination comparator threshold for termination detection
16.	VBAT_LOWV	3.0 V	Op_Point	Pre-charge to fast-charge transition threshold
17.	VBAT_SHORT	2.0 V	Op_Point	BAT pin short-circuit detection threshold
18.	VSYS_MIN	3.5 V	Op_Point	Minimum DC System Voltage Output
19.	Vchg_OP	4.192 V	Op_Point	Battery output voltage
20.	Vchg_Sch	4.192 V	Op_Point	Charge voltage selected
21.	Efficiency	90.781 %	Op_point	Steady state efficiency
22.	IC Tj	44.326 degC	Op_point	IC junction temperature
23.	VIN_OP	6.0 V	Op_point	Vin operating point
24.	Total Pd	1.253 W	Power	Total Power Dissipation

Design Inputs

#	Name	Value	Description
1.	IchgMax	3.0	Ichg
2.	IinMax	3.0	IinMax
3.	Vchg	4.2	Vchg

#	Name	Value	Description
4.	VinMax	6.0	Maximum input voltage
5.	VinMin	5.0	Minimum input voltage
6.	base_pn	BQ25890	Base Product Number
7.	source	DC	Input Source Type
8.	Ta	30.0	Ambient temperature

Design Assistance

1. **BQ25890** Product Folder : <http://www.ti.com/product/bq25890> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).