


WEBENCH[®] Design Report

Design : 4738714/14 OPA356AIDR
 Highpass, Sallen Key, Chebyshev 0.5 dB

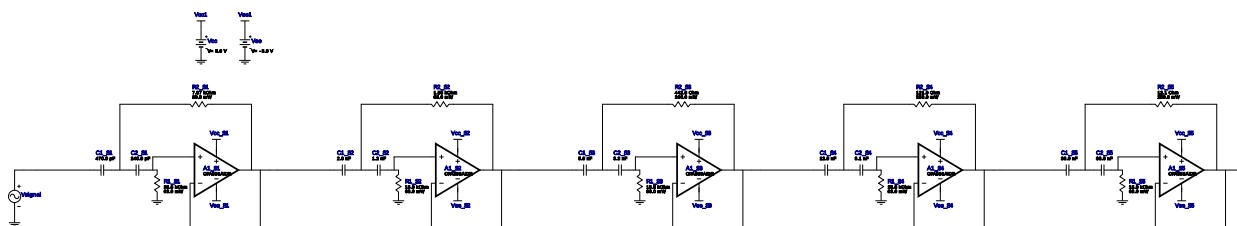

My Comments

No comments

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S1	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
2.	A1_S2	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
3.	A1_S3	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
4.	A1_S4	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
5.	A1_S5	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
6.	C1_S1	MuRata	GRM1555C1E471JA01D Series= C0G/NP0	Cap= 470.0 pF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.01	 0402 3 mm ²
7.	C1_S2	MuRata	GRM1885C1H202JA01D Series= C0G/NP0	Cap= 2.0 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm ²
8.	C1_S3	TDK	C1608C0G1E562J080AA Series= C0G/NP0	Cap= 5.6 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0603 5 mm ²
9.	C1_S4	AVX	06033C123JAT2A Series= X7R	Cap= 12.0 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0603 5 mm ²
10.	C1_S5	AVX	12065A392JAT2A Series= C0G/NP0	Cap= 39.0 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.09	 1206 11 mm ²
11.	C2_S1	Samsung Electro-Mechanics	CL10C241JB8NNNC Series= C0G/NP0	Cap= 240.0 pF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm ²
12.	C2_S2	Samsung Electro-Mechanics	CL10C122JB8NNNC Series= C0G/NP0	Cap= 1.2 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm ²
13.	C2_S3	MuRata	GRM1885C1H332JA01D Series= C0G/NP0	Cap= 3.3 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm ²
14.	C2_S4	MuRata	GRM2195C1H912JA01D Series= C0G/NP0	Cap= 9.1 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.06	 0805 7 mm ²
15.	C2_S5	AVX	08053A332JAT2A Series= C0G/NP0	Cap= 33.0 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0805 7 mm ²
16.	R1_S1	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
17.	R1_S2	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
18.	R1_S3	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
19.	R1_S4	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
20.	R1_S5	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
21.	R2_S1	Vishay-Dale	CRCW04027K87FKED Series= CRCW..e3	Res= 7.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
22.	R2_S2	Vishay-Dale	CRCW04021K58FKED Series= CRCW..e3	Res= 1.58 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
23.	R2_S3	Vishay-Dale	CRCW0603442RFKEA Series= CRCW..e3	Res= 442.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
24.	R2_S4	Panasonic	ERJ-8ENF1210V Series= ERJ-8E	Res= 121.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
25.	R2_S5	Panasonic	ERJ-8ENF12R1V Series= ERJ-8E	Res= 12.1 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²

Design Inputs


#	Name	Value	Description
1.	FilterType	Highpass	
2.	FilterResponse	Chebyshev_05dB	
3.	FilterOrder	10.0	
4.	FilterTopology	Sallen_Key	
5.	NumberOfStages	5.0	
6.	PassbandFrequency	10.0 k	
7.	StopbandAttenuation	-45.0	
8.	StopbandFrequency	8.0 k	
9.	Gain	1.0	
10.	DualSupply	+/-5.0 V	Power supply(s) to active chips
11.	ResistorTolerance	E96	Resistor series - 1% Passive resistor tolerance
12.	CapacitorTolerance	E24	Capacitor series - 5% Passive capacitance tolerance
13.	SeedCapacitance	1.0 n	Seed Capacitance to start design of filter

Design Assistance

1. **OPA356AIDR** Product Folder : <http://www.ti.com/product/OPA356> : contains the data sheet and other resources.

Filter Stage :1

Cutoff Frequency 42.153 kHz
Min GBW Req'd 2.837 MHz
Stage Gain 1.0 V/V
Stage Q 673.0 m
Stage Topology Sallen_Key

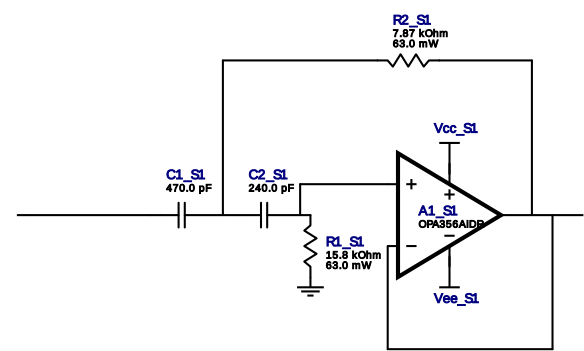


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S1	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
2.	C1_S1	MuRata	GRM1555C1E471JA01D Series= C0G/NP0	Cap= 470.0 pF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.01	 0402 3 mm ²
3.	C2_S1	Samsung Electro-Mechanics	CL10C241JB8NNNC Series= C0G/NP0	Cap= 240.0 pF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm ²
4.	R1_S1	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
5.	R2_S1	Vishay-Dale	CRCW04027K87FKED Series= CRCW..e3	Res= 7.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²

Filter Stage :2

Cutoff Frequency 20.502 kHz
Min GBW Req'd 3.147 MHz
Stage Gain 1.0 V/V
Stage Q 1.535
Stage Topology Sallen_Key

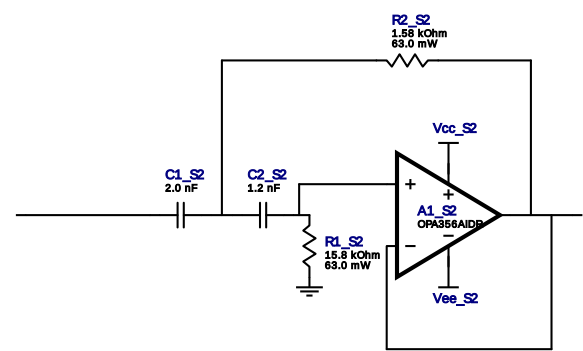


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S2	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm²
2.	C1_S2	MuRata	GRM1885C1H202JA01D Series= C0G/NP0	Cap= 2.0 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm²
3.	C2_S2	Samsung Electro-Mechanics	CL10C122JB8NNNC Series= C0G/NP0	Cap= 1.2 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm²
4.	R1_S2	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
5.	R2_S2	Vishay-Dale	CRCW04021K58FKED Series= CRCW..e3	Res= 1.58 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²

Filter Stage :3

Cutoff Frequency 13.713 kHz
Min GBW Req'd 3.964 MHz
Stage Gain 1.0 V/V
Stage Q 2.891
Stage Topology Sallen_Key

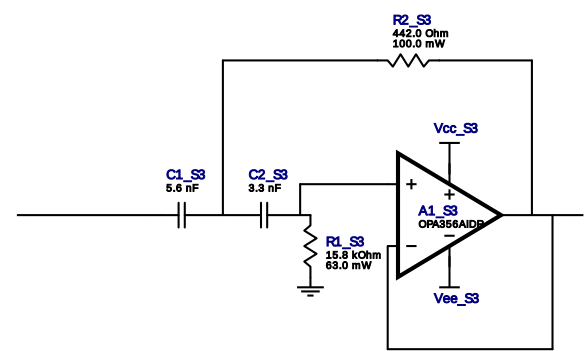


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S3	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm²
2.	C1_S3	TDK	C1608C0G1E562J080AA Series= C0G/NP0	Cap= 5.6 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0603 5 mm²
3.	C2_S3	MuRata	GRM1885C1H332JA01D Series= C0G/NP0	Cap= 3.3 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.01	 0603 5 mm²
4.	R1_S3	Vishay-Dale	CRCW040215K8FKED Series= CRCW..e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
5.	R2_S3	Vishay-Dale	CRCW0603442RFKEA Series= CRCW..e3	Res= 442.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²

Filter Stage :4

Cutoff Frequency 11.005 kHz
Min GBW Req'd 6.175 MHz
Stage Gain 1.0 V/V
Stage Q 5.611
Stage Topology Sallen_Key

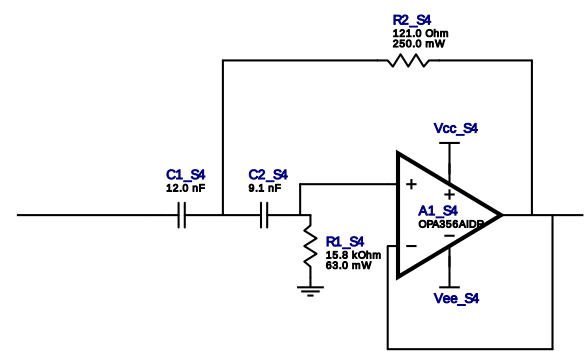


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S4	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
2.	C1_S4	AVX	06033C123JAT2A Series= X7R	Cap= 12.0 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0603 5 mm ²
3.	C2_S4	MuRata	GRM2195C1H912JA01D Series= C0G/NP0	Cap= 9.1 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.06	 0805 7 mm ²
4.	R1_S4	Vishay-Dale	CRCW040215K8FKED Series= CRCW...e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
5.	R2_S4	Panasonic	ERJ-8ENF1210V Series= ERJ-8E	Res= 121.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²

Filter Stage :5

Cutoff Frequency 9.964 kHz
 Min GBW Req'd 17.921 MHz
 Stage Gain 1.0 V/V
 Stage Q 17.987
 Stage Topology Sallen_Key

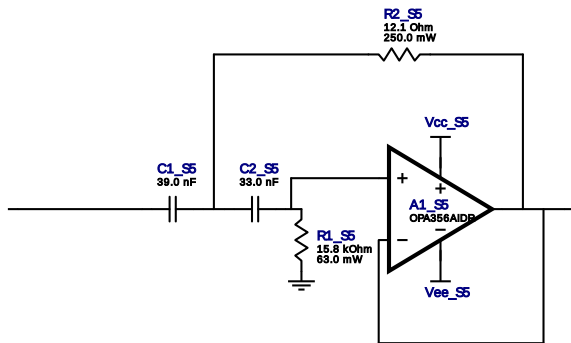

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	A1_S5	Texas Instruments, Inc.	OPA356AIDR	GbwTyp= 450.0MHz VccMin= 2.5 V VccMax= 5.5 V	1	\$0.70	 D0008A 57 mm ²
2.	C1_S5	AVX	12065A392JAT2A Series= C0G/NP0	Cap= 39.0 nF VDC= 50.0 V Tolerance= 5.0 %	1	\$0.09	 1206 11 mm ²
3.	C2_S5	AVX	08053A332JAT2A Series= C0G/NP0	Cap= 33.0 nF VDC= 25.0 V Tolerance= 5.0 %	1	\$0.06	 0805 7 mm ²
4.	R1_S5	Vishay-Dale	CRCW040215K8FKED Series= CRCW...e3	Res= 15.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
5.	R2_S5	Panasonic	ERJ-8ENF12R1V Series= ERJ-8E	Res= 12.1 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).