


WEBENCH® Design Report

Design : 3473280/65 UCC38C40DR
UCC38C40DR 100.0V-230.0V to 20.00V @ 5.0A

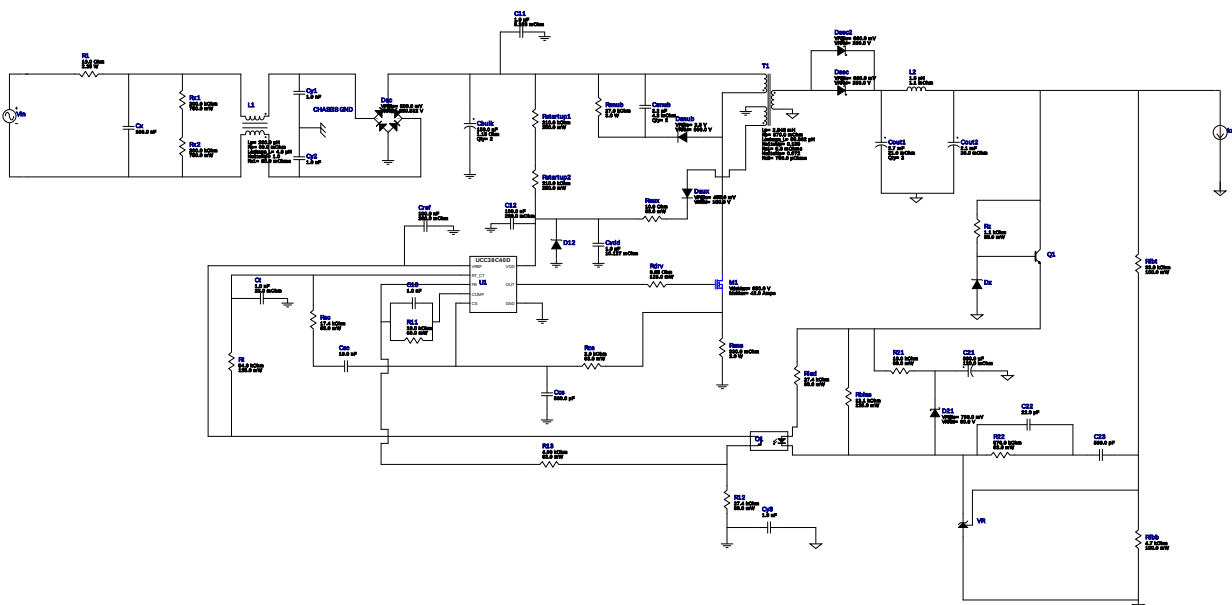



1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.

My Comments


No comments

Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	Panasonic	EEV-FK1H331Q Series= FK	Cap= 330.0 uF ESR= 120.0 mOhm VDC= 50.0 V IRMS= 900.0 mA	1	\$0.48	 SM_RADIAL_H13 264 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	Yageo America	CC0805KRX7R9BB561 Series= X7R	Cap= 560.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²






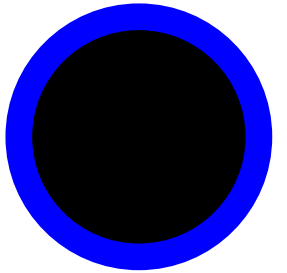
#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
7.	Cbulk	Vishay-Bccomponents	MAL215759151E3 Series= 2239	Cap= 150.0 uF ESR= 1.13 Ohm VDC= 500.0 V IRMS= 1.43 A	2	\$4.45	 157PUM-SI_2500x4000 729 mm ²
8.	Ccs	Yageo America	CC0805KRX7R9BB561 Series= X7R	Cap= 560.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
9.	Cout1	TDK	B41605A8278M009 Series= 2385	Cap= 2.7 mF ESR= 21.0 mOhm VDC= 63.0 V IRMS= 5.3 A	2	\$12.37	B41605_2500x4000_9 729 mm ²
10.	Cout2	TDK	B41605A8218M002 Series= 2385	Cap= 2.1 mF ESR= 26.0 mOhm VDC= 63.0 V IRMS= 6.9 A	1	\$6.85	B41605_2500x4000_2 729 mm ²
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
13.	Csnub	TDK	C5750X6S2W225K Series= X6S	Cap= 2.2 uF ESR= 4.3 mOhm VDC= 400.0 V IRMS= 0.0 A	2	NA	 2220 54 mm ²
14.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
15.	Cvdd	MuRata	GRM188R61C105KA93D Series= X5R	Cap= 1.0 uF ESR= 10.127 mOhm VDC= 16.0 V IRMS= 994.63 mA	1	\$0.01	 0603 5 mm ²
16.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm ²
17.	Cy1	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
18.	Cy2	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
19.	Cy3	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
20.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
21.	D21	Diodes Inc.	B260A-13-F	VF@Io= 700.0 mV VRRM= 60.0 V	1	\$0.09	 SMA 37 mm ²
22.	Dac	CUSTOM	CUSTOM	VF@Io= 500.0 mV VRRM= 650.532 V	1	NA	CUSTOM 0 mm ²
23.	Daux	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
24.	Dsec	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
25.	Dsec2	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
26.	Dsnub	Bourns	CD1408-FU1800	VF@Io= 2.5 V VRRM= 800.0 V	1	\$0.13	 Diode_1408 13 mm ²
27.	Dz	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
28.	L1	CUSTOM	CUSTOM	Lp= 200.0 µH Rp= 60.0 mOhm Leakage_L= 4.0 µH Ns1toNp= 1.0 Rs1= 60.0 mOhms	1	NA	CUSTOM 0 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
29.	L2	Coilcraft	SER1590-152MLB	L= 1.5 μ H DCR= 1.1 mOhm	1	\$1.12	 SER1590 324 mm ²
30.	M1	STMicroelectronics	STP57N65M5	VdsMax= 650.0 V IdsMax= 42.0 Amps	1	\$7.05	 TO-220AB 397 mm ²
31.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
32.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
33.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm ²
34.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
35.	R12	Vishay-Dale	CRCW040227K4FKED Series= CRCW..e3	Res= 27.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
36.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
37.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
38.	R22	Vishay-Dale	CRCW0402576KFKED Series= CRCW..e3	Res= 576.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
39.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
40.	Rbias	Panasonic	ERJ-6ENF1212V Series= ERJ-6E	Res= 12.1 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
41.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
42.	Rdrv	Vishay-Dale	CRCW08053R65FKEA Series= CRCW..e3	Res= 3.65 Ohm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
43.	Rfbb	Yageo America	RC0603FR-074K7L Series= ?	Res= 4.7 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
44.	Rfbt	Yageo America	RC0603FR-0733KL Series= ?	Res= 33.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
45.	Rled	Vishay-Dale	CRCW040227K4FKED Series= CRCW..e3	Res= 27.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
46.	Rsc	Vishay-Dale	CRCW040217K4FKED Series= CRCW..e3	Res= 17.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
47.	Rsns	Stackpole Electronics Inc	CSRN2512FKR330 Series= ?	Res= 330.0 mOhm Power= 2.0 W Tolerance= 1.0%	1	\$0.13	 2512 43 mm ²
48.	Rsns	Vishay-Bccomponents	PR03000202702JAC00 Series= ?	Res= 27.0 kOhm Power= 3.0 W Tolerance= 5.0%	1	\$0.19	 PR03 0 mm ²
49.	Rstartup1	Panasonic	ERJ-8ENF2103V Series= ERJ-8E	Res= 210.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
50.	Rstartup2	Panasonic	ERJ-8ENF2103V Series= ERJ-8E	Res= 210.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
51.	Rt	Panasonic	ERJ-6ENF5492V Series= ERJ-6E	Res= 54.9 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
52.	Rx1	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
53.	Rx2	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
54.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW...e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
55.	T1	CUSTOM	CUSTOM	Lp= 2.543 mH Rp= 870.0 mOhm Leakage_L= 50.862 µH Ns1toNp= 0.139 Rs1= 8.6 mOhms Ns2toNp= 0.072 Rs2= 700.0 µOhms	1	NA	CUSTOM 0 mm ²
56.	U1	Texas Instruments	UCC38C40DR	Switcher	1	\$0.70	 D0008A 57 mm ²
57.	VR	Texas Instruments	TL431AIDBVR	Voltage References	1	\$0.07	 R-PDSO-G3 16 mm ²

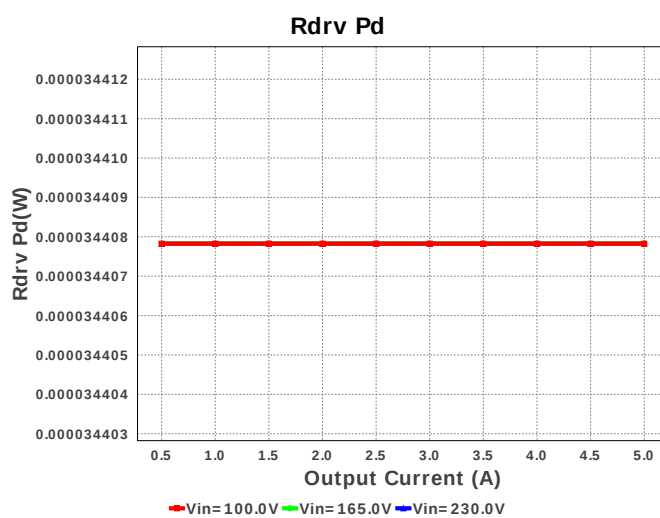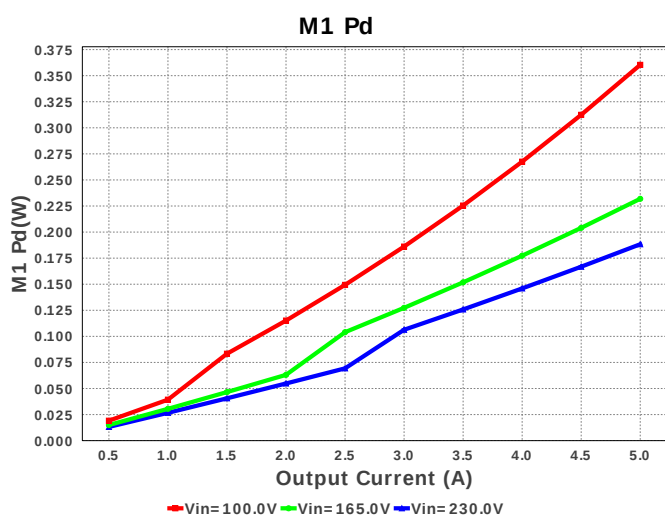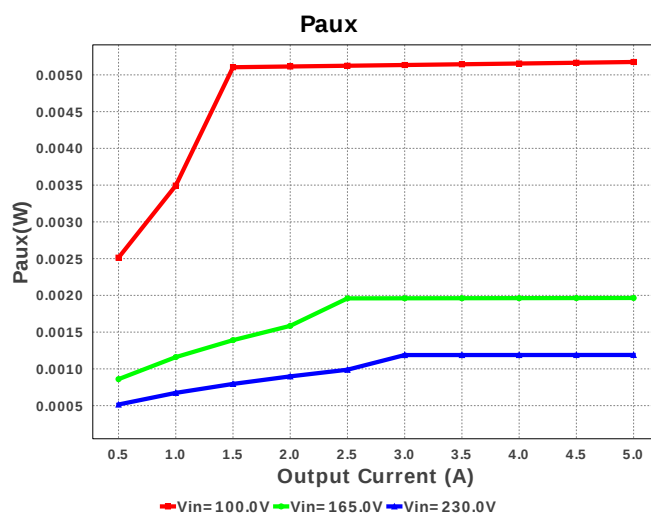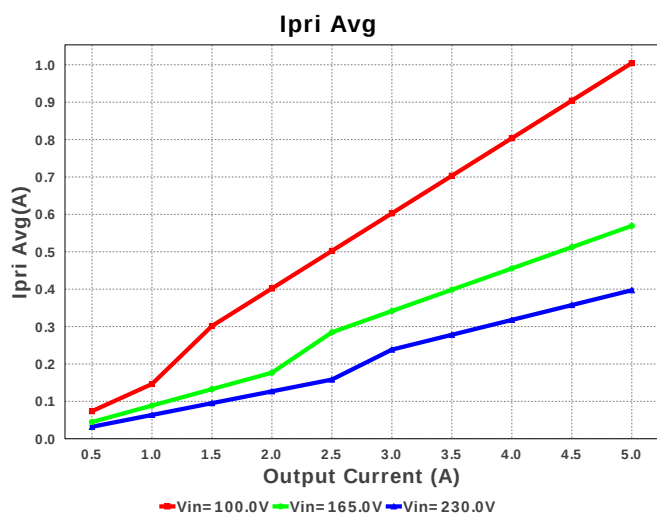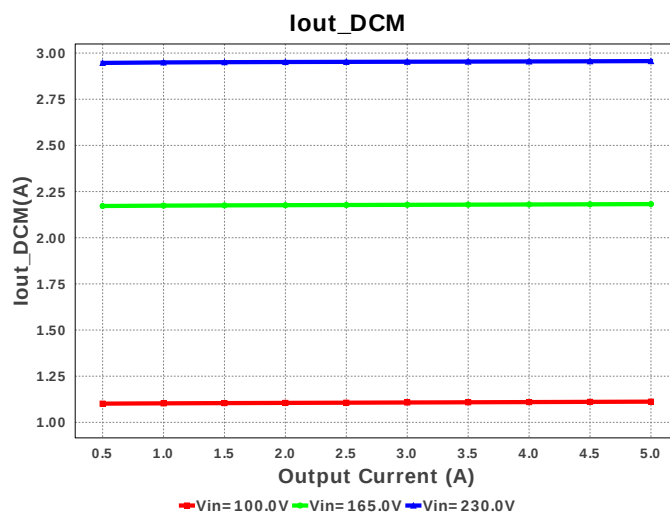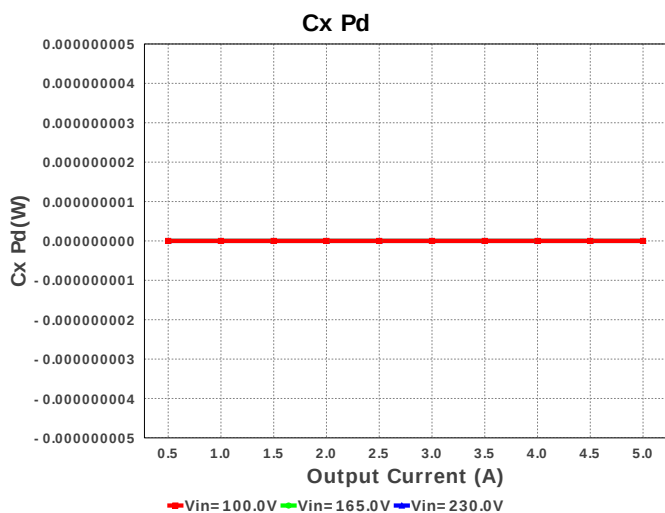

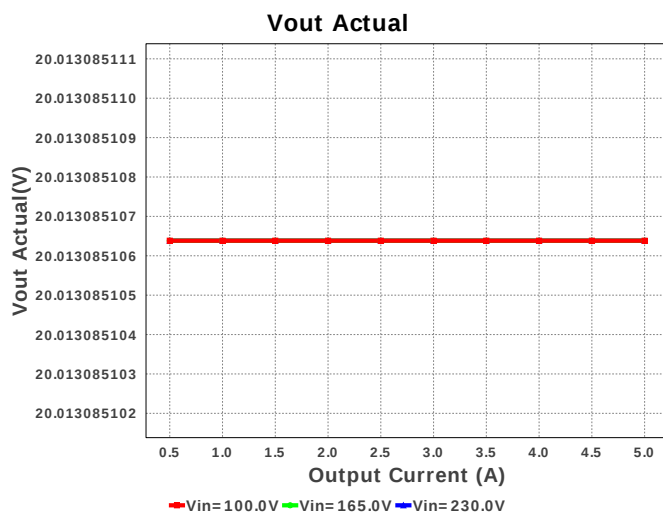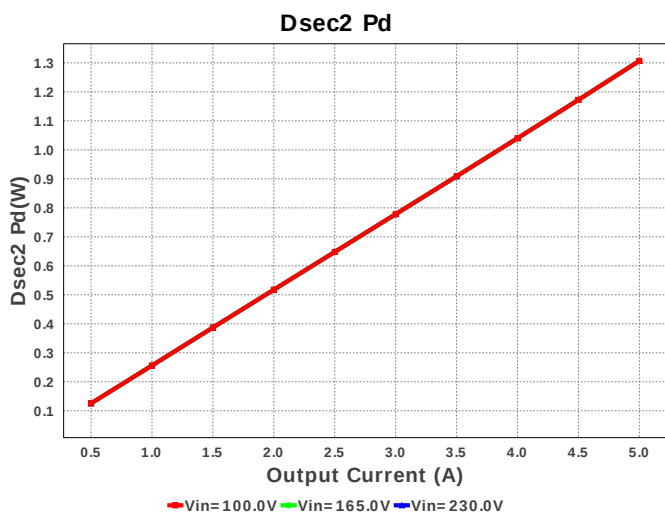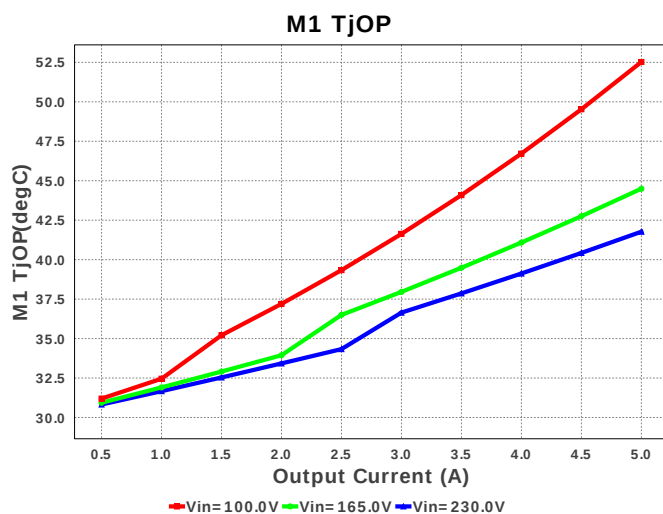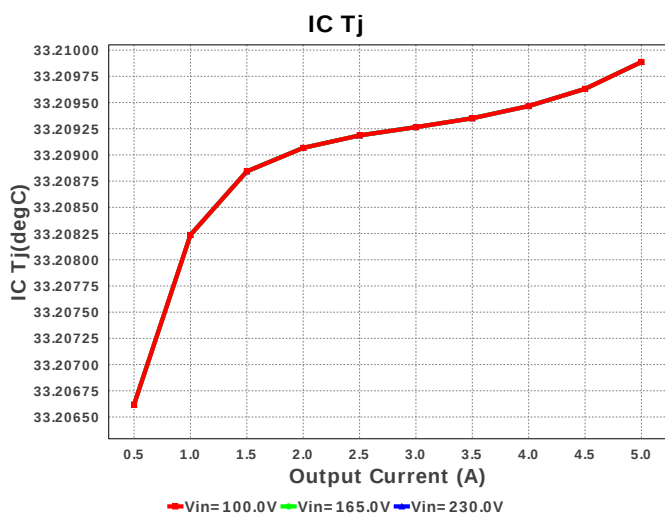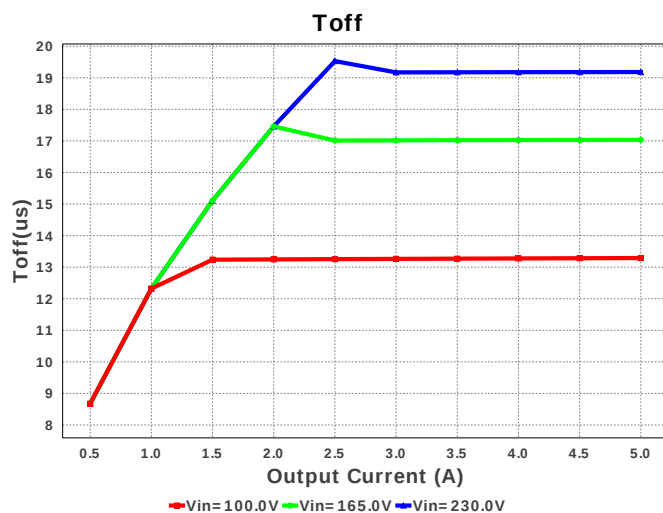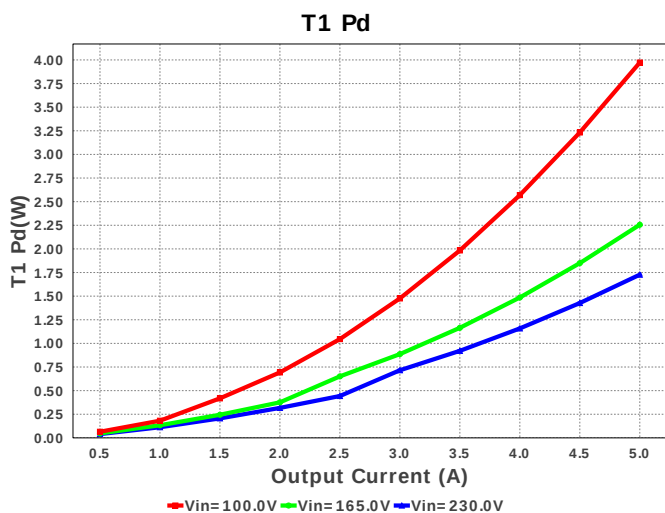


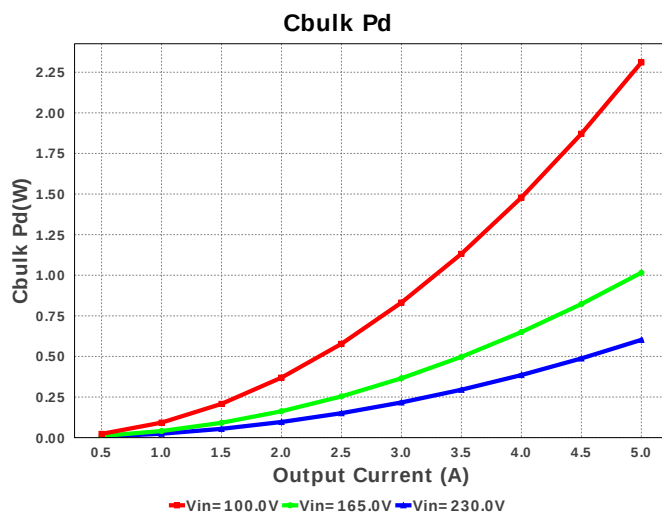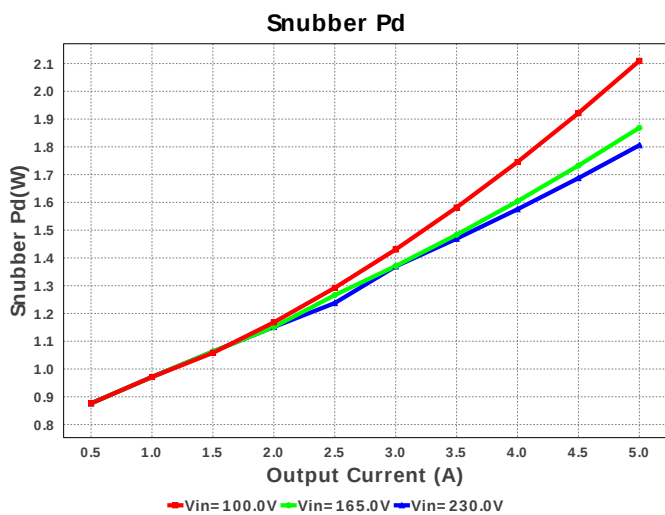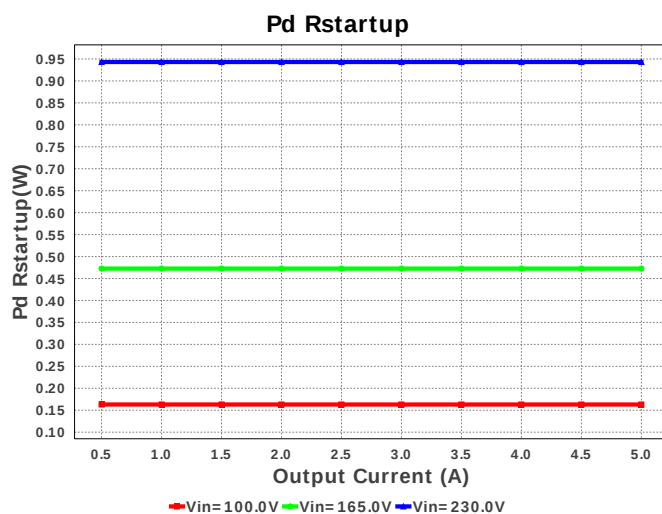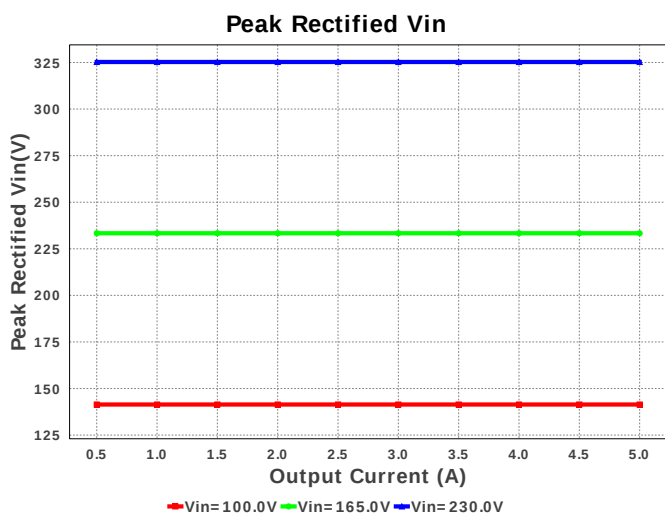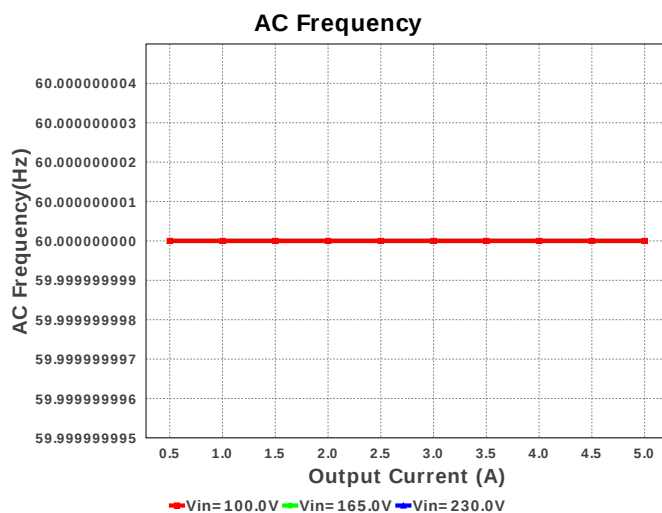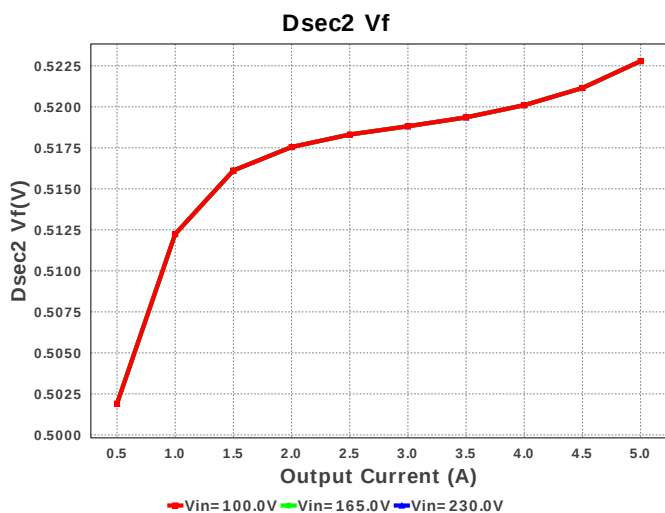

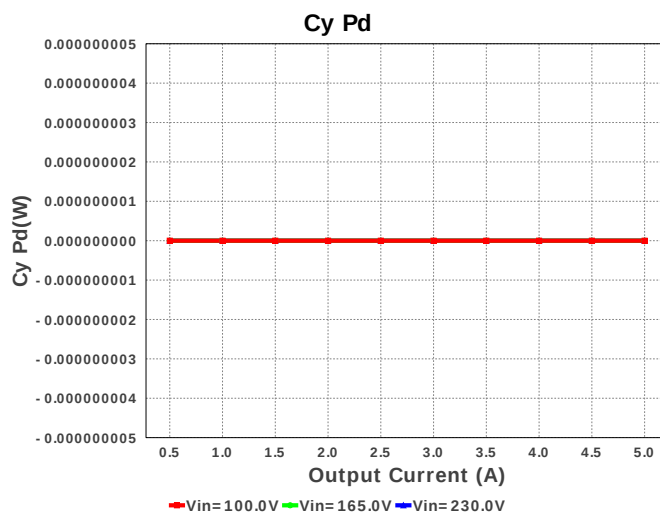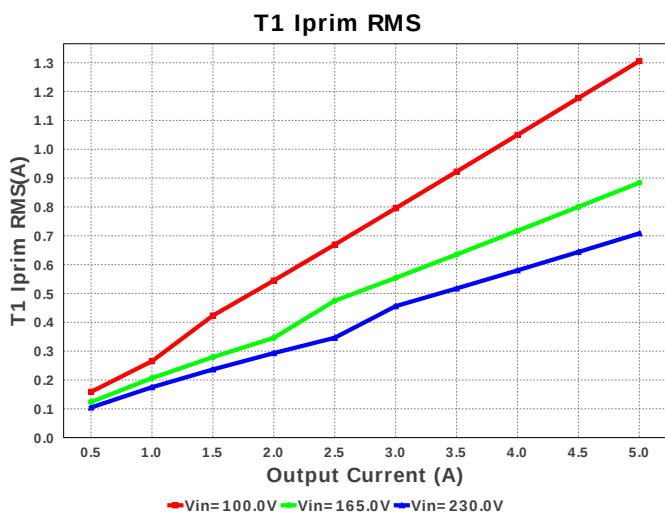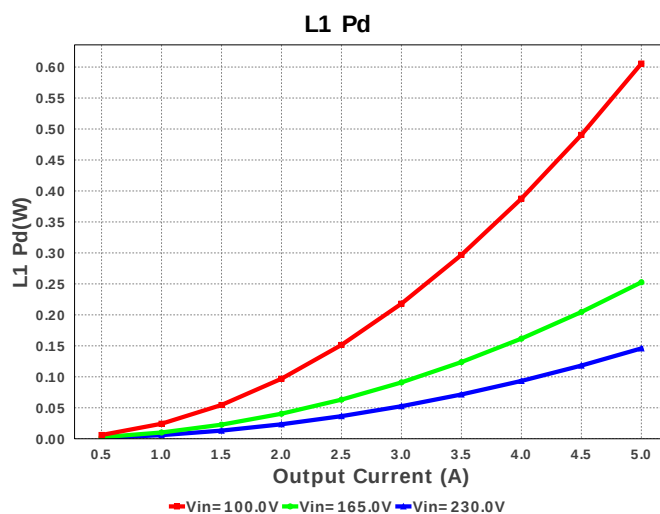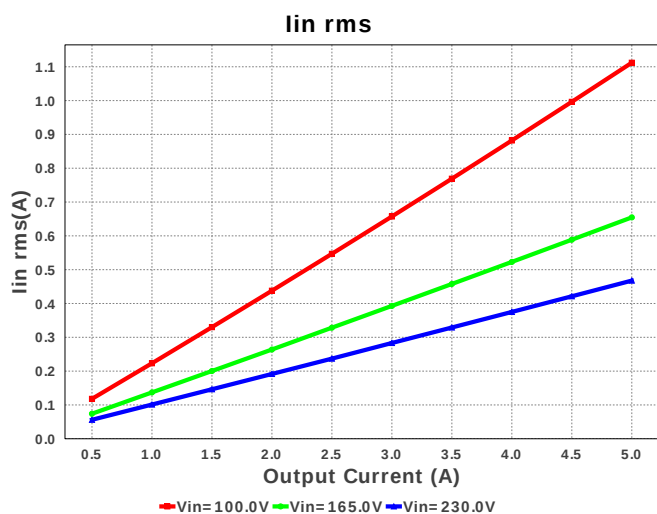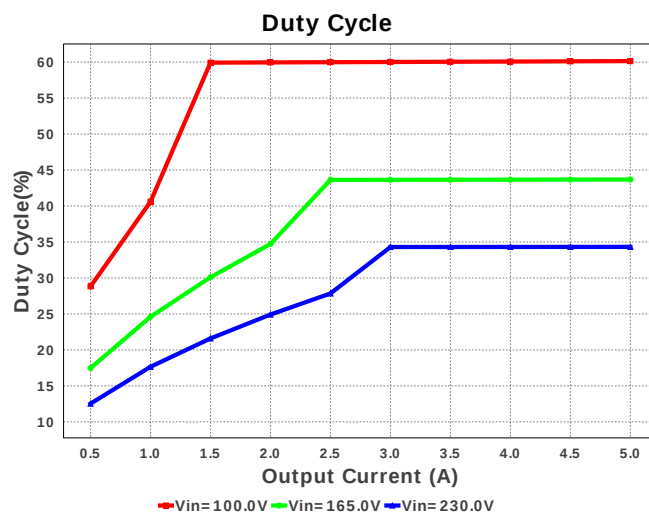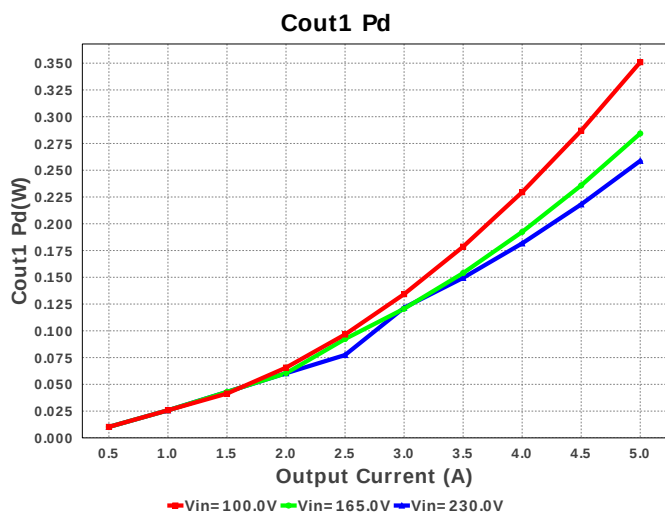


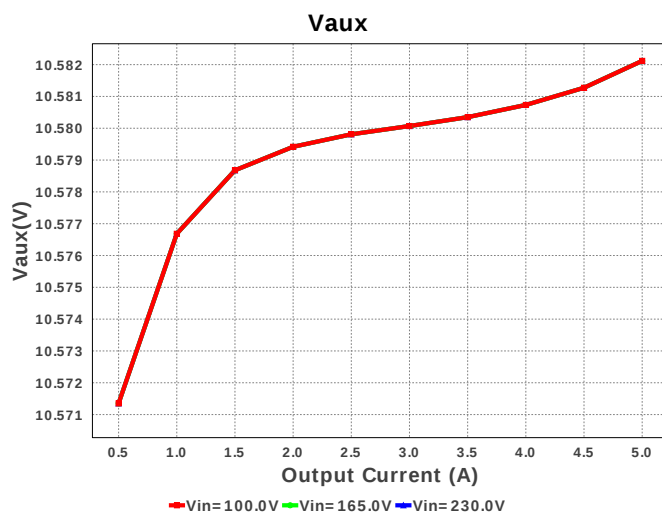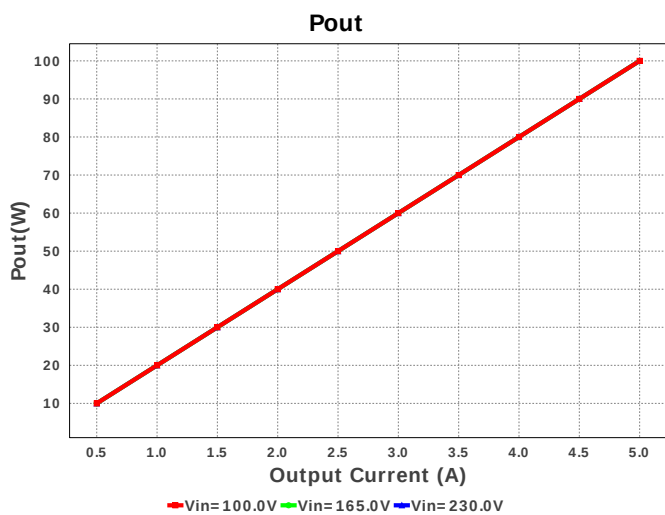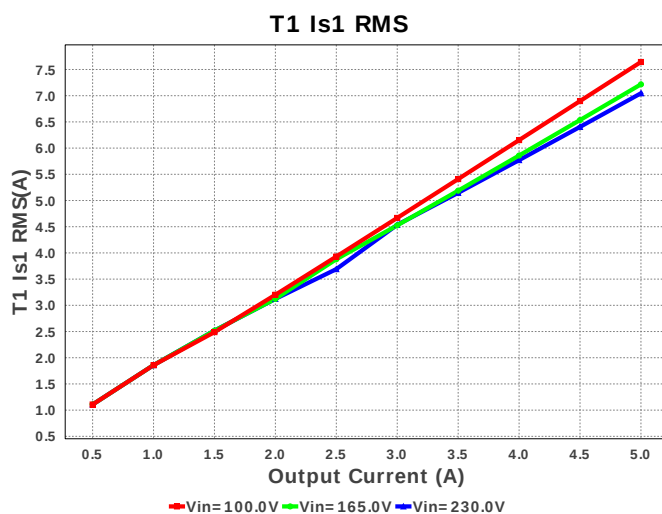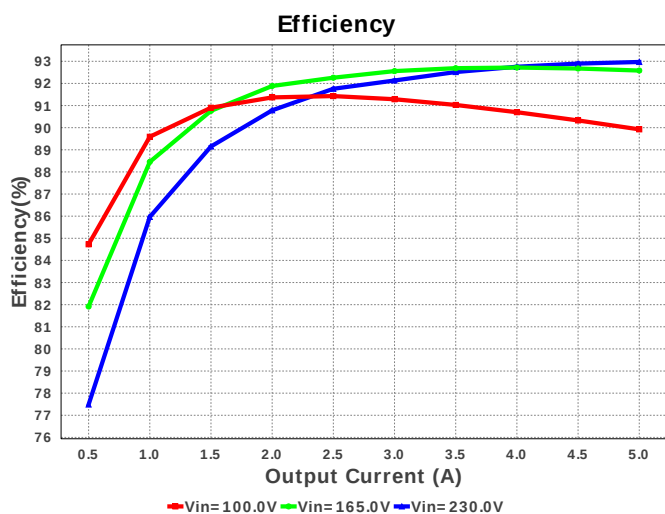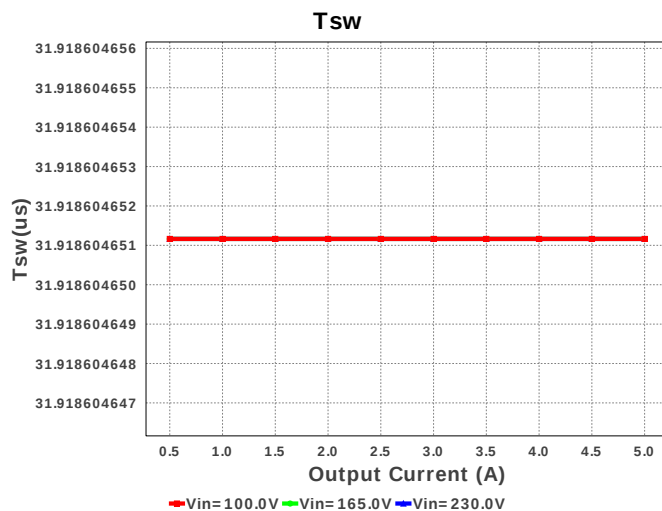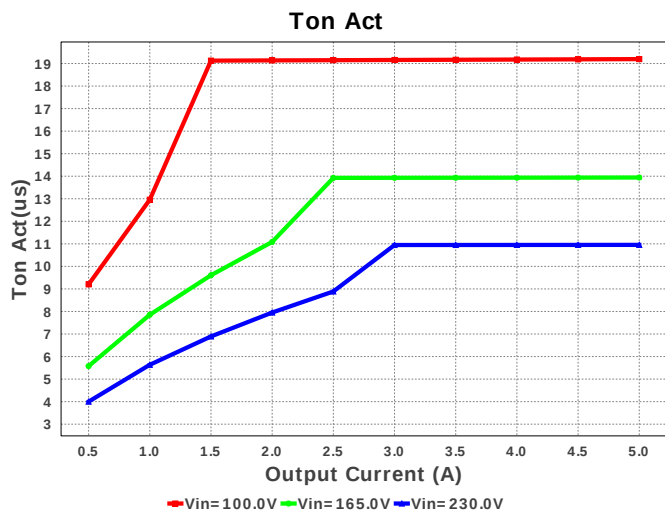


Total Pd

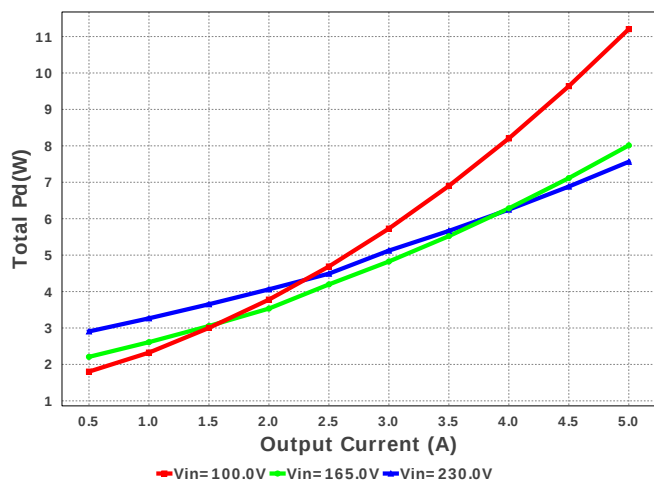


T1 Is1 pk

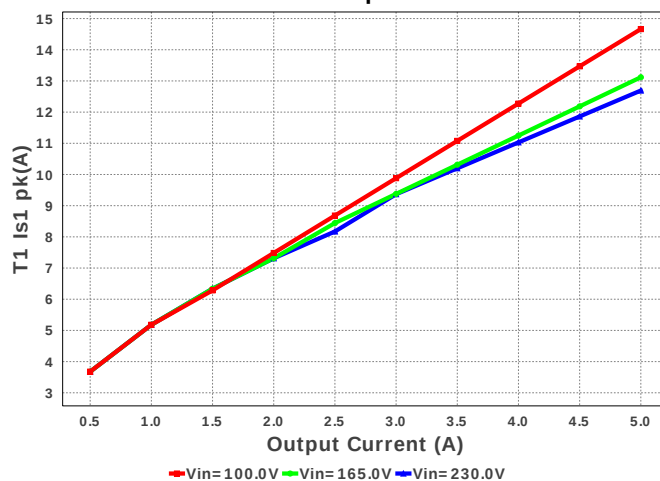


Dsec Pd

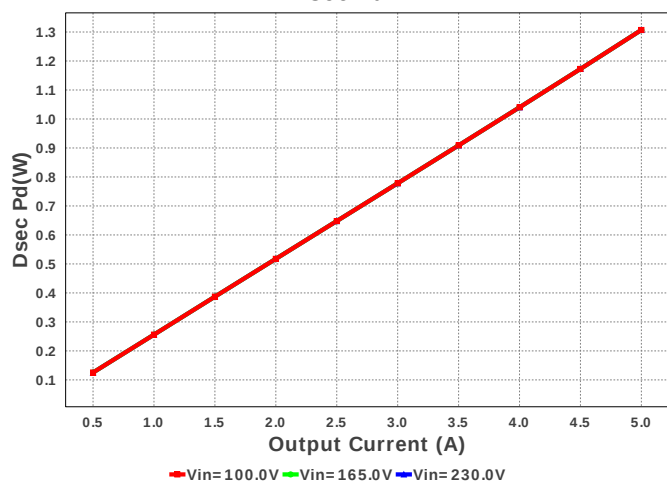


Tdead






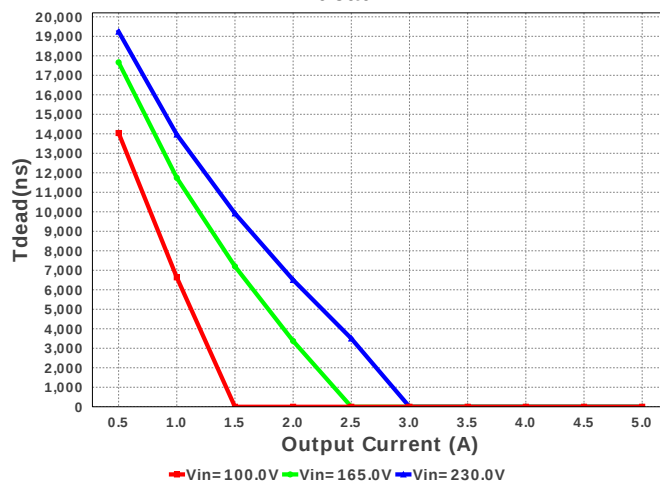








Cout1 IRMS

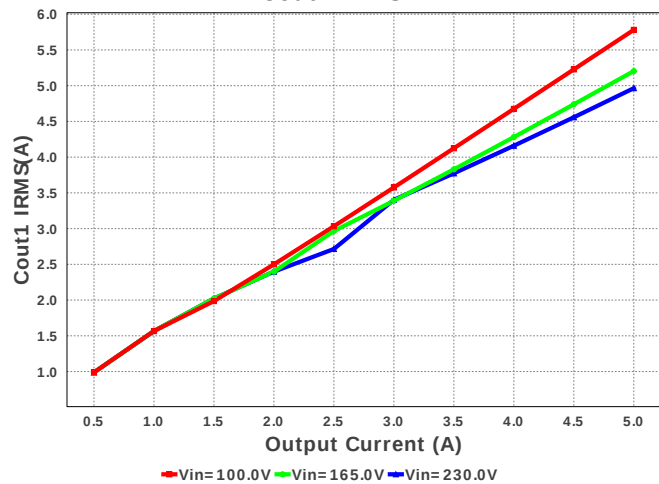


IC Pd

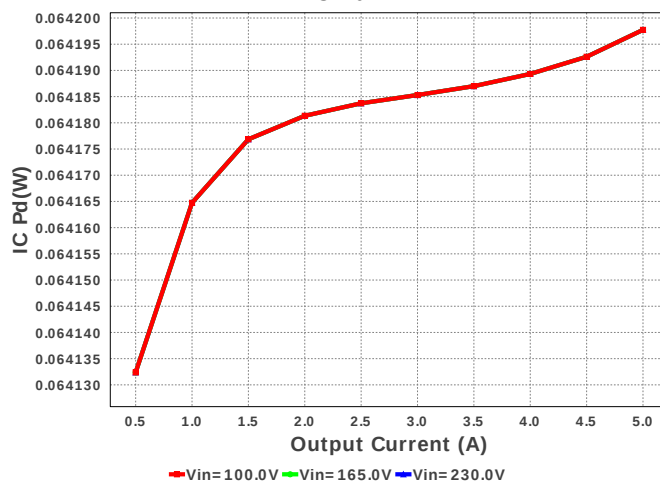

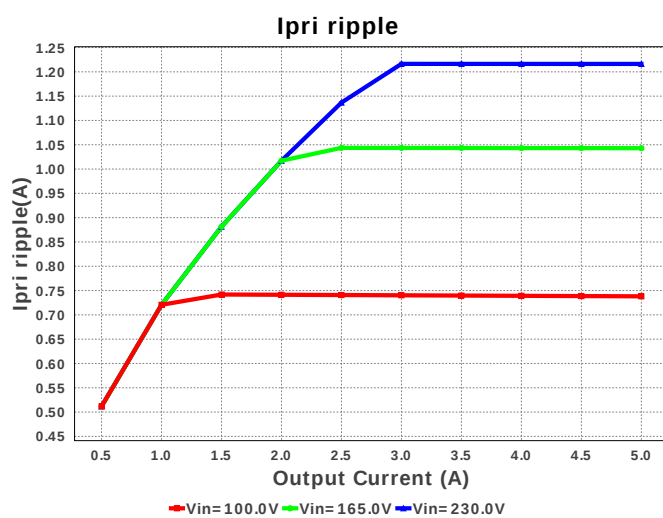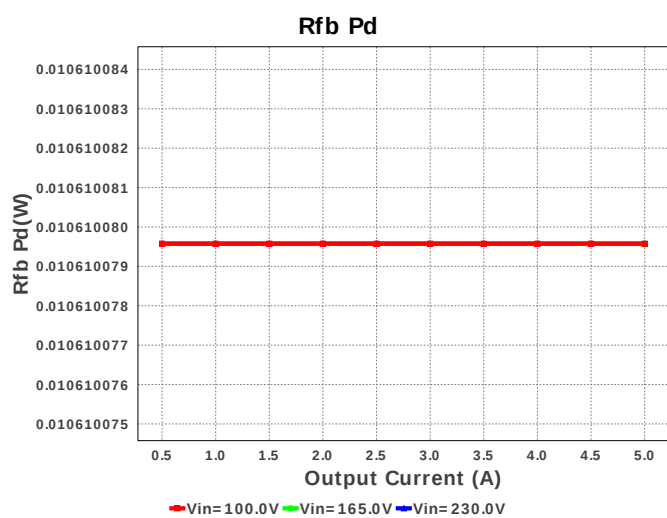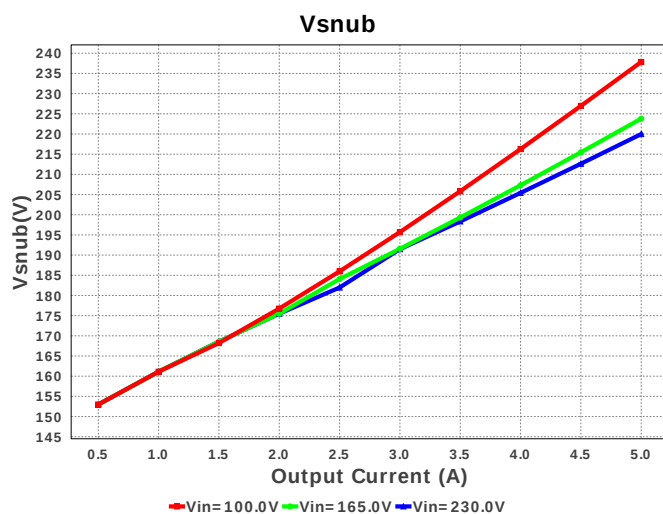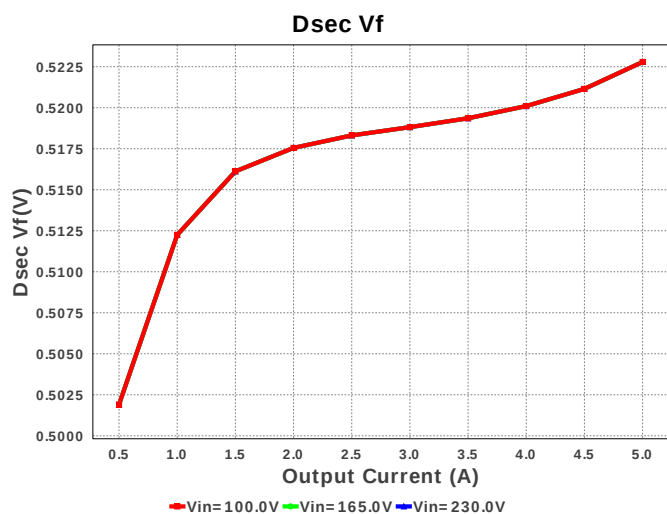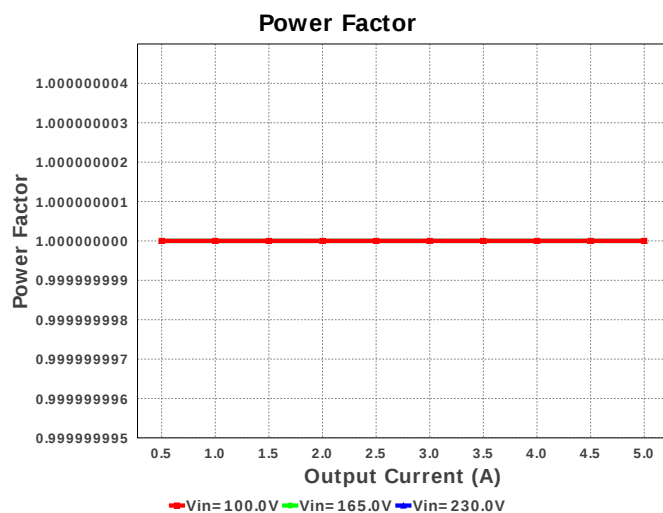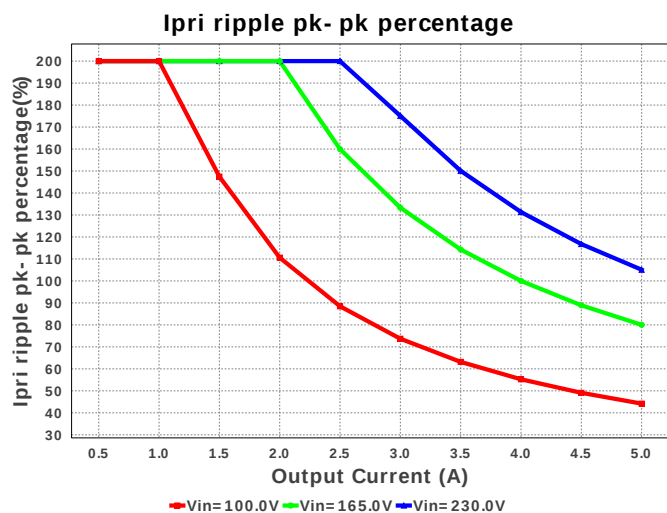

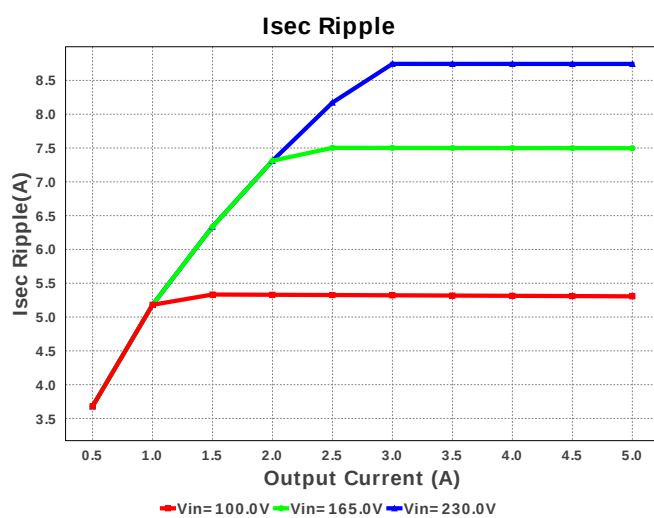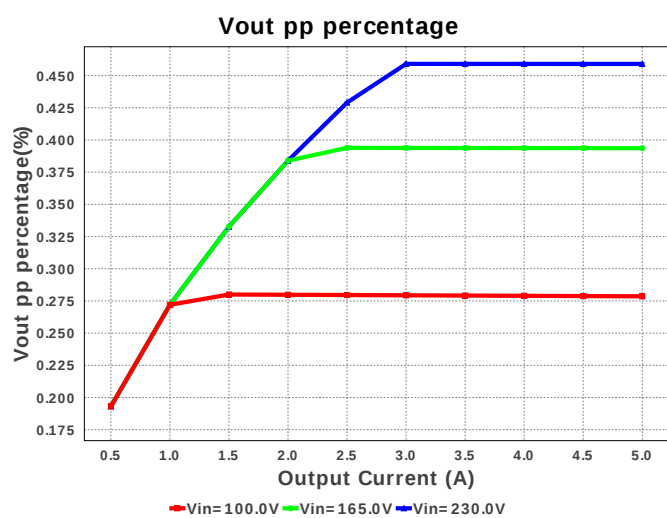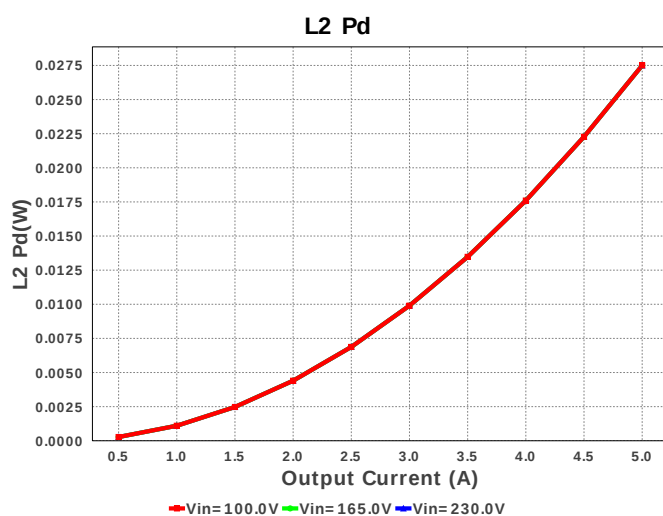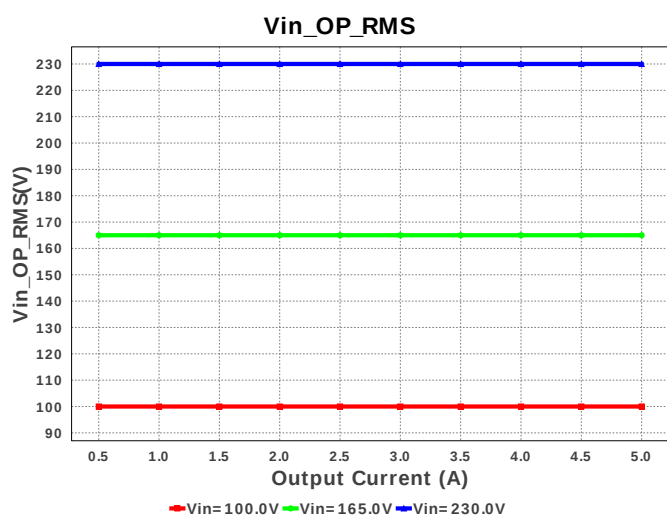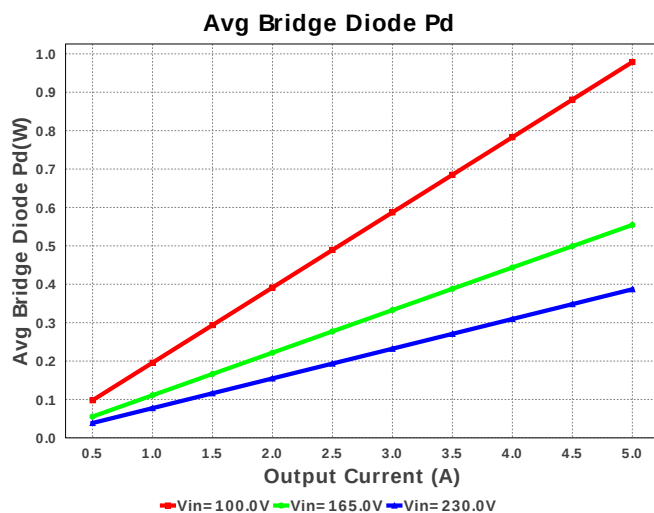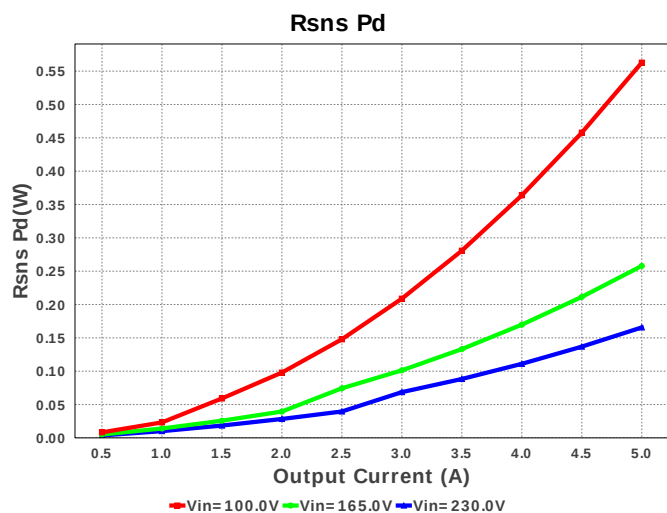

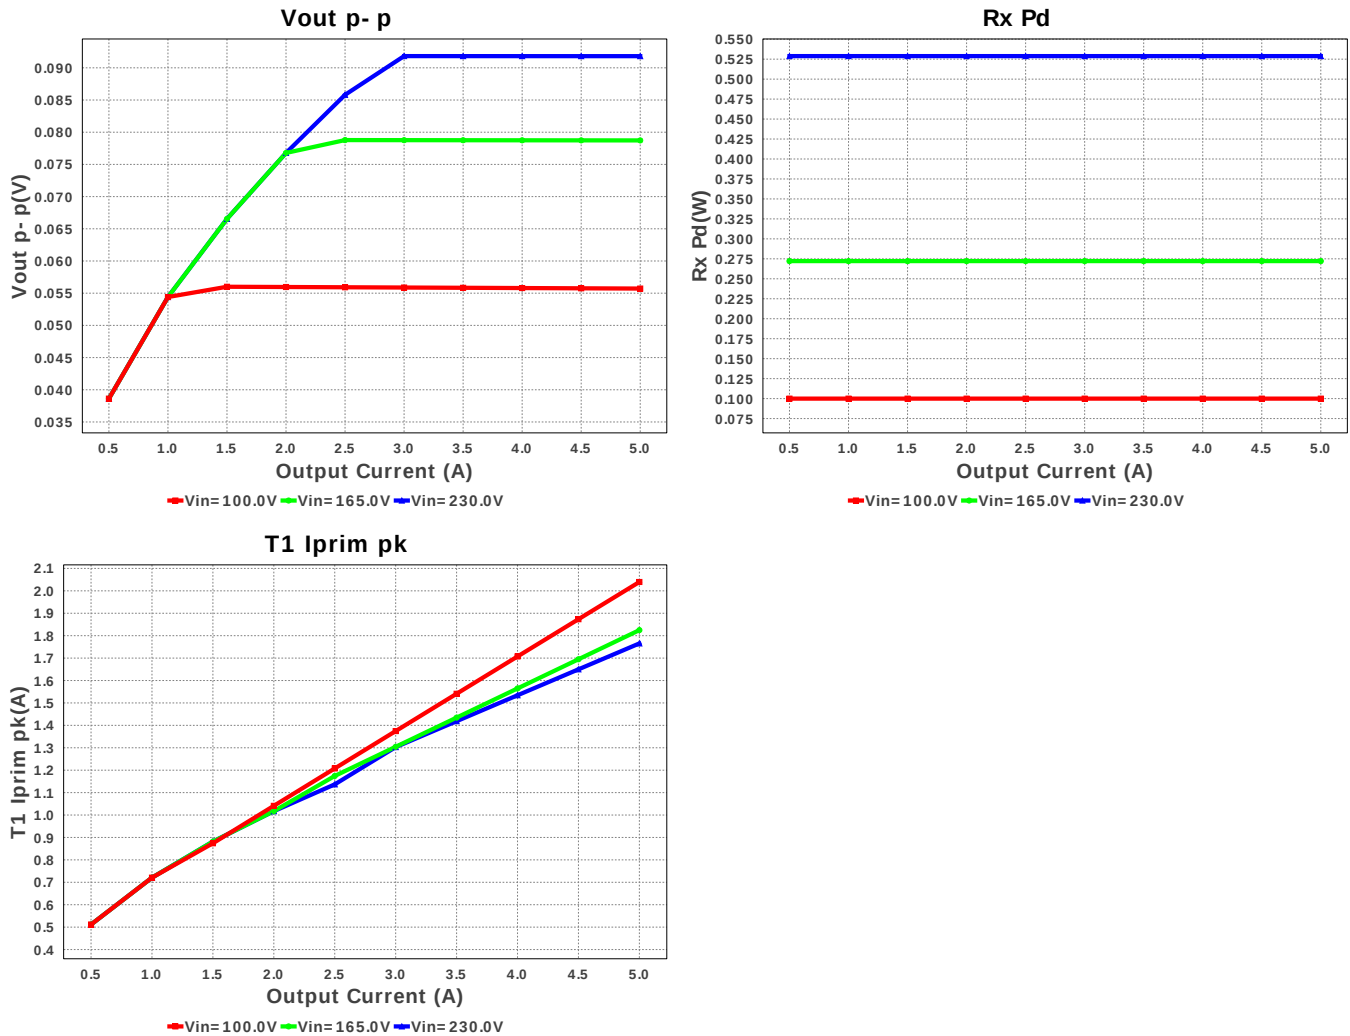

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	5.781 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	1.112 A	Current	RMS Input Current
3.	Iout_DCM	1.112 A	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	1.005 A	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	738.129 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	44.188 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	5.306 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	1.306 A	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	2.04 A	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	7.643 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	14.662 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	60	General	Total Design BOM count
14.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	522.788 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	522.788 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	35.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	6.894 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	31.33 kHz	General	Switching frequency
21.	Pout	100.0 W	General	Total output power
22.	Power Factor	1.0	General	Assumed Power Factor for the Application
23.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
24.	Toff	13.29 us	General	Approximate Converter Off Time
25.	Ton Act	19.196 us	General	Approximate Converter On Time
26.	Total BOM	\$0.0	General	Total BOM Cost
27.	Tsw	31.919 us	General	Switching Time Period
28.	Vaux	10.582 V	General	Auxiliary Voltage
29.	Vsnub	237.838 V	General	Voltage Across the Snubber

#	Name	Value	Category	Description
30.	Vout Actual	20.013 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
31.	Vout OP	20.0 V	Op_Point	Operational Output Voltage
32.	Duty Cycle	60.14 %	Op_point	Duty cycle
33.	Efficiency	89.924 %	Op_point	Steady state efficiency
34.	IC Tj	33.21 degC	Op_point	IC junction temperature
35.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
36.	IOUT_OP	5.0 A	Op_point	Iout operating point
37.	M1 TjOP	52.523 degC	Op_point	M1 MOSFET junction temperature
38.	Peak Rectified Vin	141.42 V	Op_point	Peak voltage seen at rectified input
39.	Vin_OP_RMS	100.0 V	Op_point	AC Input RMS Voltage
40.	Vout p-p	55.718 mV	Op_point	Peak-to-peak output ripple voltage
41.	Avg Bridge Diode Pd	978.704 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
42.	Cbulk Pd	2.31 W	Power	Bulk capacitor power dissipation
43.	Cout1 Pd	350.902 mW	Power	Output capacitor1 power dissipation
44.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
45.	Cy Pd	0.0 W	Power	Y-caps Power Dissipation
46.	Dsec Pd	1.307 W	Power	Secondary Diode Power Dissipation
47.	Dsec2 Pd	1.307 W	Power	Secondary Diode Power Dissipation
48.	IC Pd	64.198 mW	Power	IC power dissipation
49.	L1 Pd	605.623 mW	Power	Power Dissipation in the Inductor
50.	L2 Pd	27.5 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
51.	M1 Pd	360.371 mW	Power	M1 MOSFET total power dissipation
52.	Paux	5.175 mW	Power	Power Dissipation in Raux and Daux
53.	Pd Rstartup	163.018 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
54.	Rdrv Pd	34.408 μ W	Power	Power Dissipation in Gate Drive Resistor
55.	Rfb Pd	10.61 mW	Power	Rfb Power Dissipation
56.	Rsns Pd	562.79 mW	Power	Current Limit Sense Resistor Power Dissipation
57.	Rx Pd	99.968 mW	Power	Total Power Dissipation in Rx1 and Rx2
58.	Snubber Pd	2.11 W	Power	Snubber Power Dissipation
59.	T1 Pd	3.972 W	Power	Estimated Losses in Transformer
60.	Total Pd	11.205 W	Power	Total Power Dissipation
61.	Vout Tolerance	2.095 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
62.	Vout pp percentage	278.588 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	5.0	Maximum Output Current
2.	VinMax	230.0	Maximum input voltage
3.	VinMin	100.0	Minimum input voltage
4.	Vout	20.0	Output Voltage
5.	acFrequency	50.0	Light Output in Lumen
6.	base_pn	UCC38C40	Texas Instruments Base Part Number
7.	source	AC	Input Source Type
8.	ta	30.0	Ambient temperature

Design Assistance

1. UCC38C40 Product Folder : <http://www.ti.com/product/UCC38C40> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).