
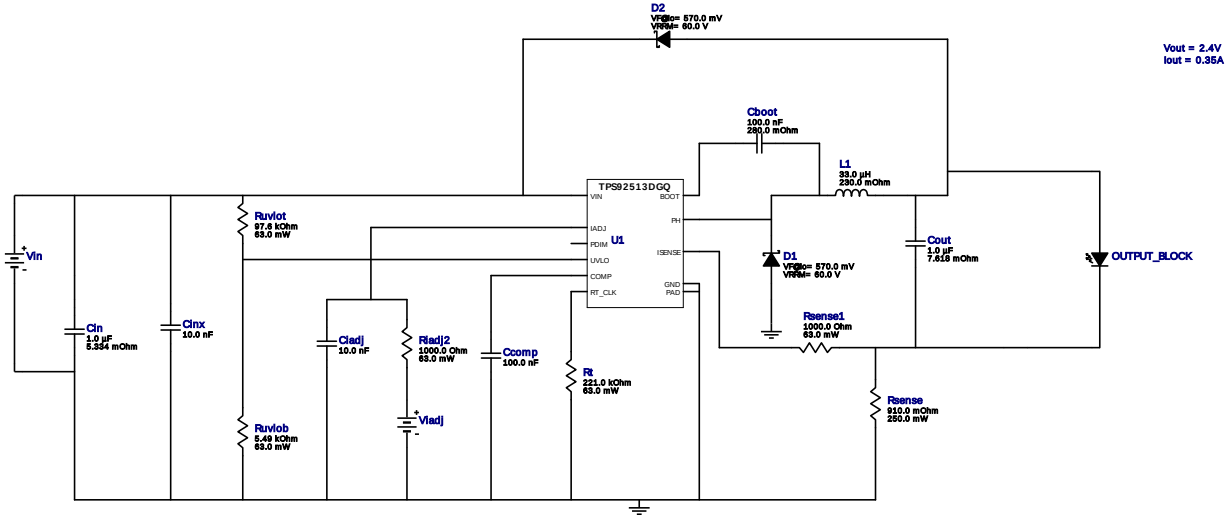


WEBENCH® Design Report



Design : 4738418/7 TPS92513DGQR
TPS92513DGQR 24.0V-32.0V to 2.40V @ 0.35A















Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
2.	Ccomp	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	Ciadj	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	Cin	MuRata	GRM31CR72A105KA01L Series= X7R	Cap= 1.0 uF ESR= 5.334 mOhm VDC= 100.0 V IRMS= 1.55432 A	1	\$0.11	 1206_190 11 mm ²
5.	Cinx	MuRata	GRM188R72A103KA01D Series= X7R	Cap= 10.0 nF VDC= 100.0 V IRMS= 0.0 A	1	\$0.01	 0603 5 mm ²
6.	Cout	TDK	C1005X5R0J105M Series= X5R	Cap= 1.0 uF ESR= 7.618 mOhm VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
7.	D1	NXP Semiconductor	PMEG6010CEH,115	VF@Io= 570.0 mV VRRM= 60.0 V	1	\$0.04	 SOD-123F 12 mm ²
8.	D2	NXP Semiconductor	PMEG6010CEH,115	VF@Io= 570.0 mV VRRM= 60.0 V	1	\$0.04	 SOD-123F 12 mm ²
9.	D_LED	Avago	ASMT-AR00-AQR00	LED	1	\$1.53	 asmt_a 147 mm ²
10.	L1	Bourns	SRR4028-330Y	L= 33.0 uH DCR= 230.0 mOhm	1	\$0.26	 SRR4028 34 mm ²


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
11.	Riadj2	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1000.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
12.	Rsense	Bourns	CRM0805-FX-R910ELF Series= ?	Res= 910.0 mOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.03	 0805 7 mm ²
13.	Rsense1	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1000.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
14.	Rt	Vishay-Dale	CRCW0402221KFKED Series= CRCW..e3	Res= 221.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
15.	Ruvlob	Vishay-Dale	CRCW04025K49FKED Series= CRCW..e3	Res= 5.49 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
16.	Ruvlot	Vishay-Dale	CRCW040297K6FKED Series= CRCW..e3	Res= 97.6 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
17.	U1	Texas Instruments	TPS92513DGQR	Switcher	1	\$0.45	 DGQ0010D_NV_N 24 mm ²

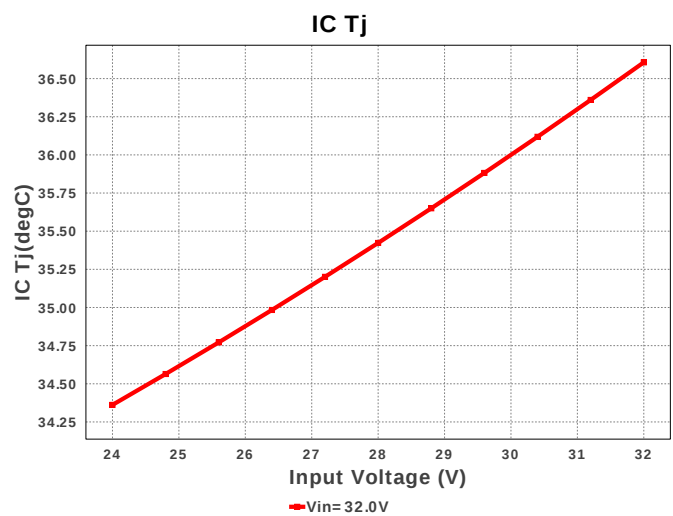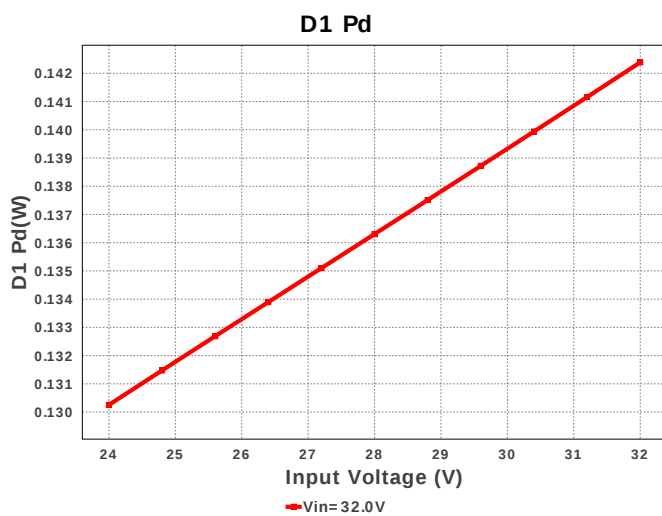

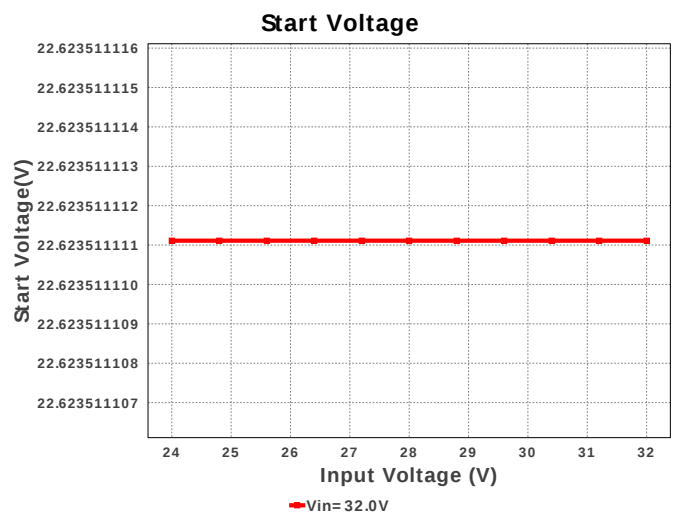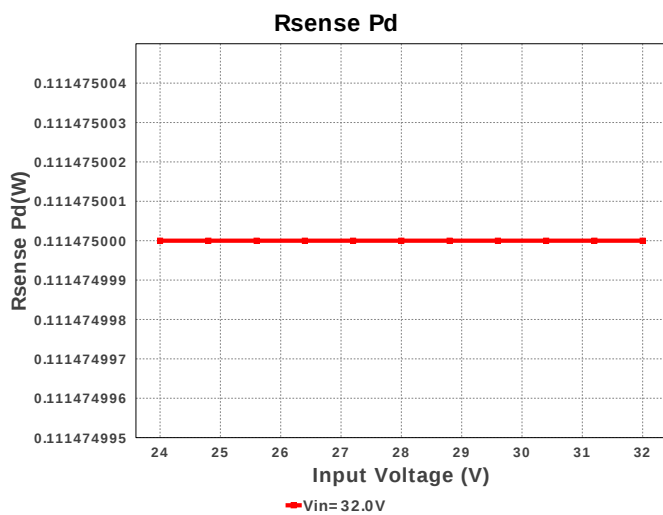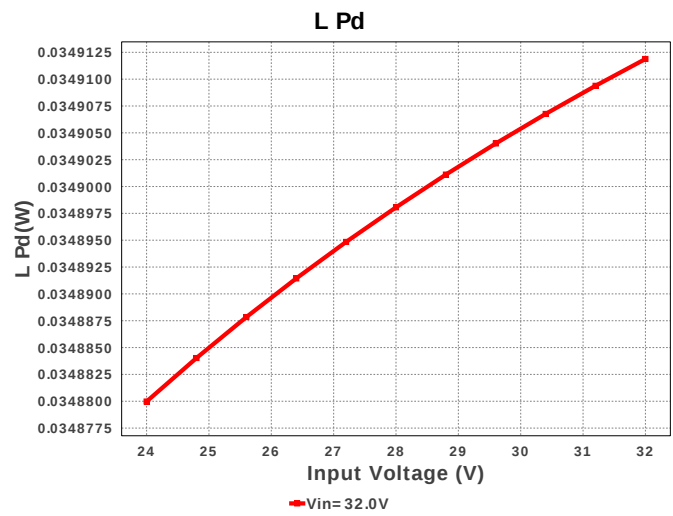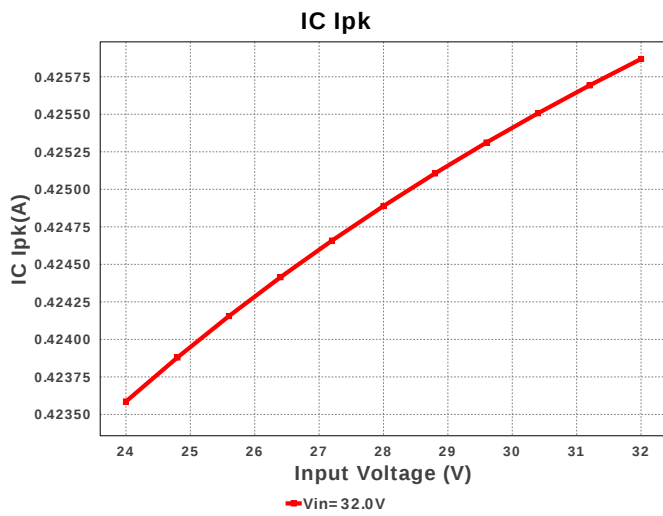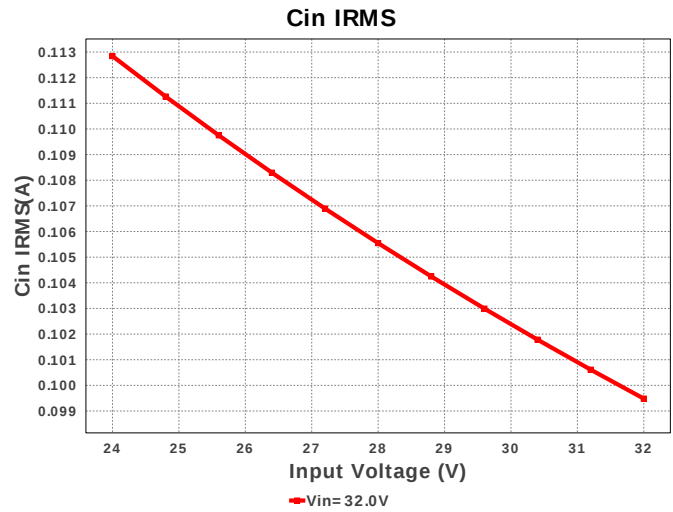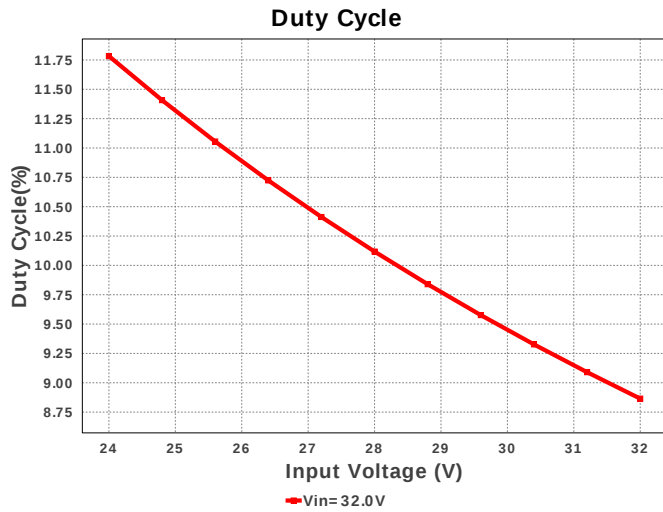

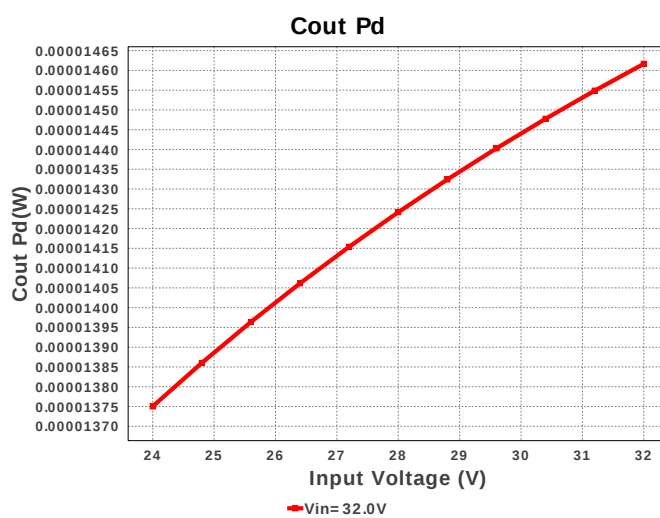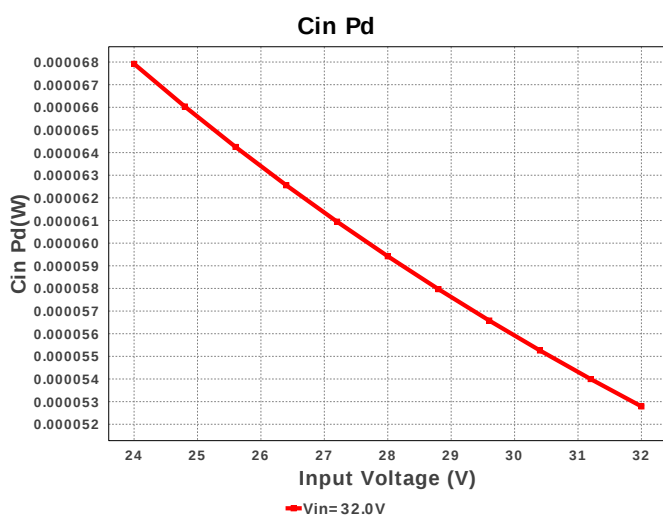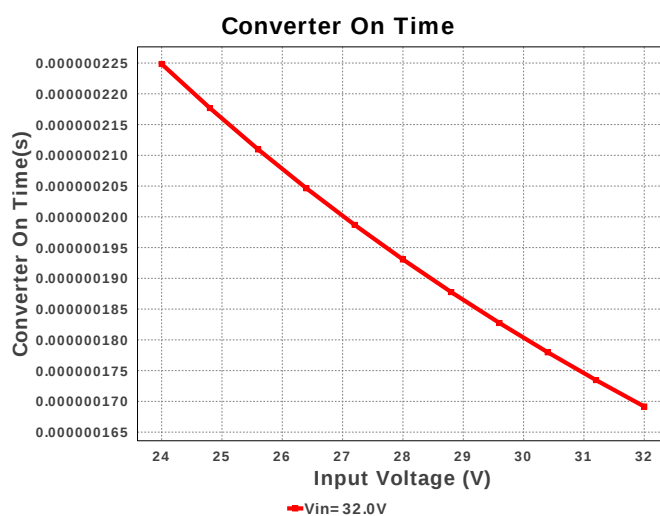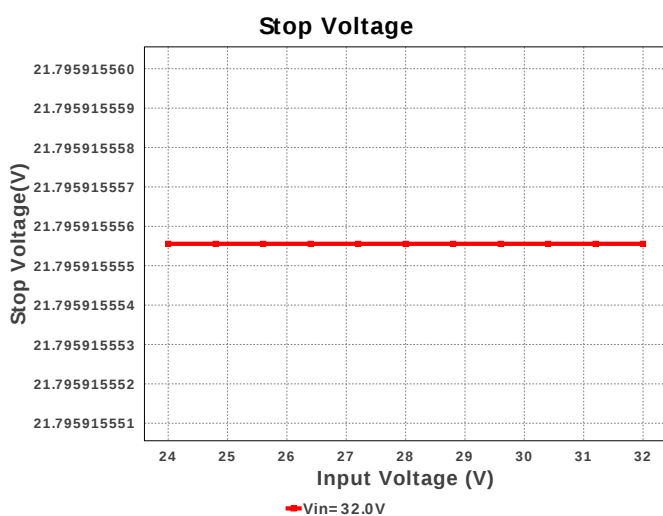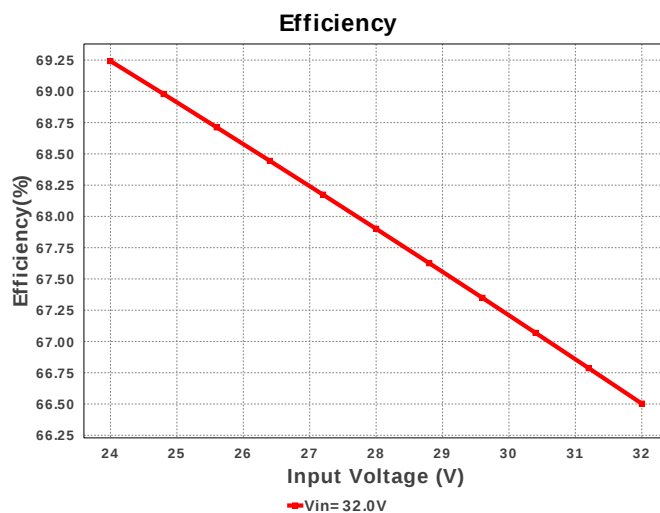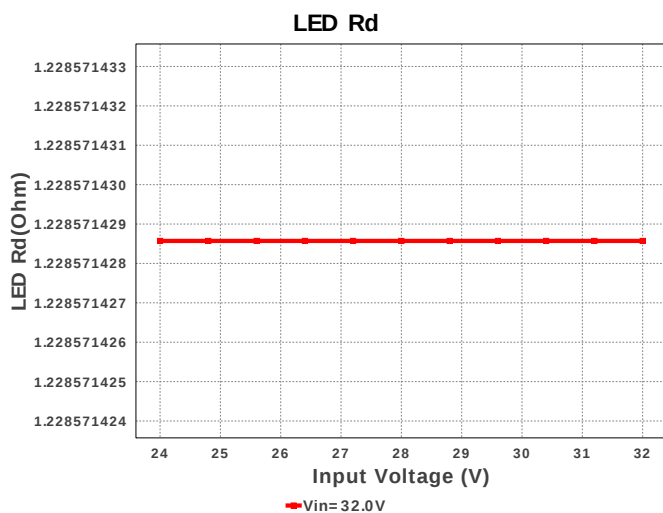

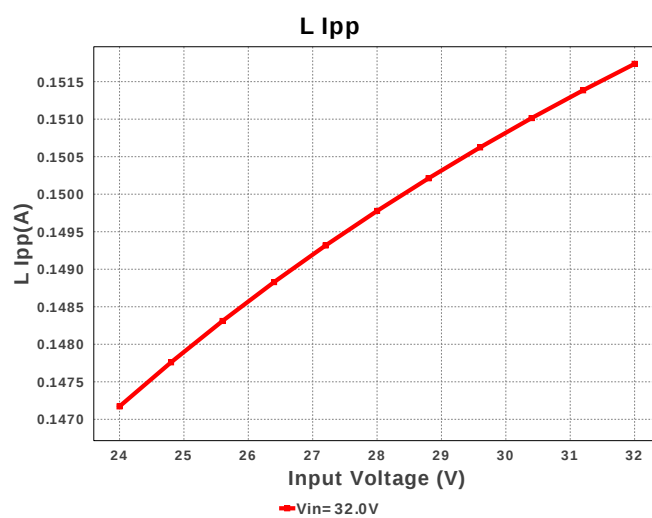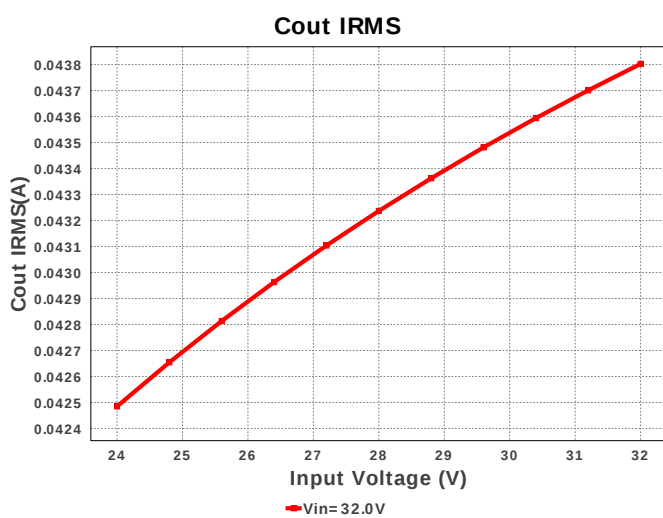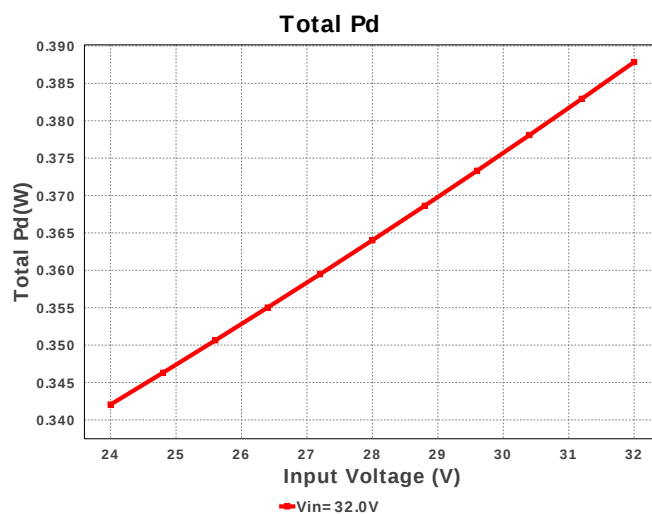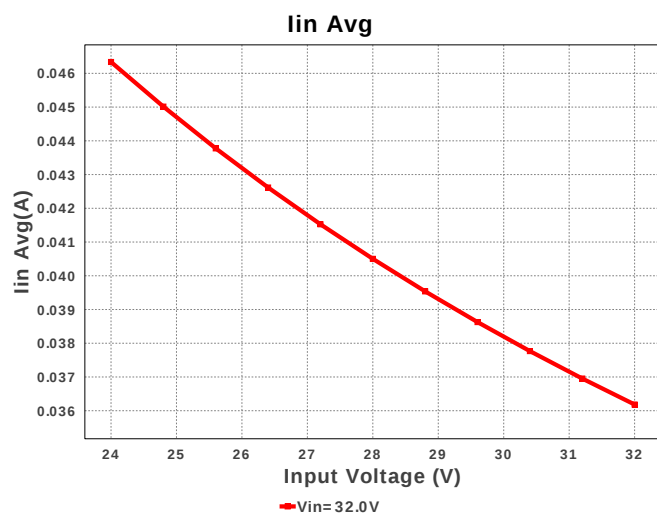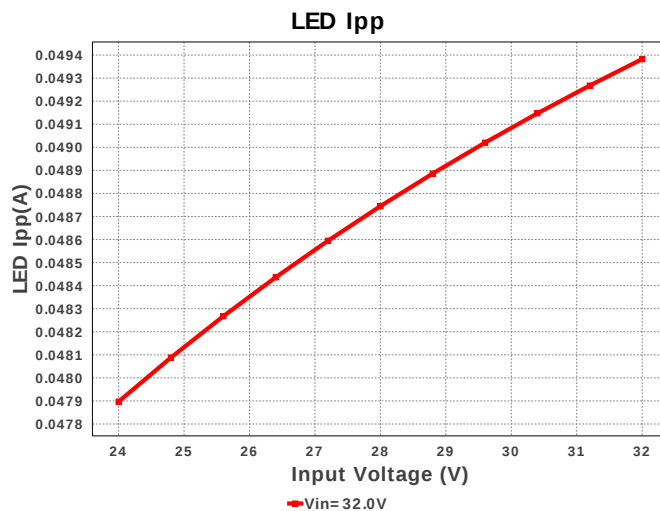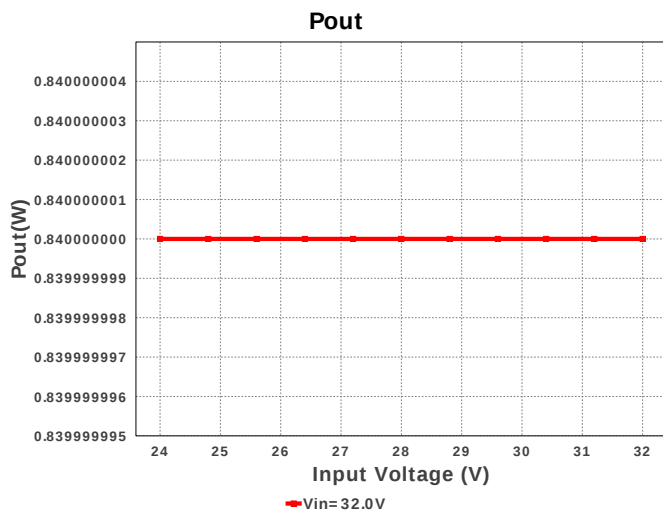

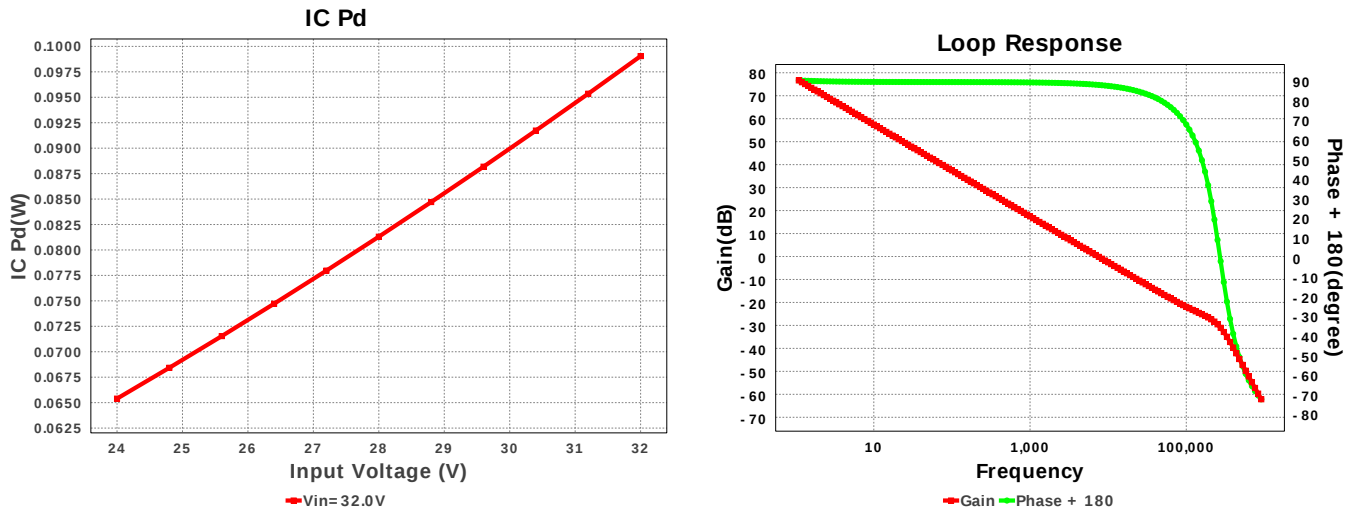

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	99.483 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	43.663 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	425.627 mA	Current	Peak switch current in IC
4.	Iin Avg	36.184 mA	Current	Average input current
5.	L Ipp	151.25 mA	Current	Peak-to-peak inductor ripple current
6.	LED Ipp	49.225 mA	Current	LED Ripple Current
7.	BOM Count	17	General	Total Design BOM count
8.	FootPrint	288.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	524.038 kHz	General	Switching frequency
10.	IC Tolerance	0.0 V	General	IC Feedback Tolerance
11.	Pout	840.0 mW	General	Total output power
12.	Total BOM	\$2.56	General	Total BOM Cost
13.	Vout OP	2.4 V	Op_Point	Operational Output Voltage
14.	Cross Freq	7.466 kHz	Op_point	Bode plot crossover frequency
15.	Duty Cycle	8.865 %	Op_point	Duty cycle
16.	Efficiency	66.504 %	Op_point	Steady state efficiency
17.	IC Tj	36.606 degC	Op_point	IC junction temperature
18.	ICThetaJA	66.7 degC/W	Op_point	IC junction-to-ambient thermal resistance
19.	IOUT_OP	350.0 mA	Op_point	Iout operating point
20.	LED Rd	1.229 Ohm	Op_point	LED DynamicResistance
21.	Phase Marg	88.494 deg	Op_point	Bode Plot Phase Margin
22.	VIN_OP	32.0 V	Op_point	Vin operating point
23.	Cin Pd	52.79 μW	Power	Input capacitor power dissipation
24.	Cout Pd	14.523 μW	Power	Output capacitor power dissipation
25.	D1 Pd	142.388 mW	Power	Output Diode Power Dissipation
26.	IC Pd	99.046 mW	Power	IC power dissipation
27.	L Pd	34.908 mW	Power	Inductor power dissipation
28.	Rsense Pd	111.475 mW	Power	LED Current Rsns Power Dissipation
29.	Total Pd	387.846 mW	Power	Total Power Dissipation
30.	Start Voltage	22.624 V	UVLO	Start Voltage with External UVLO Resistors
31.	Stop Voltage	21.796 V	UVLO	Stop Voltage with External UVLO Resistors
32.	Converter On Time	168.627 ns		Approximate Converter On Time

Design Inputs

#	Name	Value	Description
1.	Iout	350.0 m	Maximum Output Current
2.	VinMax	32.0	Maximum input voltage
3.	VinMin	24.0	Minimum input voltage
4.	Vout	2.4	Output Voltage
5.	application	LED_DRIVER	LED Application
6.	base_pn	TPS92513	Base Product Number
7.	LED_Architect	N	LED Architect Project
8.	ledparallel	1.0	Number of LED in parallel
9.	ledpartnumber	ASMT-AR00-AQR00	LED Part number
10.	ledseries	1.0	Number of LED in series
11.	line_fsw	60.0	AC Line Frequency
12.	source	DC	Input Source Type
13.	Ta	30.0	Ambient temperature

Design Assistance

1. **TPS92513** Product Folder : <http://www.ti.com/product/TPS92513> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).