


WEBENCH® Design Report




Design : 4733747/4 UCC28C40DR
UCC28C40DR 110.0V-130.0V to 12.00V @ 5.0A

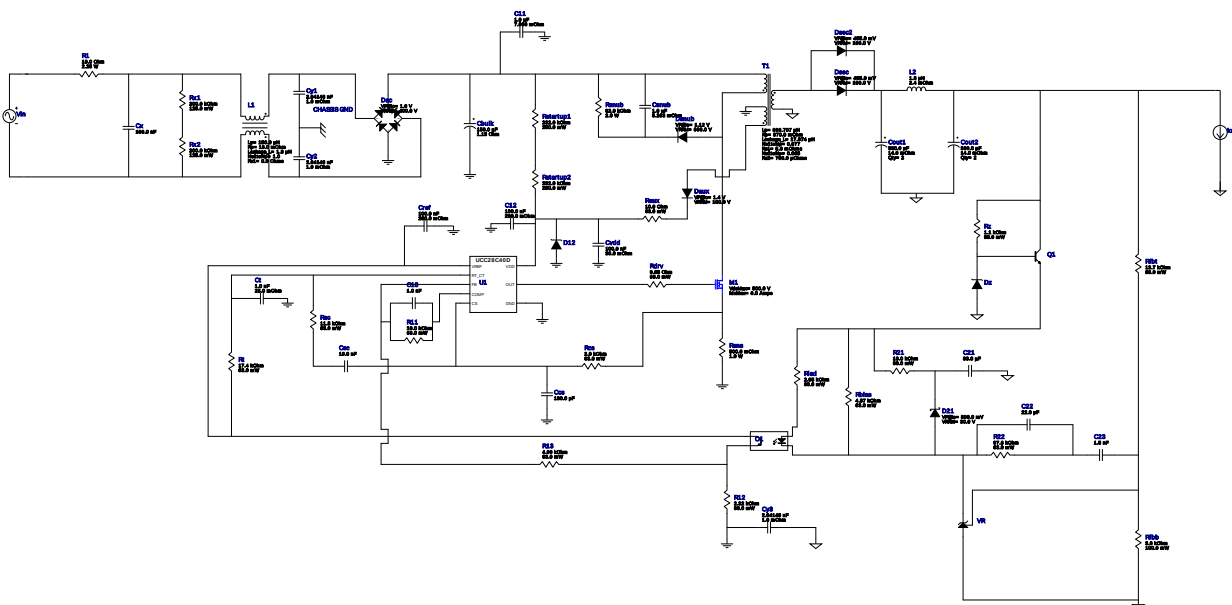


1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.

Electrical BOM





#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	MuRata	GRM55DR72E105KW01L Series= X7R	Cap= 1.0 uF ESR= 7.086 mOhm VDC= 250.0 V IRMS= 2.0605 A	1	\$0.26	 2220_200 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	MuRata	KCM55WR7YA336MH01K Series= X7R	Cap= 33.0 uF VDC= 35.0 V IRMS= 0.0 A	1	\$1.51	 KCM55W 59 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	Yageo America	CC0805KRX7R9BB152 Series= X7R	Cap= 1.5 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
7.	Cbulk	Vishay-Bccomponents	MAL215759151E3 Series= 2239	Cap= 150.0 uF ESR= 1.13 Ohm VDC= 500.0 V IRMS= 1.43 A	1	\$4.45	 157PUM-SI_2500x4000 729 mm ²
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
9.	Cout1	Panasonic	25SVPF330M Series= ?	Cap= 330.0 uF ESR= 14.0 mOhm VDC= 25.0 V IRMS= 5.0 A	2	\$0.70	 CAPSMT_62_F12 151 mm ²
10.	Cout2	Panasonic	25SVPF330M Series= ?	Cap= 330.0 uF ESR= 14.0 mOhm VDC= 25.0 V IRMS= 5.0 A	2	\$0.70	 CAPSMT_62_F12 151 mm ²
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
13.	Csnub	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
14.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
15.	Cvdd	MuRata	GRM188R71C104KA01D Series= X7R	Cap= 100.0 nF ESR= 30.0 mOhm VDC= 16.0 V IRMS= 1.7 A	1	\$0.01	 0603 5 mm ²
16.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm ²
17.	Cy1	CUSTOM	CUSTOM Series= ?	Cap= 2.04148 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
18.	Cy2	CUSTOM	CUSTOM Series= ?	Cap= 2.04148 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
19.	Cy3	CUSTOM	CUSTOM Series= ?	Cap= 2.04148 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
20.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
21.	D21	Diodes Inc.	B230A-13-F	VF@Io= 500.0 mV VRRM= 30.0 V	1	\$0.09	 SMA 37 mm ²
22.	Dac	Diodes Inc.	HD04-T	VF@Io= 1.0 V VRRM= 400.0 V	1	\$0.12	 MiniDIP 62 mm ²
23.	Daux	NXP Semiconductor	BAS316,115	VF@Io= 1.4 V VRRM= 100.0 V	1	\$0.02	 SOD-323 9 mm ²
24.	Dsec	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
25.	Dsec2	STMicroelectronics	STPS20M100SG-TR	VF@Io= 455.0 mV VRRM= 100.0 V	1	\$1.33	 DDPAK 210 mm ²
26.	Dsnub	Bourns	CD214C-F3600	VF@Io= 1.12 V VRRM= 600.0 V	1	\$0.18	 SMC 83 mm ²
27.	Dz	ON Semiconductor	BZX84C9V1LT1G	Zener	1	\$0.02	 SOT-23 14 mm ²
28.	L1	API Delevan	CM6296R-154	Lp= 150.0 µH Rp= 16.0 mOhm Leakage_L= 1.8 µH Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$5.95	 CM6296 833 mm ²
29.	L2	Coilcraft	MLC1250-132MLB	L= 1.3 µH DCR= 2.4 mOhm	1	\$0.79	 MLC1250 165 mm ²
30.	M1	Fairchild Semiconductor	FDD6N50TM	VdsMax= 500.0 V IdsMax= 6.0 Amps	1	\$0.47	 DPAK 102 mm ²
31.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
32.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
33.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm ²
34.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
35.	R12	Vishay-Dale	CRCW04022K32FKED Series= CRCW..e3	Res= 2.32 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
36.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
37.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
38.	R22	Vishay-Dale	CRCW040297K6FKED Series= CRCW..e3	Res= 97.6 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
39.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
40.	Rbias	Vishay-Dale	CRCW04024K87FKED Series= CRCW..e3	Res= 4.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
41.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
42.	Rdrv	Vishay-Dale	CRCW04023R65FKED Series= CRCW..e3	Res= 3.65 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
43.	Rfbb	Yageo America	RC0603FR-073K6L Series= ?	Res= 3.6 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
44.	Rfbt	Vishay-Dale	CRCW040213K7FKED Series= CRCW..e3	Res= 13.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
45.	Rled	Vishay-Dale	CRCW04022K05FKED Series= CRCW..e3	Res= 2.05 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
46.	Rsc	Vishay-Dale	CRCW040211K5FKED Series= CRCW..e3	Res= 11.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
47.	Rsns	Stackpole Electronics Inc	CSRN2010FKR500 Series= ?	Res= 500.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.10	 2010 32 mm ²
48.	Rsnu	Vishay-Bccomponents	PR02000208202JR500 Series= ?	Res= 82.0 kOhm Power= 2.0 W Tolerance= 5.0%	1	\$0.05	PR02 113 mm ²
49.	Rstartup1	Panasonic	ERJ-8ENF2323V Series= ERJ-8E	Res= 232.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
50.	Rstartup2	Panasonic	ERJ-8ENF2323V Series= ERJ-8E	Res= 232.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
51.	Rt	Vishay-Dale	CRCW040217K4FKED Series= CRCW..e3	Res= 17.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
52.	Rx1	Panasonic	ERJ-6ENF2003V Series= ERJ-6E	Res= 200.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
53.	Rx2	Panasonic	ERJ-6ENF2003V Series= ERJ-6E	Res= 200.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
54.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW..e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
55.	T1	CUSTOM	CUSTOM	Lp= 898.707 μ H Rp= 870.0 mOhm Leakage_L= 17.974 μ H Ns1toNp= 0.077 Rs1= 8.6 mOhms Ns2toNp= 0.065 Rs2= 700.0 μ Ohms	1	NA	CUSTOM 0 mm ²
56.	U1	Texas Instruments	UCC28C40DR	Switcher	1	\$0.75	 D0008A 57 mm ²
57.	VR	Texas Instruments	TL431AIDBZR	Voltage References	1	\$0.08	 DBZ0003A 14 mm ²



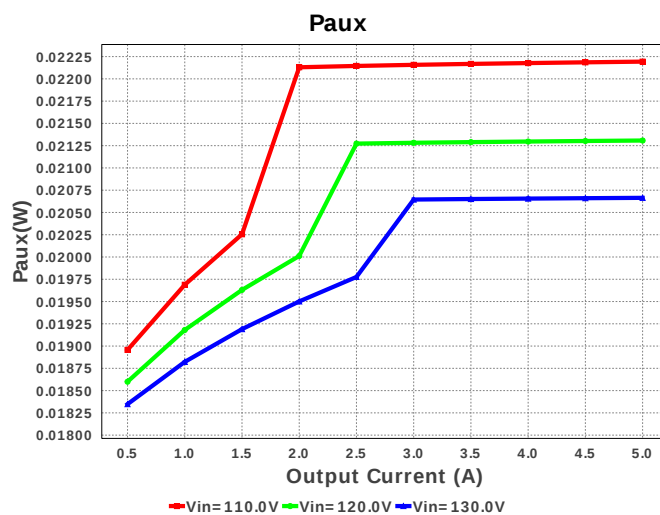
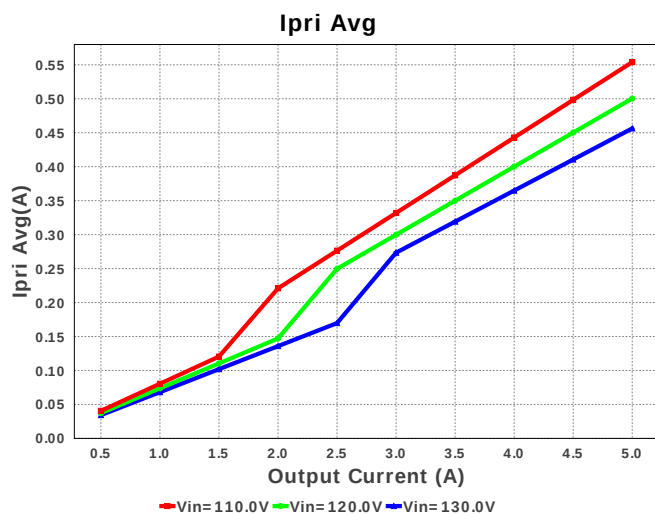
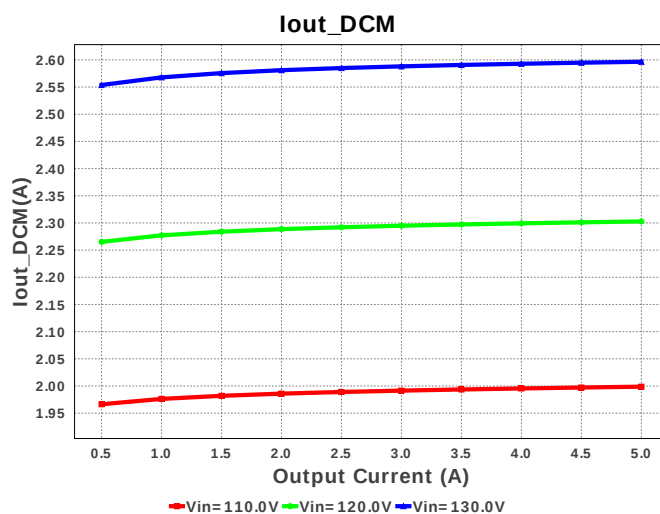
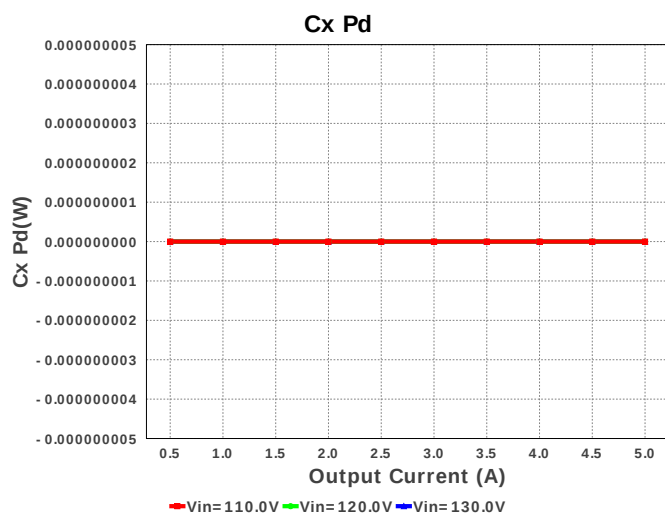


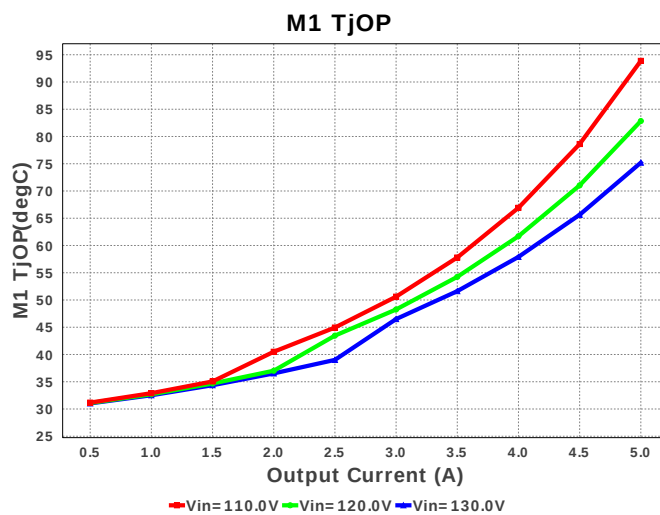
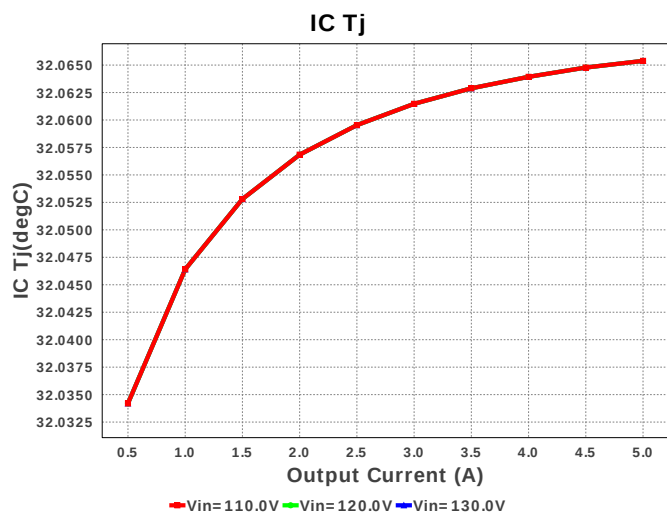
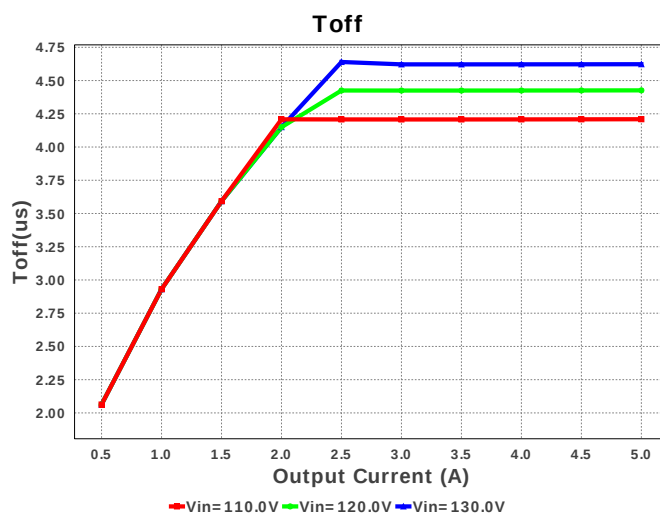
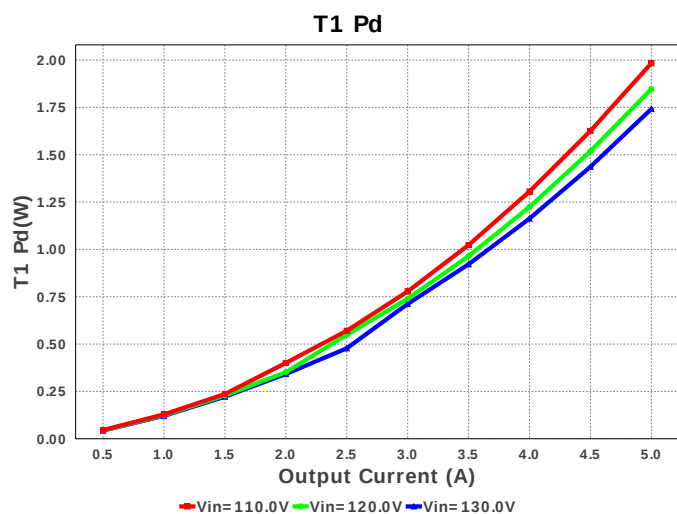
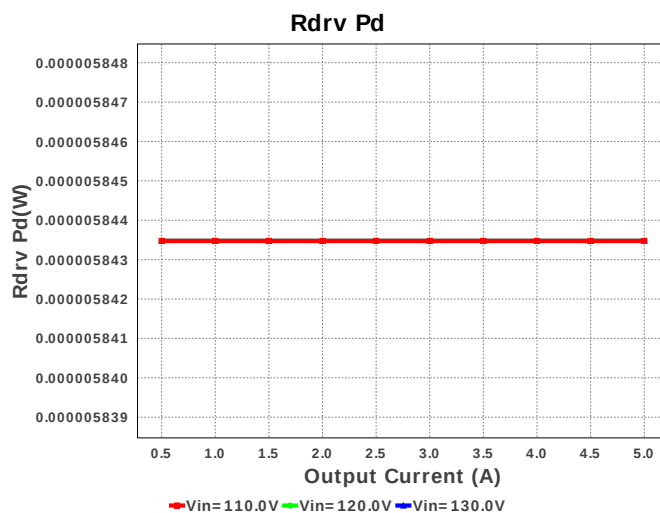
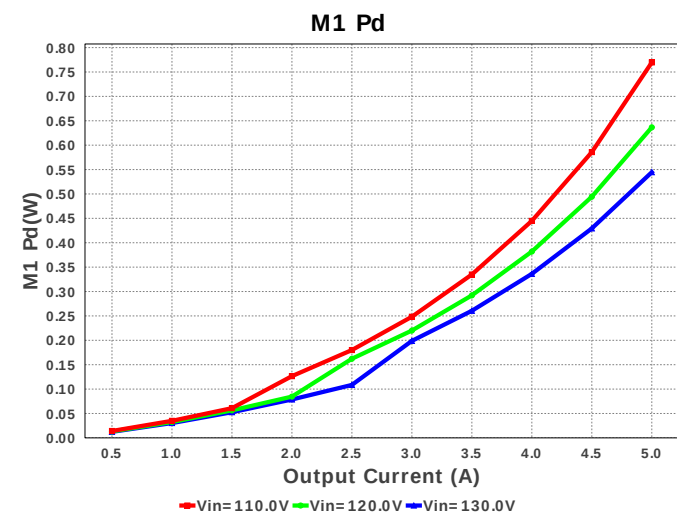


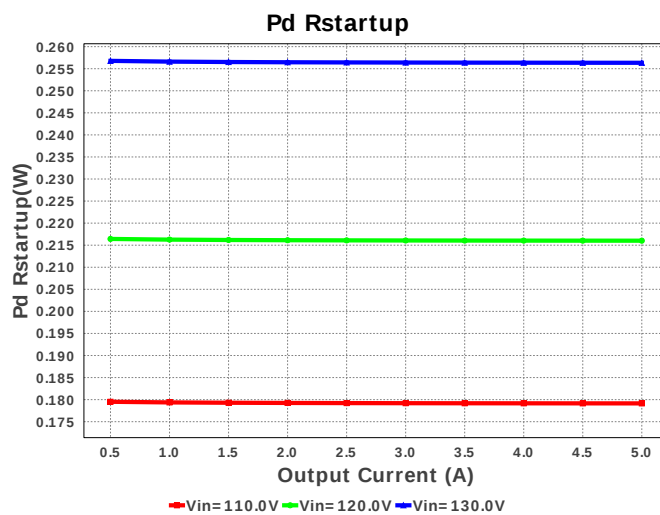
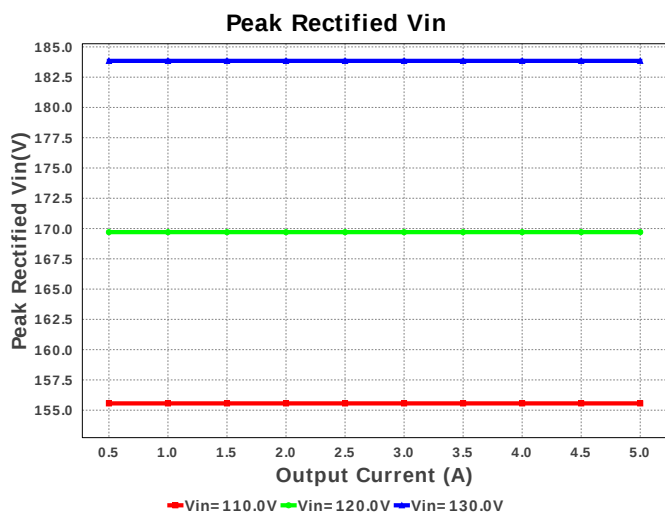
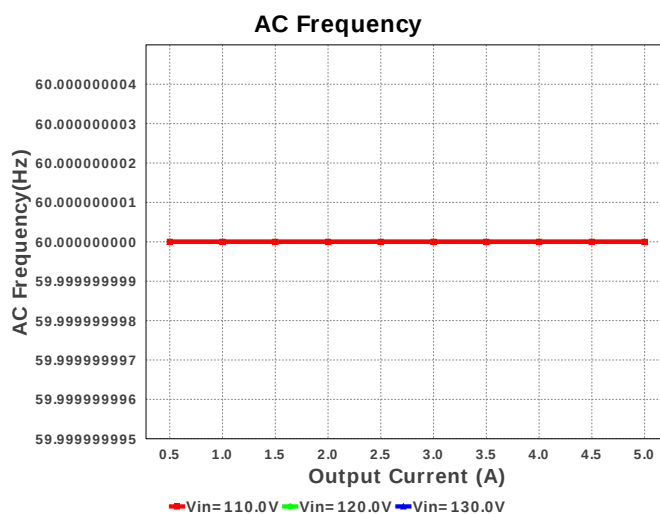
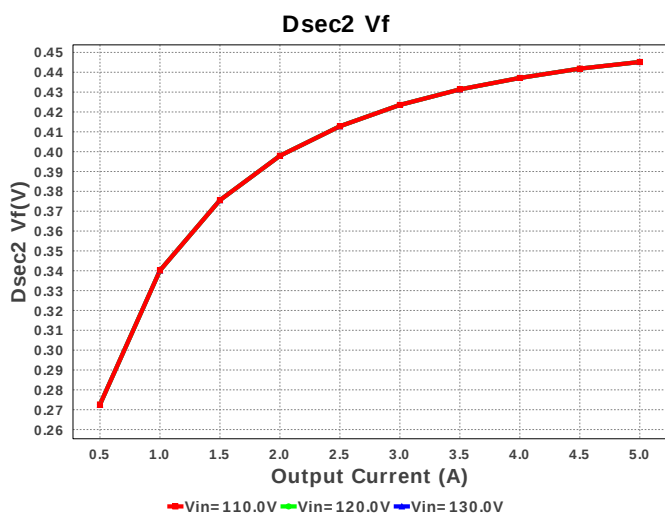
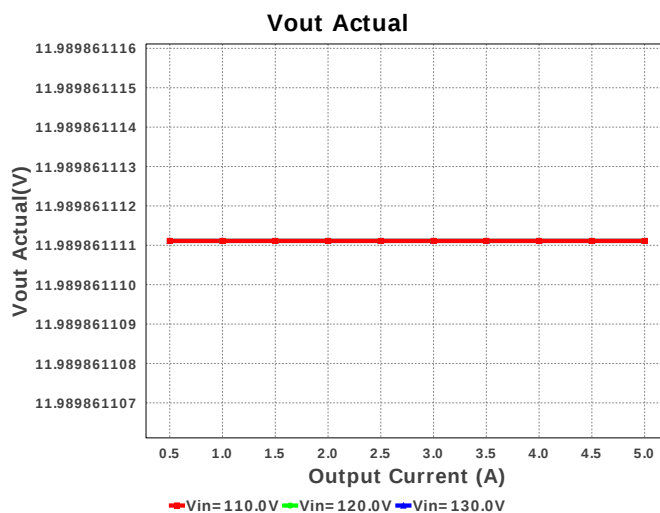
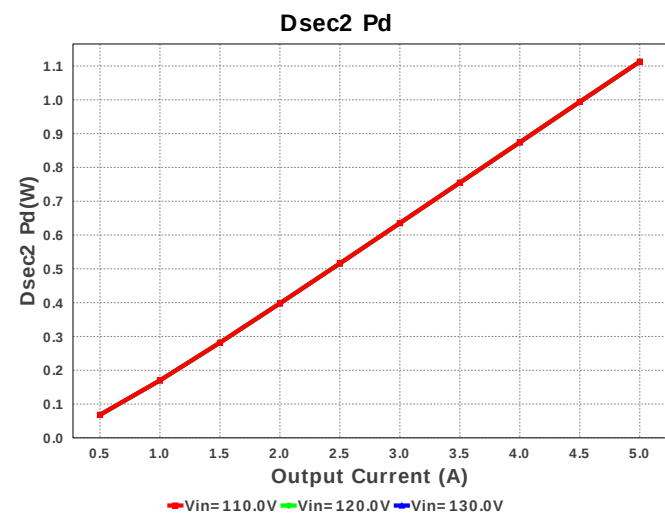


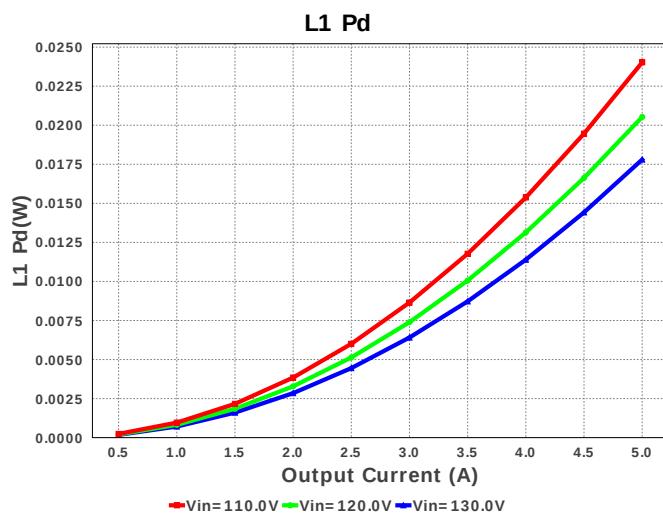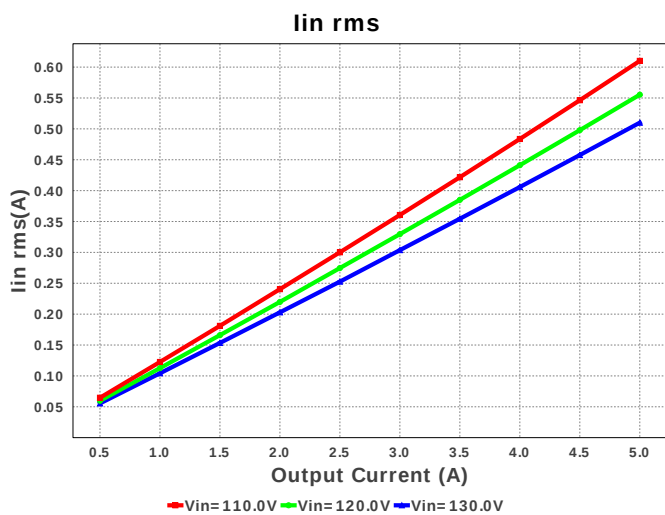
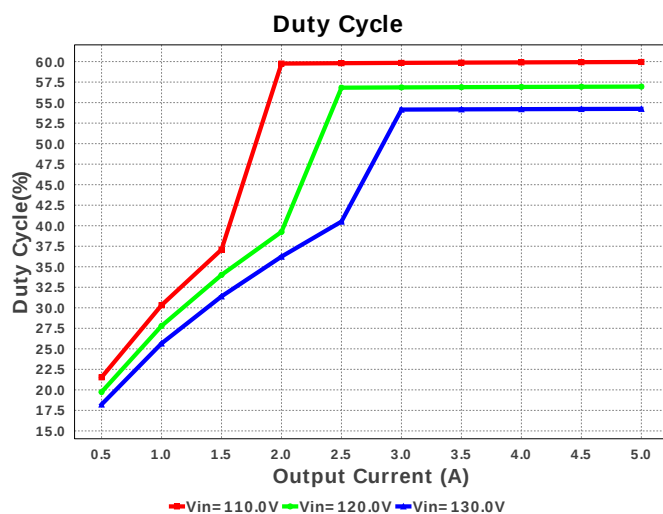
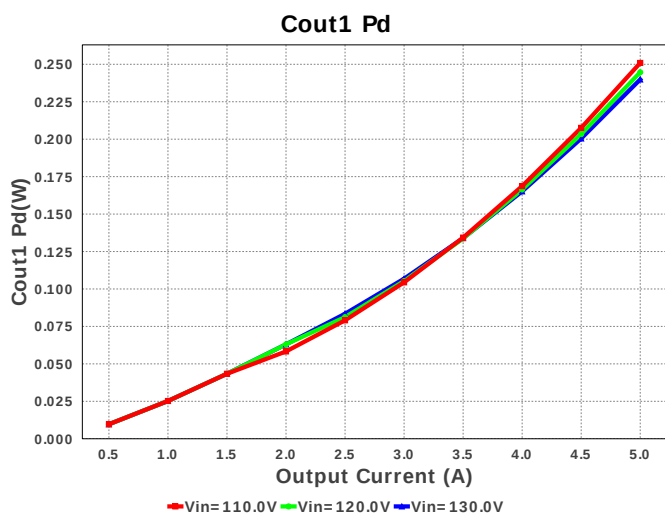
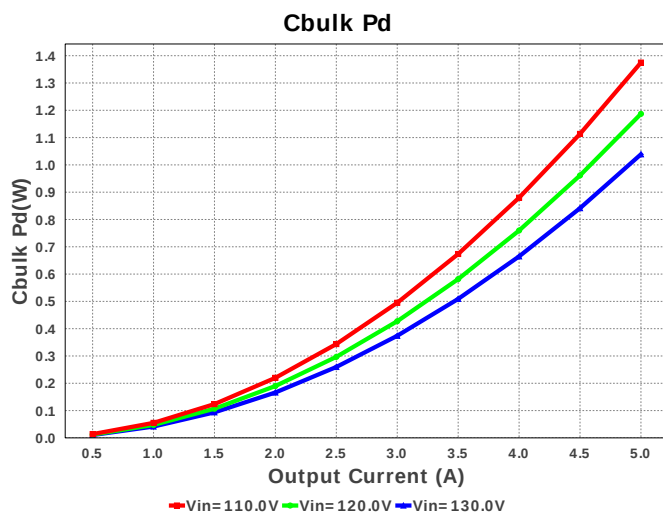
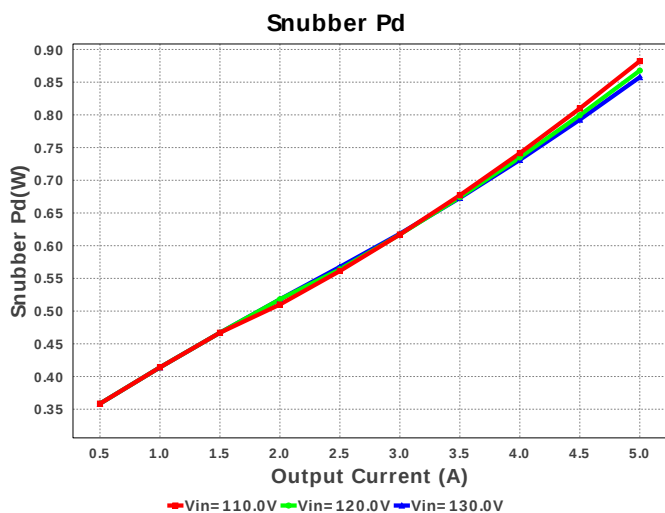


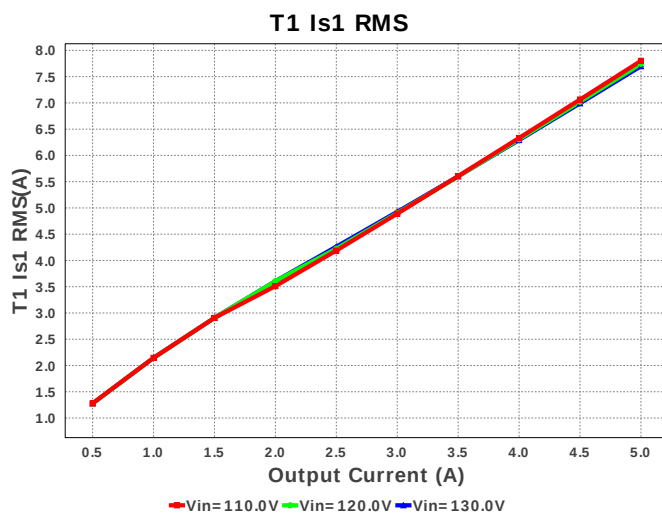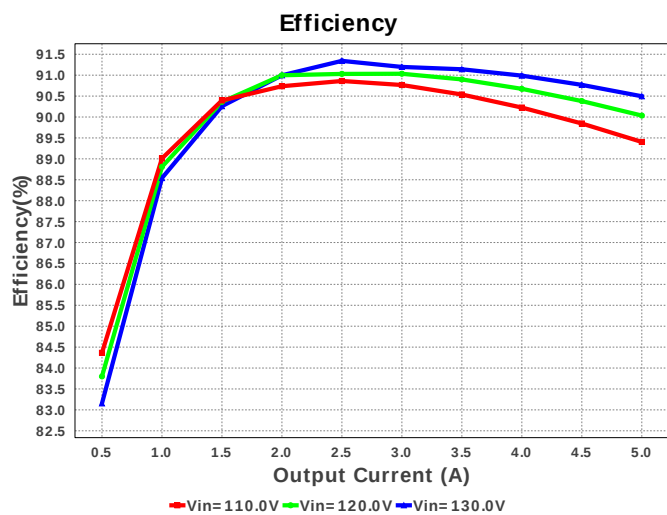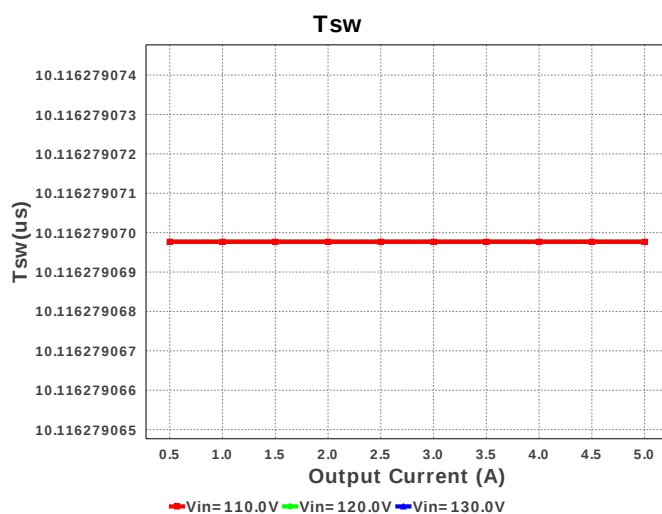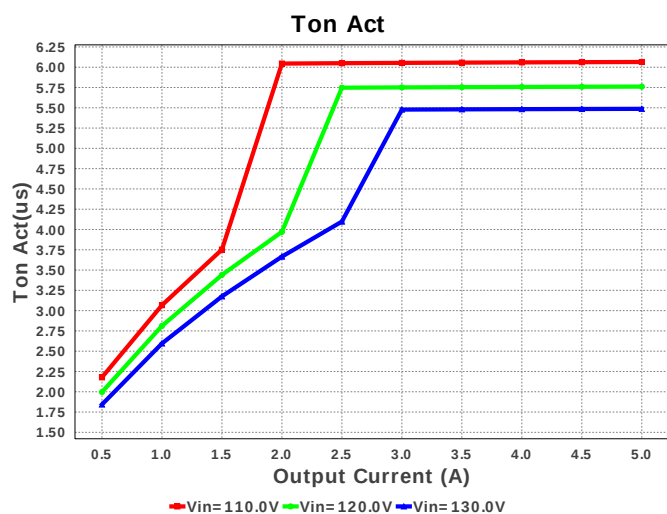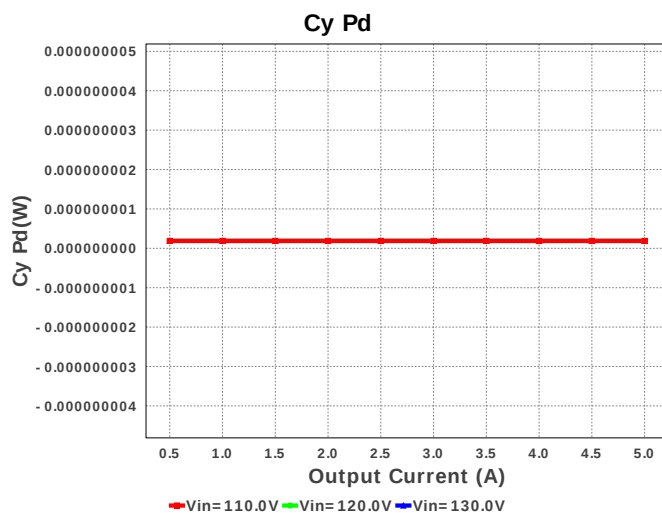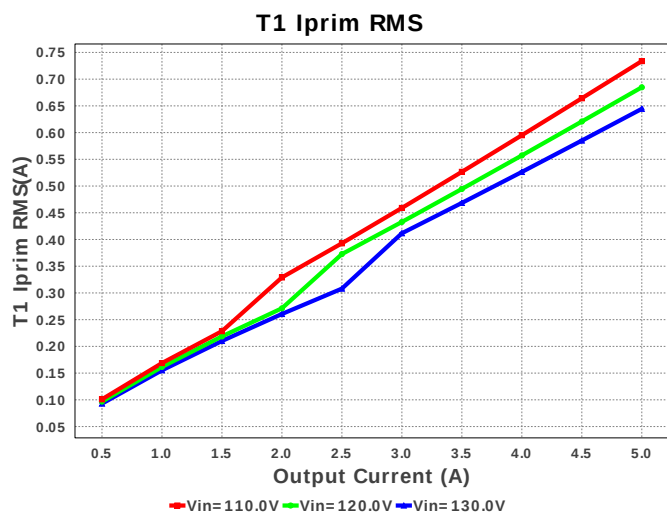

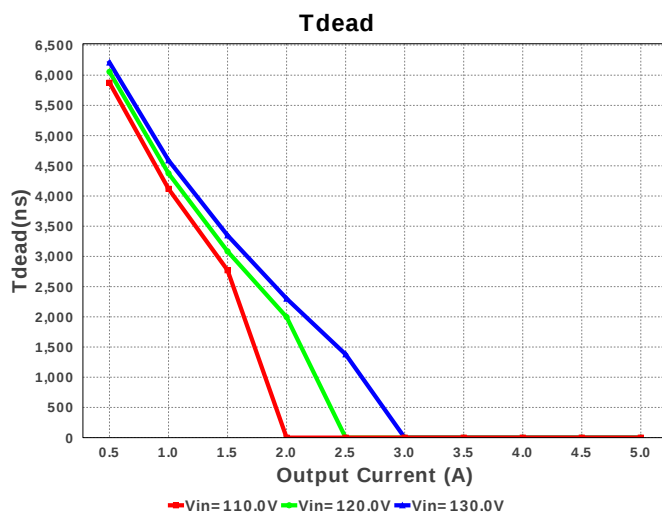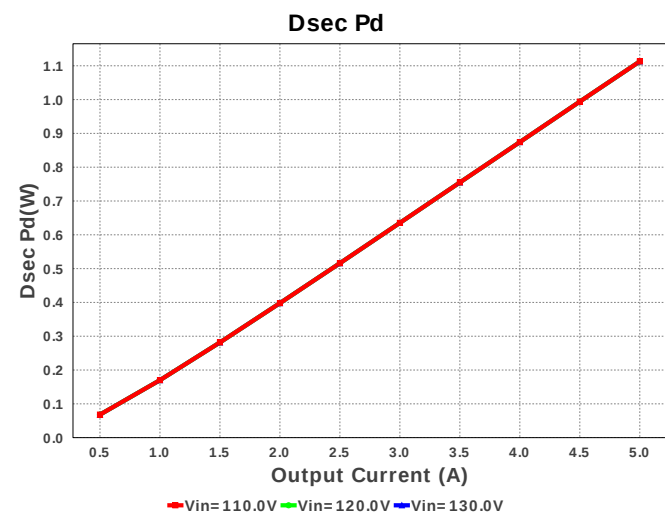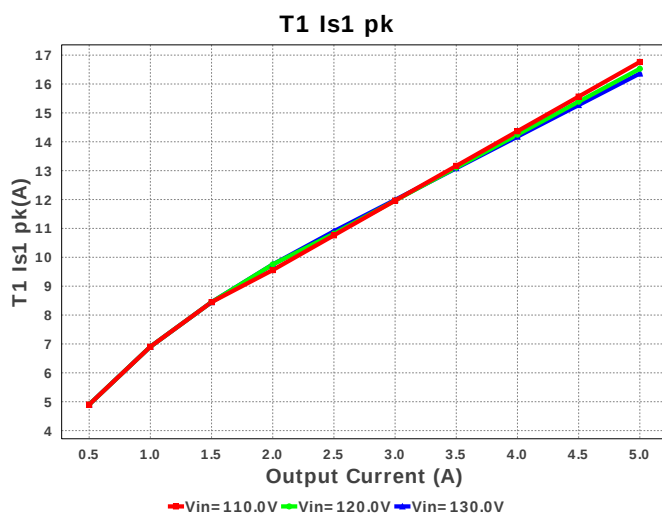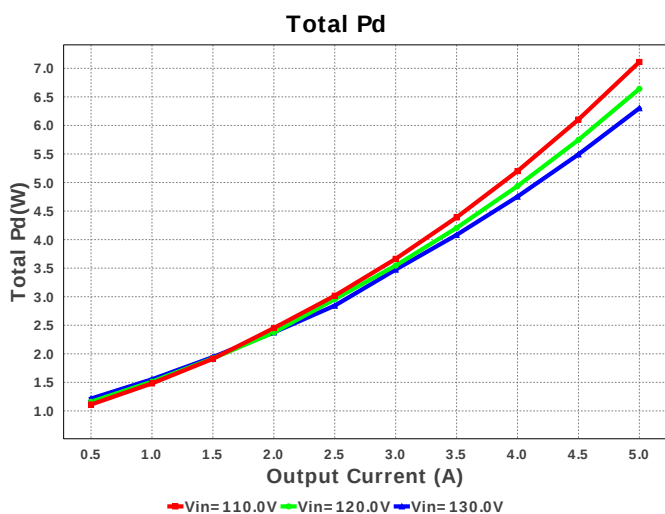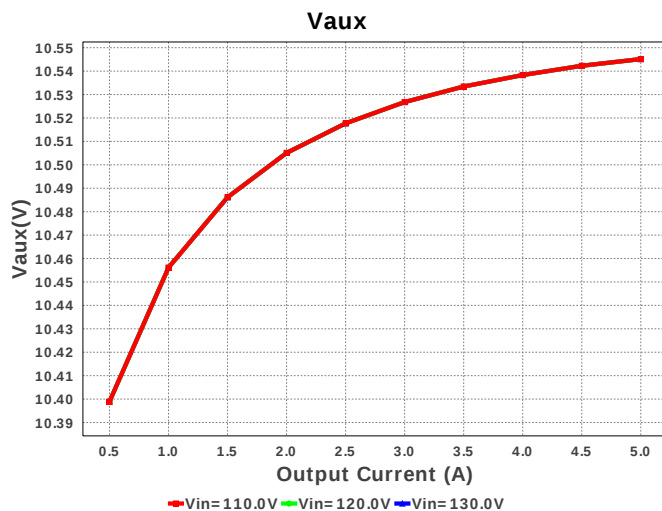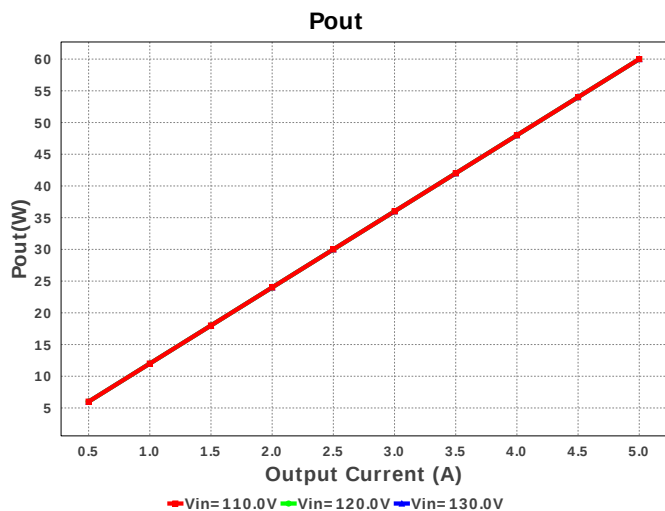

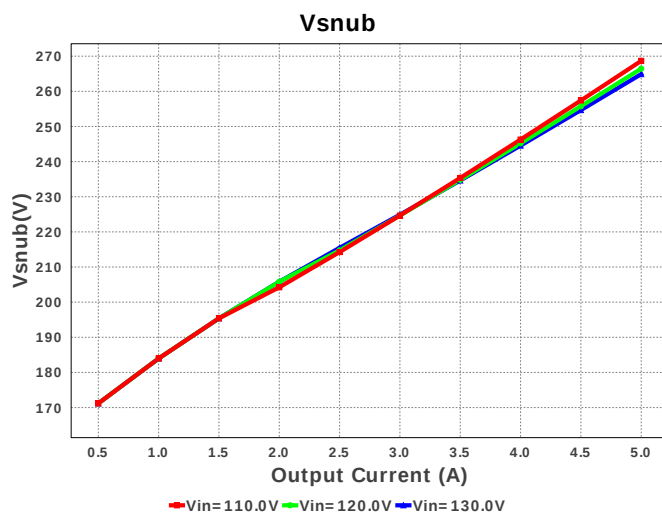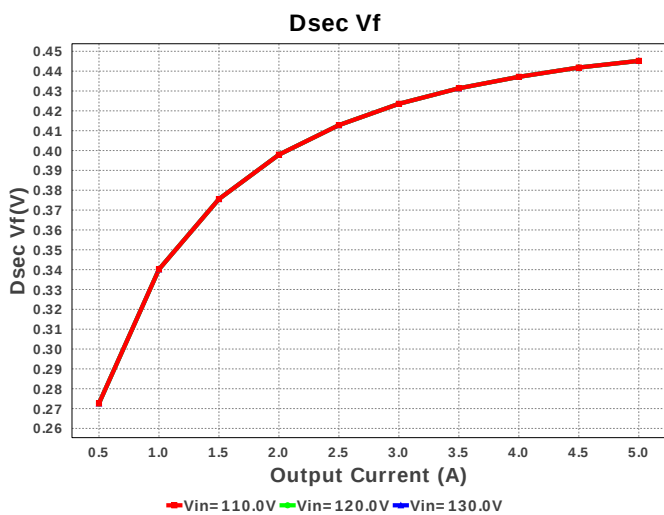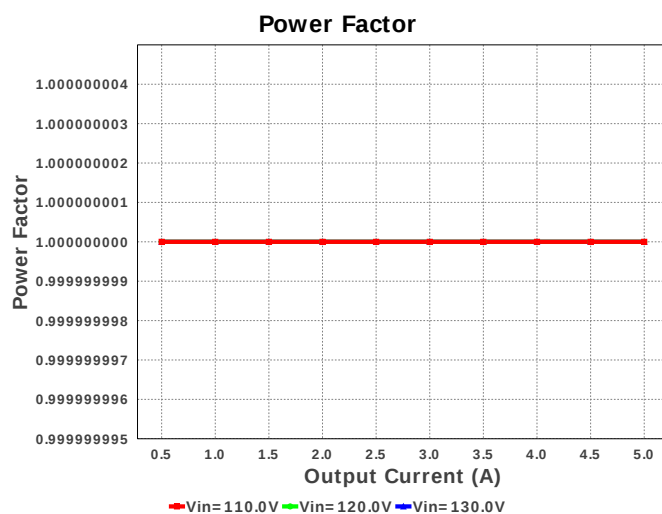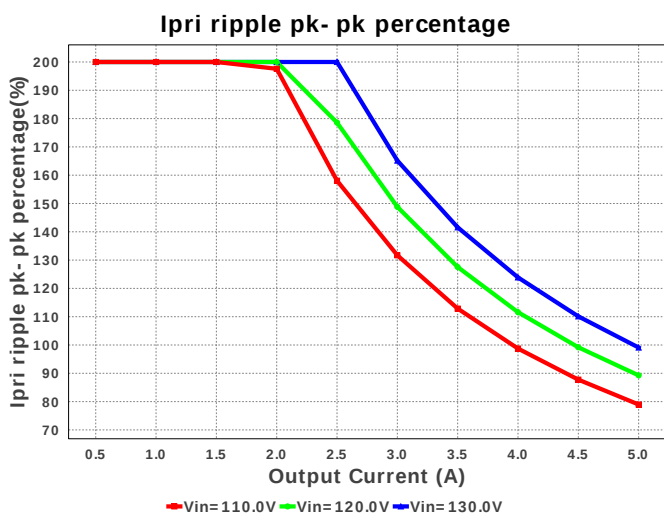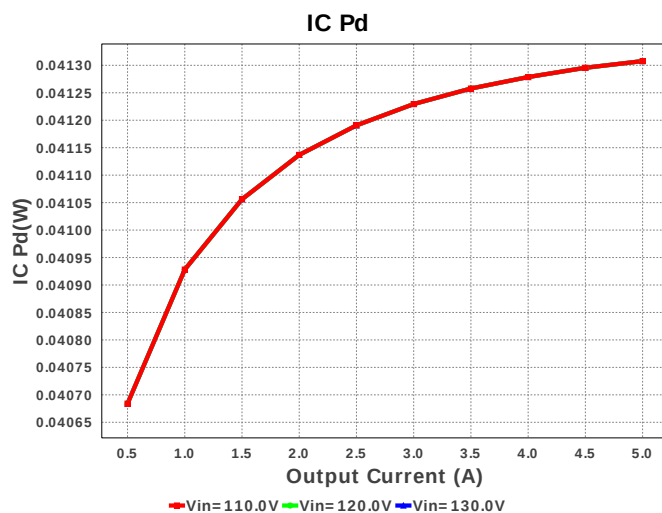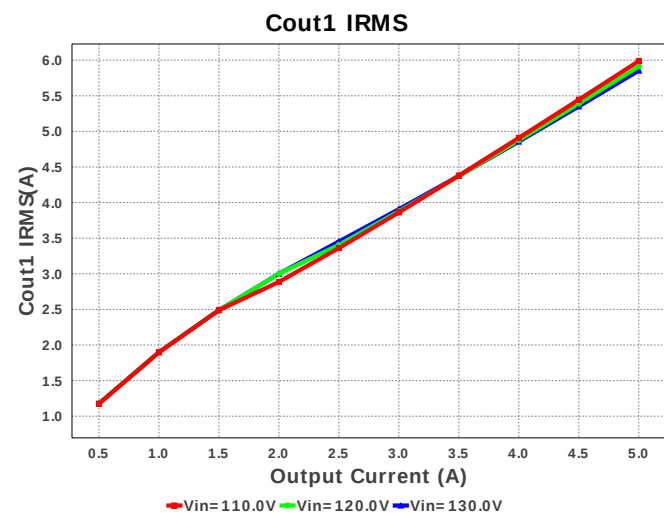

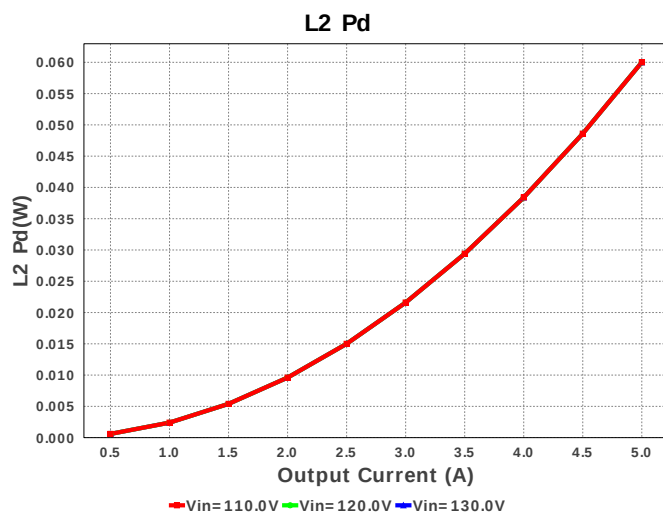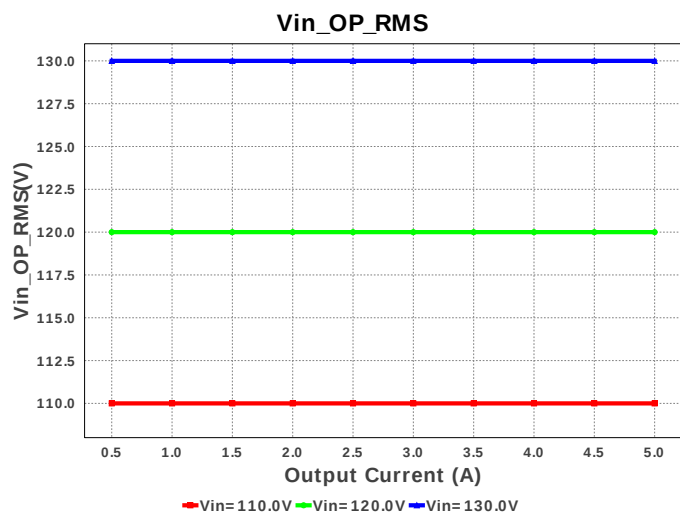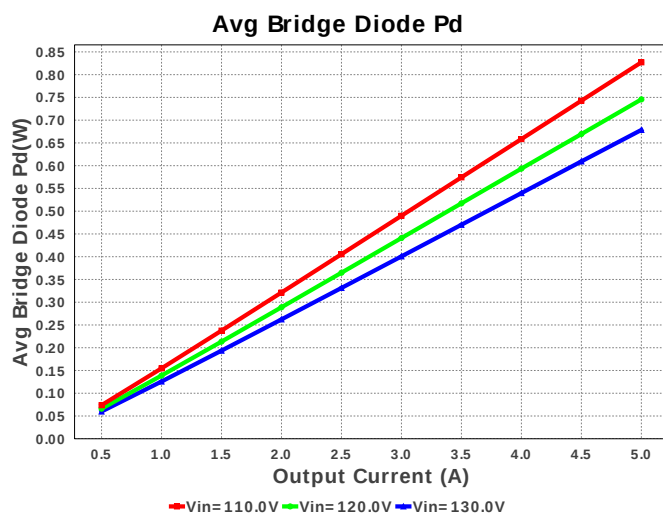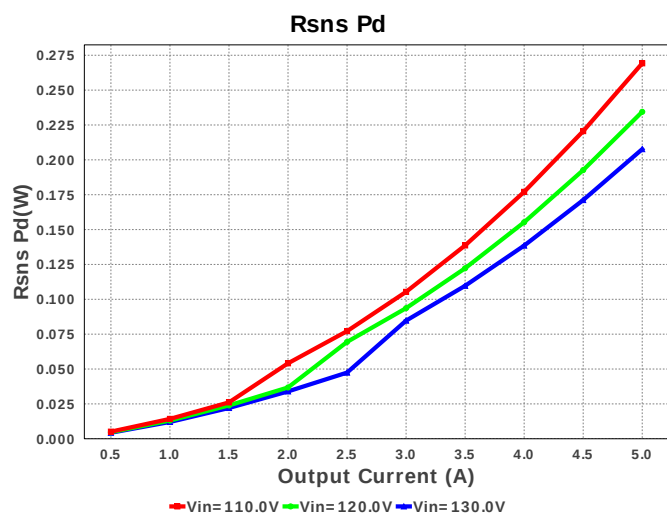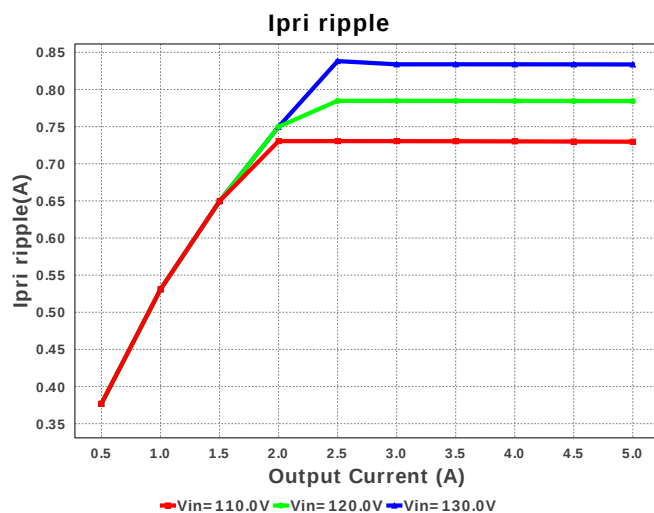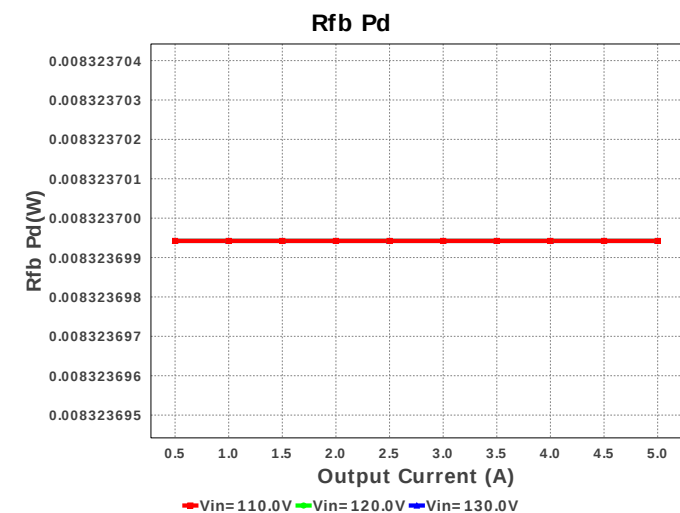

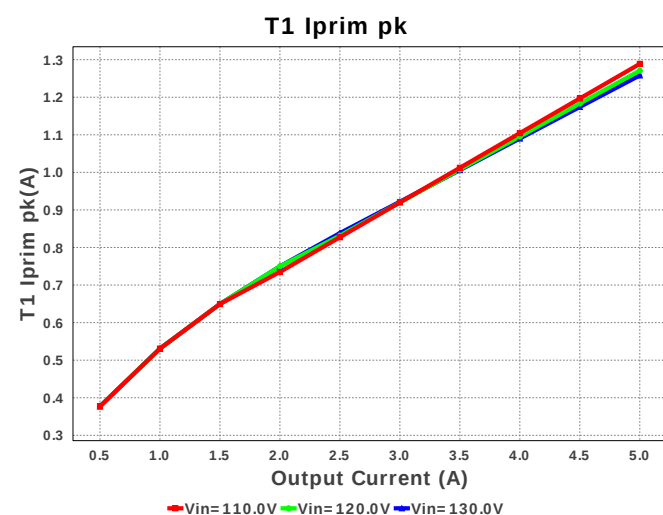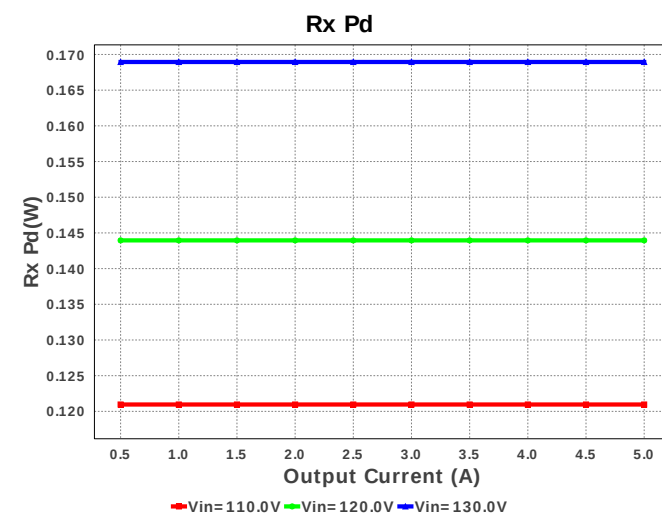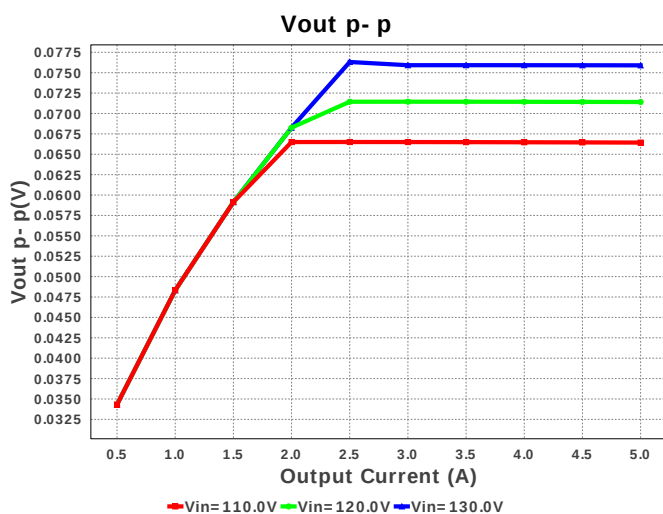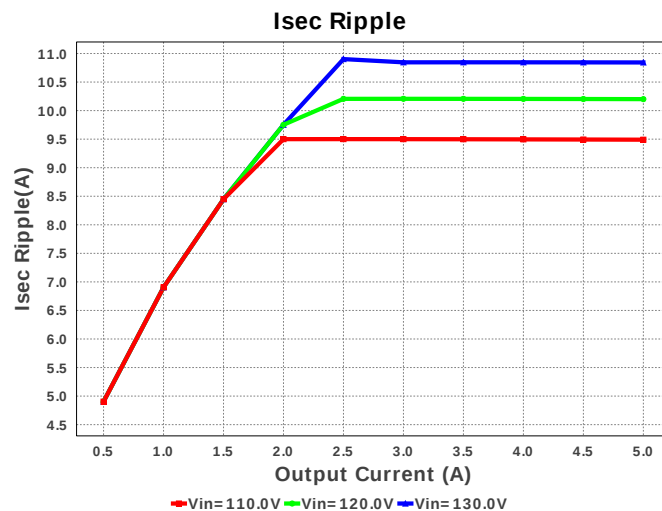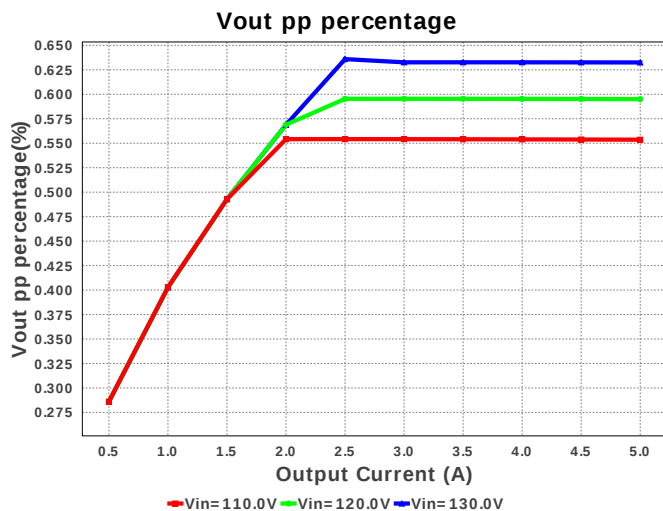

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	5.987 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	610.1 mA	Current	RMS Input Current
3.	Iout_DCM	1.999 A	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	553.924 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	729.711 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	78.974 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	9.49 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	733.772 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	1.289 A	Current	Transformer Primary Peak Current

#	Name	Value	Category	Description
10.	T1 Is1 RMS	7.8 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	16.762 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	59	General	Total Design BOM count
14.	Daux trr	4.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	445.177 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	445.177 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	30.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	4.058 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	98.851 kHz	General	Switching frequency
21.	Pout	60.0 W	General	Total output power
22.	Power Factor	1.0	General	Assumed Power Factor for the Application
23.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
24.	Toff	4.209 us	General	Approximate Converter Off Time
25.	Ton Act	6.065 us	General	Approximate Converter On Time
26.	Total BOM	\$0.0	General	Total BOM Cost
27.	Tsw	10.116 us	General	Switching Time Period
28.	Vaux	10.545 V	General	Auxiliary Voltage
29.	Vsnub	268.669 V	General	Voltage Across the Snubber
30.	Vout Actual	11.99 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
31.	Vout OP	12.0 V	Op_Point	Operational Output Voltage
32.	Duty Cycle	59.949 %	Op_point	Duty cycle
33.	Efficiency	89.404 %	Op_point	Steady state efficiency
34.	IC Tj	32.065 degC	Op_point	IC junction temperature
35.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
36.	IOUT_OP	5.0 A	Op_point	Iout operating point
37.	M1 TJOP	93.875 degC	Op_point	M1 MOSFET junction temperature
38.	Peak Rectified Vin	155.562 V	Op_point	Peak voltage seen at rectified input
39.	Vin_OP_RMS	110.0 V	Op_point	AC Input RMS Voltage
40.	Vout p-p	66.433 mV	Op_point	Peak-to-peak output ripple voltage
41.	Avg Bridge Diode Pd	827.092 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
42.	Cbulk Pd	1.375 W	Power	Bulk capacitor power dissipation
43.	Cout1 Pd	250.912 mW	Power	Output capacitor1 power dissipation
44.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
45.	Cy Pd	187.5 pW	Power	Y-caps Power Dissipation
46.	Dsec Pd	1.113 W	Power	Secondary Diode Power Dissipation
47.	Dsec2 Pd	1.113 W	Power	Secondary Diode Power Dissipation
48.	IC Pd	41.308 mW	Power	IC power dissipation
49.	L1 Pd	24.025 mW	Power	Power Dissipation in the Inductor
50.	L2 Pd	60.0 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
51.	M1 Pd	769.582 mW	Power	M1 MOSFET total power dissipation
52.	Paux	22.193 mW	Power	Power Dissipation in Raux and Daux
53.	Pd Rstartup	179.147 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
54.	Rdrv Pd	5.843 μW	Power	Power Dissipation in Gate Drive Resistor
55.	Rfb Pd	8.324 mW	Power	Rfb Power Dissipation
56.	Rsns Pd	269.211 mW	Power	Current Limit Sense Resistor Power Dissipation
57.	Rx Pd	120.961 mW	Power	Total Power Dissipation in Rx1 and Rx2
58.	Snubber Pd	882.205 mW	Power	Snubber Power Dissipation
59.	T1 Pd	1.983 W	Power	Estimated Losses in Transformer
60.	Total Pd	7.111 W	Power	Total Power Dissipation
61.	Vout Tolerance	1.926 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
62.	Vout pp percentage	553.61 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	5.0	Maximum Output Current
2.	VinMax	130.0	Maximum input voltage
3.	VinMin	110.0	Minimum input voltage
4.	Vout	12.0	Output Voltage
5.	acFrequency	50.0	Light Output in Lumen
6.	base_pn	UCC28C40	Texas Instruments Base Part Number
7.	source	AC	Input Source Type
8.	ta	30.0	Ambient temperature

Design Assistance

1. UCC28C40 Product Folder : <http://www.ti.com/product/UCC28C40> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).