


WEBENCH® Amplifier Design Report

Design : 4764088/9 OPA209AIDBVT
 Your OPA209AIDBVT Non-inverting Amp Design

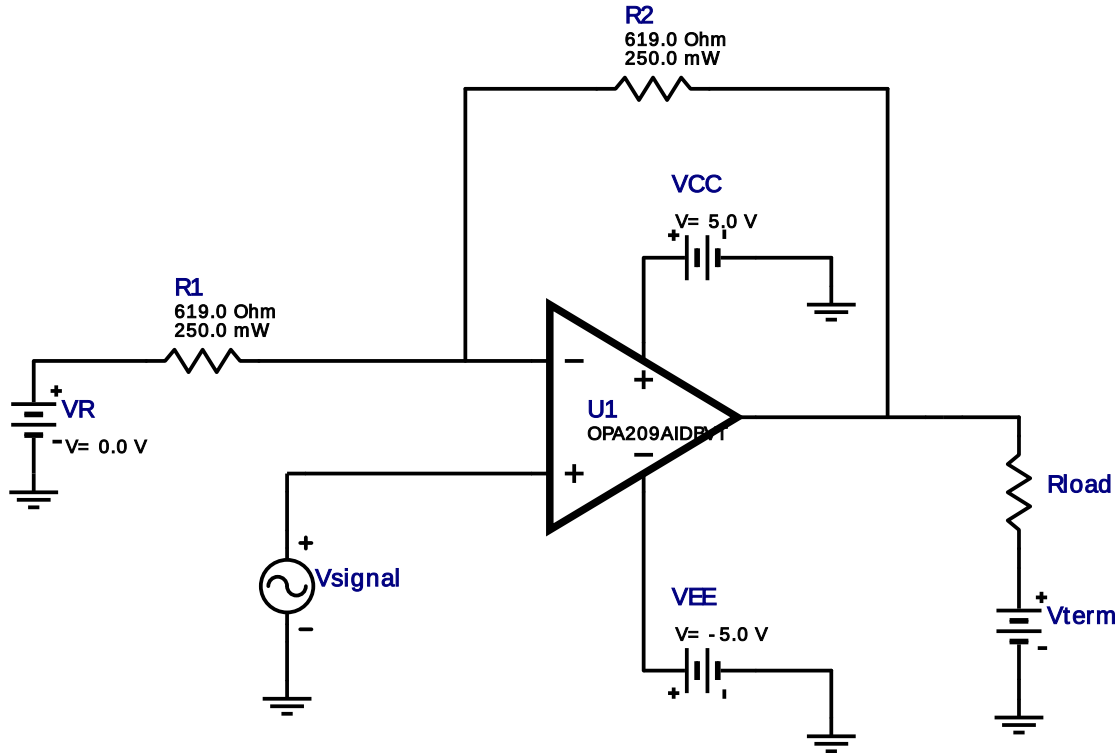

My Comments

No comments

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	R1	Panasonic	ERJ-8ENF6190V Series= ERJ-8E	Res= 619.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
2.	R2	Panasonic	ERJ-8ENF6190V Series= ERJ-8E	Res= 619.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
3.	U1	Texas Instruments, Inc.	OPA209AIDBVT	GbwTyp= 18.0 MHz VccMin= 4.5 V VccMax= 36.0 V	1	\$1.27	 DBV0005A 15 mm ²

Design Inputs

#	Name	Value	Description
1.	Topology	Non-inverting	
2.	ClosedLoopGain	2.0 V/V	System Gain
3.	SmallSignalClosedLoopBandwidth	10000.0 Hz	Circuit Bandwidth
4.	DualSupply	true	Power supply(s) to active chips
5.	PositiveSupplyVoltage	5.0 V	
6.	PositiveSupplyTolerance	5.0 %	
7.	NegativeSupplyVoltage	-5.0 V	
8.	NegativeSupplyTolerance	5.0 %	
9.	VinMin	-2.0 V	Minimum input voltage
10.	VinMax	2.0 V	Maximum input voltage
11.	VinPkPk	4.0 V	Peak to peak input voltage (VinMax – VinMin)

#	Name	Value	Description
12.	VinMidpointVoltage	0.0 V	Midpoint of input voltage $((V_{inMax} - V_{inMin})/2 + V_{inMin})$
13.	VoutMin	-4.0 V	Minimum output voltage
14.	VoutMax	4.0 V	Maximum output voltage
15.	VoutPkPk	8.0 V	Peak to peak input voltage $(V_{outMax} - V_{outMin})$
16.	VoutMidpointVoltage	0.0 V	Midpoint of input voltage $((V_{outMax} - V_{outMin})/2 + V_{outMin})$
17.	VRefRecommended	0.0 V	Recommended WEBENCH Voltage Reference Value
18.	VRefUserSpec	0.0 V	User override of Voltage Reference Value
19.	TempMin	-20.0 degC	Minimum Specified Temperature
20.	TempMax	70.0 degC	Maximum Specified Temperature

Performance Values - Design Criteria

#	Name	Value	Description
1.	Vcc	5.0 V	Positive Power Supply
2.	Vee	-5.0 V	Negative Power Supply
3.	Op Amp	OPA209AIDBVT	Circuit's Operational Amplifier
4.	Gain	2.0 V/V	Signal Gain
5.	Vin Min	-2.0 V	Input minimum voltage
6.	Vin Max	2.0 V	Input maximum voltage
7.	Vin pk-pk	4.0 V	Input peak-to-peak voltage
8.	Vin Midpoint	0.0 V	Input midpoint voltage
9.	Vout Min	-4.0 V	Output minimum voltage
10.	Vout Max	4.0 V	Output maximum voltage
11.	Vout pk-pk	8.0 V	Output peak-to-peak voltage
12.	Vout Midpoint	0.0 V	Output midpoint voltage
13.	Voltage Reference	0.0 V	Voltage reference
14.	R1	611.111 Ohms	Gain resistor
15.	R1 Tolerance		Gain resistor tolerance
16.	R2	611.111 Ohms	Feedback resistor
17.	R2 Tolerance		Feedback resistor tolerance
18.	SS Bandwidth	10.0 kHz	Small Signal Bandwidth
19.	Temp Minimum	-20.0 degC	Minimum circuit temperature
20.	Temp Maximum	70.0 degC	Maximum circuit temperature
21.	R1	619.0 Ohms	Gain resistor
22.	R1 Tolerance	1.0 %	Gain resistor tolerance
23.	R2	619.0 Ohms	Feedback resistor
24.	R2 Tolerance	1.0 %	Feedback resistor tolerance
25.	SS Bandwidth	9.0 MHz	Small Signal Bandwidth

Performance Values - Actual Design

#	Name	Value	Description
1.	Vcc	5.0 V	Positive Power Supply
2.	Vee	-5.0 V	Negative Power Supply
3.	Op Amp	OPA209AIDBVT	Actual Circuit operational amplifier
4.	Gain_target	2.0 V/V	Signal gain with actual resistors
5.	Vin Min	-2.0 V	Input minimum voltage
6.	Vin Max	2.0 V	Input maximum voltage
7.	Vin pk-pk	4.0 V	Input peak-to-peak voltage
8.	Vin Midpoint	0.0 V	Input midpoint voltage
9.	Vout Min	-4.0 V	Actual Output minimum voltage
10.	Vout Max	4.0 V	Actual Output maximum voltage
11.	Vout pk-pk	8.0 V	Actual Output peak-to-peak voltage
12.	Vout Midpoint	0.0 V	Actual Output midpoint voltage
13.	Voltage Reference	0.0 V	Actual Voltage reference
14.	Temp Minimum	-20.0 degC	Minimum circuit temperature
15.	Temp Maximum	70.0 degC	Maximum circuit temperature

Performance Values - Operating Frequency Values

#	Name	Value	Description
1.	Amplifier GBWP	18.0 MHz	Amplifier Gain Bandwidth Product
2.	Amplifier Slew Rate	6.4 V/usec	Amplifier Slew Rate
3.	Closed Loop Bandwidth	9.0 MHz	System Bandwidth
4.	FPBW	101.859 mKHz	Circuit Full-power Bandwidth

Performance Values - Power Requirements

#	Name	Value	Description
1.	Vcc	5.0 V	Positive nominal power supply
2.	Vee	-5.0 V	Negative nominal power supply
3.	Vsupply Max	36.0 V	Operational amplifier maximum power supply range
4.	Vsupply Min	4.5 V	Operational amplifier minimum power supply range
5.	Power IC	22.0 mW	Operational amplifier nominal power dissipation

Performance Values - Vos / Ib Vout error

#	Name	Value	Description
1.	Vout Vos(max) error	300.0 mV	25 deg C maximum offset voltage error at the output
2.	Vout Ib(max) error	0.0 mV	25 deg C maximum input bias current error at the output
3.	Tot error RSS	300.0 mV	Root sum square of output offset errors
4.	Tot error Worst Case	300.0 mV	Sum of output offset errors

Performance Values - Vout Gain vs. Resistor Tolerance

No calculated performance values for this design.

Performance Values - Error Over Temperature

#	Name	Value	Description
1.	Vos at maximum temperature	160.0 mV	Maximum amplifier offset voltage drift error at high temperature
2.	Vos at minimum temperature	80.0 mV	Maximum amplifier offset voltage drift error at low temperature

Performance Values - Total Output Noise

#	Name	Value	Description
1.	Noise (rms)	23.484 uVrms	Total output rms noise error
2.	Noise (p-p)	154.992 uVp-p	Total peak-to-peak output noise (3 sigma)
3.	SNR	101.62 dB	Operational amplifier output Signal to Noise ratio

Design Assistance

1. **OPA209** Product Folder : <http://www.ti.com/product/OPA209> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).