
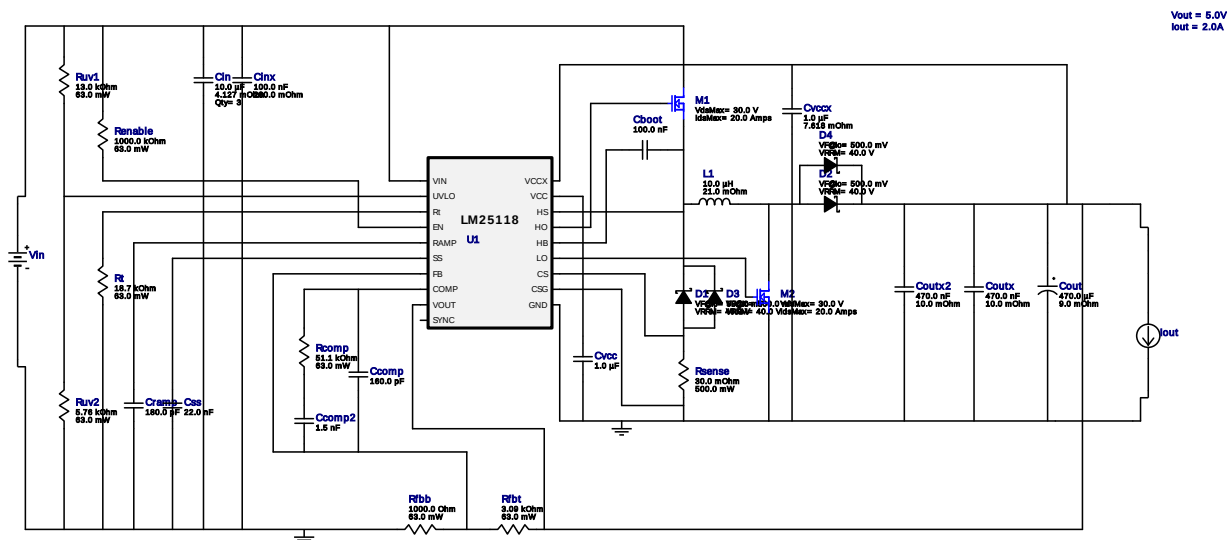














Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	MuRata	GRM21BR71E104KA01L Series= X7R	Cap= 100.0 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
2.	Ccomp	Samsung Electro-Mechanics	CL21C161JBANNNC Series= C0G/NP0	Cap= 160.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	Ccomp2	Yageo America	CC0805KRX7R9BB152 Series= X7R	Cap= 1.5 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
4.	Cin	MuRata	GRM21BR61C106KE15L Series= X5R	Cap= 10.0 uF ESR= 4.127 mOhm VDC= 16.0 V IRMS= 2.46634 A	3	\$0.03	0805 7 mm ²
5.	Cinx	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
6.	Cout	Chemi-Con	APXF6R3ARA471MH80G Series= PXF	Cap= 470.0 uF ESR= 9.0 mOhm VDC= 6.3 V IRMS= 4.5 A	1	\$0.92	CAPSMT_62_H80 106 mm ²
7.	Coutx	MuRata	GRM188R71C474KA88D Series= X7R	Cap= 470.0 nF ESR= 10.0 mOhm VDC= 16.0 V IRMS= 0.0 A	1	\$0.02	0603 5 mm ²
8.	Coutx2	MuRata	GRM188R71C474KA88D Series= X7R	Cap= 470.0 nF ESR= 10.0 mOhm VDC= 16.0 V IRMS= 0.0 A	1	\$0.02	0603 5 mm ²
9.	Cramp	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
10.	Css	Yageo America	CC0805KRX7R9BB223 Series= X7R	Cap= 22.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
11.	Cvcc	Taiyo Yuden	EMK212B7105KG-T Series= X7R	Cap= 1.0 uF VDC= 16.0 V IRMS= 0.0 A	1	\$0.02	 0805 7 mm ²
12.	Cvccx	TDK	C1005X5R0J105M Series= X5R	Cap= 1.0 uF ESR= 7.618 mOhm VDC= 6.3 V IRMS= 0.0 A	1	\$0.01	 0402 3 mm ²
13.	D1	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	 SMA 37 mm ²
14.	D2	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	 SMA 37 mm ²
15.	D3	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	 SMA 37 mm ²
16.	D4	Diodes Inc.	B340A-13-F	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.11	 SMA 37 mm ²
17.	L1	Bourns	SDR1307-100ML	L= 10.0 uH DCR= 21.0 mOhm	1	\$0.35	 SDR1307 227 mm ²
18.	M1	Texas Instruments	CSD17579Q3A	VdsMax= 30.0 V IdsMax= 20.0 Amps	1	\$0.19	 TRANS_NexFET_Q3A 18 mm ²
19.	M2	Texas Instruments	CSD17579Q3A	VdsMax= 30.0 V IdsMax= 20.0 Amps	1	\$0.19	 TRANS_NexFET_Q3A 18 mm ²
20.	Rcomp	Vishay-Dale	CRCW040251K1FKED Series= CRCW..e3	Res= 51.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
21.	Renale	Vishay-Dale	CRCW04021M00FKED Series= CRCW..e3	Res= 1000.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
22.	Rfbb	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1000.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
23.	Rfbt	Vishay-Dale	CRCW04023K09FKED Series= CRCW..e3	Res= 3.09 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
24.	Rsense	Stackpole Electronics Inc	CSR1206FK30L0 Series= ?	Res= 30.0 mOhm Power= 500.0 mW Tolerance= 1.0%	1	\$0.10	 1206 11 mm ²
25.	Rt	Vishay-Dale	CRCW040218K7FKED Series= CRCW..e3	Res= 18.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
26.	Ruv1	Vishay-Dale	CRCW040213K0FKED Series= CRCW..e3	Res= 13.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
27.	Ruv2	Vishay-Dale	CRCW04025K76FKED Series= CRCW..e3	Res= 5.76 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
28. U1		Texas Instruments	LM25118MH/NOPB	Switcher	1	\$2.40	 MXA20A 71 mm ²

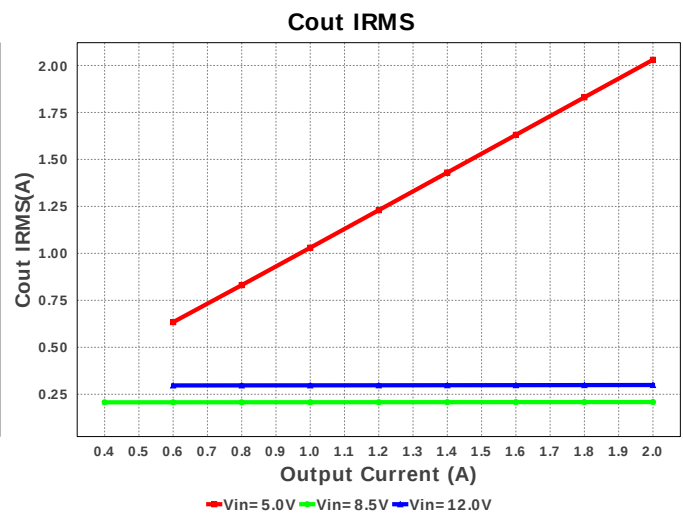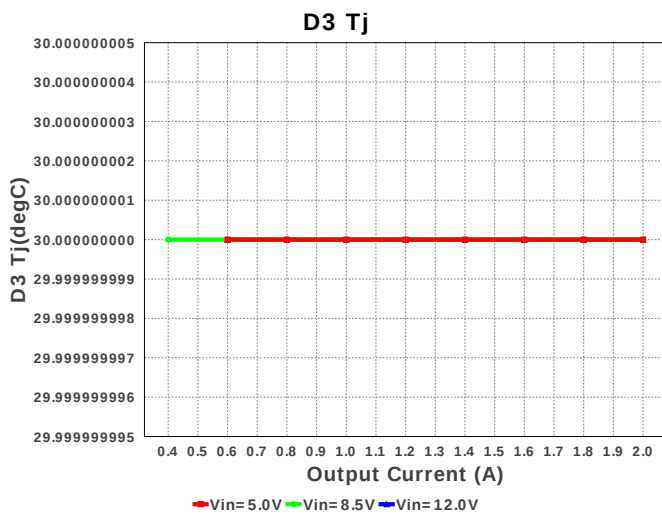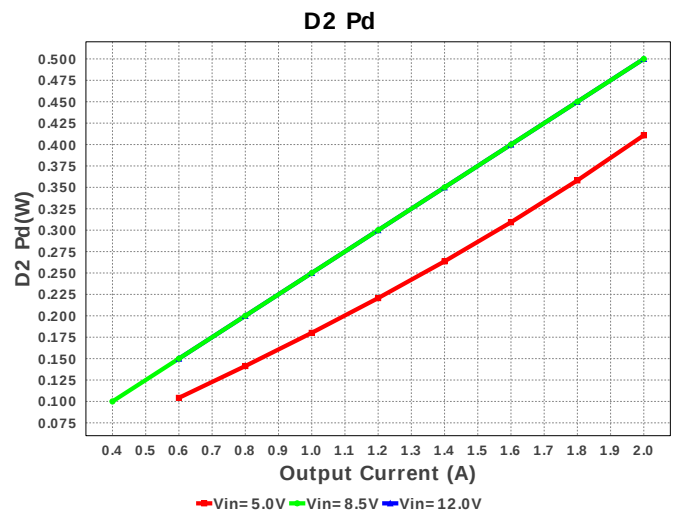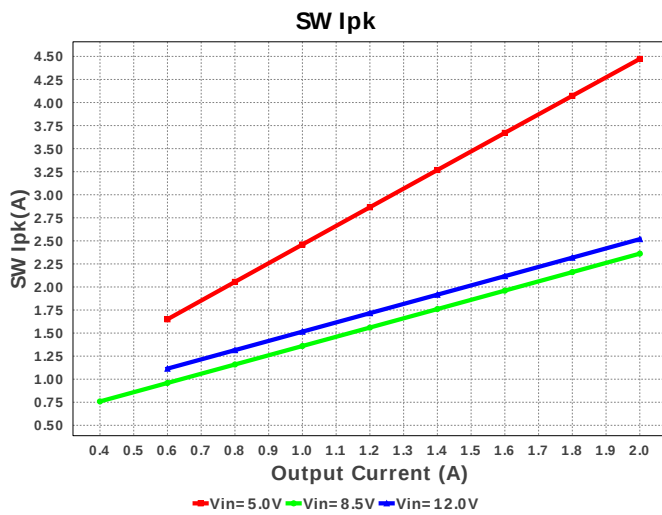

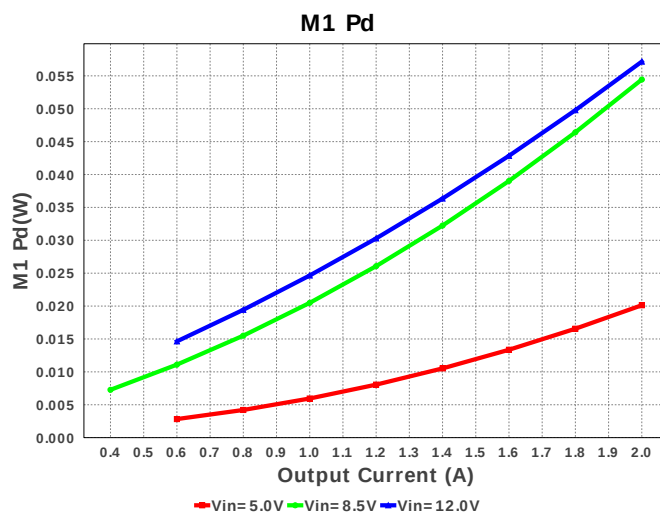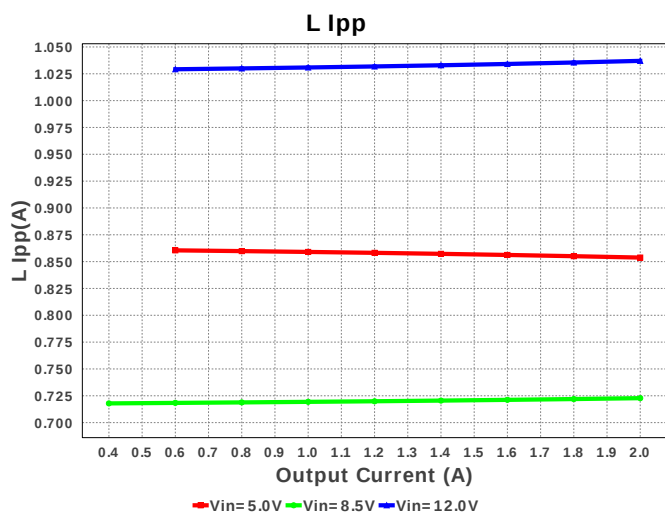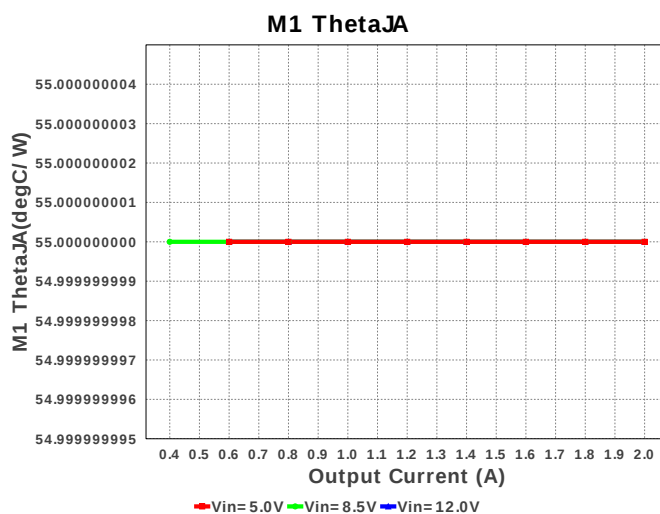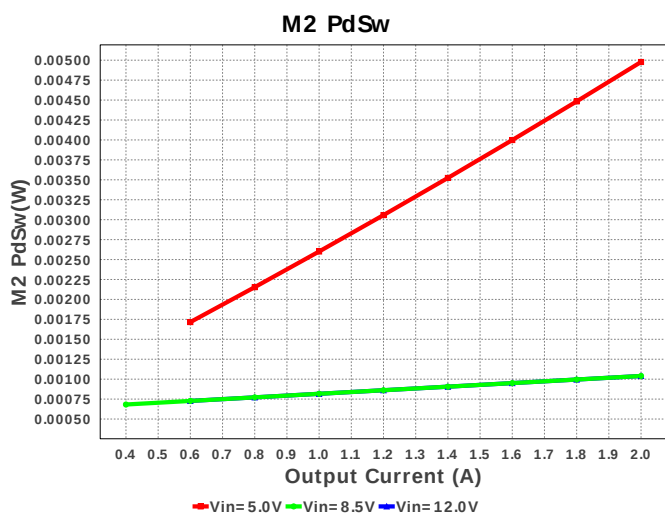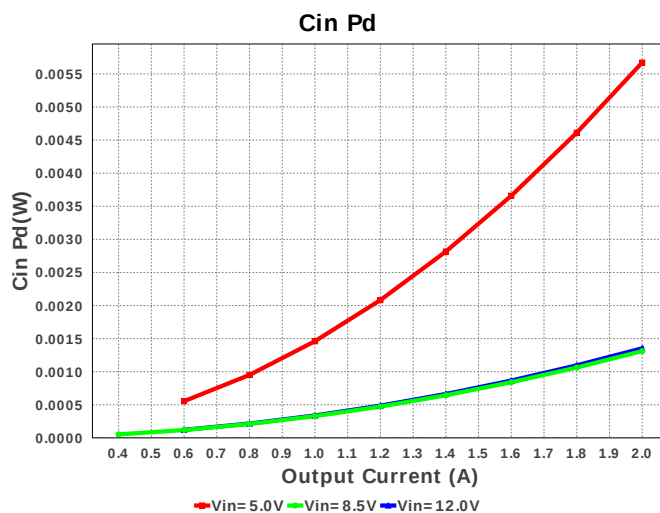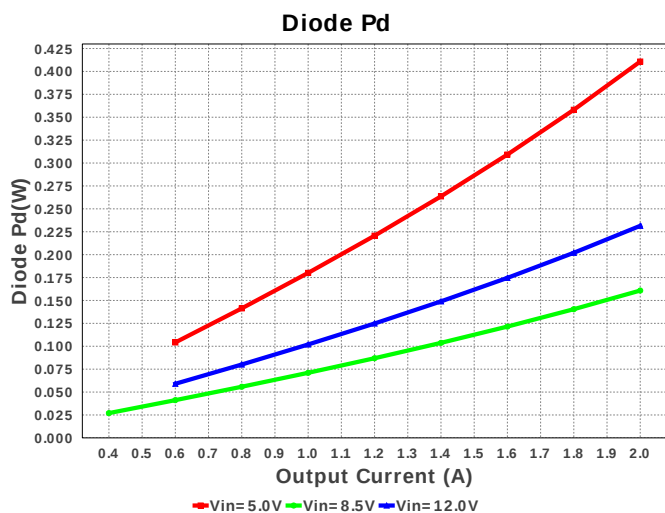


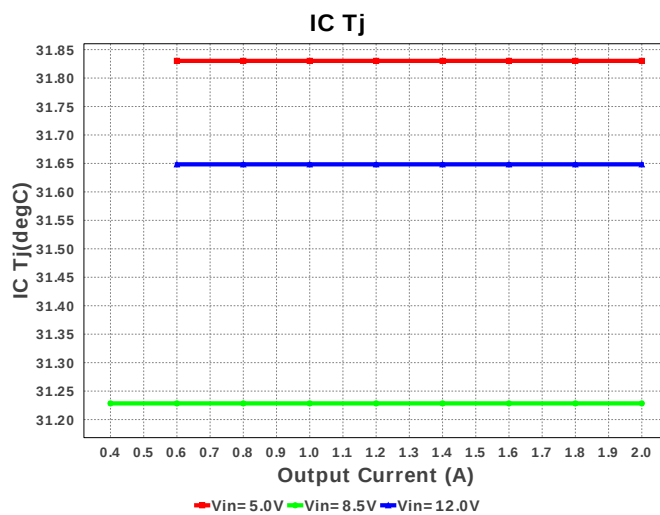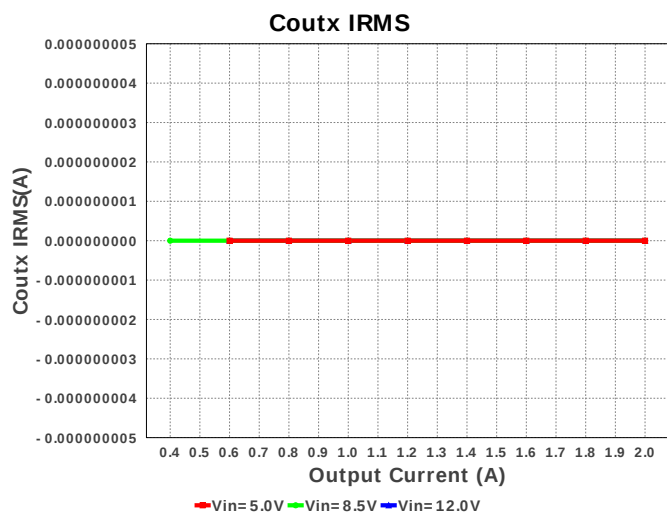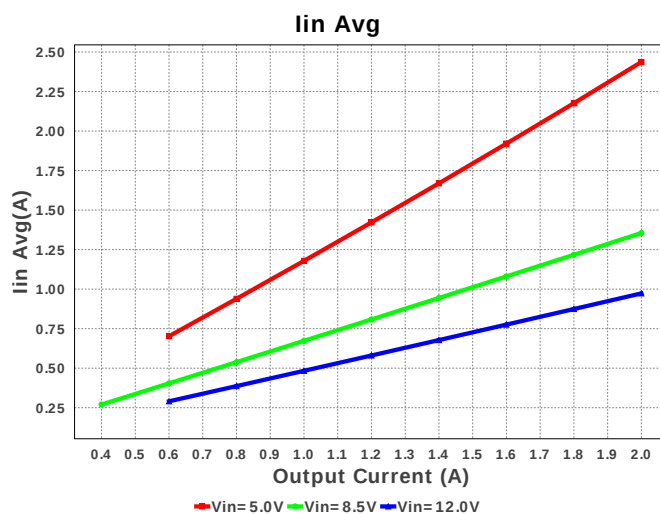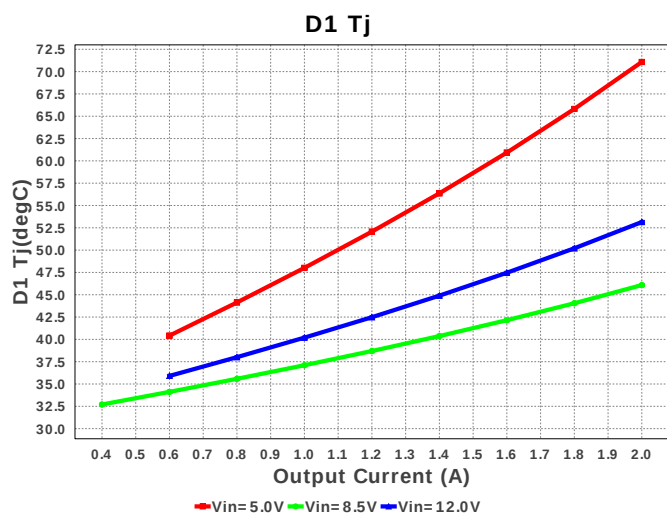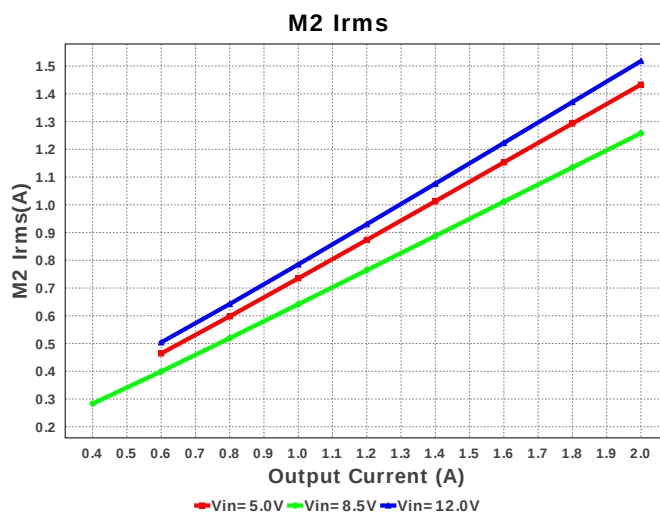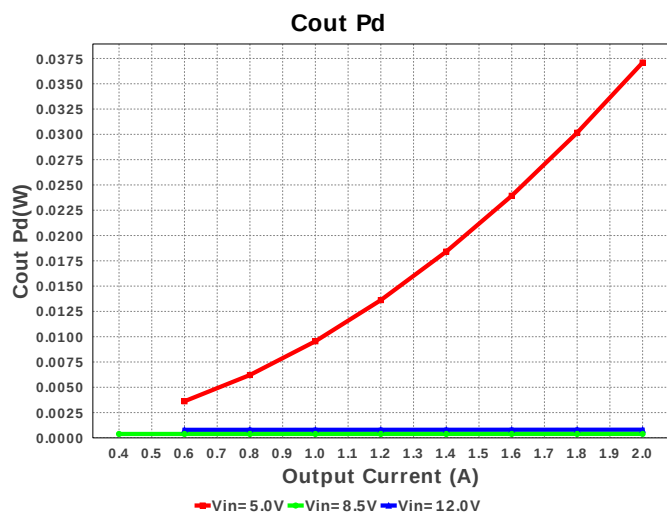

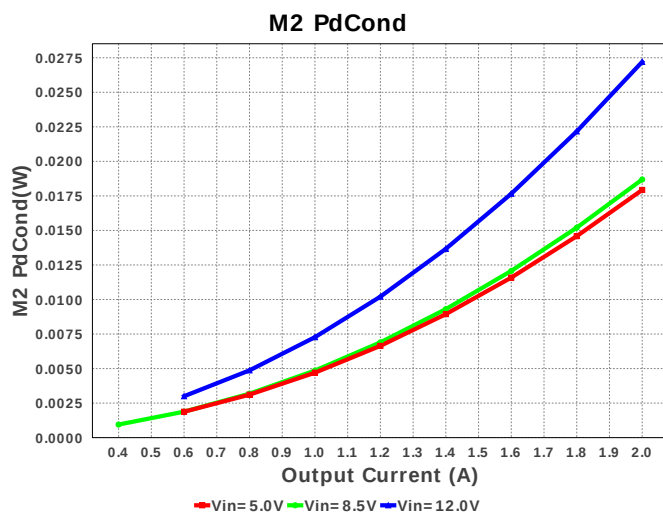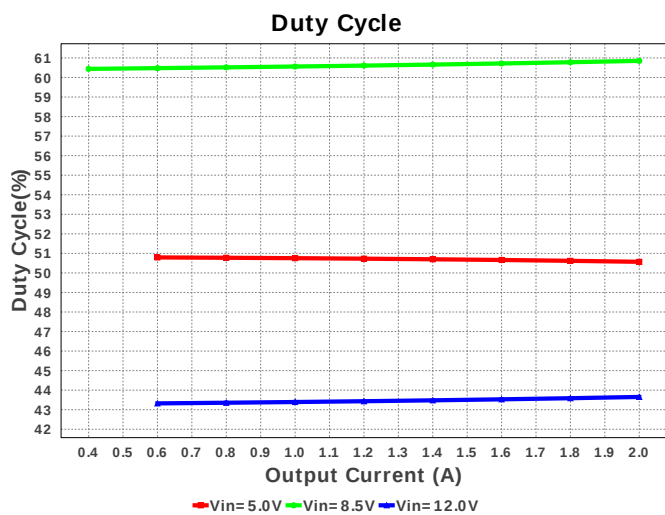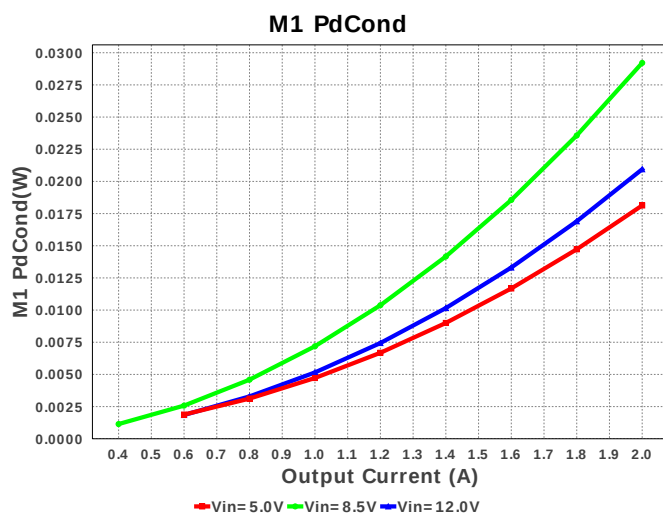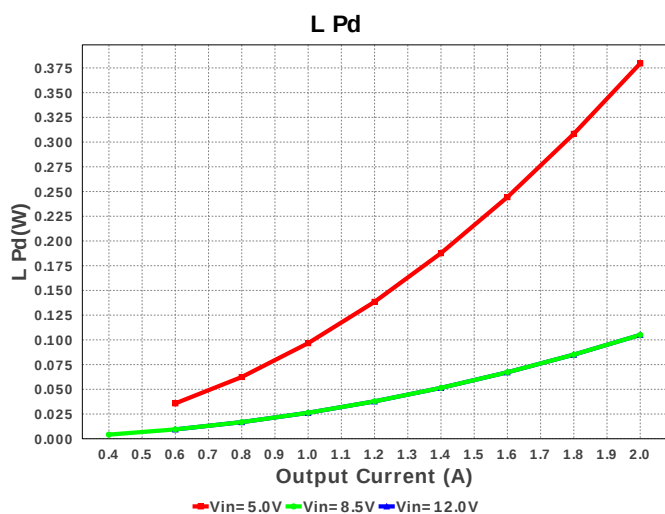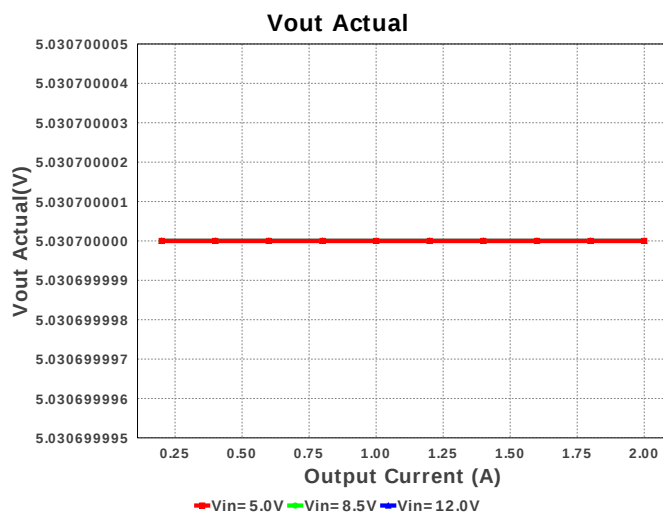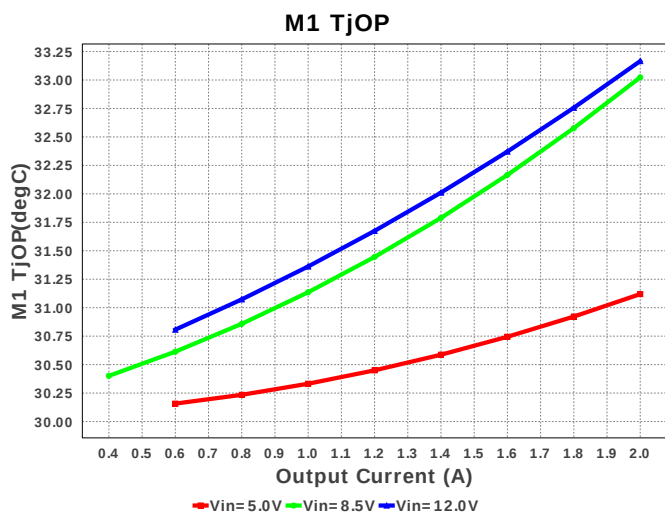


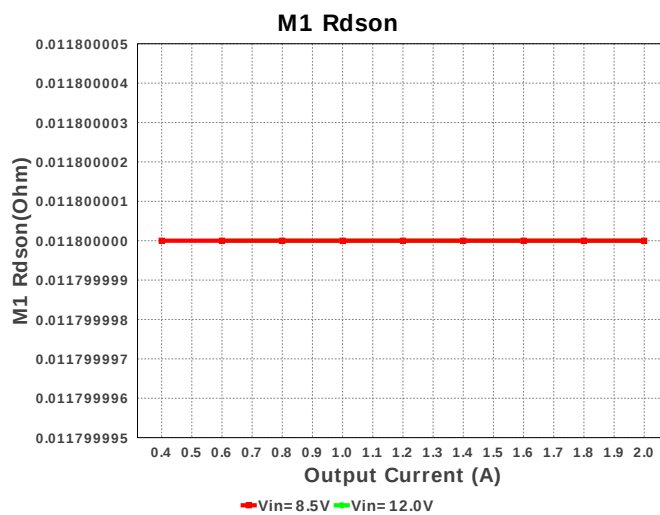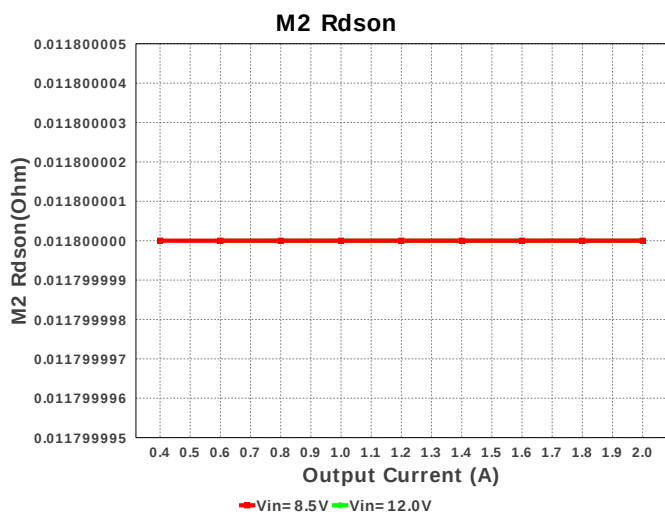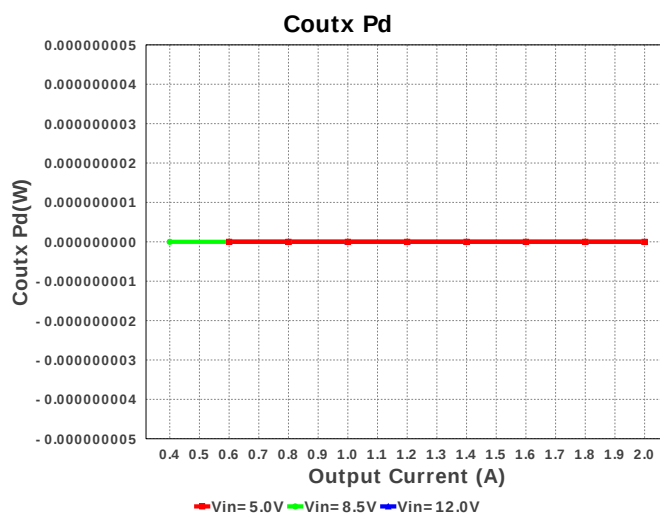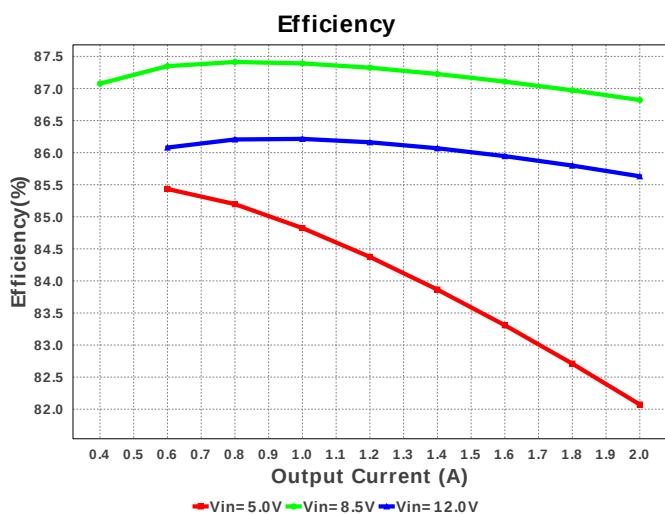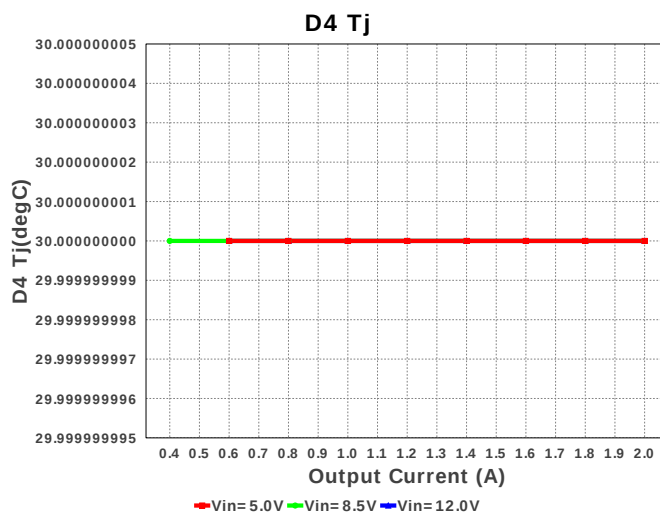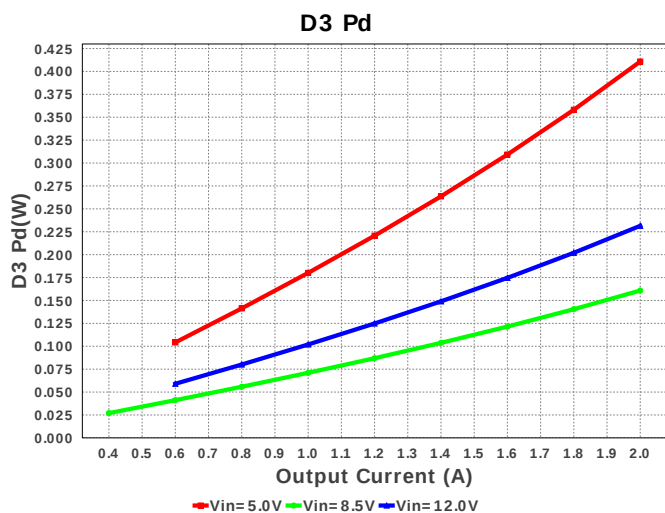


M2 ThetaJA

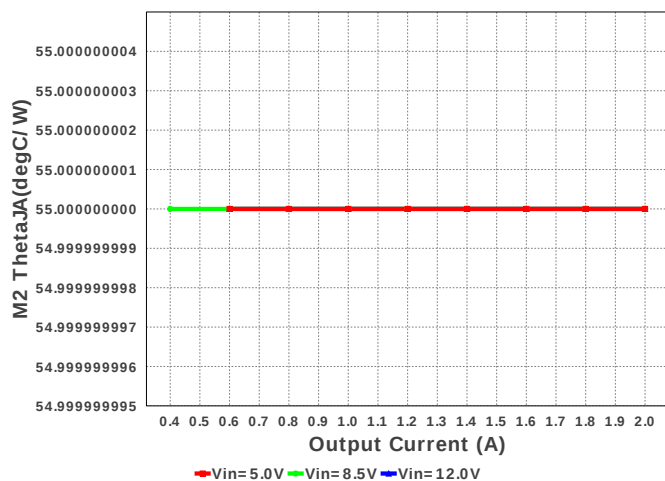


M2 Pd

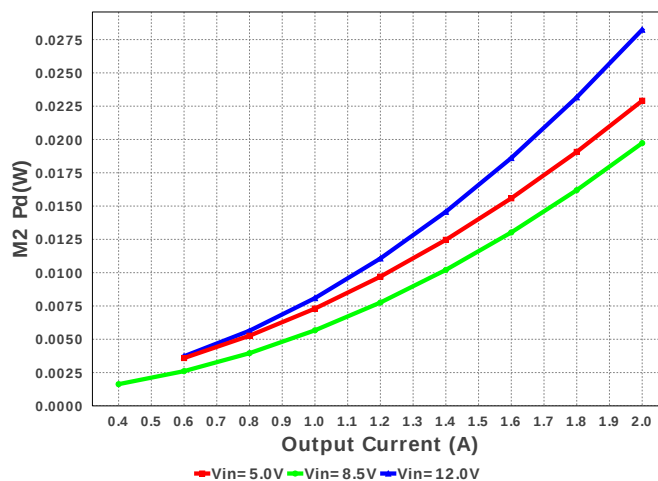


Pout

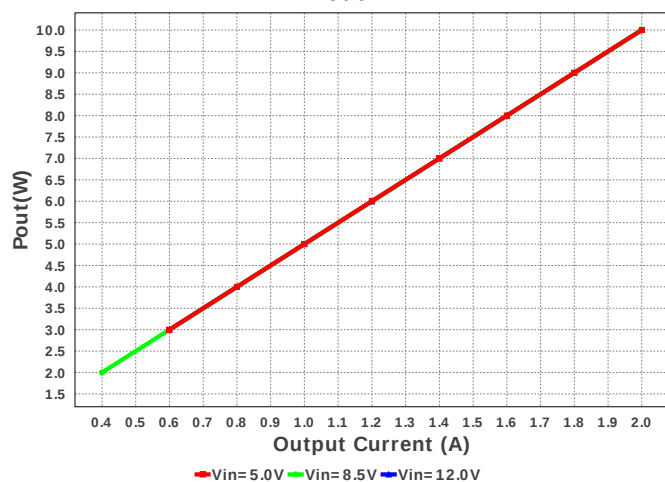


M1 PdSw






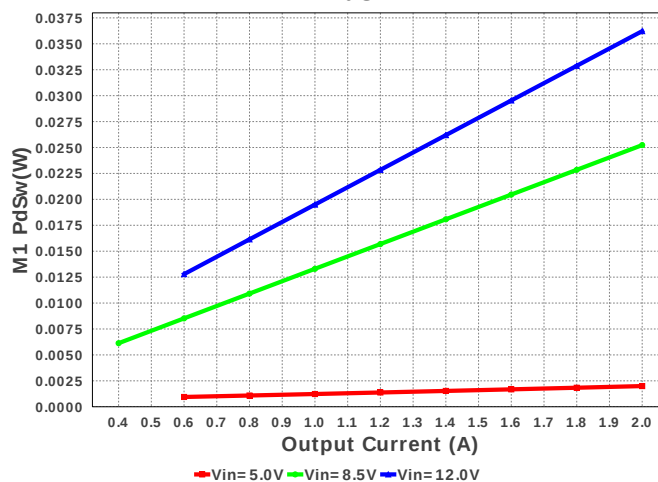



Total Pd

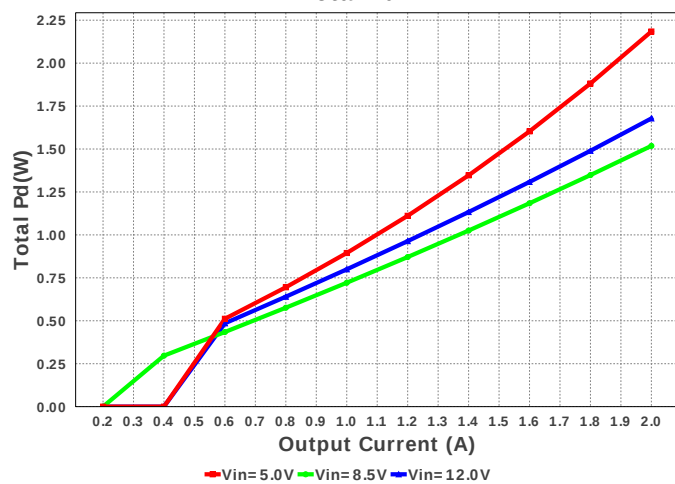

D1 Pd

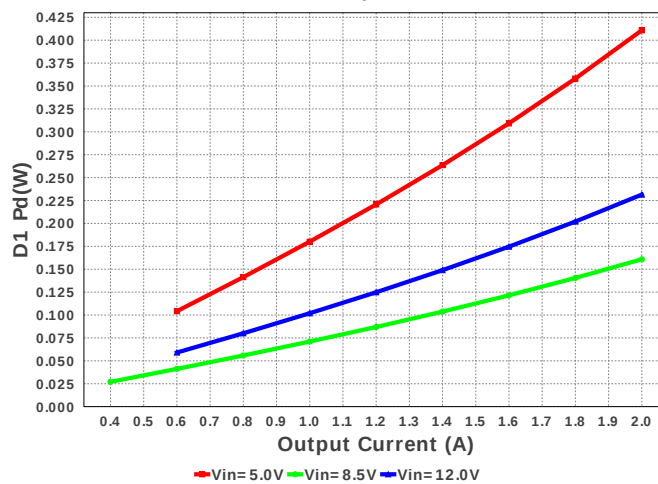

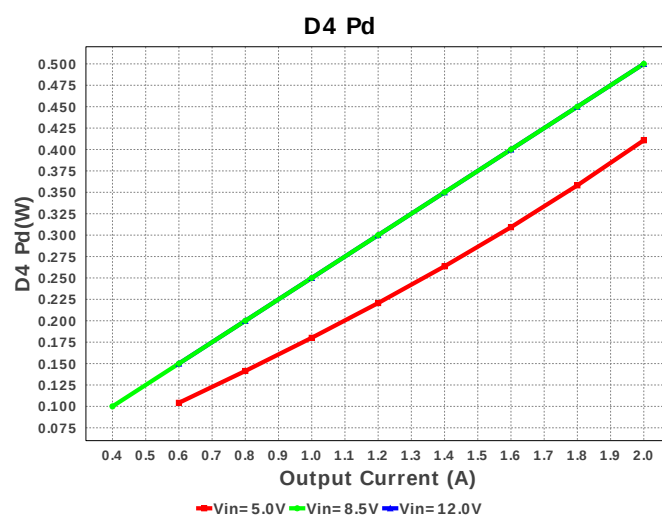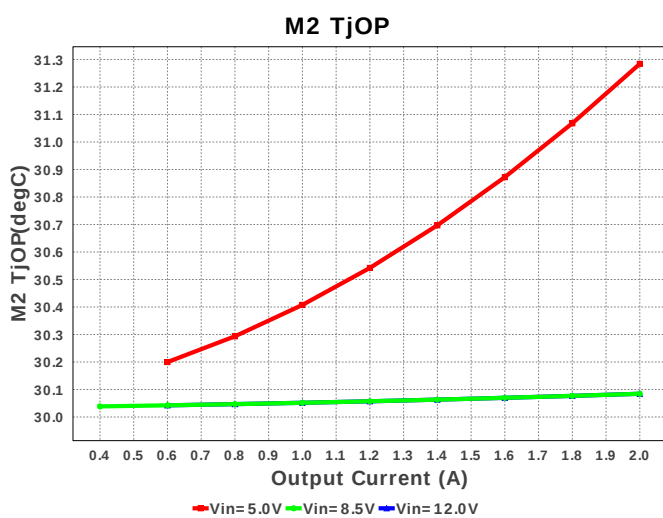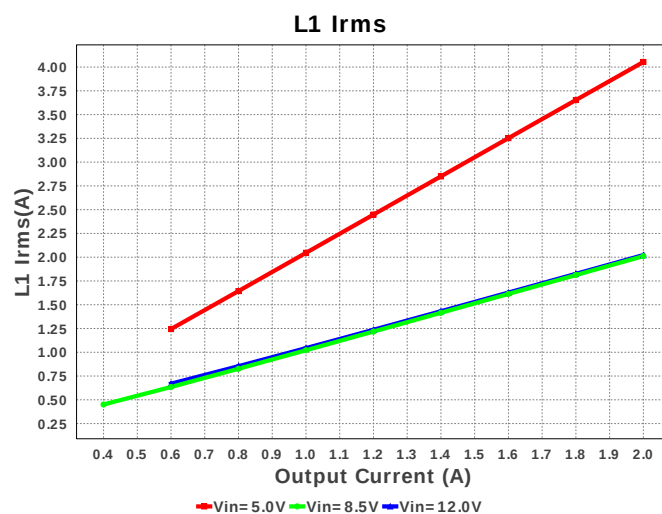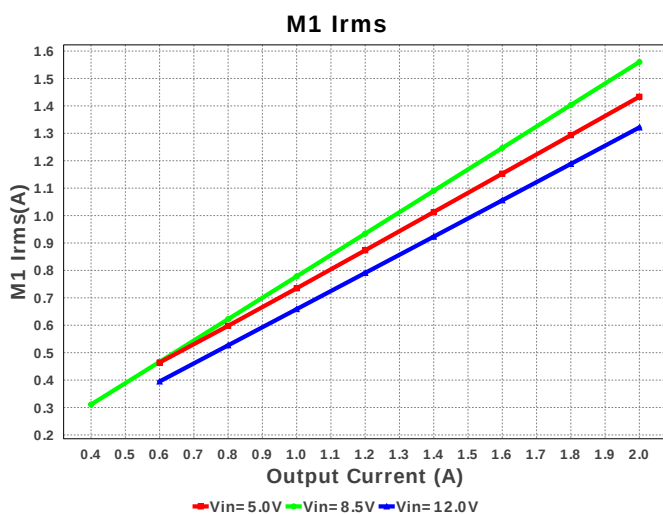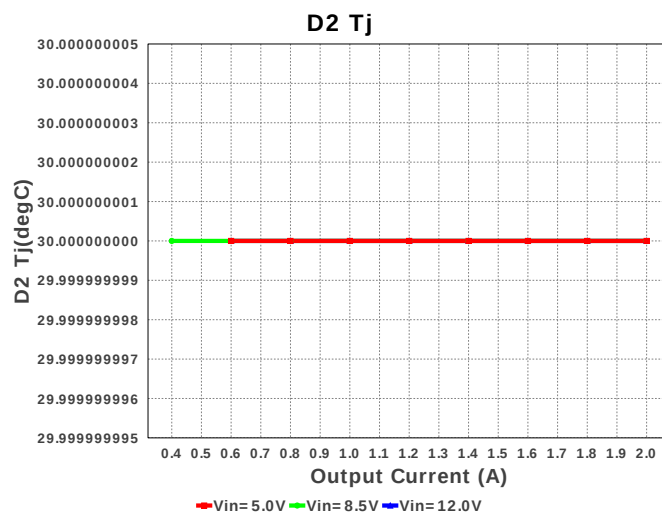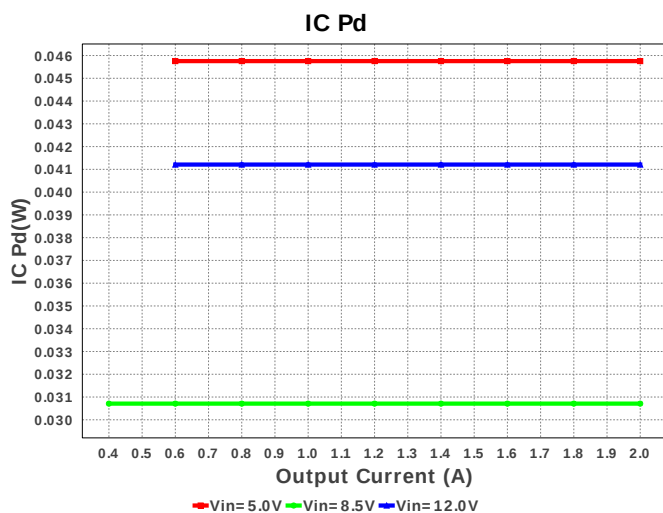

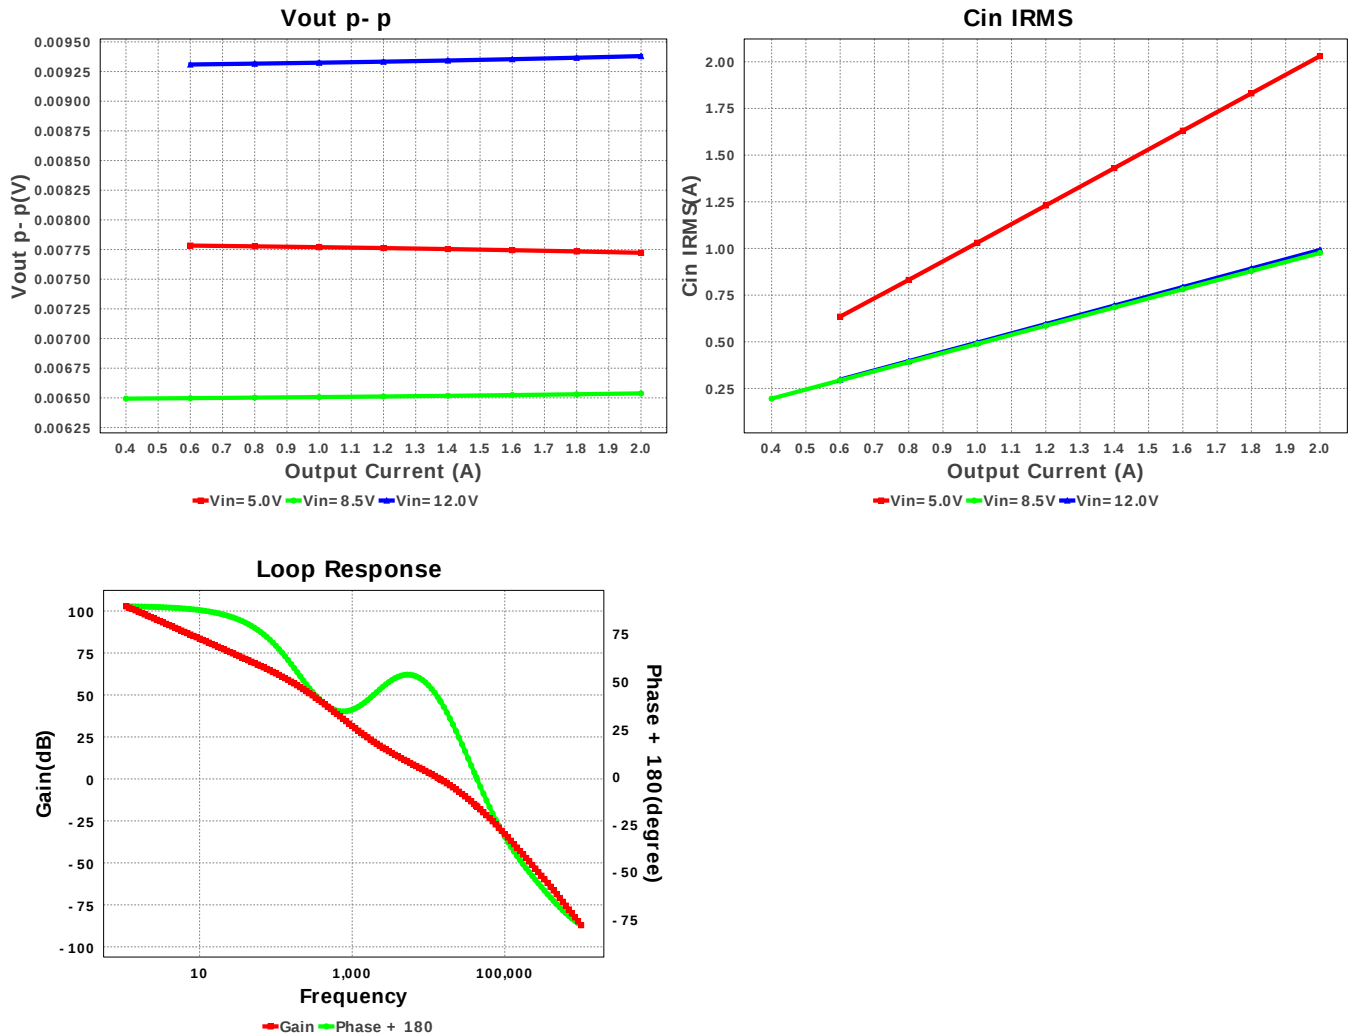

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	991.915 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	299.378 mA	Current	Output capacitor RMS ripple current
3.	Coutx IRMS	0.0 A	Current	Output capacitor_x RMS ripple current
4.	Iin Avg	958.35 mA	Current	Average input current
5.	L Ipp	1.037 A	Current	Peak-to-peak inductor ripple current
6.	L1 Irms	2.022 A	Current	Inductor ripple current
7.	M1 Irms	1.321 A	Current	MOSFET RMS ripple current
8.	M2 Irms	1.518 A	Current	MOSFET RMS ripple current
9.	SW Ipk	2.519 A	Current	Peak switch current
10.	BOM Count	30	General	Total Design BOM count
11.	FootPrint	702.0 mm ²	General	Total Foot Print Area of BOM components
12.	Frequency	294.659 kHz	General	Switching frequency
13.	IC Tolerance	18.0 mV	General	IC Feedback Tolerance
14.	M1 Rdson	11.8 mOhm	General	Drain-Source On-resistance
15.	M1 ThetaJA	55.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
16.	M2 Rdson	11.8 mOhm	General	Drain-Source On-resistance
17.	M2 ThetaJA	55.0 degC/W	General	MOSFET junction-to-ambient thermal resistance
18.	Pout	10.0 W	General	Total output power
19.	Total BOM	\$4.88	General	Total BOM Cost
20.	D1 Tj	53.145 degC	Op_Point	D1 junction temperature
21.	D1 Tj	53.145 degC	Op_Point	D1 junction temperature
22.	D2 Tj	71.078 degC	Op_Point	D2 junction temperature
23.	D3 Tj	53.145 degC	Op_Point	D3 junction temperature
24.	D4 Tj	71.078 degC	Op_Point	D4 junction temperature
25.	Low Freq Gain	102.795 dB	Op_Point	Gain at 10Hz
26.	Vout Actual	5.031 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
27.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
28.	Cross Freq	14.039 kHz	Op_point	Bode plot crossover frequency
29.	Duty Cycle	43.655 %	Op_point	Duty cycle
30.	Efficiency	86.955 %	Op_point	Steady state efficiency
31.	Gain Marg	-15.954 dB	Op_point	Bode Plot Gain Margin

#	Name	Value	Category	Description
32.	IC Tj	31.648 degC	Op_point	IC junction temperature
33.	ICThetaJA	40.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
34.	IOUT_OP	2.0 A	Op_point	Iout operating point
35.	M1 TjOP	33.166 degC	Op_point	MOSFET junction temperature
36.	M2 TjOP	35.968 degC	Op_point	MOSFET junction temperature
37.	Phase Marg	40.439 deg	Op_point	Bode Plot Phase Margin
38.	VIN_OP	12.0 V	Op_point	Vin operating point
39.	Vout p-p	9.38 mV	Op_point	Peak-to-peak output ripple voltage
40.	Cin Pd	1.354 mW	Power	Input capacitor power dissipation
41.	Cout Pd	806.644 μW	Power	Output capacitor power dissipation
42.	Coutx Pd	0.0 W	Power	Output capacitor_x power loss
43.	D1 Pd	231.452 mW	Power	Diode power dissipation
44.	D2 Pd	410.776 mW	Power	Diode2 power dissipation
45.	D3 Pd	231.452 mW	Power	Diode3 power dissipation
46.	D4 Pd	410.776 mW	Power	Diode4 power dissipation
47.	Diode Pd	231.452 mW	Power	Diode power dissipation
48.	IC Pd	41.21 mW	Power	IC power dissipation
49.	L Pd	105.0 mW	Power	Inductor power dissipation
50.	M1 Pd	57.799 mW	Power	MOSFET power dissipation
51.	M1 PdCond	21.579 mW	Power	M1 MOSFET conduction losses
52.	M1 PdSw	36.22 mW	Power	M1 MOSFET switching losses
53.	M2 Pd	35.443 mW	Power	MOSFET power dissipation
54.	M2 PdCond	27.905 mW	Power	M2 MOSFET conduction losses
55.	M2 PdSw	7.539 mW	Power	M2 MOSFET switching losses
56.	Total Pd	1.5 W	Power	Total Power Dissipation
57.	Vout Tolerance	3.012 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	12.0	Maximum input voltage
3.	VinMin	5.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	base_pn	LM25118	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. The LM25118 is a wide range buck-boost controller which is operable in an ultra wide input range of 3 to 75V. A buck-boost regulator can maintain regulation for input voltages either higher or lower than the output voltage. The challenge is that buck-boost power converters are not as efficient as buck regulators. The LM5118 has been designed as a dual mode controller whereby the power converter acts as a buck regulator while the input voltage is above the output. As the input voltage approaches the output voltage, a gradual transition to the buck-boost mode occurs. This gradual transition between modes eliminates disturbances at the output during transitions.

2. **LM25118 Product Folder** : <http://www.ti.com/product/LM25118> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).