




WEBENCH® Design Report


Design : 4759963/11 UCC28C41QDRQ1
UCC28C41QDRQ1 110.0V-220.0V to 14.00V @ 2.0A


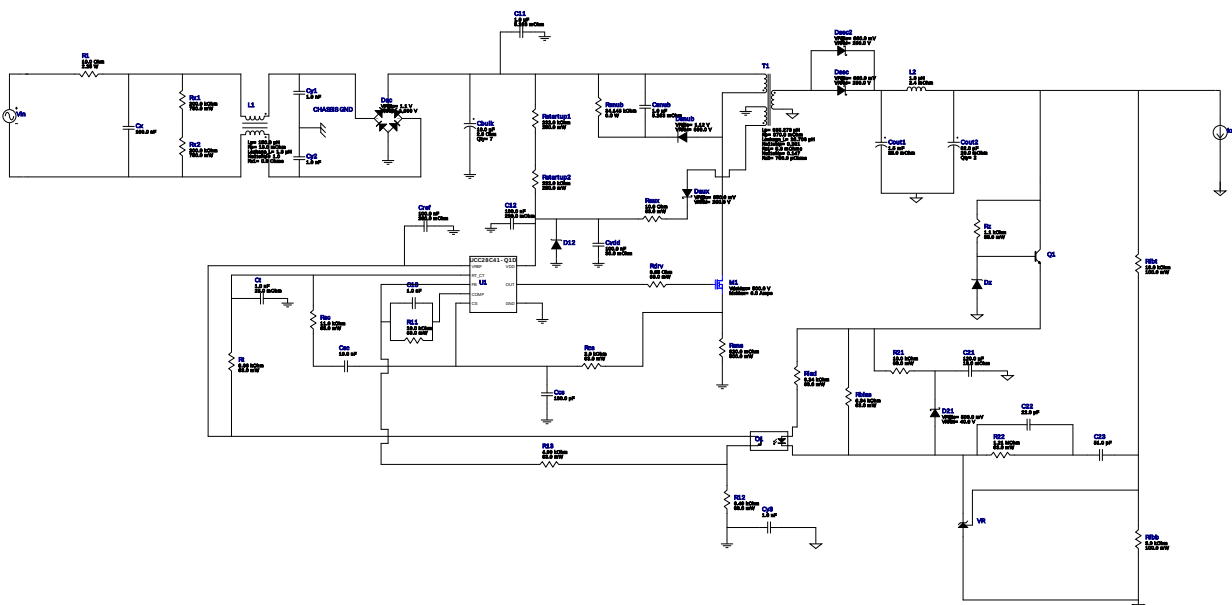


1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.

Electrical BOM



#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	Panasonic	35SVPF120M Series= ?	Cap= 120.0 uF ESR= 18.0 mOhm VDC= 35.0 V IRMS= 4.4 A	1	\$0.70	 CAPSMT_62_F12 151 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	Samsung Electro-Mechanics	CL21C510JBANNNC Series= C0G/NP0	Cap= 51.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
7.	Cbulk	Kemet	ESG106M400AH4AA Series= 2334	Cap= 10.0 uF ESR= 2.9 Ohm VDC= 400.0 V IRMS= 100.0 mA	7	\$0.19	 ESG106 144 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
9.	Cout1	Panasonic	EEV-FK1V152M Series= FK	Cap= 1.5 mF ESR= 35.0 mOhm VDC= 35.0 V IRMS= 1.8 A	1	\$0.74	 SM_RADIAL_J16 399 mm ²
10.	Cout2	Panasonic	35SVPF82M Series= ?	Cap= 82.0 uF ESR= 20.0 mOhm VDC= 35.0 V IRMS= 4.0 A	2	\$0.61	 CAPSMT_62_E12 106 mm ²
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
12.	Csc	MuRata	GRM216R71H103KA01D Series= X7R	Cap= 10.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
13.	Csnub	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm ²
14.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
15.	Cvdd	MuRata	GRM188R71C104KA01D Series= X7R	Cap= 100.0 nF ESR= 30.0 mOhm VDC= 16.0 V IRMS= 1.7 A	1	\$0.01	 0603 5 mm ²
16.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm ²
17.	Cy1	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
18.	Cy2	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
19.	Cy3	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	 B81123_1800x500x1050 140 mm ²
20.	D12	Diodes Inc.	MMSZ5248B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
21.	D21	Vishay-Semiconductor	SS14-E3/61T	VF@Io= 500.0 mV VRRM= 40.0 V	1	\$0.08	 SMA 37 mm ²
22.	Dac	Vishay-Semiconductor	DF10SA	VF@Io= 1.1 V VRRM= 1,000.0 V	1	\$0.24	 DF-S 99 mm ²
23.	Daux	Diodes Inc.	DFLS1200-7	VF@Io= 850.0 mV VRRM= 200.0 V	1	\$0.21	 PowerDI123 13 mm ²
24.	Dsec	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
25.	Dsec2	ON Semiconductor	MBRB40250TG	VF@Io= 860.0 mV VRRM= 250.0 V	1	\$0.94	 DDPAK 210 mm ²
26.	Dsnub	Bourns	CD214C-F3600	VF@Io= 1.12 V VRRM= 600.0 V	1	\$0.18	 SMC 83 mm ²
27.	Dz	Diodes Inc.	MMSZ5241B-7-F	Zener	1	\$0.04	 SOD-123 13 mm ²
28.	L1	API Delevan	CM6296R-154	Lp= 150.0 µH Rp= 16.0 mOhm Leakage_L= 1.8 µH Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$5.95	 CM6296 833 mm ²
29.	L2	Coilcraft	SER1360-182KLB	L= 1.8 µH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm ²
30.	M1	Fairchild Semiconductor	FDD6N50TM	VdsMax= 500.0 V IdsMax= 6.0 Amps	1	\$0.47	 DPAK 102 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
31.	O1	Vishay-Semiconductor	TCMT1107	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
32.	Q1	ON Semiconductor	BC846BLT1G	Bipolar Transistor	1	\$0.02	 SOT-23 14 mm ²
33.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm ²
34.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
35.	R12	Vishay-Dale	CRCW04026K49FKED Series= CRCW..e3	Res= 6.49 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
36.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
37.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
38.	R22	Vishay-Dale	CRCW04021M21FKED Series= CRCW..e3	Res= 1.21 MOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
39.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
40.	Rbias	Vishay-Dale	CRCW04026K34FKED Series= CRCW..e3	Res= 6.34 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
41.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
42.	Rdrv	Vishay-Dale	CRCW04023R65FKED Series= CRCW..e3	Res= 3.65 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
43.	Rfbb	Yageo America	RC0603FR-073K9L Series= ?	Res= 3.9 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
44.	Rfbt	Yageo America	RC0603FR-0718KL Series= ?	Res= 18.0 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
45.	Rled	Vishay-Dale	CRCW04026K34FKED Series= CRCW..e3	Res= 6.34 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
46.	Rsc	Vishay-Dale	CRCW040211K0FKED Series= CRCW..e3	Res= 11.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
47.	Rsns	Bourns	CRM1206-FX-R820ELF Series= ?	Res= 820.0 mOhm Power= 500.0 mW Tolerance= 1.0%	1	\$0.03	 1206 11 mm ²
48.	Rsnu	CUSTOM	CUSTOM Series= ?	Res= 34.146 kOhm Power= 0.0 W Tolerance= 0.0%	1	NA	CUSTOM 0 mm ²
49.	Rstartup1	Panasonic	ERJ-8ENF2323V Series= ERJ-8E	Res= 232.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
50.	Rstartup2	Panasonic	ERJ-8ENF2323V Series= ERJ-8E	Res= 232.0 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
51.	Rt	Vishay-Dale	CRCW04028K66FKED Series= CRCW..e3	Res= 8.66 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
52.	Rx1	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
53.	Rx2	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
54.	Rz	Vishay-Dale	CRCW04021K10FKED Series= CRCW..e3	Res= 1.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
55.	T1	CUSTOM	CUSTOM	Lp= 935.278 µH Rp= 870.0 mOhm Leakage_L= 18.706 µH Ns1toNp= 0.201 Rs1= 8.6 mOhms Ns2toNp= 0.147 Rs2= 700.0 µOhms	1	NA	CUSTOM 0 mm ²
56.	U1	Texas Instruments	UCC28C41QDRQ1	Switcher	1	\$0.80	 D0008A 57 mm ²
57.	VR	Texas Instruments	TL431AIDBZR	Voltage References	1	\$0.08	 DBZ0003A 14 mm ²





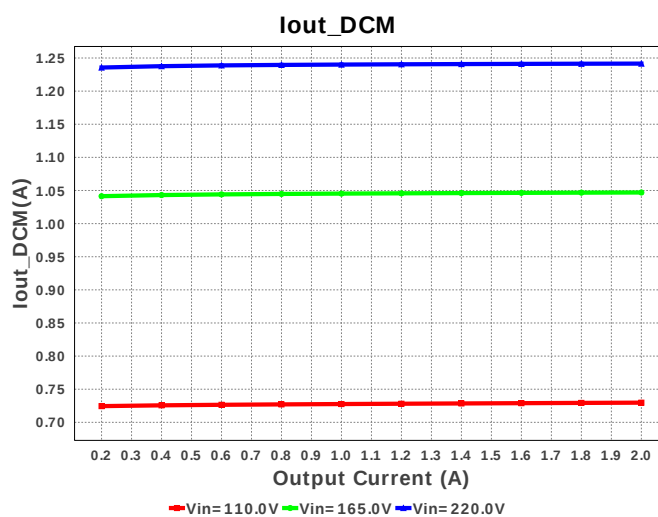
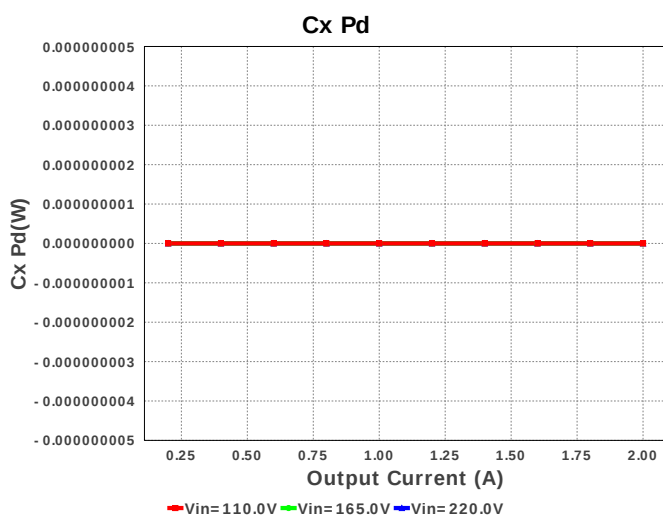


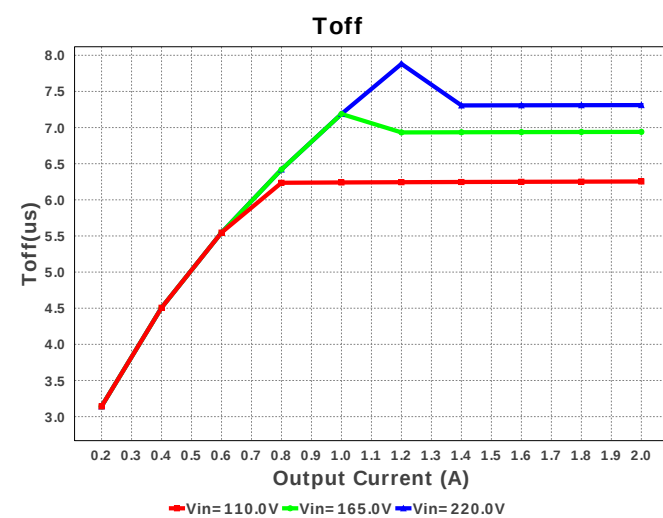
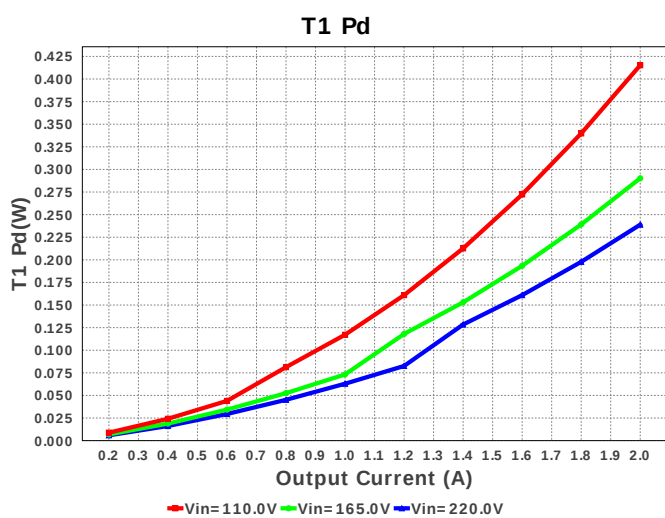
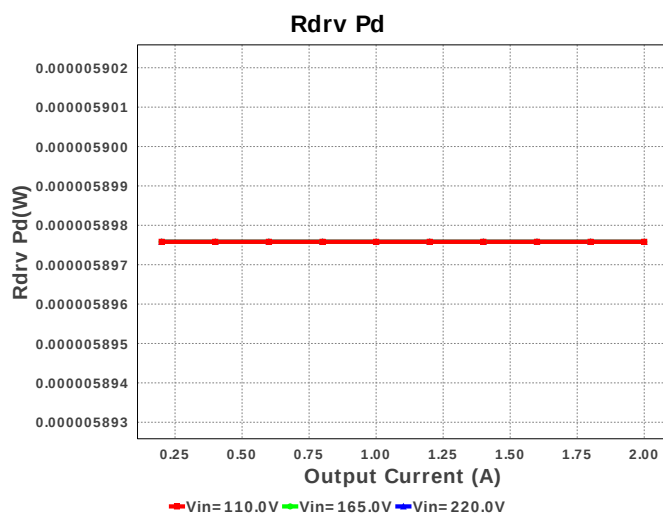
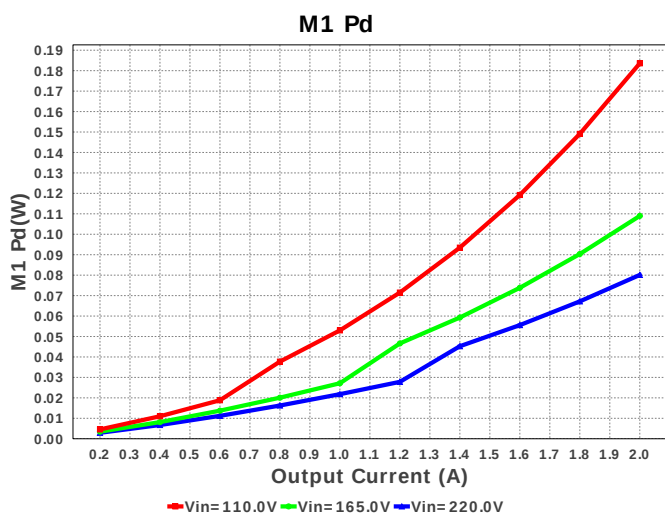
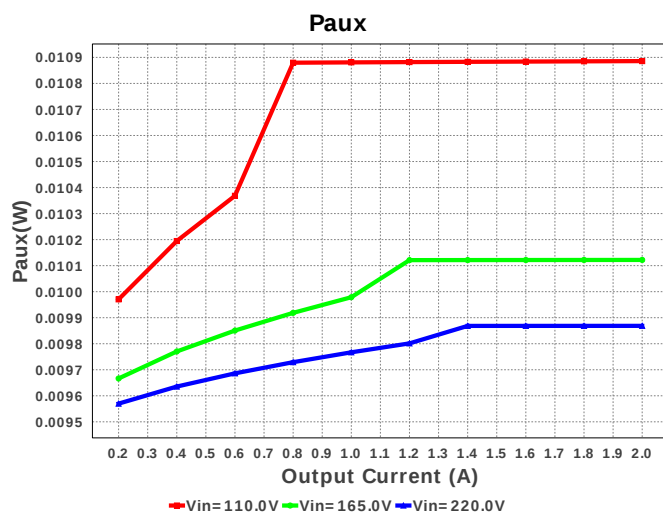
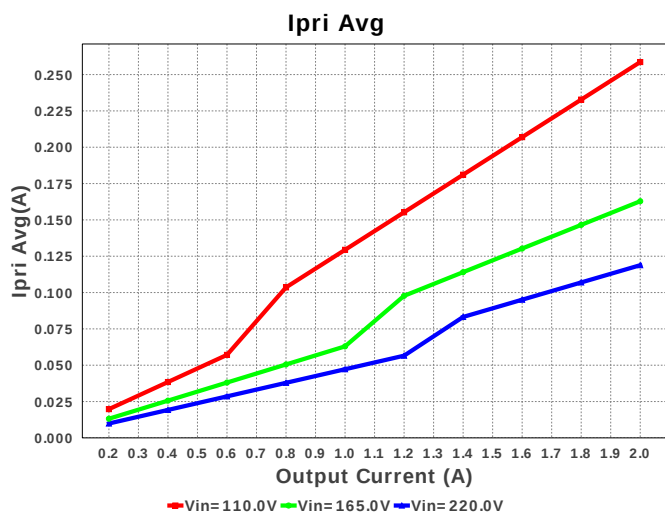


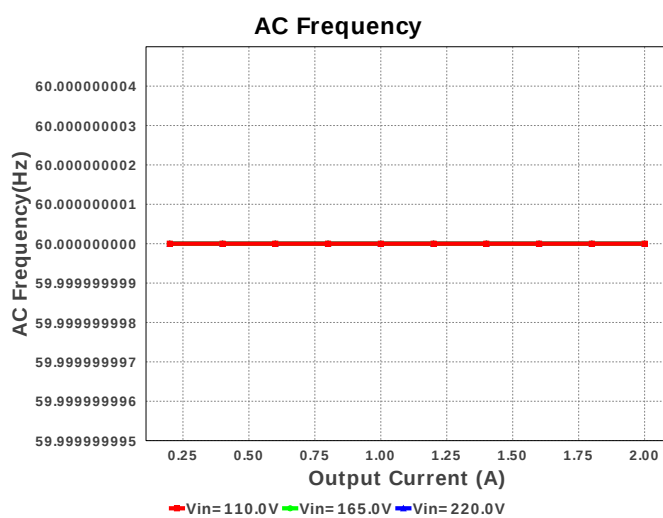
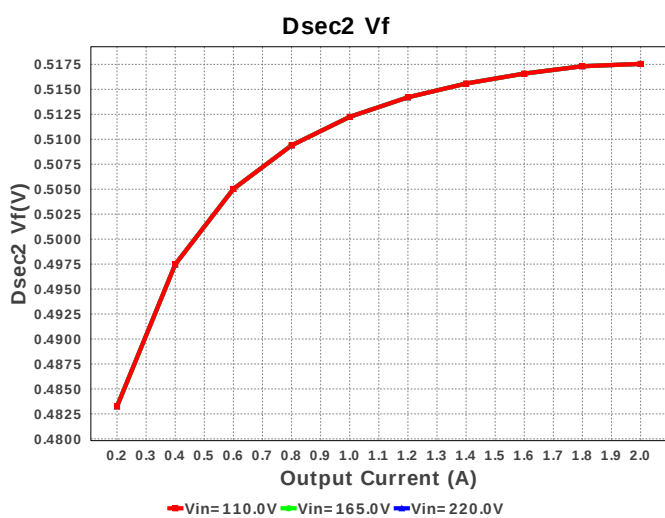
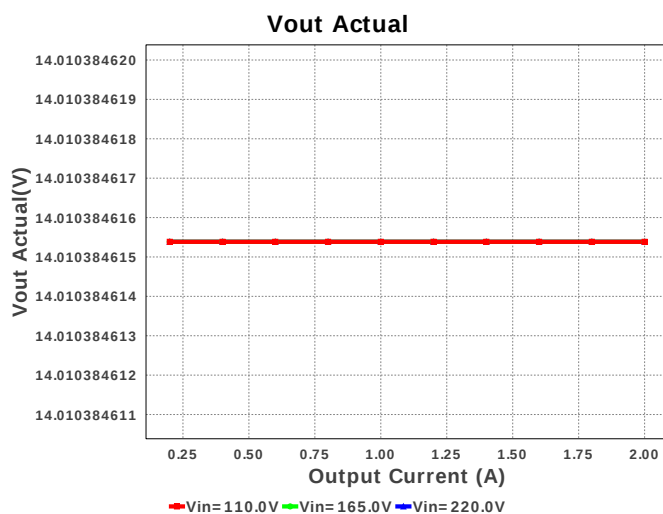
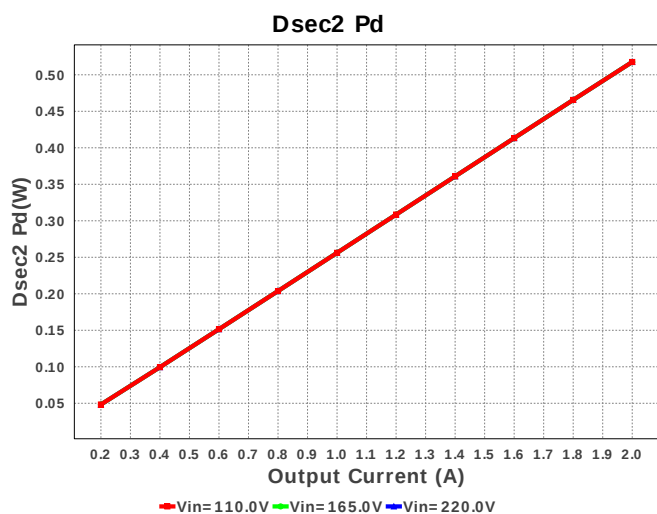
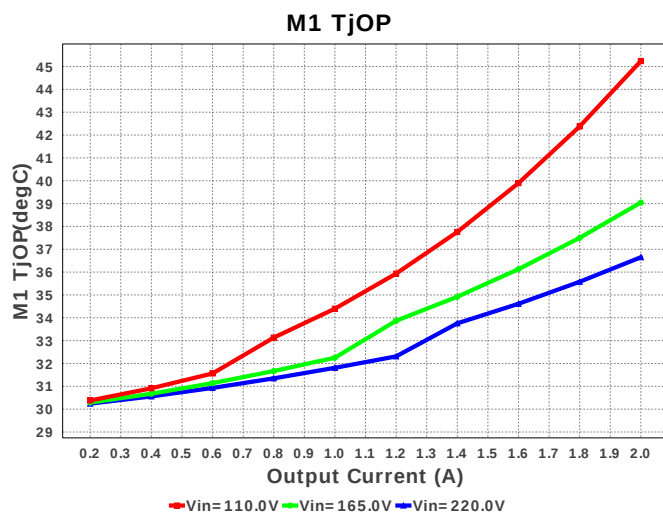
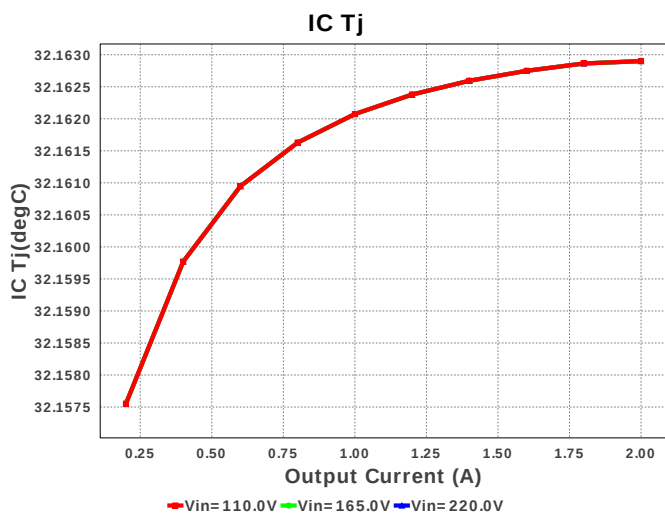


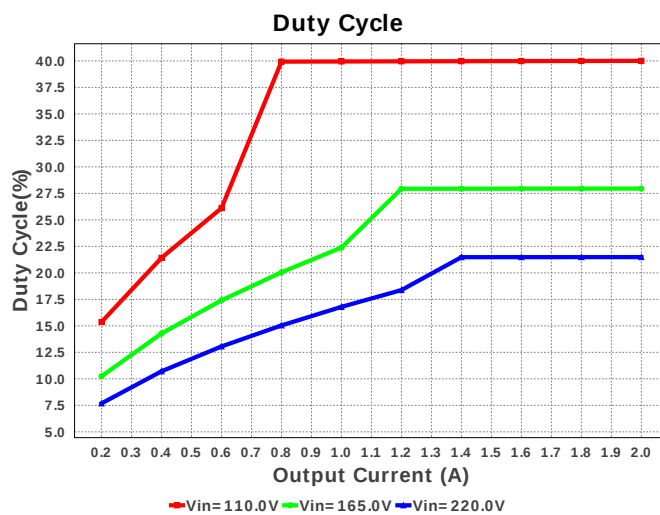
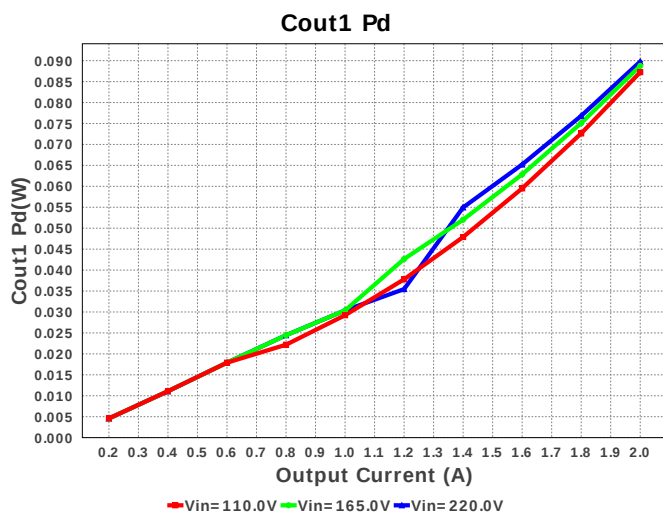
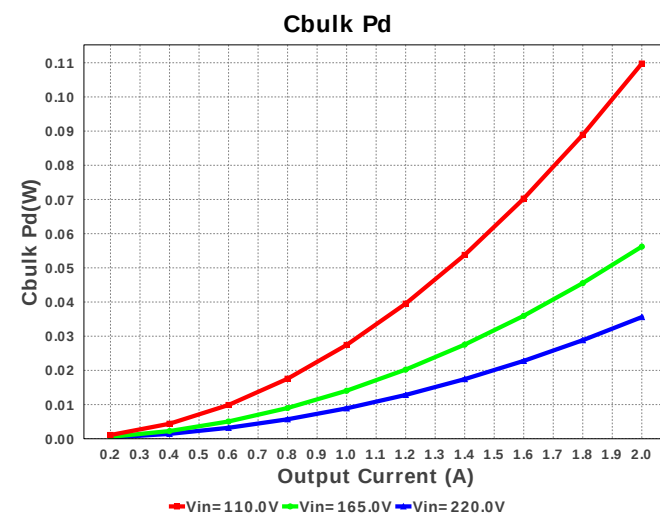
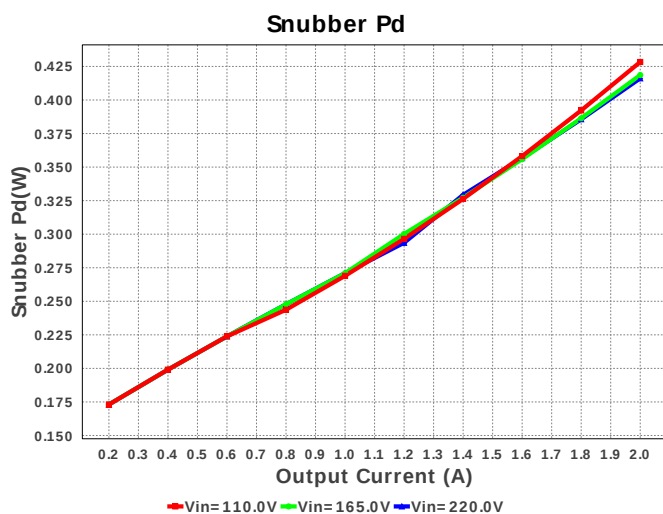
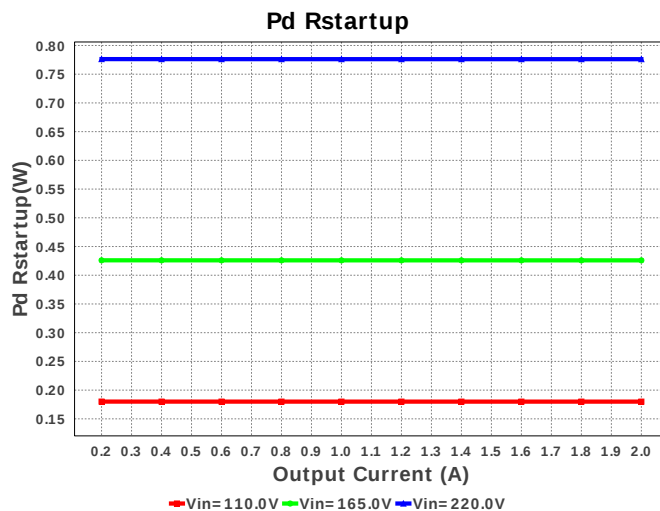
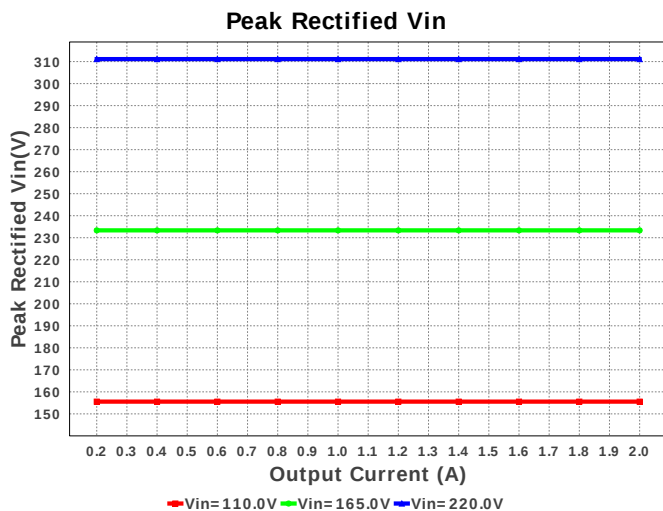


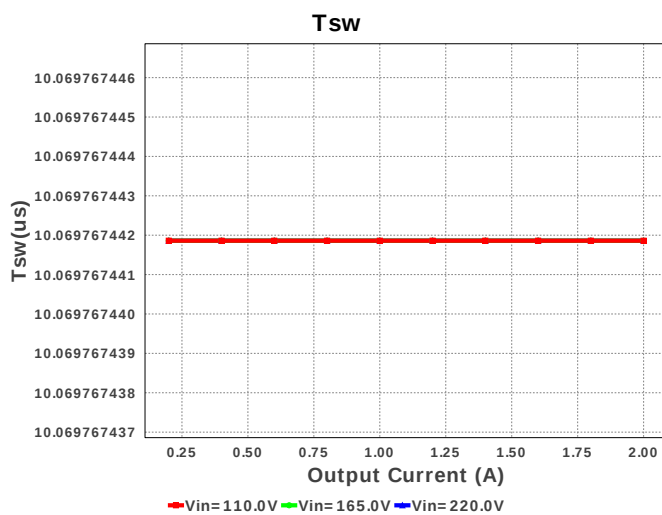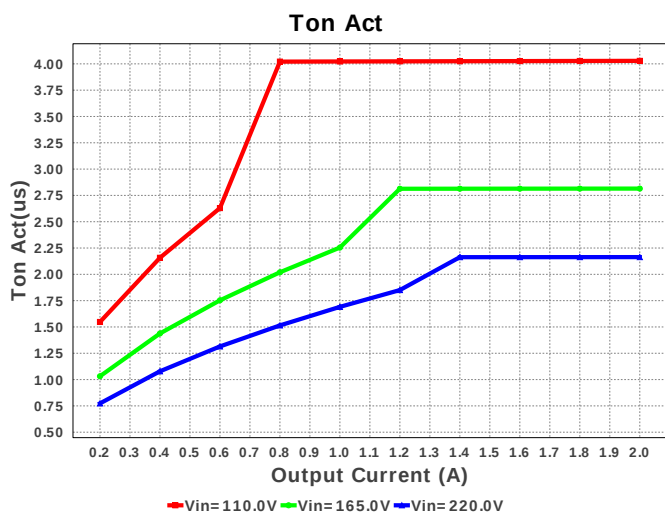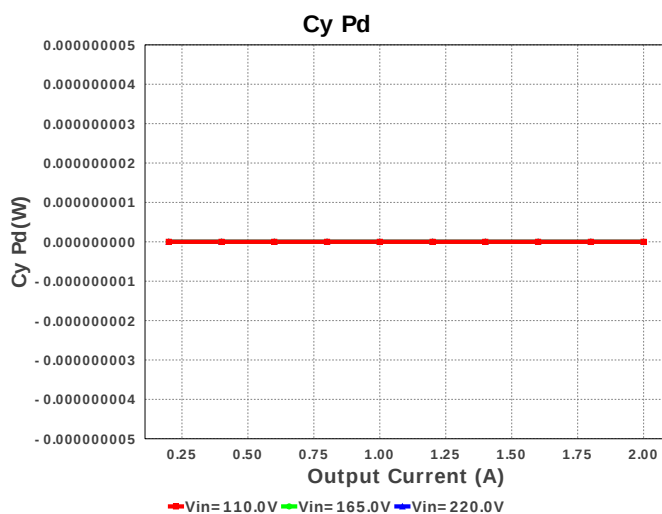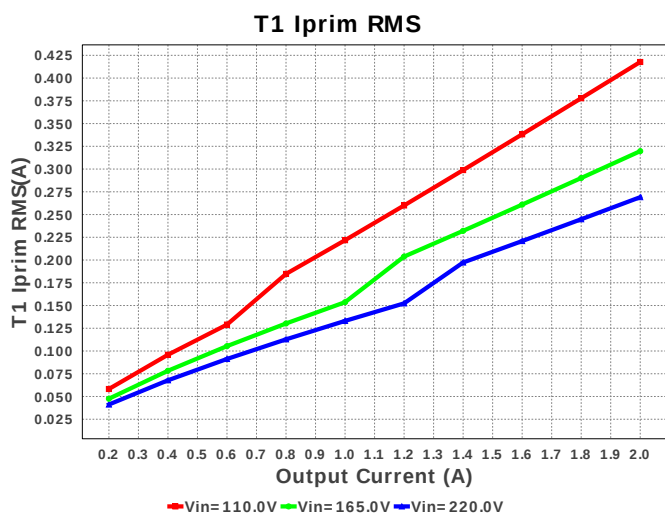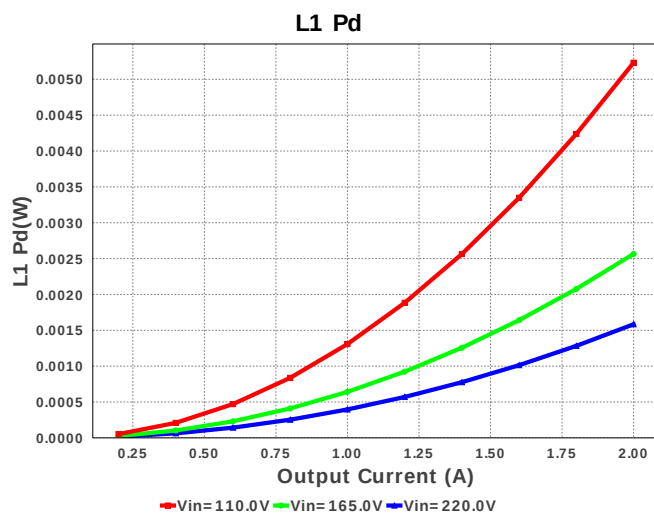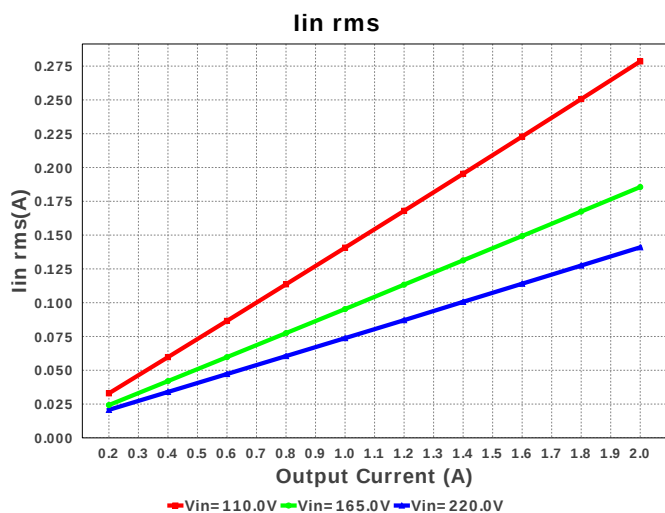


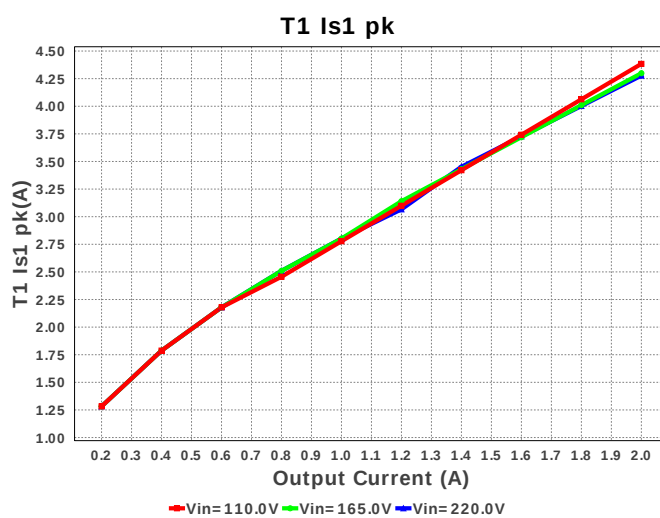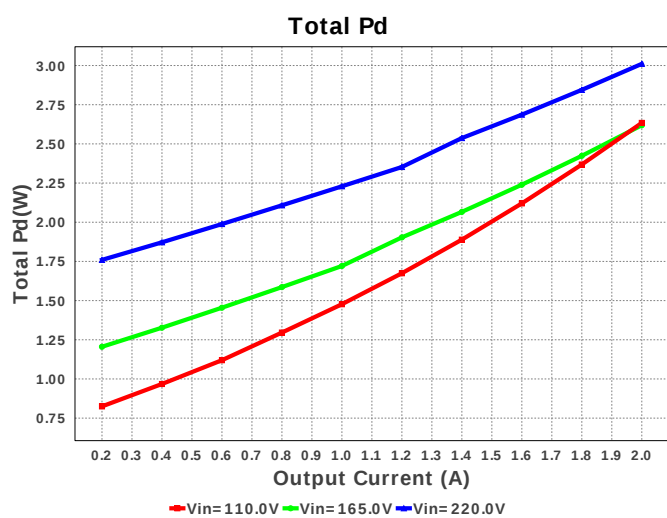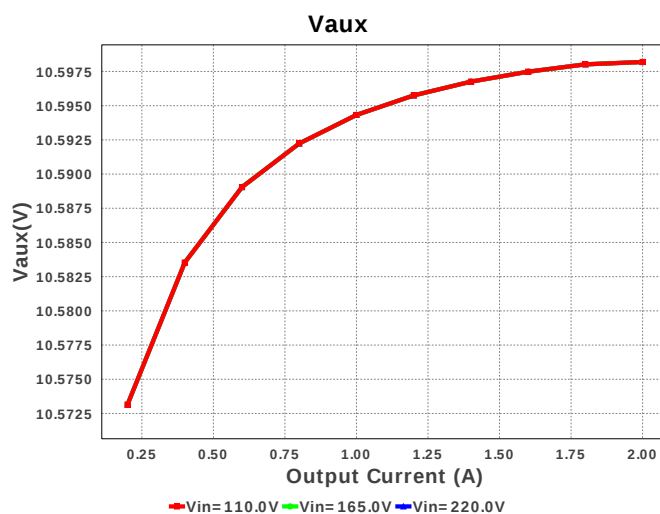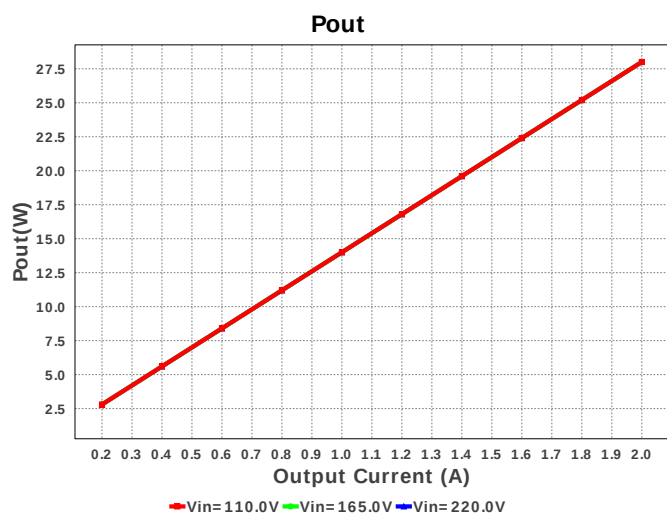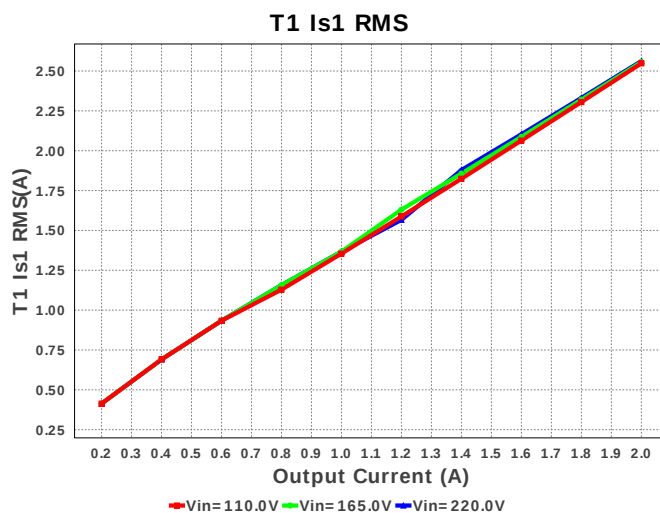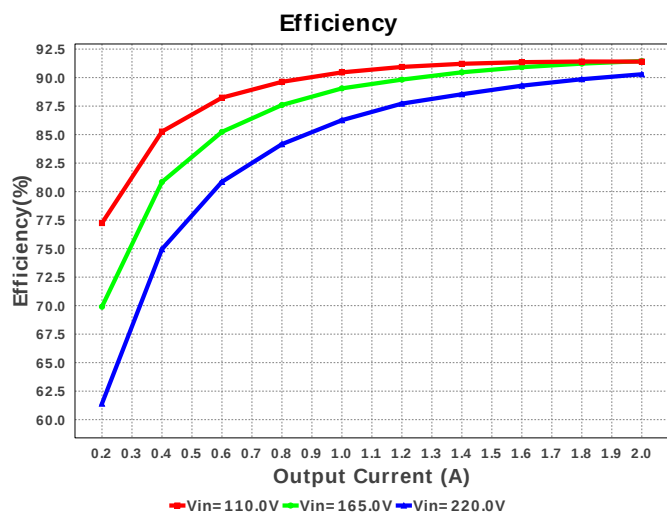

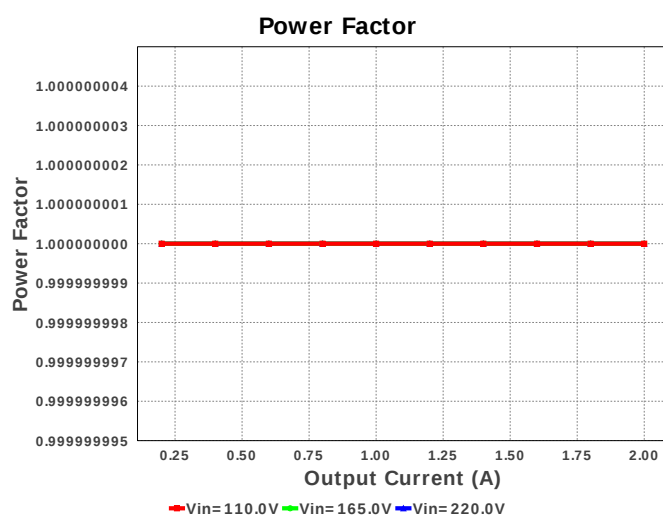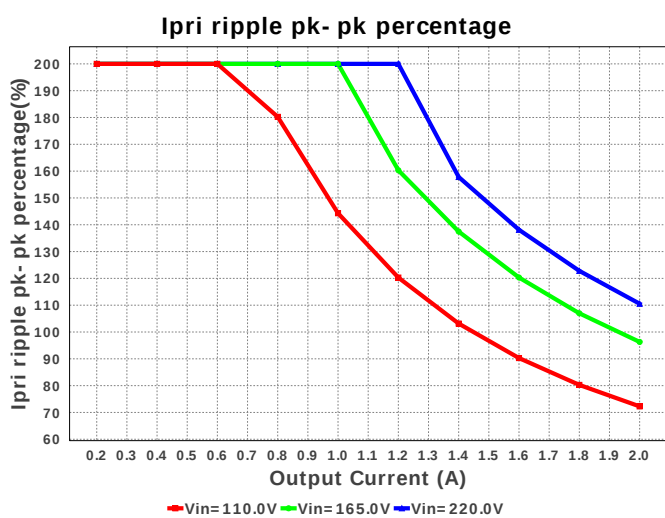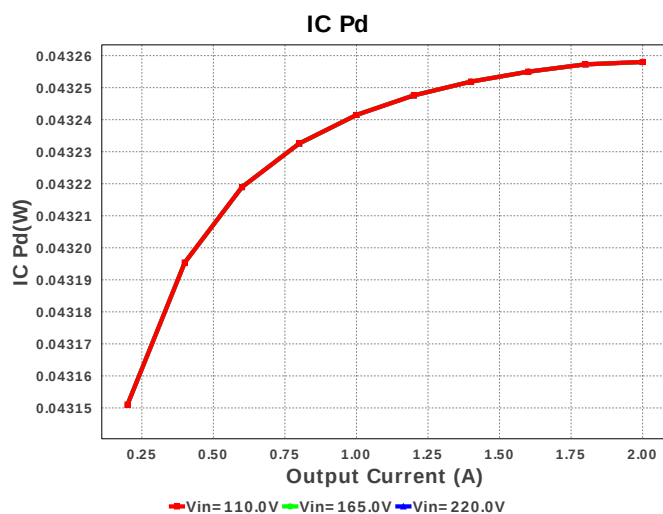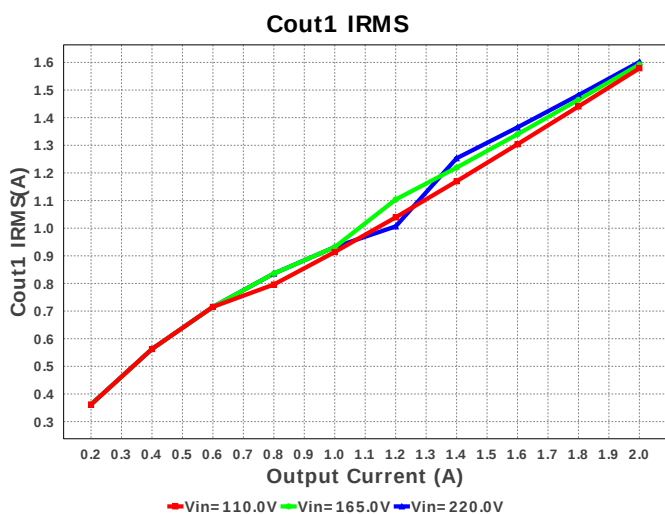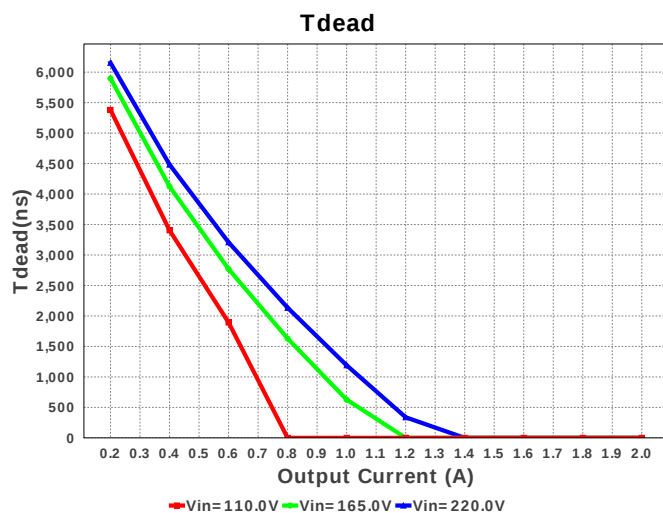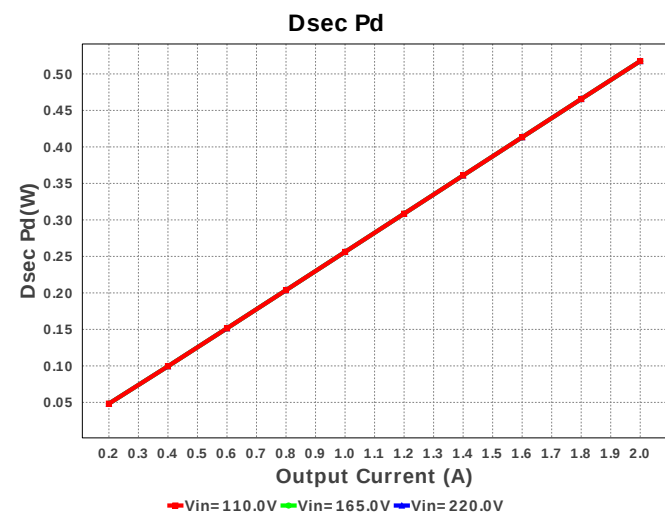

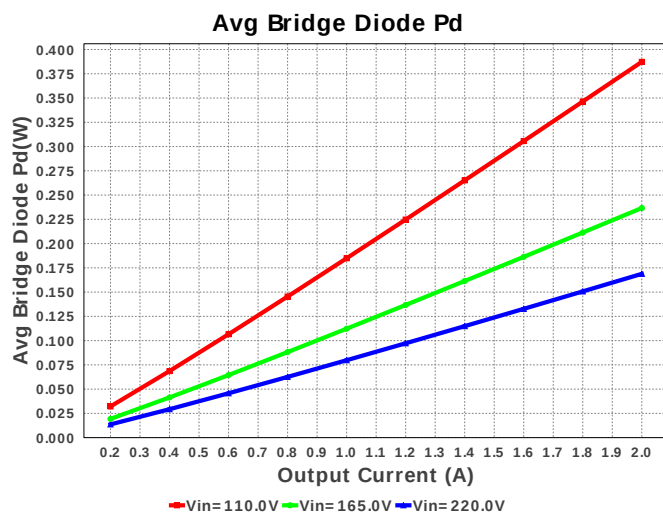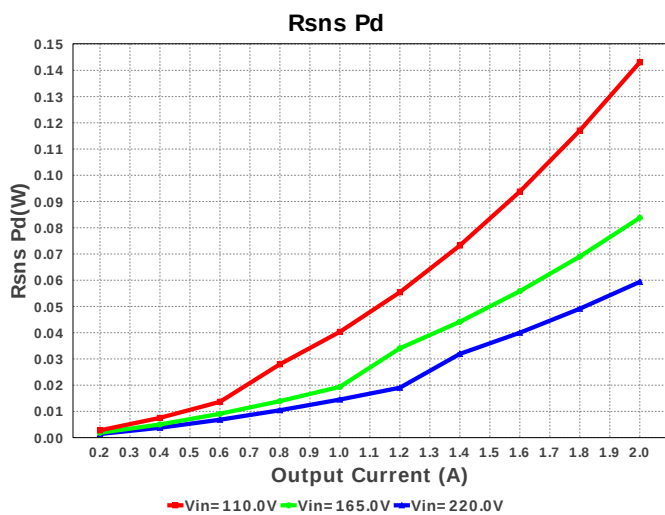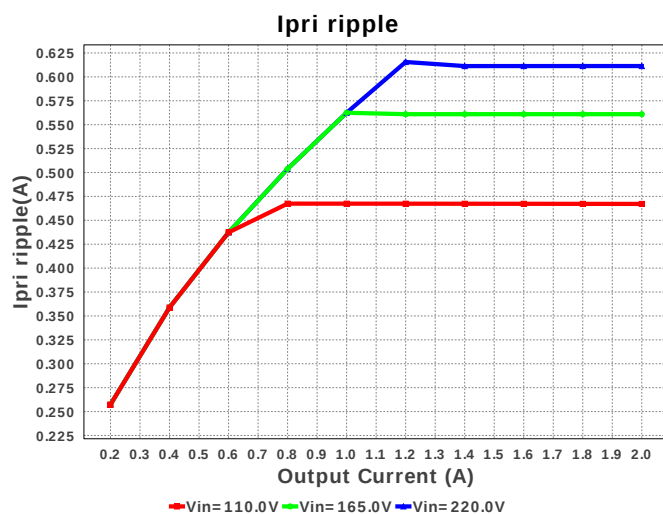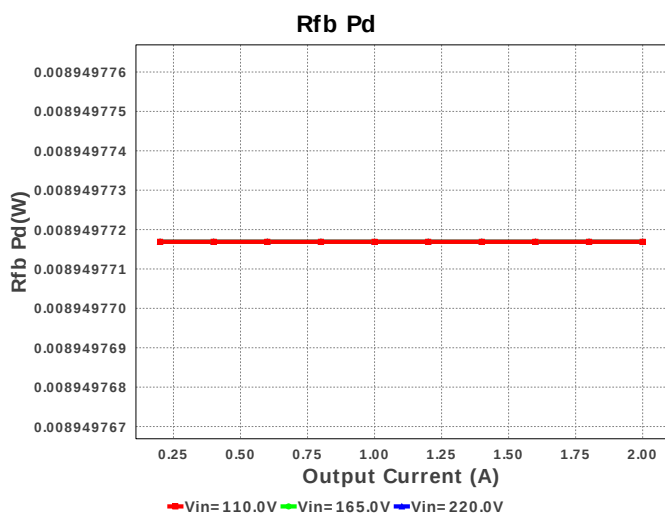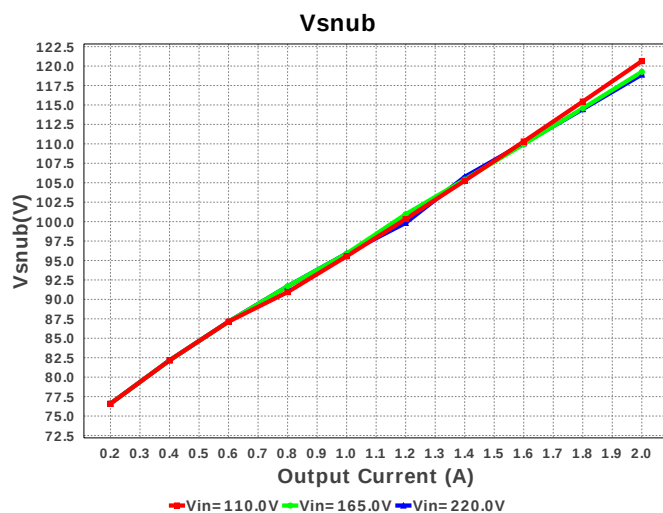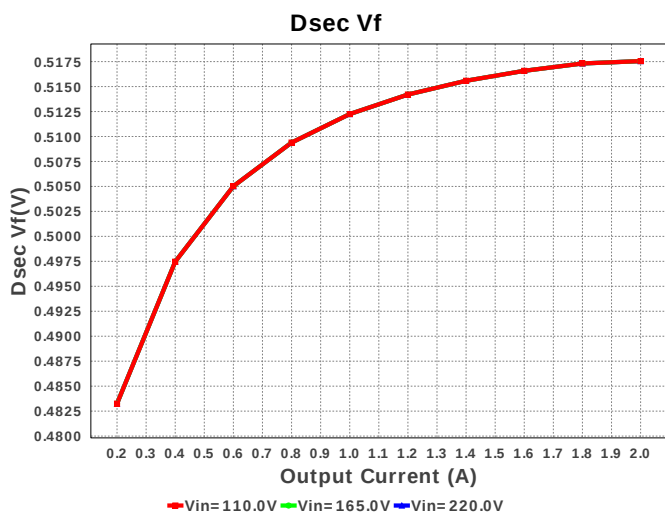

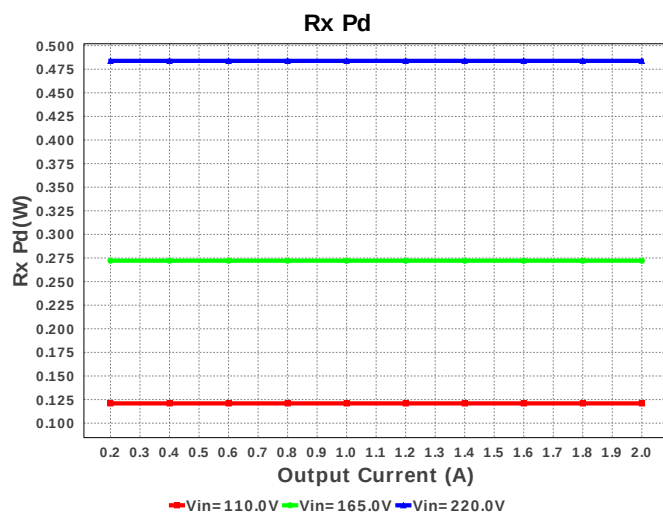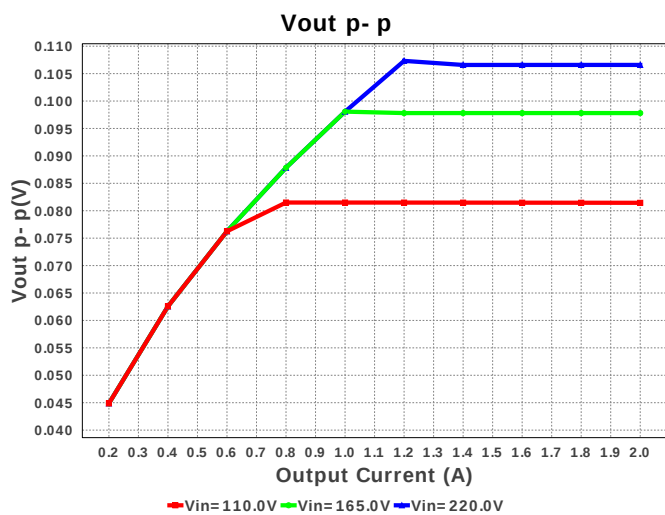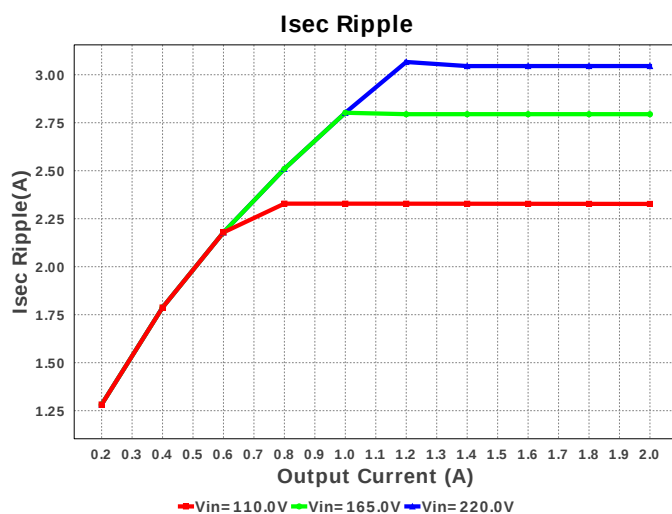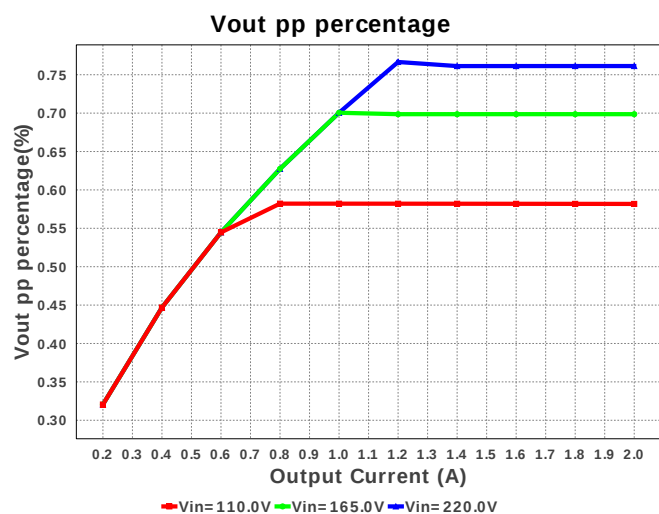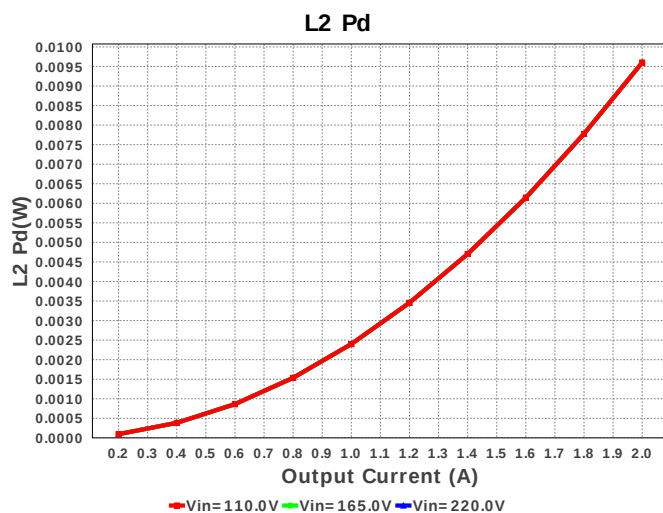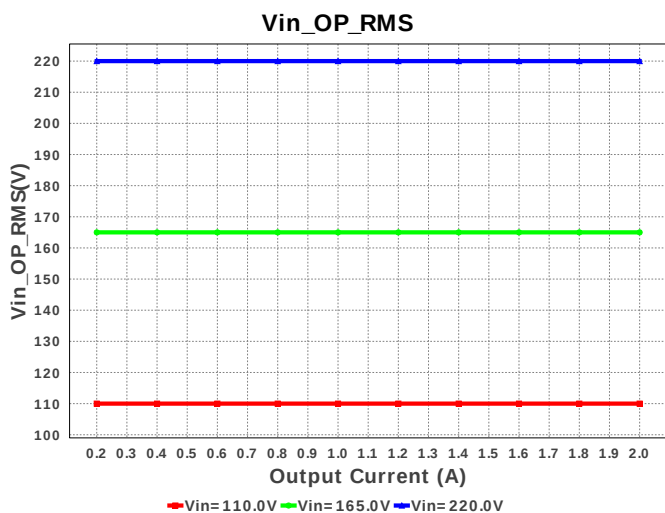

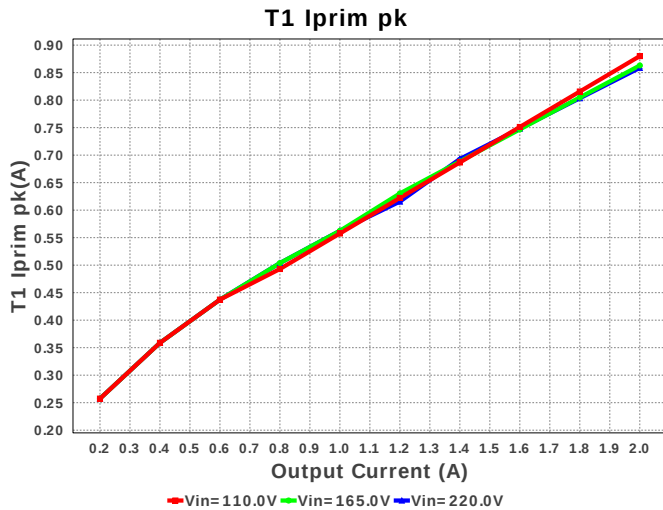

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	1.579 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	278.49 mA	Current	RMS Input Current
3.	Iout_DCM	729.698 mA	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	258.617 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	467.136 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	72.26 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	2.327 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	417.687 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	880.037 mA	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	2.548 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	4.384 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	64	General	Total Design BOM count
14.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	517.55 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	517.55 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	30.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	4.863 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	99.307 kHz	General	Switching frequency
21.	Mode	CCM	General	Conduction Mode
22.	Pout	28.0 W	General	Total output power
23.	Power Factor	1.0	General	Assumed Power Factor for the Application
24.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
25.	Toff	6.254 us	General	Approximate Converter Off Time
26.	Ton Act	4.028 us	General	Approximate Converter On Time
27.	Total BOM	\$0.0	General	Total BOM Cost
28.	Tsw	10.07 us	General	Switching Time Period
29.	Vaux	10.598 V	General	Auxiliary Voltage
30.	Vsnub	120.639 V	General	Voltage Across the Snubber
31.	Vout Actual	14.01 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
32.	Vout OP	14.0 V	Op_Point	Operational Output Voltage
33.	Duty Cycle	40.005 %	Op_point	Duty cycle
34.	Efficiency	91.402 %	Op_point	Steady state efficiency
35.	IC Tj	32.163 degC	Op_point	IC junction temperature
36.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
37.	IOUT_OP	2.0 A	Op_point	Iout operating point
38.	M1 TjOP	45.238 degC	Op_point	M1 MOSFET junction temperature
39.	Peak Rectified Vin	155.562 V	Op_point	Peak voltage seen at rectified input
40.	Vin_OP_RMS	110.0 V	Op_point	AC Input RMS Voltage
41.	Vout p-p	81.445 mV	Op_point	Peak-to-peak output ripple voltage
42.	Avg Bridge Diode Pd	387.26 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
43.	Cbulk Pd	109.761 mW	Power	Bulk capacitor power dissipation
44.	Cout1 Pd	87.24 mW	Power	Output capacitor1 power dissipation
45.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
46.	Cy Pd	0.0 W	Power	Y-caps Power Dissipation
47.	Dsec Pd	517.55 mW	Power	Secondary Diode Power Dissipation
48.	Dsec2 Pd	517.55 mW	Power	Secondary Diode Power Dissipation
49.	IC Pd	43.258 mW	Power	IC power dissipation
50.	L1 Pd	5.232 mW	Power	Power Dissipation in the Inductor

#	Name	Value	Category	Description
51.	L2 Pd	9.6 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
52.	M1 Pd	183.586 mW	Power	M1 MOSFET total power dissipation
53.	Paux	10.886 mW	Power	Power Dissipation in Raux and Daux
54.	Pd Rstartup	179.986 mW	Power	Power Dissipation in Rstartup1 and Rstartup2
55.	Rdrv Pd	5.898 μ W	Power	Power Dissipation in Gate Drive Resistor
56.	Rfb Pd	8.95 mW	Power	Rfb Power Dissipation
57.	Rsns Pd	143.059 mW	Power	Current Limit Sense Resistor Power Dissipation
58.	Rx Pd	120.961 mW	Power	Total Power Dissipation in Rx1 and Rx2
59.	Snubber Pd	428.321 mW	Power	Snubber Power Dissipation
60.	T1 Pd	415.238 mW	Power	Estimated Losses in Transformer
61.	Total Pd	2.634 W	Power	Total Power Dissipation
62.	Vout Tolerance	1.986 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
63.	Vout pp percentage	581.75 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	Iout1	2.0	Output Current #1
3.	Iout2	1.0	Output Current #2
4.	VinMax	220.0	Maximum input voltage
5.	VinMin	110.0	Minimum input voltage
6.	Vout	14.0	Output Voltage
7.	Vout1	14.0	Output Voltage #1
8.	Vout2	1.8	Output Voltage #2
9.	acFrequency	50.0	Light Output in Lumen
10.	base_pn	UCC28C41-Q1	Texas Instruments Base Part Number
11.	source	AC	Input Source Type
12.	ta	30.0	Ambient temperature

Design Assistance

1. UCC28C41-Q1 Product Folder : <http://www.ti.com/product/UCC28C41%2DQ1> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).