


WEBENCH® Design Report

Design : 4257287/149 UCC28720DR
UCC28720DR 110.0V-130.0V to 5.37V @ 1.0A

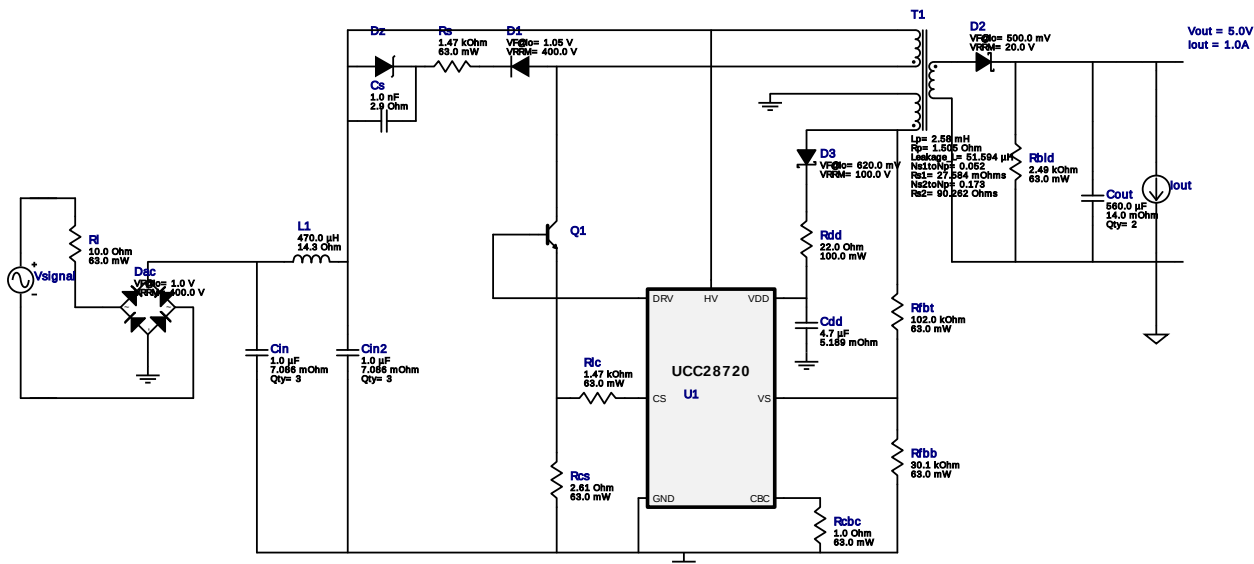


1. Rbld is a starting point, but may need to be experimented with in order to get minimum current needed to hold Vout at no load. Rlc and the feedback resistors may also need adjustment based on the actual transformer used. For more information please click the design assistance button.







My Comments







No comments







Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cdd	MuRata	GRM21BR61E475KA12L Series= X5R	Cap= 4.7 uF ESR= 5.189 mOhm VDC= 25.0 V IRMS= 2.03531 A	1	\$0.02	 0805 7 mm ²
2.	Cin	MuRata	GRM55DR72E105KW01L Series= X7R	Cap= 1.0 uF ESR= 7.086 mOhm VDC= 250.0 V IRMS= 2.0605 A	3	\$0.26	 2220_200 54 mm ²
3.	Cin2	MuRata	GRM55DR72E105KW01L Series= X7R	Cap= 1.0 uF ESR= 7.086 mOhm VDC= 250.0 V IRMS= 2.0605 A	3	\$0.26	 2220_200 54 mm ²
4.	Cout	Panasonic	16SVPF560M Series= ?	Cap= 560.0 uF ESR= 14.0 mOhm VDC= 16.0 V IRMS= 4.95 A	2	\$0.61	 CAPSMT_62_E12 106 mm ²
5.	Cs	MuRata	GRM188R72E102KW07D Series= X7R	Cap= 1.0 nF ESR= 2.9 Ohm VDC= 250.0 V IRMS= 90.0 mA	1	\$0.01	 0603 5 mm ²
6.	D1	Bourns	CD1408-FU1400	VF@Io= 1.05 V VRRM= 400.0 V	1	\$0.13	 Diode_1408 13 mm ²
7.	D2	Diodes Inc.	B220-13-F	VF@Io= 500.0 mV VRRM= 20.0 V	1	\$0.08	 SMB 44 mm ²


#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	D3	Vishay-Semiconductor	SS2PH10-M3	VF@Io= 620.0 mV VRRM= 100.0 V	1	\$0.14	DO-220AA 14 mm ²
9.	Dac	Diodes Inc.	HD04-T	VF@Io= 1.0 V VRRM= 400.0 V	1	\$0.12	 MiniDIP 62 mm ²
10.	Dz	ON Semiconductor	1SMB5951BT3G	Zener	1	\$0.10	 SMB 44 mm ²
11.	L1	Bourns	SDR0302-471KL	L= 470.0 µH DCR= 14.3 Ohm	1	\$0.18	 SDR0302 15 mm ²
12.	Q1	STMicroelectronics	STN2580	Bipolar Transistor	1	\$0.19	 SOT-223 76 mm ²
13.	Rbld	Vishay-Dale	CRCW04022K49FKED Series= CRCW..e3	Res= 2.49 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
14.	Rcbc	Vishay-Dale	CRCW04021R00FKED Series= CRCW..e3	Res= 1.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
15.	Rcs	Vishay-Dale	CRCW04022R61FKED Series= CRCW..e3	Res= 2.61 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
16.	Rdd	Yageo America	RC0603FR-0722RL Series= ?	Res= 22.0 Ohm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
17.	Rfbb	Vishay-Dale	CRCW040230K1FKED Series= CRCW..e3	Res= 30.1 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
18.	Rfbt	Vishay-Dale	CRCW0402102KFKED Series= CRCW..e3	Res= 102.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
19.	RI	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
20.	Rlc	Vishay-Dale	CRCW04021K47FKED Series= CRCW..e3	Res= 1.47 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
21.	Rs	Vishay-Dale	CRCW04021K47FKED Series= CRCW..e3	Res= 1.47 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
22.	T1	CUSTOM	CUSTOM	Lp= 2.58 mH Rp= 1.505 Ohm Leakage_L= 51.594 µH Ns1toNp= 0.052 Rs1= 27.584 mOhms Ns2toNp= 0.173 Rs2= 90.262 Ohms	1	NA	CUSTOM 0 mm ²
23.	U1	Texas Instruments	UCC28720DR	Switcher	1	\$0.40	 R-PDSO-G7 55 mm ²

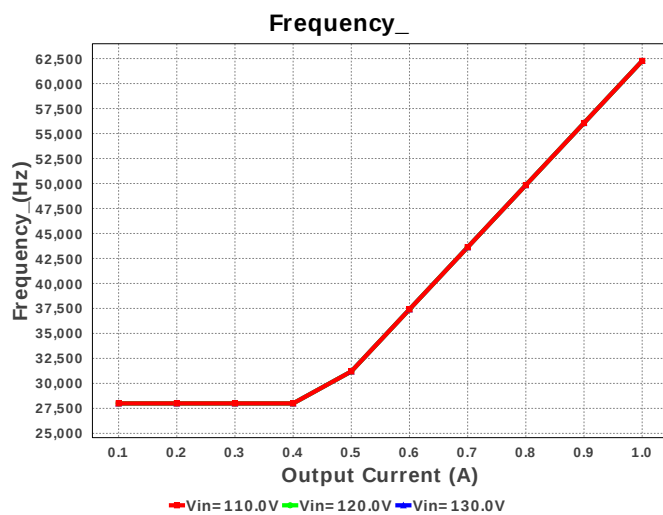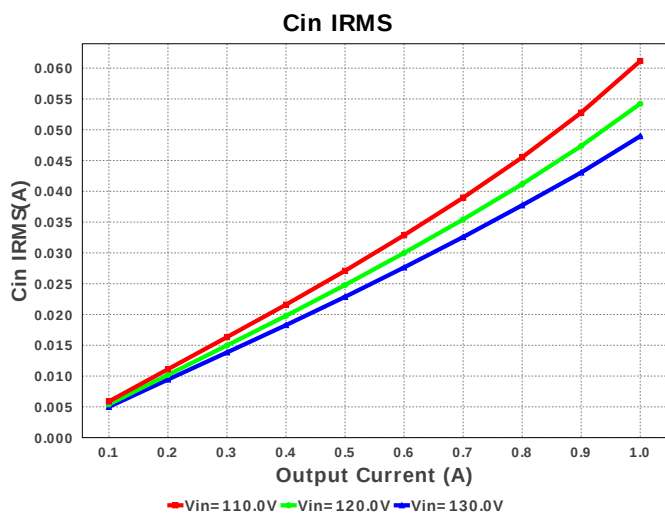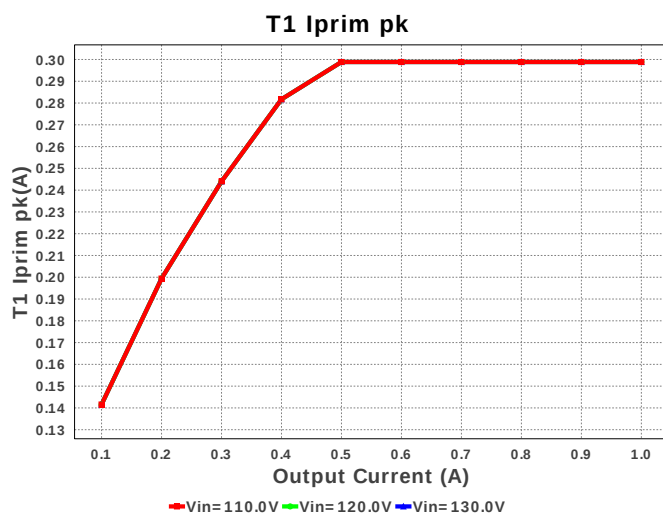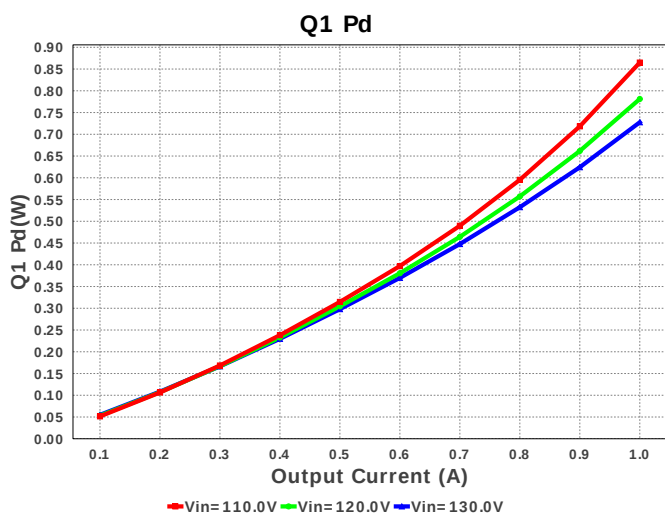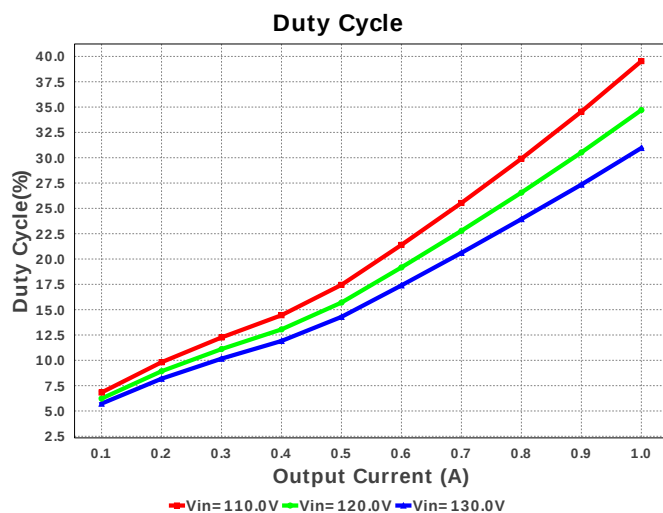
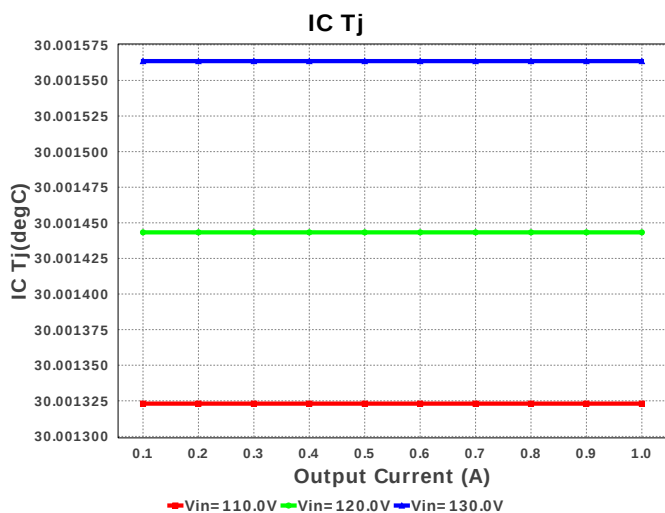


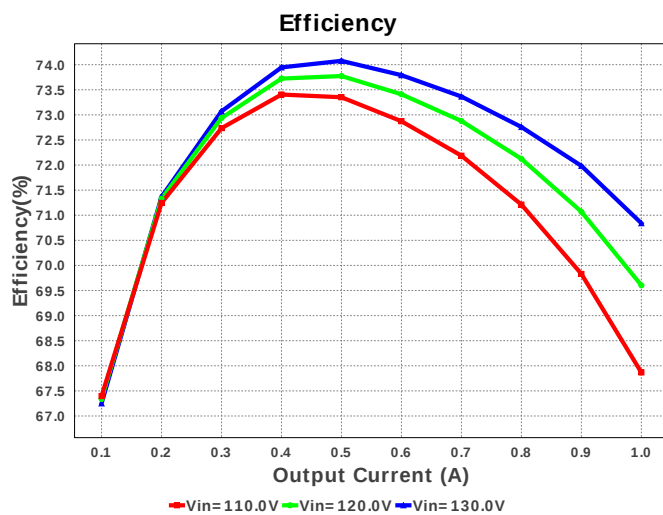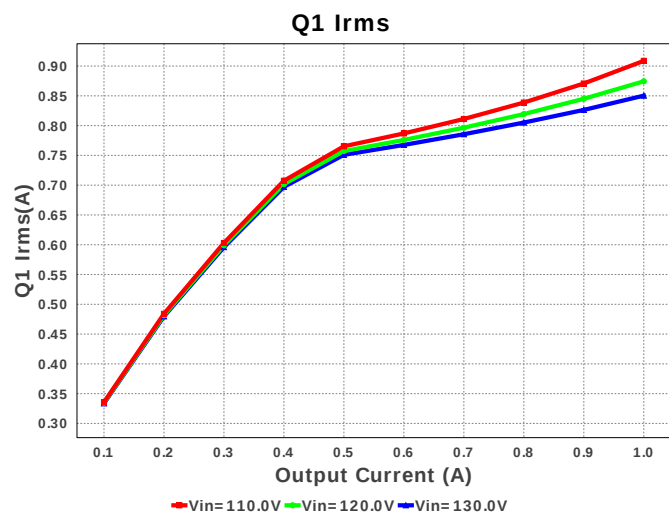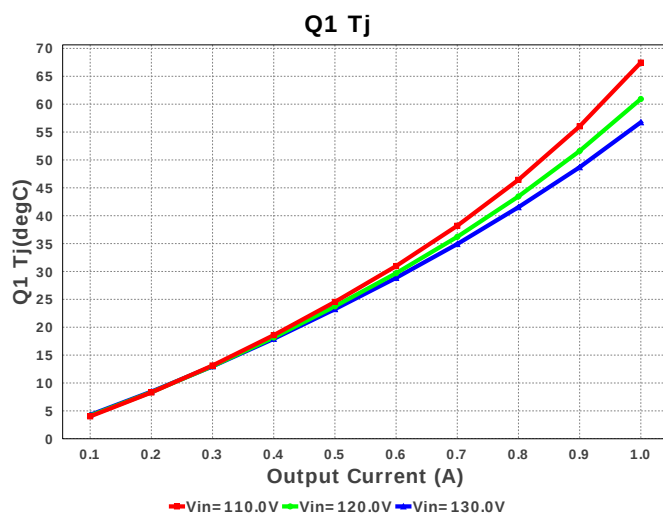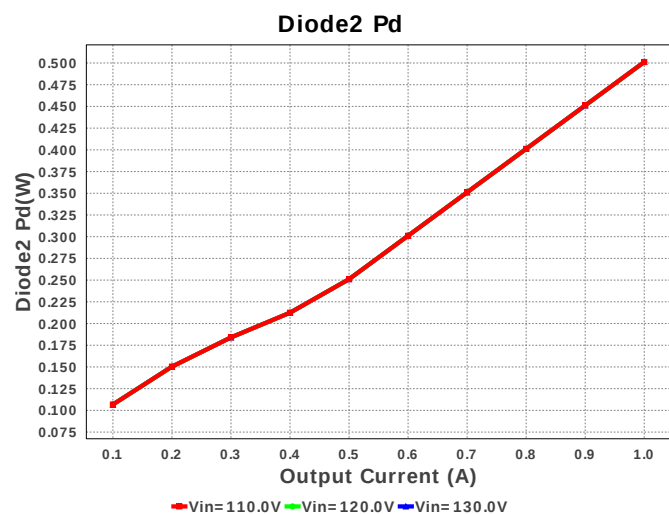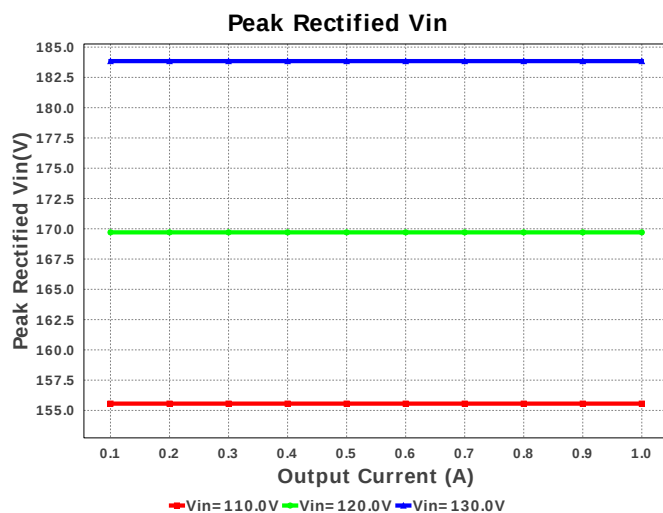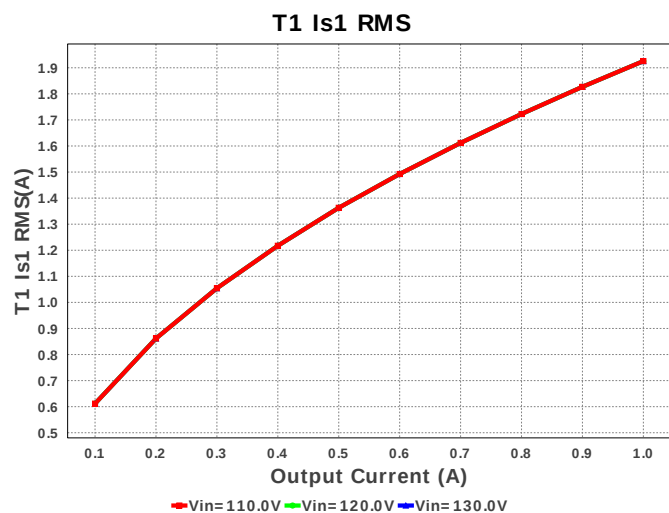

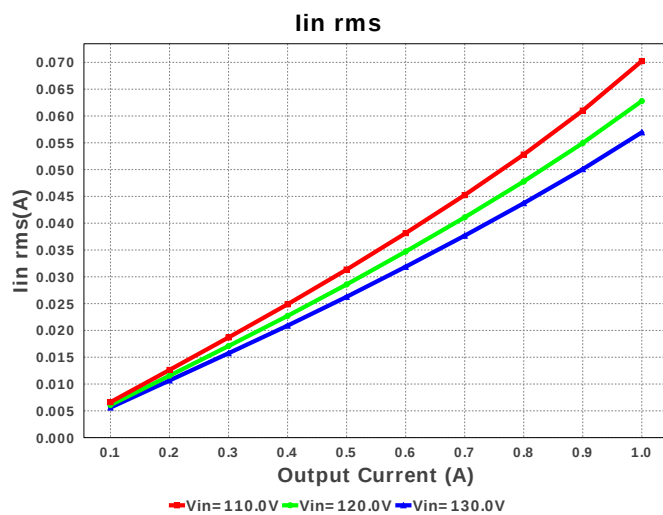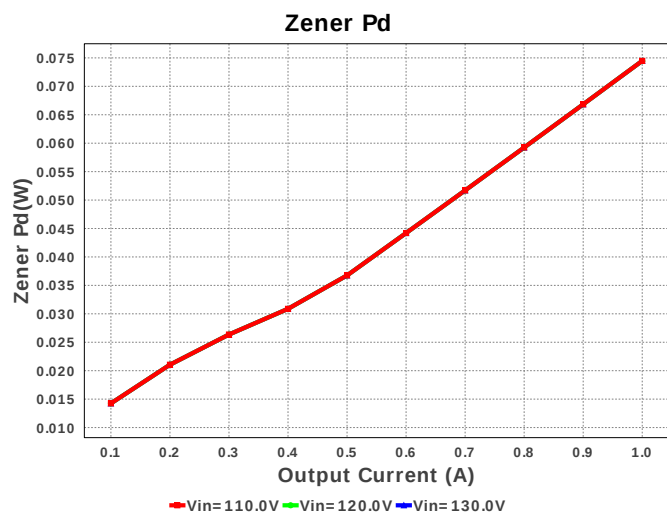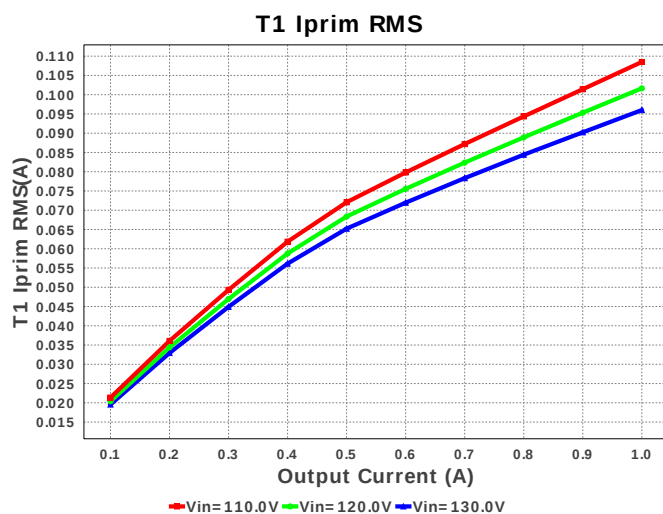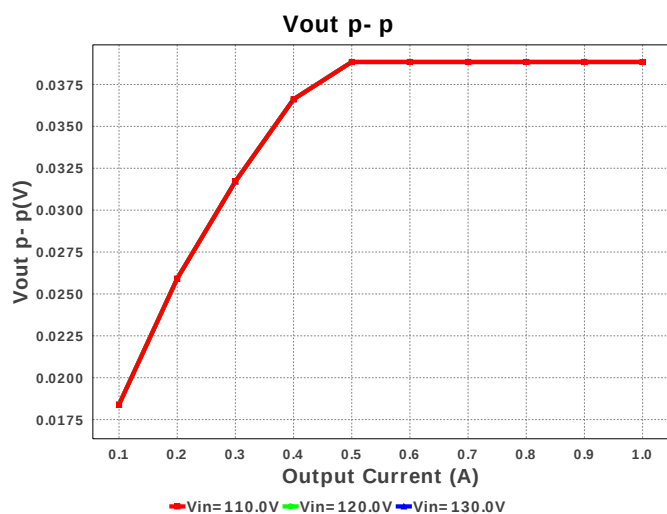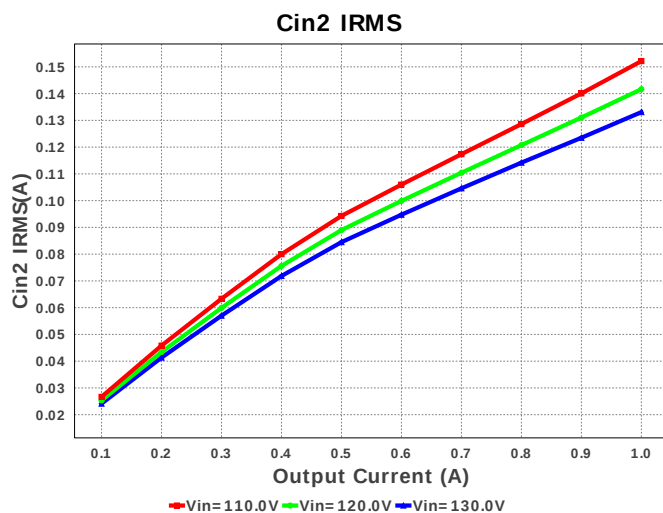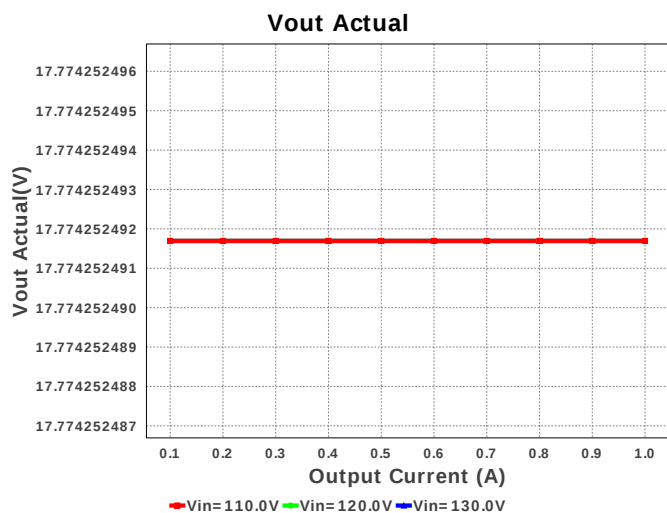

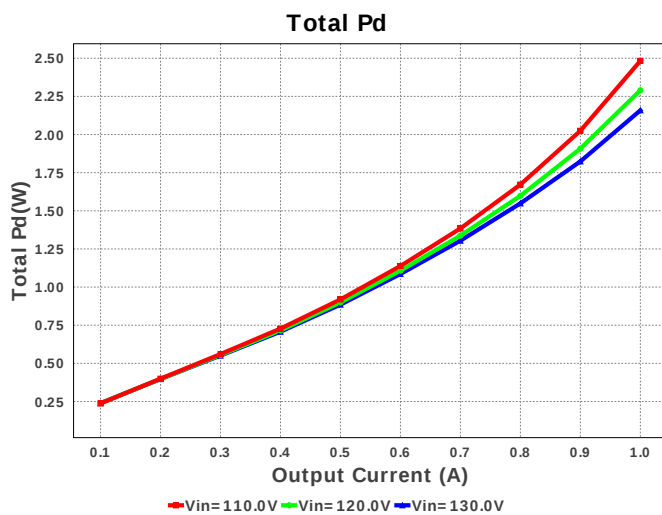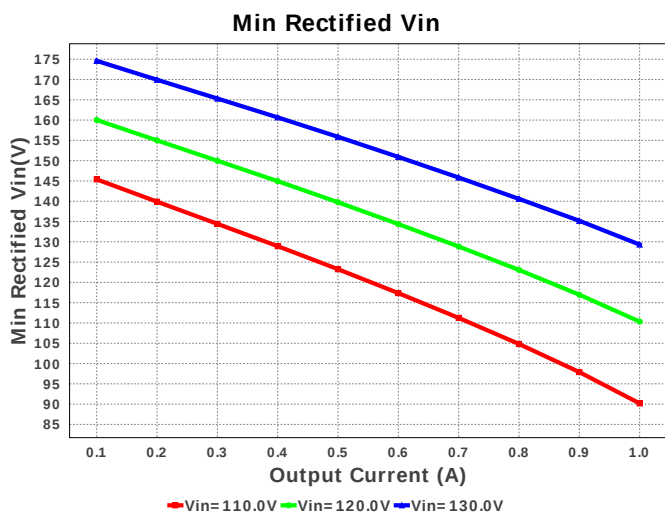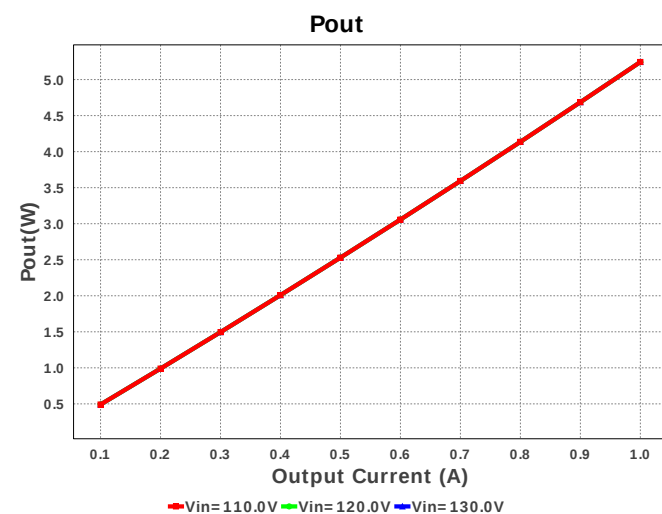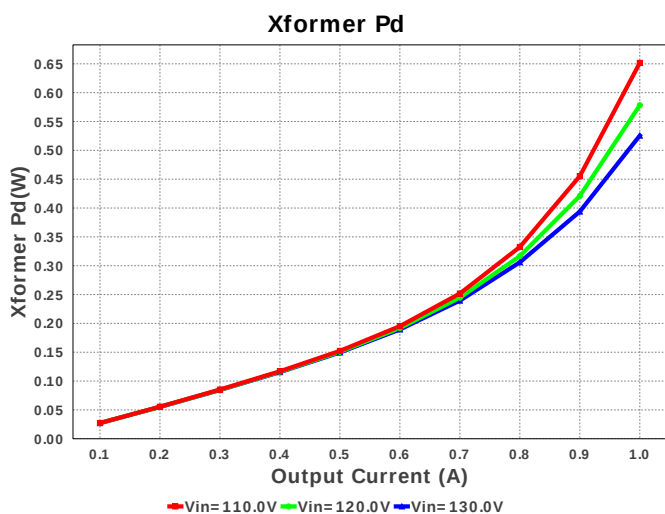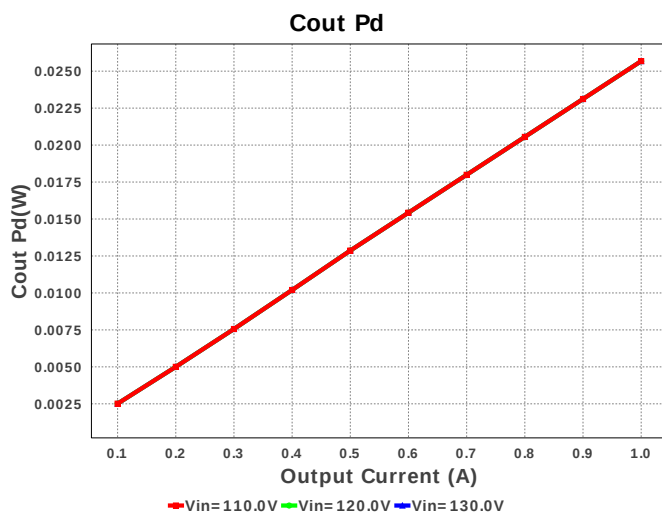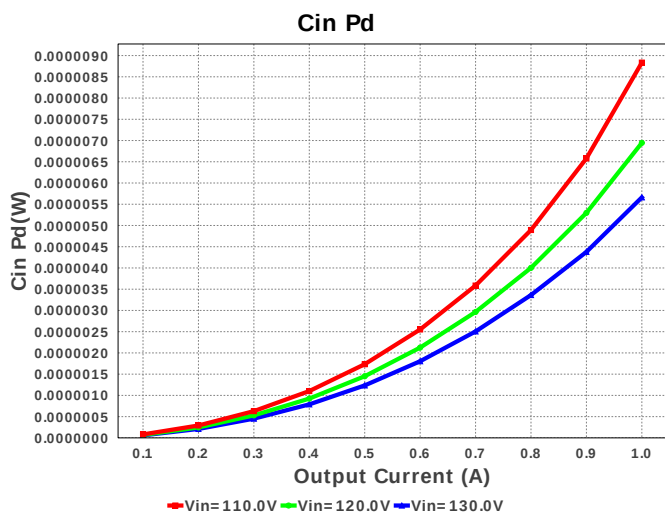

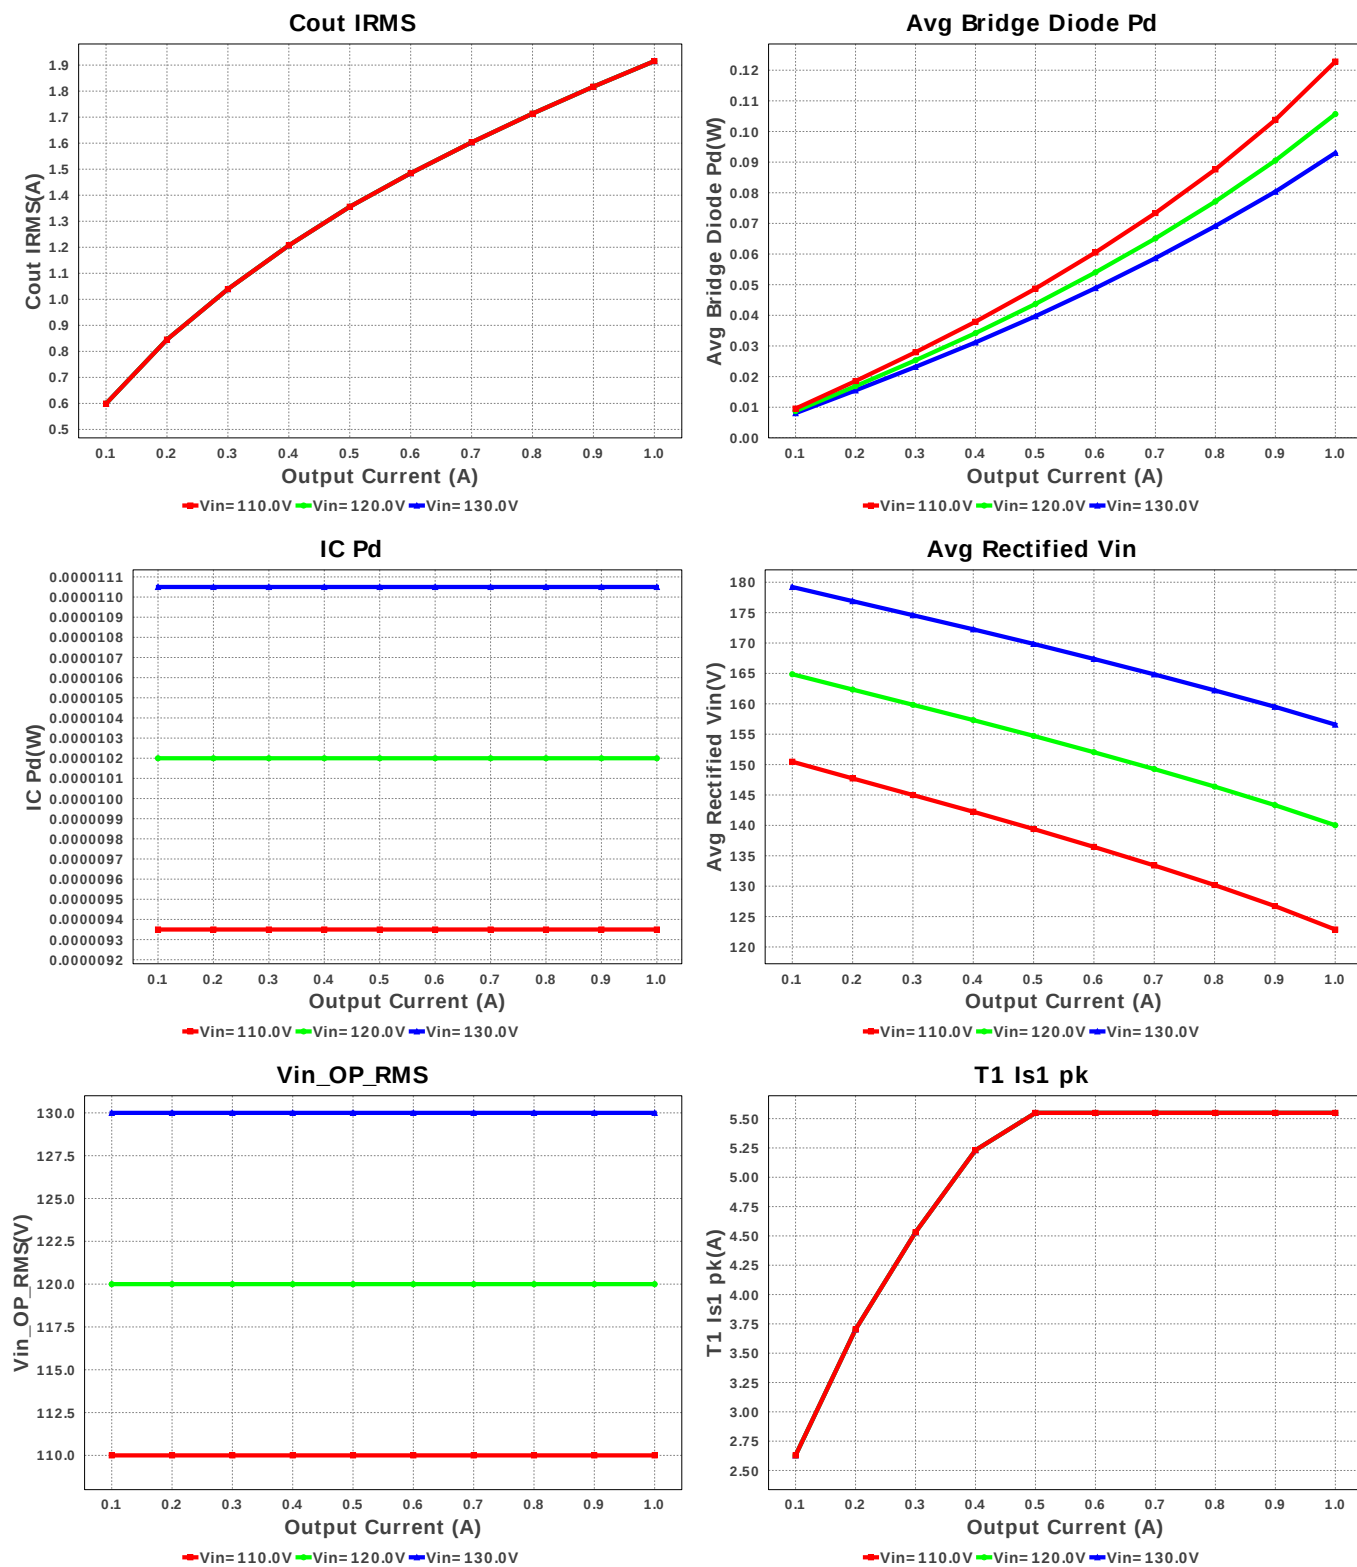

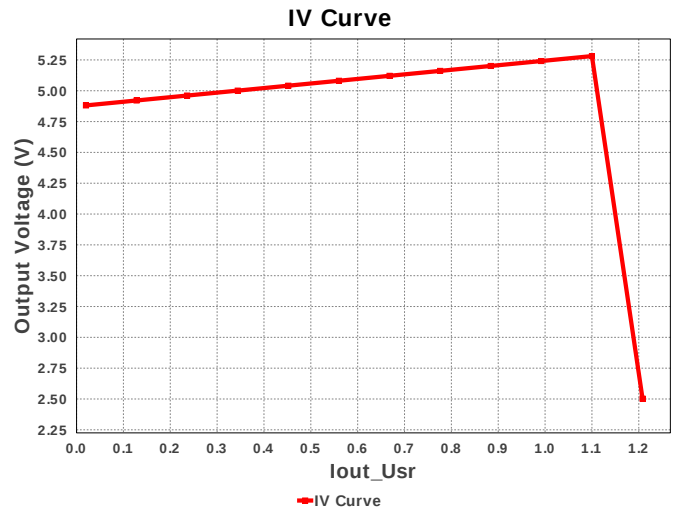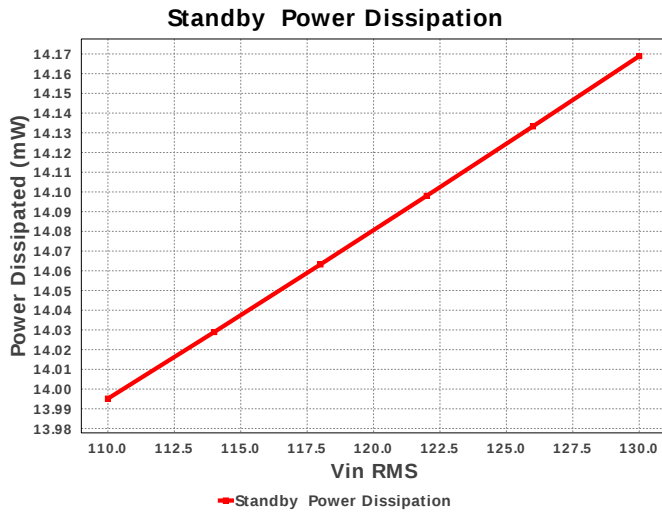

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	46.883 mA	Current	Input capacitor RMS ripple current
2.	Cin2 IRMS	129.858 mA	Current	Input Capacitor Cin2 RMS Ripple Current
3.	Cout IRMS	1.923 A	Current	Output capacitor RMS ripple current
4.	Iin rms	54.184 mA	Current	RMS Input Current
5.	Q1 Irms	867.656 mA	Current	Q1 RMS current
6.	T1 Iprim RMS	94.151 mA	Current	Transformer Primary RMS Current
7.	T1 Iprim pk	298.851 mA	Current	Transformer Primary Peak Current
8.	T1 Is1 RMS	1.934 A	Current	Transformer Secondary1 RMS Current
9.	T1 Is1 pk	5.596 A	Current	Transformer Secondary1 Peak Current
10.	Avg Rectified Vin	157.04 V	General	Average Rectified Voltage for the AC Line Period
11.	BOM Count	28	General	Total Design BOM count
12.	FootPrint	905.0 mm ²	General	Total Foot Print Area of BOM components
13.	Mode	DCM	General	Conduction Mode
14.	Pout	5.369 W	General	Total output power
15.	Total BOM	\$0.0	General	Total BOM Cost
16.	Q1 Tj	50.133 degC	Op_Point	Q1 Junction Temperature
17.	Vout Actual	17.774 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
18.	Vout OP	5.369 V	Op_Point	Operational Output Voltage
19.	Duty Cycle	29.776 %	Op_point	Duty cycle
20.	Efficiency	76.221 %	Op_point	Steady state efficiency
21.	Frequency_	59.961 kHz	Op_point	Switching frequency
22.	IC Tj	30.001 degC	Op_point	IC junction temperature
23.	ICThetaJA	70.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
24.	IOUT_OP	1.0 A	Op_point	Iout operating point
25.	Min Rectified Vin	130.235 V	Op_point	Minimum voltage seen at rectified input
26.	Peak Rectified Vin	183.846 V	Op_point	Peak voltage seen at rectified input
27.	Vin_OP_RMS	130.0 V	Op_point	AC Input RMS Voltage
28.	Vout p-p	39.17 mV	Op_point	Peak-to-peak output ripple voltage
29.	Avg Bridge Diode Pd	59.682 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
30.	Cin Pd	5.192 µW	Power	Input capacitor power dissipation
31.	Cout Pd	25.894 mW	Power	Output capacitor power dissipation
32.	Diode2 Pd	376.31 mW	Power	Diode2 power dissipation
33.	IC Pd	9.35 µW	Power	IC power dissipation
34.	Q1 Pd	642.731 mW	Power	Q1 Power Dissipation
35.	Total Pd	1.675 W	Power	Total Power Dissipation
36.	Xformer Pd	444.413 mW	Power	Transformer power dissipation
37.	Zener Pd	19.723 mW	Power	Zener power dissipation
38.	Vout Tolerance	1.76 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	1.0	Maximum Output Current
2.	VinMax	130.0	Maximum input voltage
3.	VinMin	110.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	acFrequency	50.0	Light Output in Lumen
6.	base_pn	UCC28720	Texas Instruments Base Part Number
7.	source	AC	Input Source Type
8.	ta	30.0	Ambient temperature

Design Assistance

1. Application Hints Rbld Rbld is used to set a minimum load for the circuit, so that in standby the output voltage does not float up. The value chosen by WEBENCH should be a good starting point but may need to be adjusted to achieve minimum power dissipation at standby as well. Rlc Rlc provides the function of feed-forward line compensation to eliminate change in IPP due to change in di/dt and the propagation delay of the internal comparator and MOSFET turn-off time. For best results the chosen value may need to be adjusted based on board, FET and transformer parasitics. Rcbc Rcbc is used to set the amount of output voltage compensation to offset cable resistance. Connecting this resistor from the CBC pin to GND will program a current that is summed into the VS feedback divider, increasing the regulation voltage as I_{out} increases. Rf_{bt} & Rf_{bb} The feedback resistors will set the output voltage of the circuit. The values chosen may need to be fine tuned based on the final Transformer turns ratios and the voltage across the output diode at close to zero current. Part Description The UCC28700 family of flyback power supply controllers provides Constant-Voltage (CV) and Constant-Current (CC) output regulation. Primary-Side Regulation (PSR) eliminates the use of an Opto-Coupler. Please see the datasheet for further design guidance. <http://www.ti.com/lit/ds/symlink/ucc28720.pdf>

2. UCC28720 Product Folder : <http://www.ti.com/product/UCC28720> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).