








WEBENCH® Design Report







Design : 4769495/2 TPS562200DDCR
TPS562200DDCR 12.0V-14.0V to 5.00V @ 0.5A

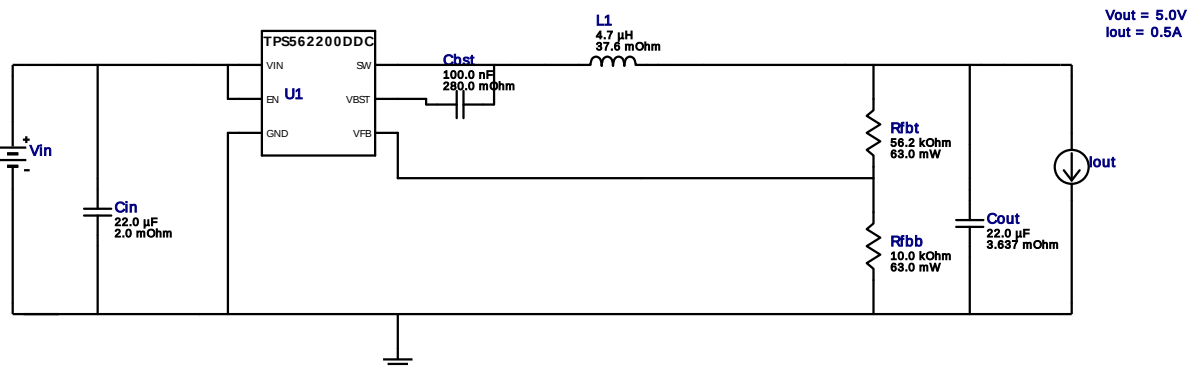


Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbst	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
2.	Cin	MuRata	GRM32ER61E226KE15L Series= X5R	Cap= 22.0 uF ESR= 2.0 mOhm VDC= 25.0 V IRMS= 3.67 A	1	\$0.16	 1210 15 mm ²
3.	Cout	MuRata	GRM31CR61A226KE19L Series= X5R	Cap= 22.0 uF ESR= 3.637 mOhm VDC= 10.0 V IRMS= 3.56456 A	1	\$0.07	 1206_190 11 mm ²
4.	L1	Bourns	SRN6045-4R7Y	L= 4.7 uH DCR= 37.6 mOhm	1	\$0.16	 SRN6045 64 mm ²
5.	Rfbb	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
6.	Rfht	Vishay-Dale	CRCW040256K2FKED Series= CRCW..e3	Res= 56.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
7.	U1	Texas Instruments	TPS562200DDCR	Switcher	1	\$0.47	 DDC0006A 10 mm ²

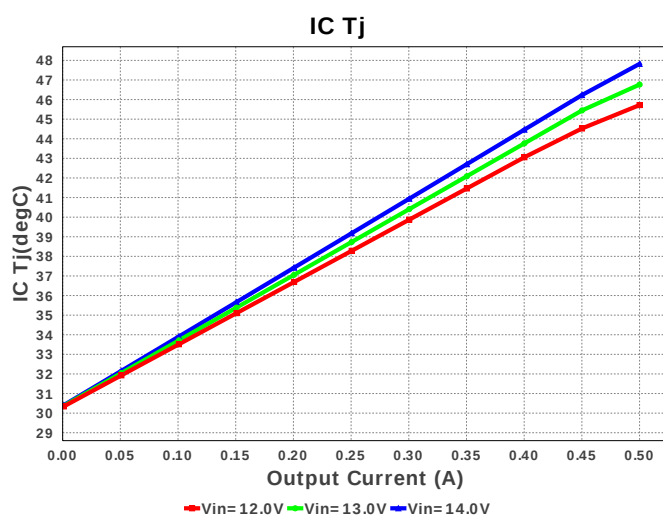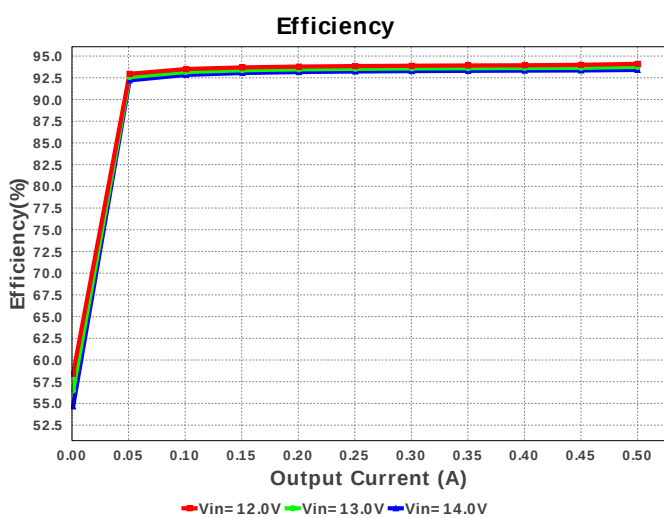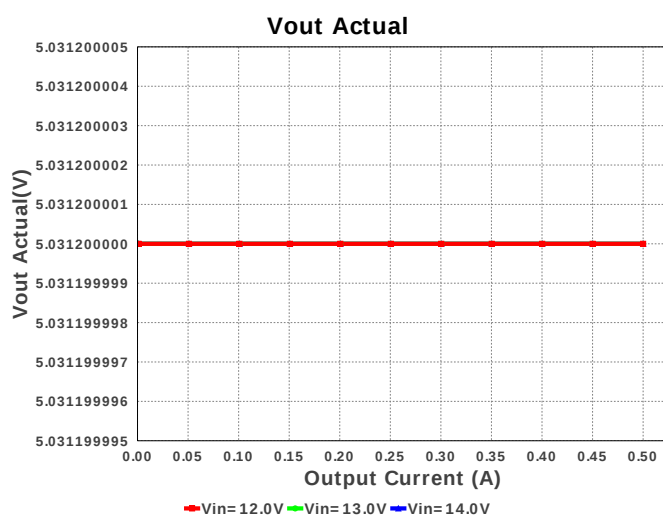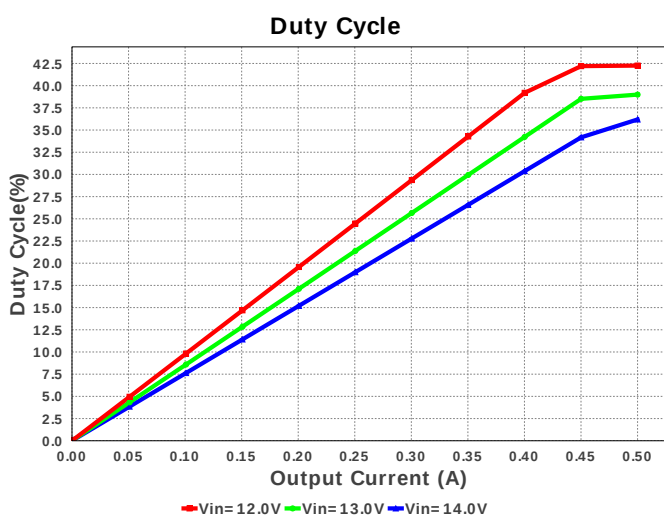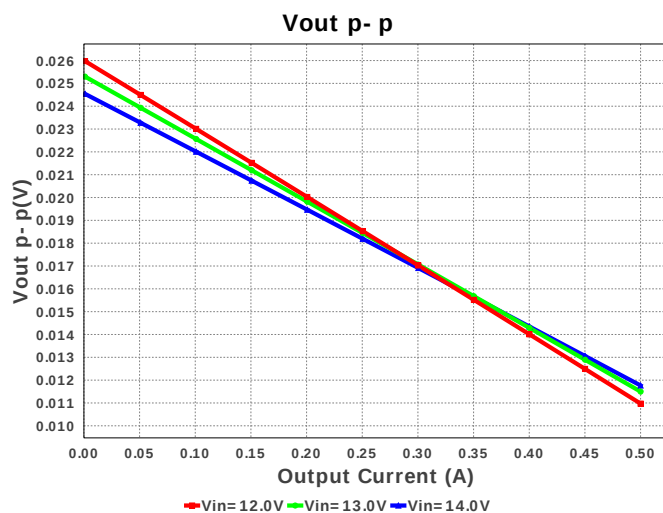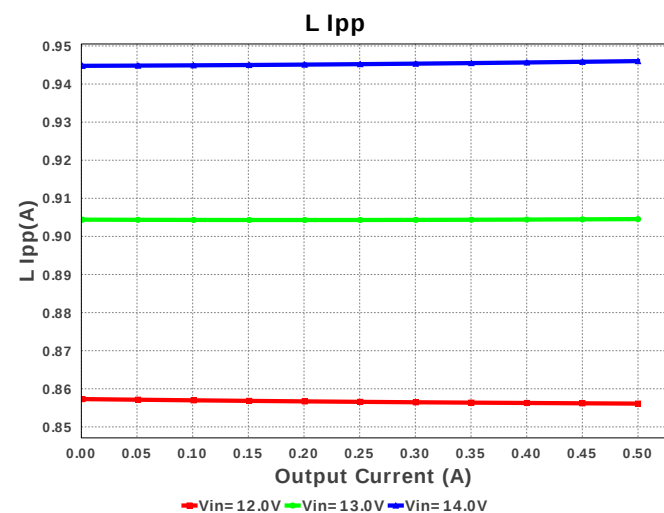

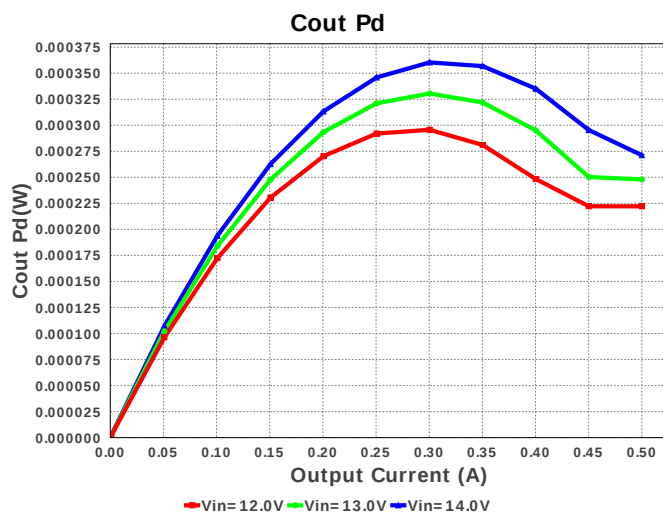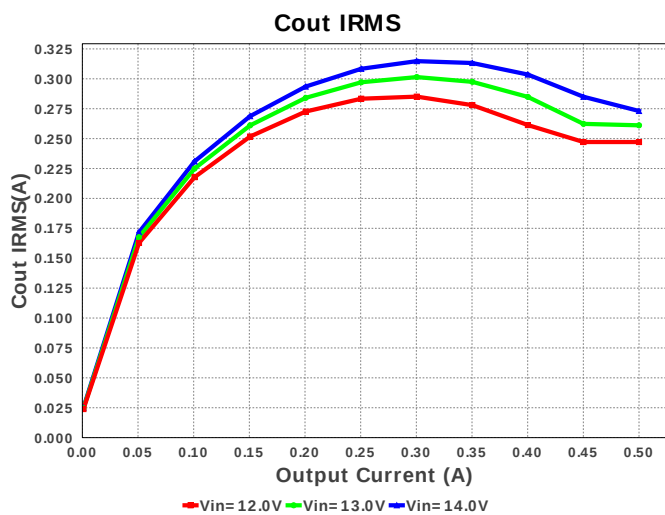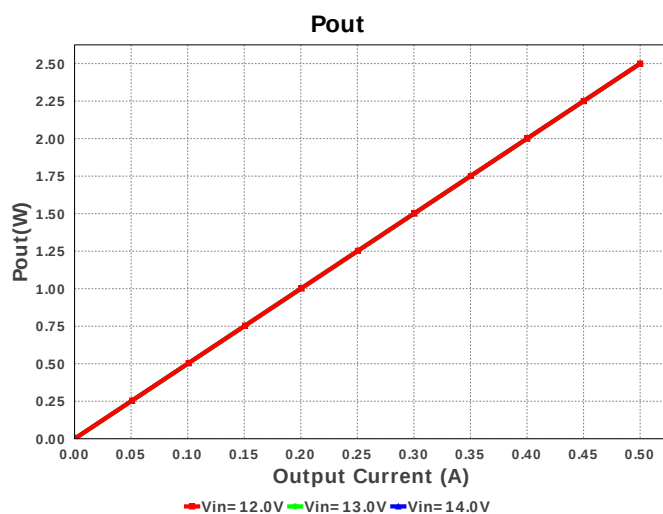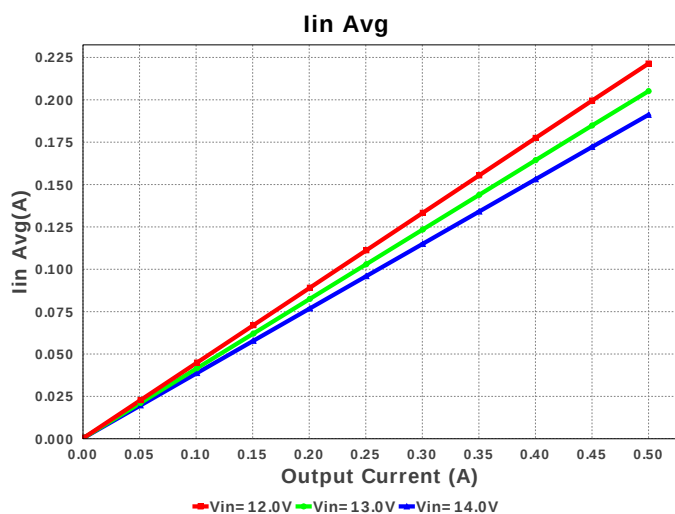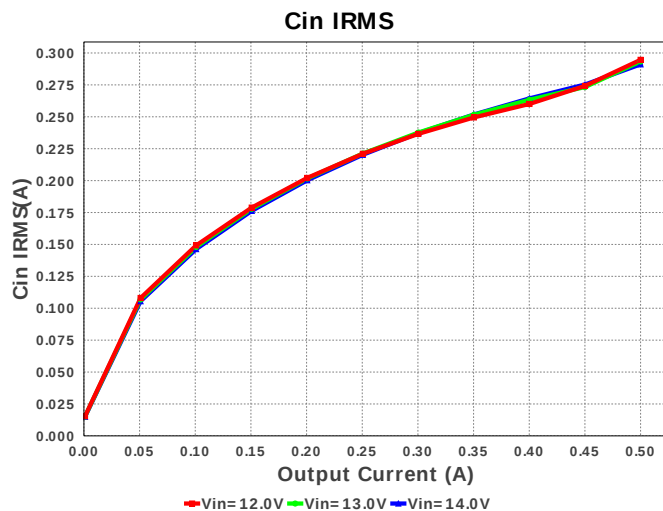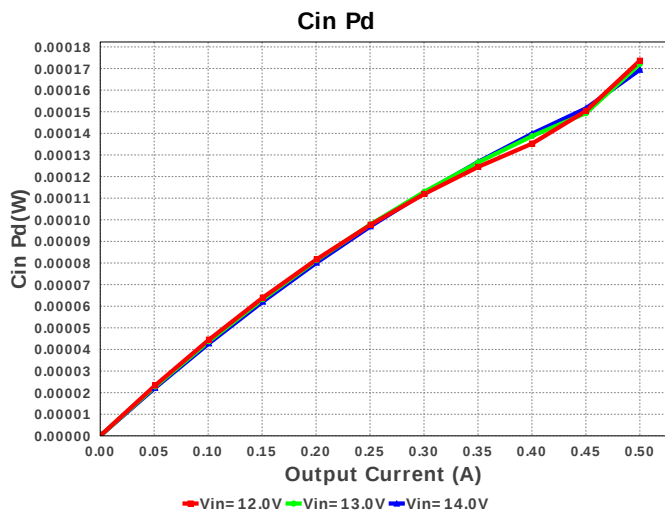

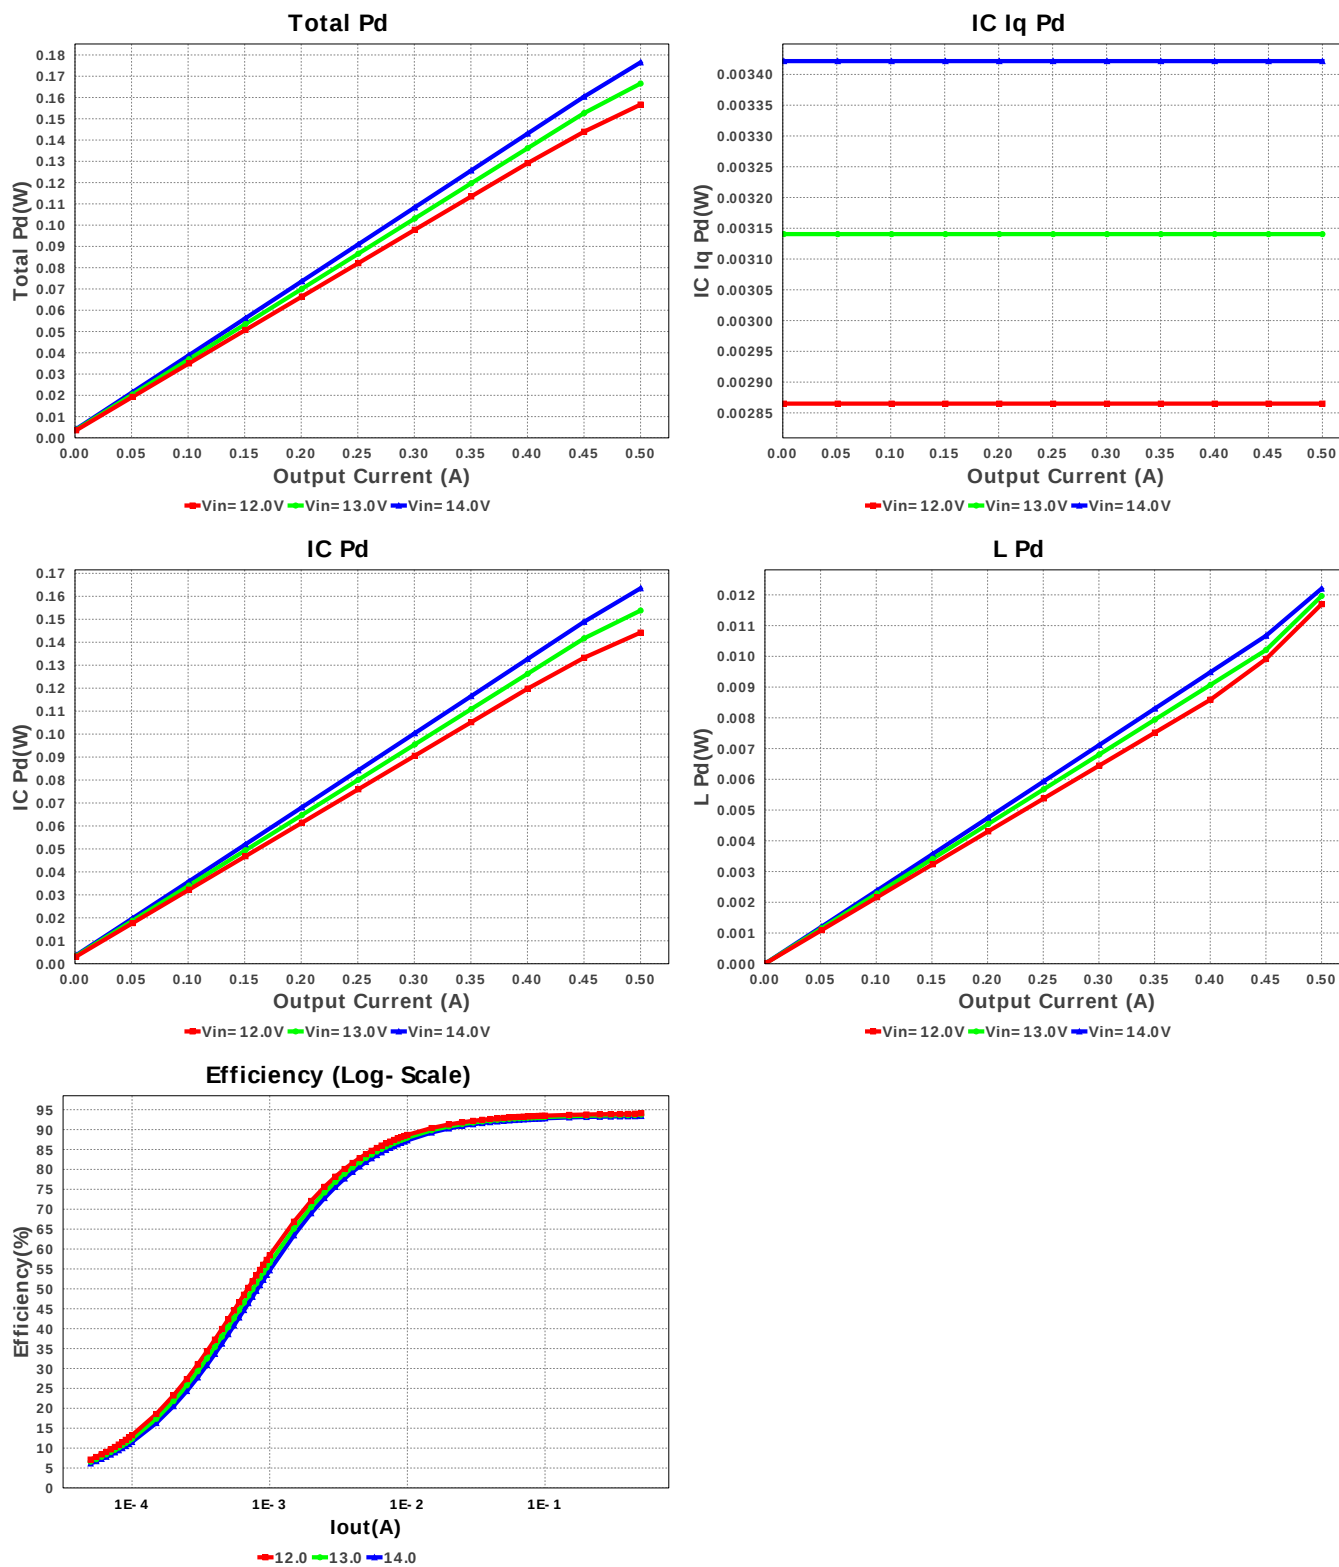

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	291.073 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	273.093 mA	Current	Output capacitor RMS ripple current
3.	Iin Avg	191.18 mA	Current	Average input current
4.	L Ipp	946.02 mA	Current	Peak-to-peak inductor ripple current
5.	BOM Count	7	General	Total Design BOM count
6.	FootPrint	113.0 mm ²	General	Total Foot Print Area of BOM components
7.	Frequency	722.991 kHz	General	Switching frequency
8.	Mode	CCM	General	Conduction Mode
9.	Pout	2.5 W	General	Total output power
10.	Total BOM	\$0.89	General	Total BOM Cost
11.	Vout Actual	5.031 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors

#	Name	Value	Category	Description
12.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
13.	Duty Cycle	36.191 %	Op_point	Duty cycle
14.	Efficiency	93.405 %	Op_point	Steady state efficiency
15.	IC Tj	47.822 degC	Op_point	IC junction temperature
16.	ICThetaJA	109.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
17.	IOUT_OP	500.0 mA	Op_point	Iout operating point
18.	VIN_OP	14.0 V	Op_point	Vin operating point
19.	Vout p-p	8.991 mV	Op_point	Peak-to-peak output ripple voltage
20.	Cin Pd	169.447 μ W	Power	Input capacitor power dissipation
21.	Cout Pd	271.247 μ W	Power	Output capacitor power dissipation
22.	IC Iq Pd	3.422 mW	Power	IC Iq Pd
23.	IC Pd	163.501 mW	Power	IC power dissipation
24.	L Pd	12.204 mW	Power	Inductor power dissipation
25.	Total Pd	176.516 mW	Power	Total Power Dissipation
26.	Vout Tolerance	3.053 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	500.0 m	Maximum Output Current
2.	VinMax	14.0	Maximum input voltage
3.	VinMin	12.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	base_pn	TPS562200	Texas Instruments Base Part Number
6.	source	DC	Input Source Type
7.	ta	30.0	Ambient temperature

Design Assistance

1. TPS562200 Product Folder : <http://www.ti.com/product/TPS562200> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).