


## WEBENCH® Design Report








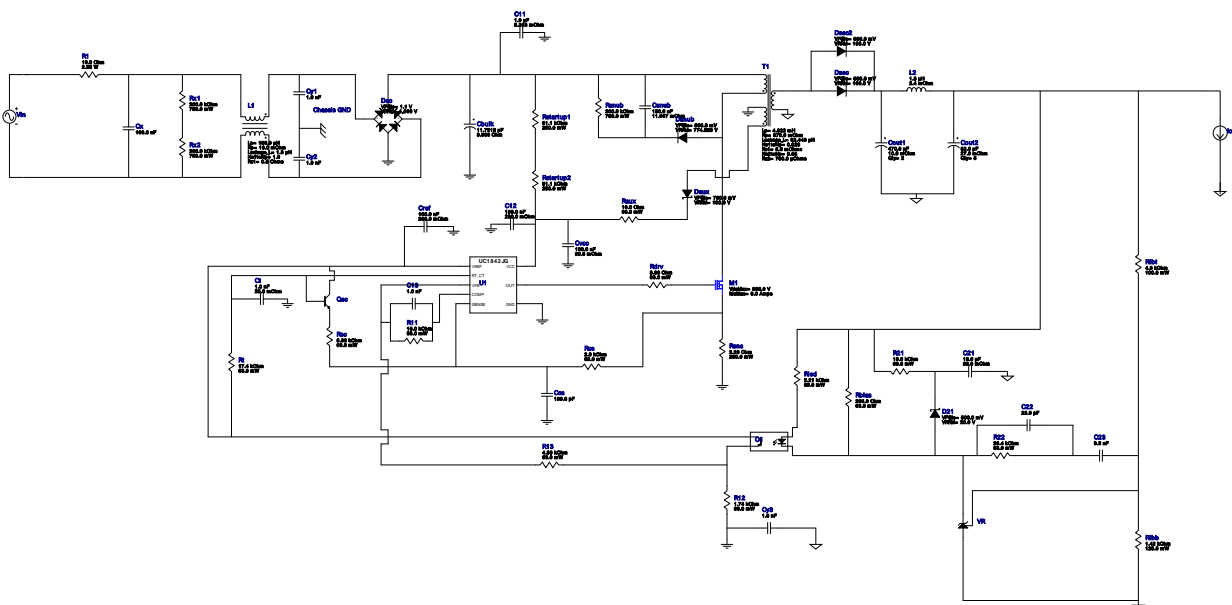


Design : 4215160/24 UC1842J  
UC1842J 210.0V-230.0V to 5.00V @ 4.0A




















1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.



### Electrical BOM





#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	TDK	C5750X6S2W105K Series= X6S	Cap= 1.0 uF ESR= 5.263 mOhm VDC= 400.0 V IRMS= 0.0 A	1	\$1.19	 2220 54 mm <sup>2</sup>
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>
4.	C21	Panasonic	50SVPF18M Series= ?	Cap= 18.0 uF ESR= 35.0 mOhm VDC= 50.0 V IRMS= 2.7 A	1	\$0.53	 CAPSMT_62_E7 106 mm <sup>2</sup>
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>
6.	C23	MuRata	GRM216R71E332KA01D Series= X7R	Cap= 3.3 nF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>
7.	Cbulk	CUSTOM	CUSTOM Series= ?	Cap= 11.7216 uF ESR= 3.50564 Ohm VDC= 390.32 V IRMS= 231.1 mA	1	NA	CUSTOM 0 mm <sup>2</sup>
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Cout1	Nichicon	RNU1C471MDN1PH Series= ?	Cap= 470.0 uF ESR= 10.0 mOhm VDC= 16.0 V IRMS= 6.1 A	2	\$0.52	 NU_1000x1250 144 mm <sup>2</sup>
10.	Cout2	Panasonic	16SVPF82M Series= ?	Cap= 82.0 uF ESR= 27.0 mOhm VDC= 16.0 V IRMS= 3.0 A	5	\$0.35	 CAPSMT_62_E61 53 mm <sup>2</sup>
11.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm <sup>2</sup>
12.	Csnub	TDK	C3225X7T2J154K Series= X7T	Cap= 150.0 nF ESR= 11.907 mOhm VDC= 630.0 V IRMS= 0.0 A	1	\$0.19	 1210 15 mm <sup>2</sup>
13.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm <sup>2</sup>
14.	Cvcc	MuRata	GRM188R71E104KA01D Series= X7R	Cap= 100.0 nF ESR= 30.0 mOhm VDC= 25.0 V IRMS= 1.51 A	1	\$0.01	 0603 5 mm <sup>2</sup>
15.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm <sup>2</sup>
16.	Cy1	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	  B81123_1800x500x1050 140 mm <sup>2</sup>
17.	Cy2	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	  B81123_1800x500x1050 140 mm <sup>2</sup>
18.	Cy3	TDK	B81123C1102M Series= B81123	Cap= 1.0 nF VDC= 3.0 kV IRMS= 0.0 A	1	\$0.22	  B81123_1800x500x1050 140 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
19.	D21	Diodes Inc.	B220-13-F	VF@Io= 500.0 mV VRRM= 20.0 V	1	\$0.08	 SMB 44 mm <sup>2</sup>
20.	Dac	Vishay-Semiconductor	DF10SA	VF@Io= 1.1 V VRRM= 1,000.0 V	1	\$0.24	 DF-S 99 mm <sup>2</sup>
21.	Daux	Diodes Inc.	B1100-13-F	VF@Io= 790.0 mV VRRM= 100.0 V	1	\$0.10	 SMA 37 mm <sup>2</sup>
22.	Dsec	Vishay-Semiconductor	SS10PH10-M3/86A	VF@Io= 880.0 mV VRRM= 100.0 V	1	\$0.29	 TO-277A 56 mm <sup>2</sup>
23.	Dsec2	Vishay-Semiconductor	SS10PH10-M3/86A	VF@Io= 880.0 mV VRRM= 100.0 V	1	\$0.29	 TO-277A 56 mm <sup>2</sup>
24.	Dsnub	CUSTOM	CUSTOM	VF@Io= 500.0 mV VRRM= 774.529 V	1	NA	CUSTOM 0 mm <sup>2</sup>
25.	L1	API Delevan	CM6296R-154	Lp= 150.0 µH Rp= 16.0 mOhm Leakage_L= 1.8 µH Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$5.95	 CM6296 833 mm <sup>2</sup>
26.	L2	Coilcraft	SER1360-182KLB	L= 1.8 µH DCR= 2.4 mOhm	1	\$0.72	 SER1360 225 mm <sup>2</sup>
27.	M1	STMicroelectronics	STF10N80K5	VdsMax= 800.0 V IdsMax= 9.0 Amps	1	\$2.52	 TO-220FP 79 mm <sup>2</sup>
28.	O1	Vishay-Semiconductor	TCMT1109	Optocoupler	1	\$0.21	 SOP-4 44 mm <sup>2</sup>
29.	Qsc	STMicroelectronics	2N2222A	Bipolar Transistor	1	NA	 TO-18 57 mm <sup>2</sup>
30.	R1	Vishay-Dale	AC03000001009JACCS Series= F_RES	Res= 10.0 Ohm Power= 2.25 W Tolerance= 5.0%	1	\$0.30	 AC03 158 mm <sup>2</sup>
31.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
32.	R12	Vishay-Dale	CRCW04021K74FKED Series= CRCW..e3	Res= 1.74 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>
33.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm <sup>2</sup>







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
34.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
35.	R22	Vishay-Dale	CRCW040229K4FKED Series= CRCW..e3	Res= 29.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
36.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
37.	Rbias	Vishay-Dale	CRCW0402205RFKED Series= CRCW..e3	Res= 205.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
38.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
39.	Rdrv	Vishay-Dale	CRCW04028R66FKED Series= CRCW..e3	Res= 8.66 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
40.	Rfbb	Yageo America	RT0805BRD071K42L Series= RT0805	Res= 1.42 kOhm Power= 125.0 mW Tolerance= 0.1%	1	\$0.05	 0805 7 mm²
41.	Rfbt	Yageo America	RC0603FR-074K3L Series= ?	Res= 4.3 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm²
42.	Rled	Vishay-Dale	CRCW04022K21FKED Series= CRCW..e3	Res= 2.21 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
43.	Rsc	Vishay-Dale	CRCW04028K66FKED Series= CRCW..e3	Res= 8.66 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
44.	Rsns	Vishay-Dale	CRCW12062R26FKEA Series= CRCW..e3	Res= 2.26 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
45.	Rsns	Vishay-Dale	CRCW2010300KFKEF Series= ?	Res= 300.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²
46.	Rstartup1	Panasonic	ERJ-8ENF5112V Series= ERJ-8E	Res= 51.1 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
47.	Rstartup2	Panasonic	ERJ-8ENF5112V Series= ERJ-8E	Res= 51.1 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm²
48.	Rt	Vishay-Dale	CRCW040217K4FKED Series= CRCW..e3	Res= 17.4 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm²
49.	Rx1	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²
50.	Rx2	Vishay-Semiconductor	CRCW2010200KFKEF Series= ?	Res= 200.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm²
51.	T1	CUSTOM	CUSTOM	Lp= 4.622 mH Rp= 870.0 mOhm Leakage_L= 92.443 µH Ns1toNp= 0.028 Rs1= 8.6 mOhms Ns2toNp= 0.08 Rs2= 700.0 µOhms	1	NA	CUSTOM 0 mm²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
52. U1		Texas Instruments	UC1842J	Switcher	1	\$9.18	 JG0008A 111 mm <sup>2</sup>
53. VR		Texas Instruments	LMV431CM5/NOPB	Voltage References	1	\$0.16	 R-PDSO-G3 16 mm <sup>2</sup>



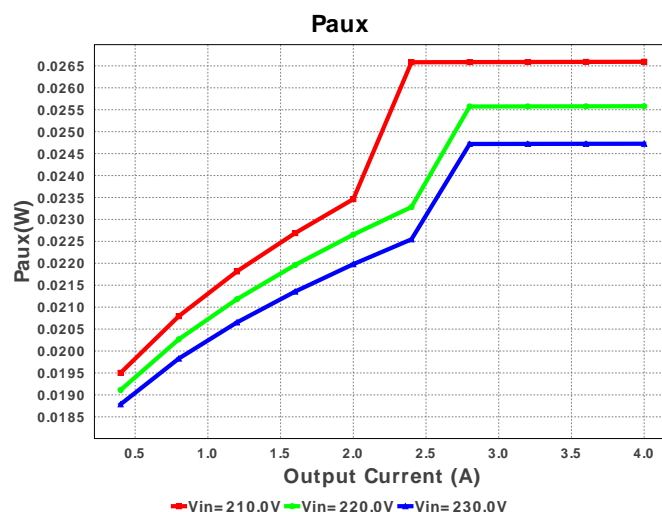
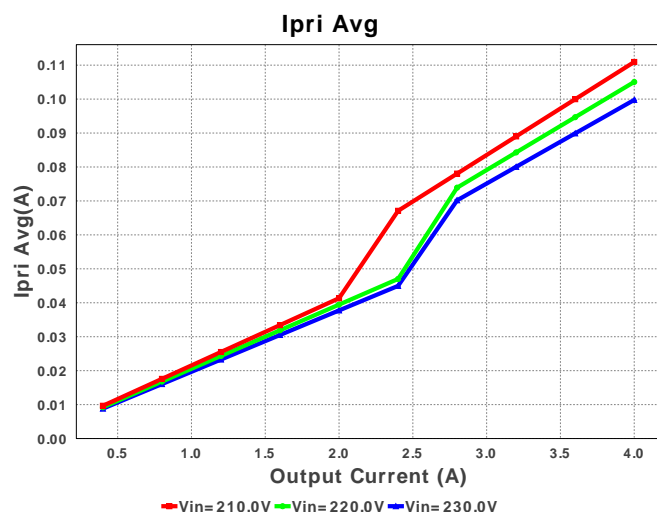
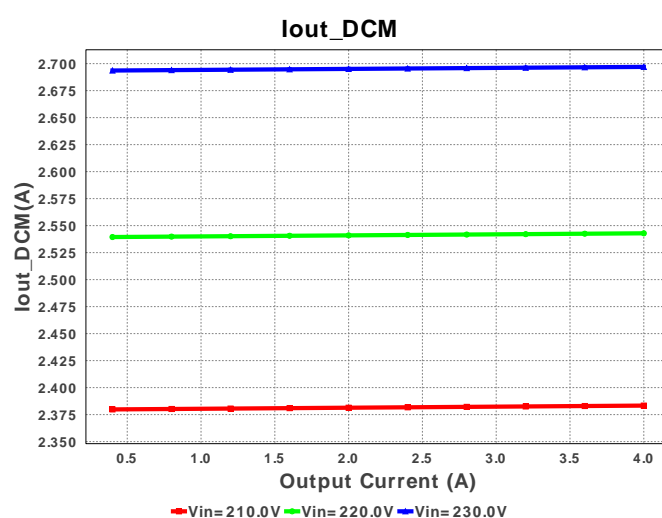
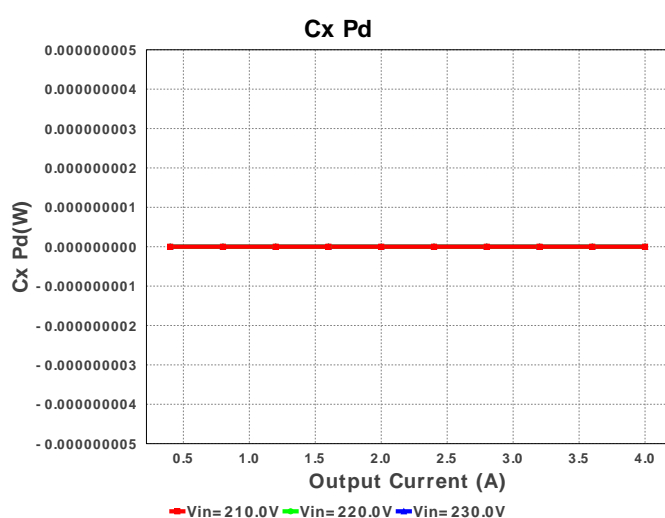


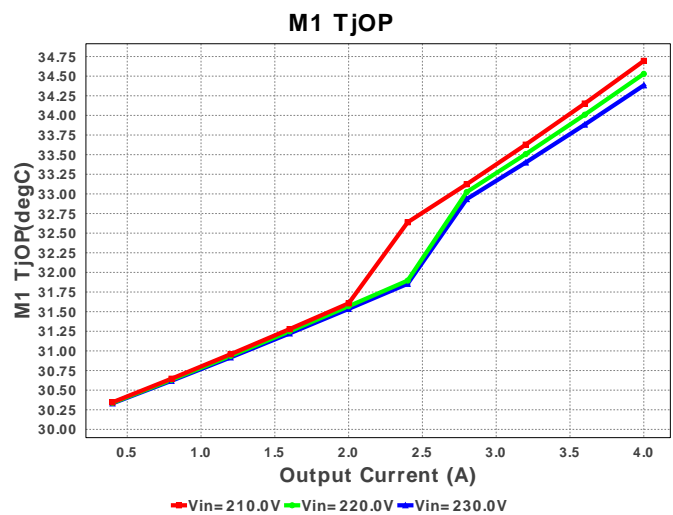
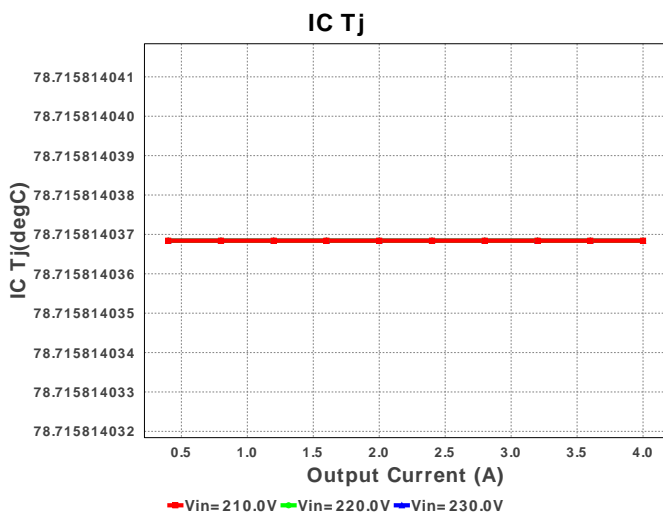
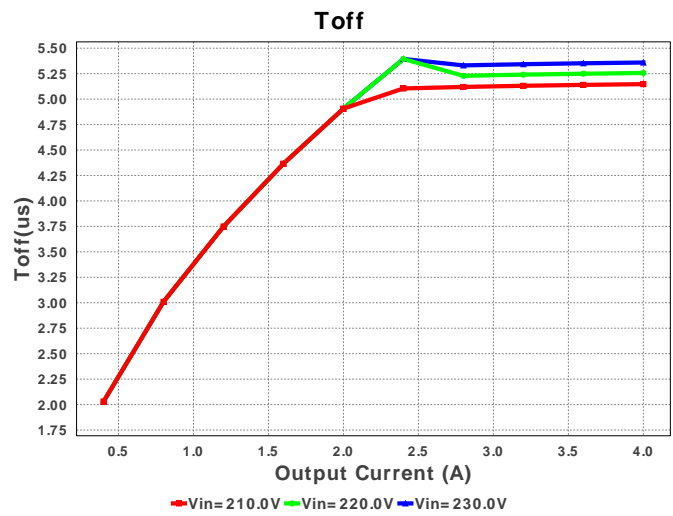
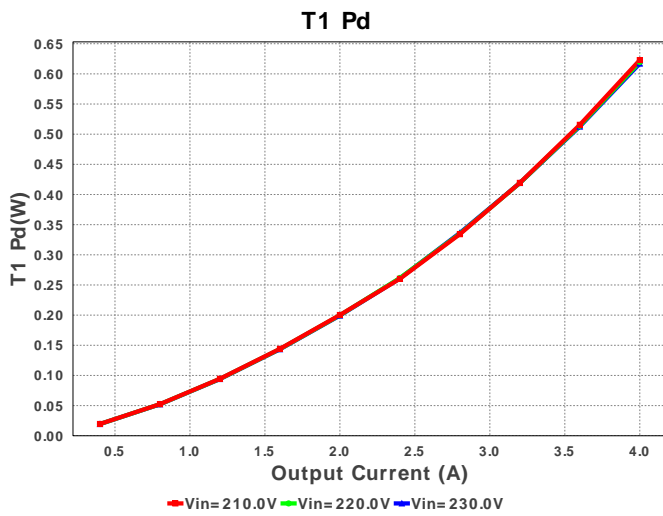
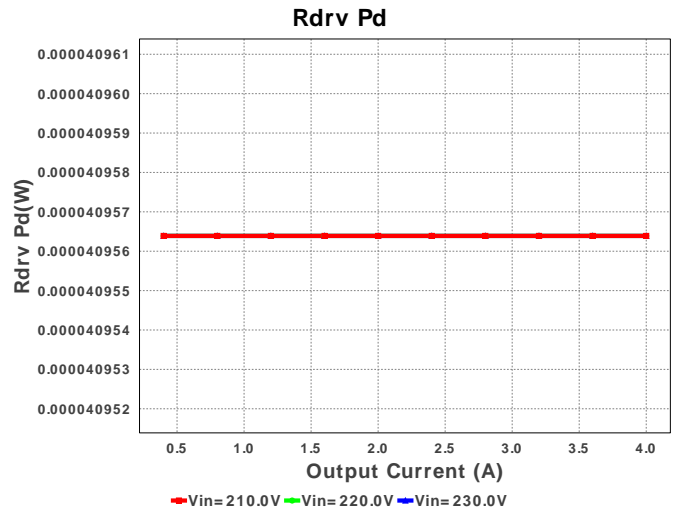
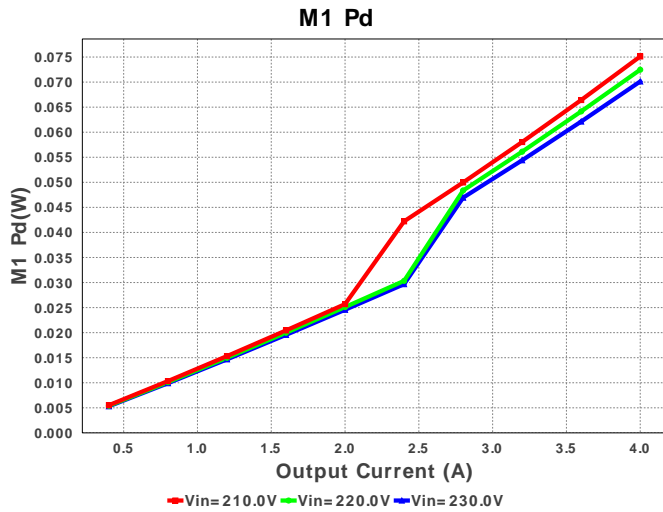


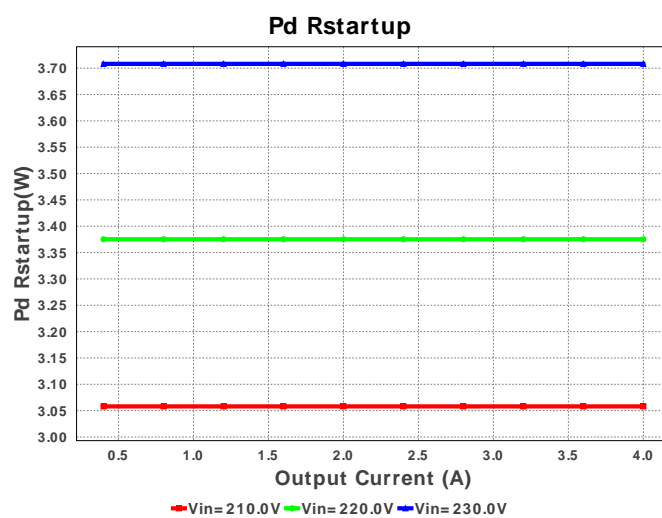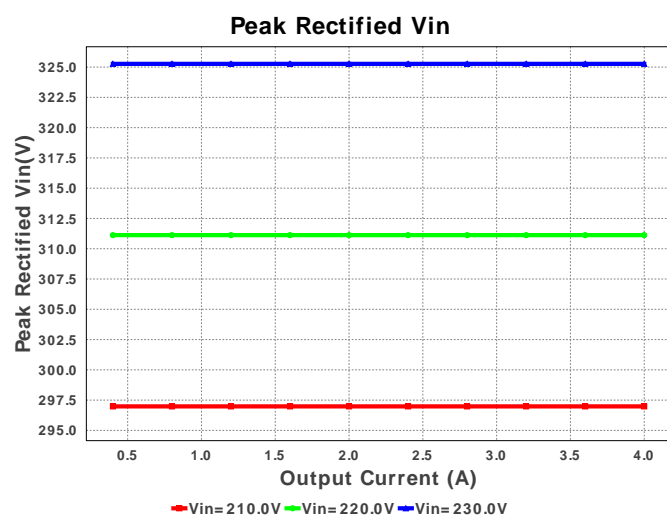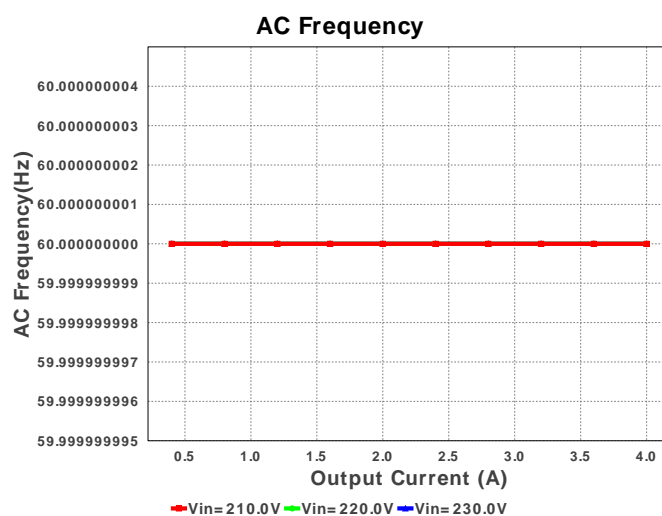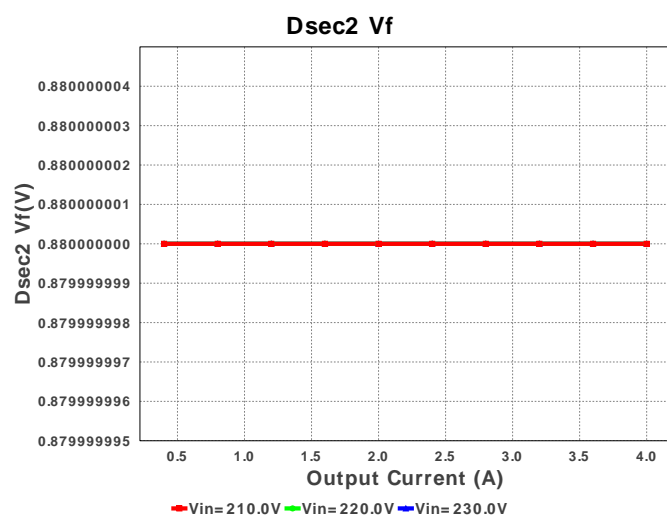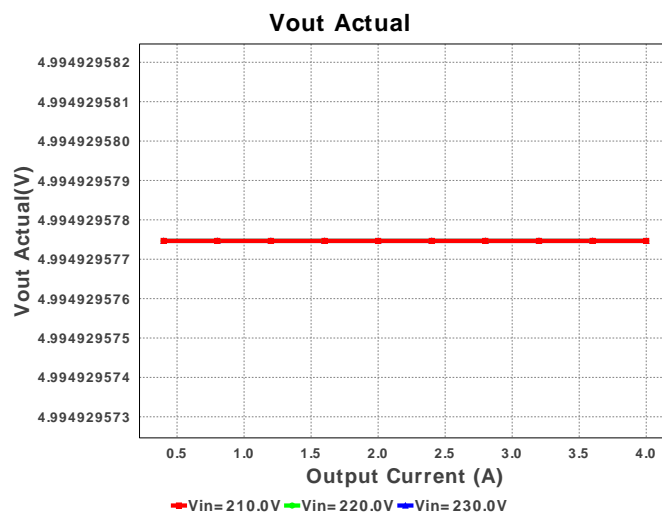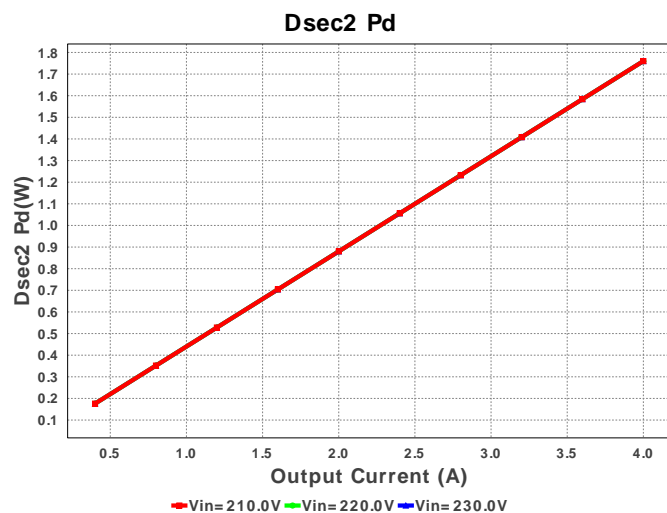

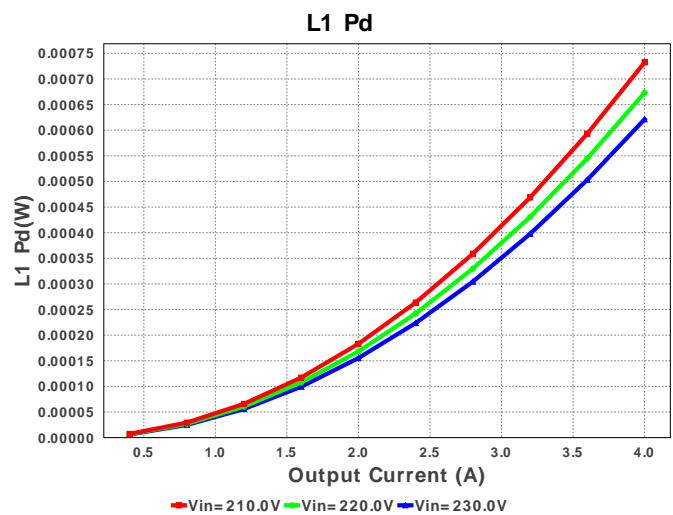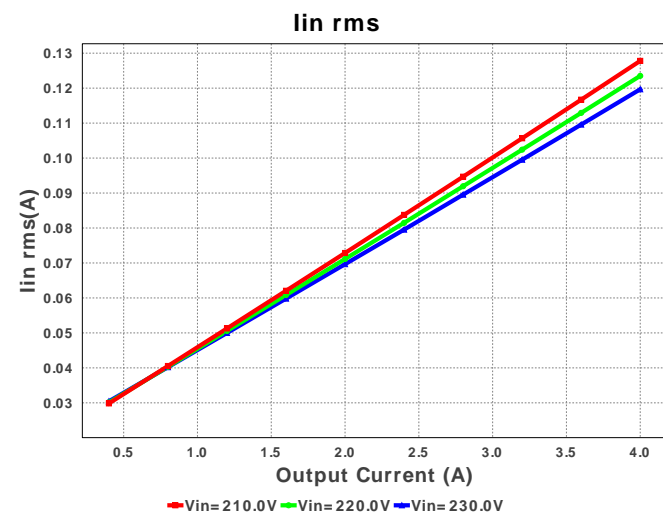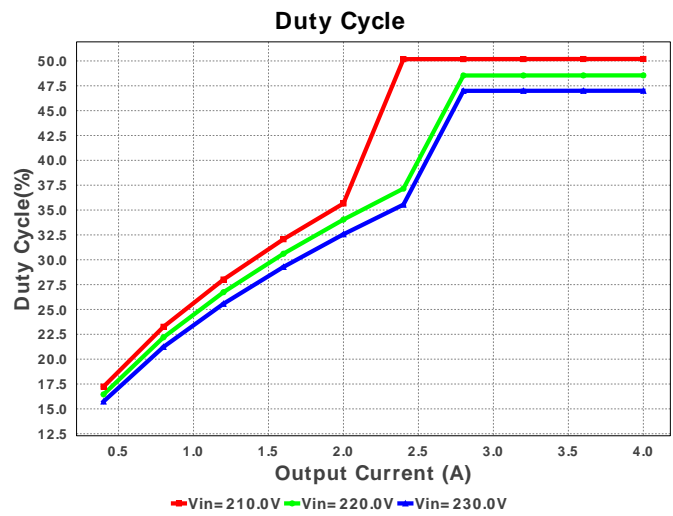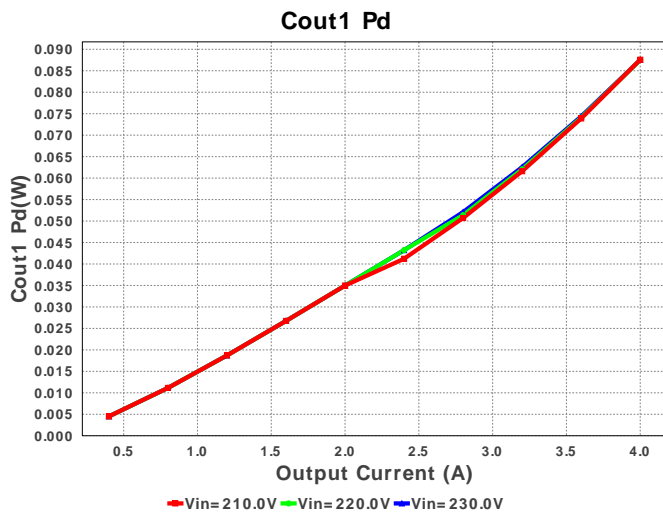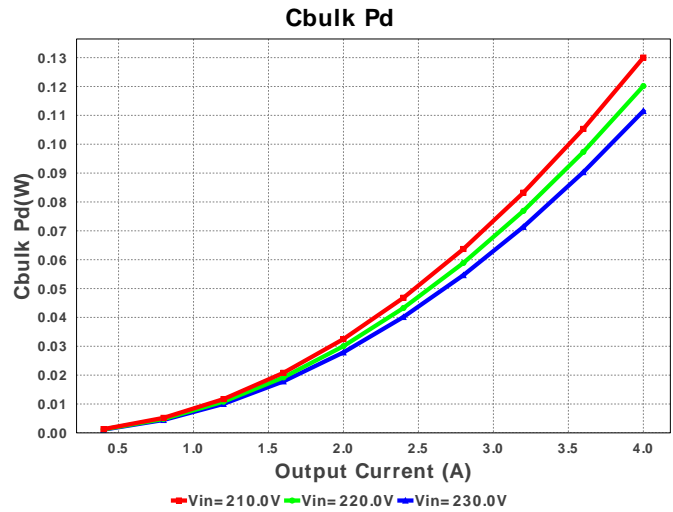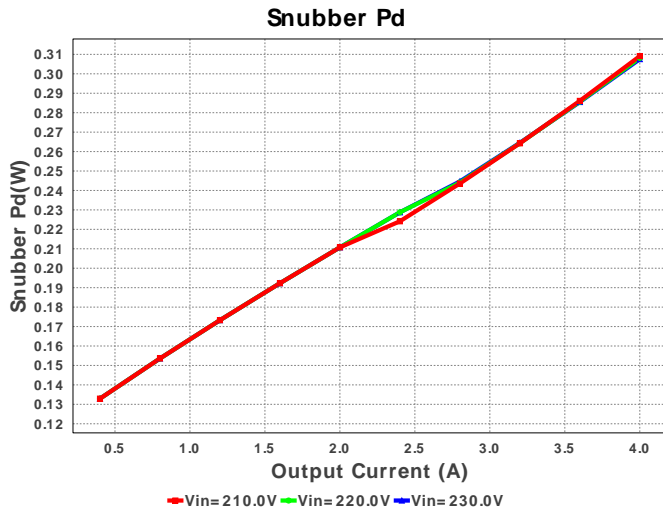




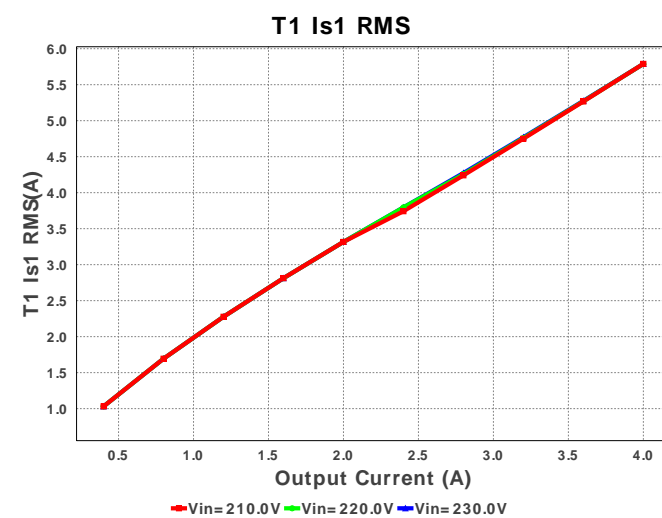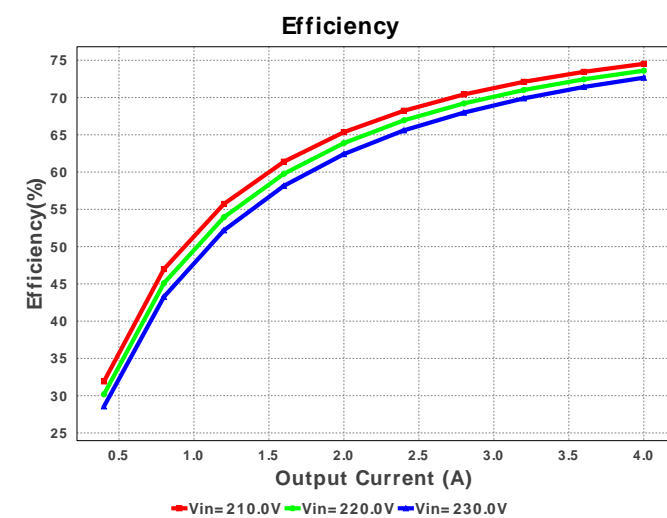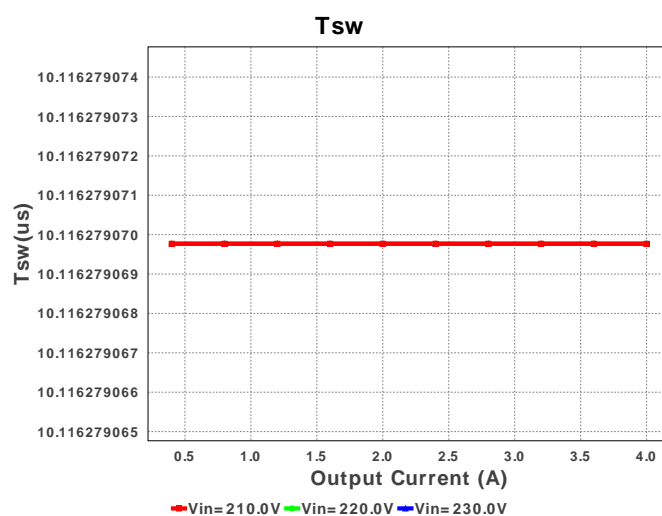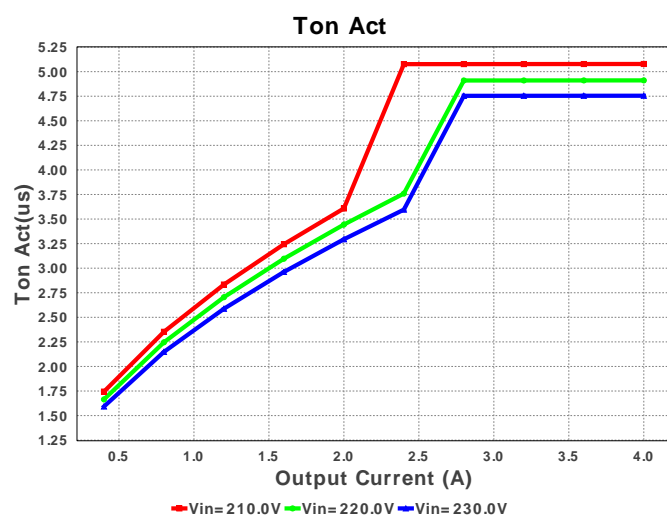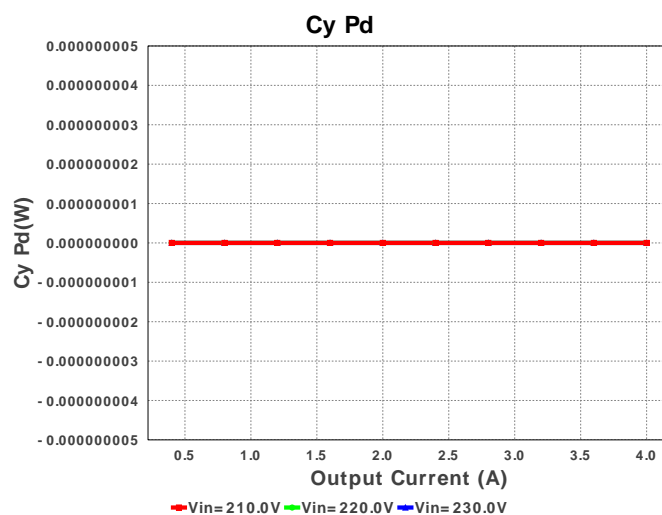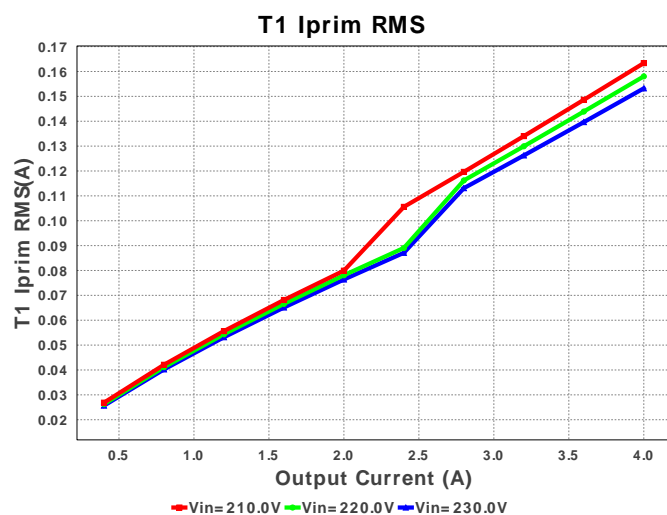


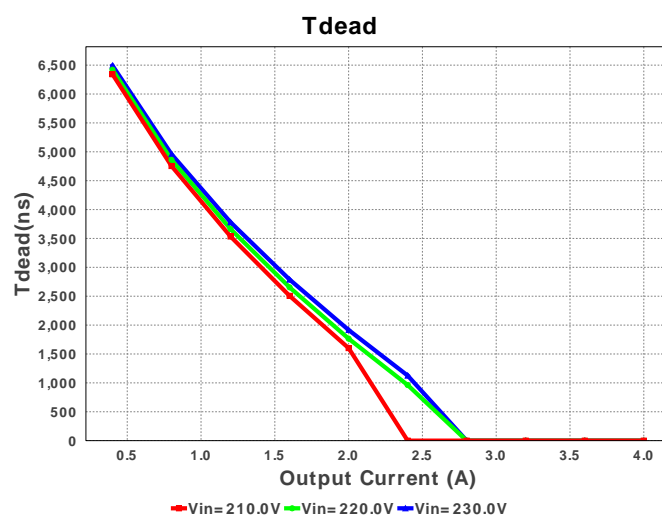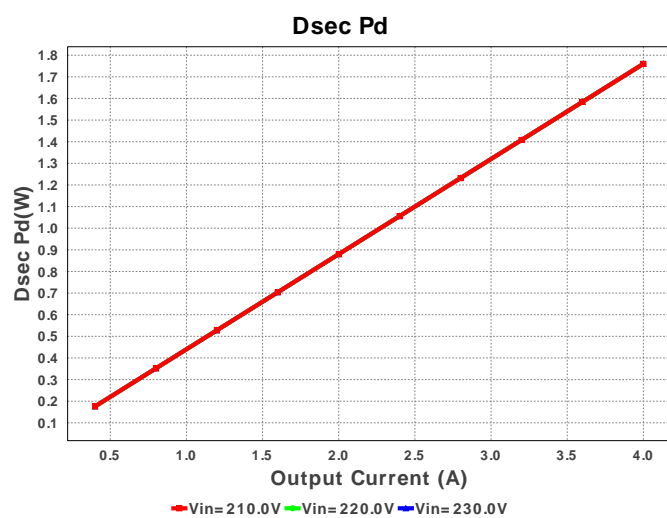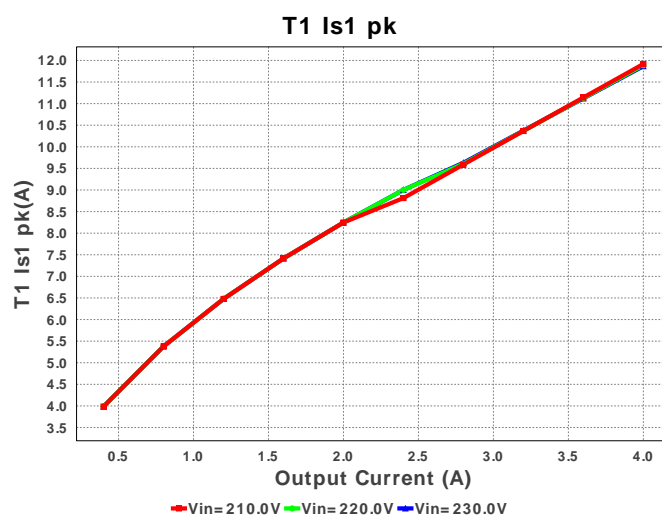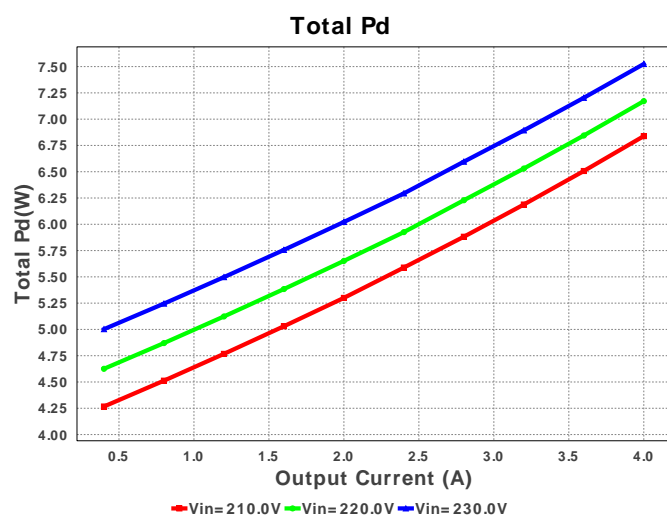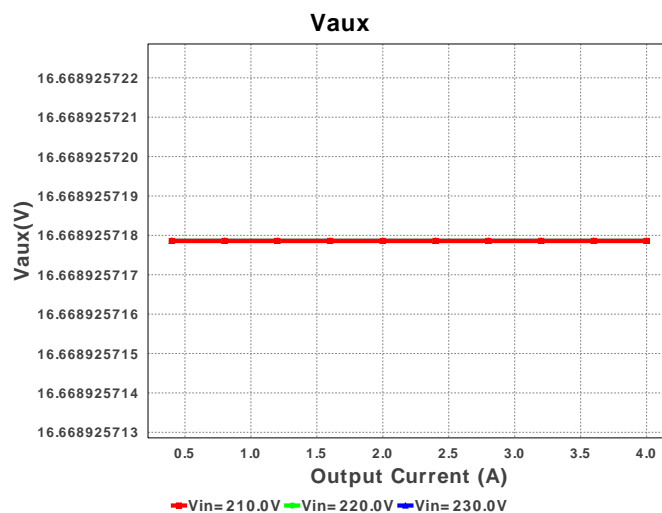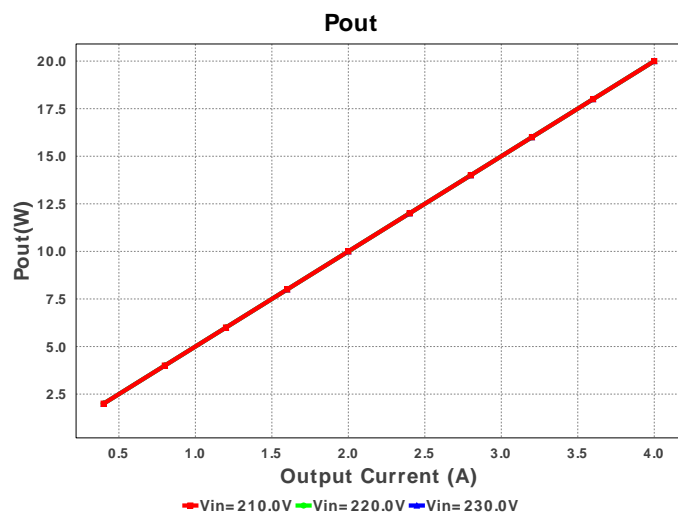


Cout1 IRMS

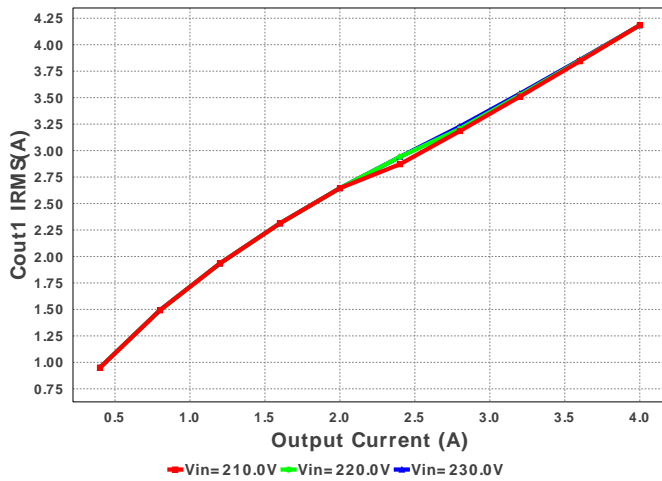


IC Pd

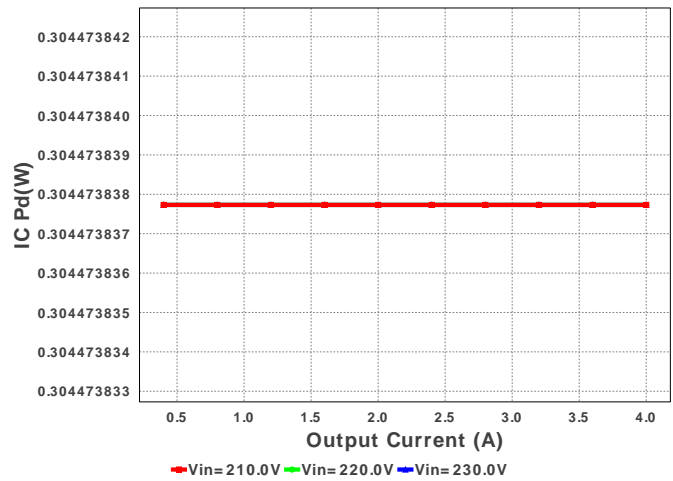


Ipri ripple pk- pk percentage

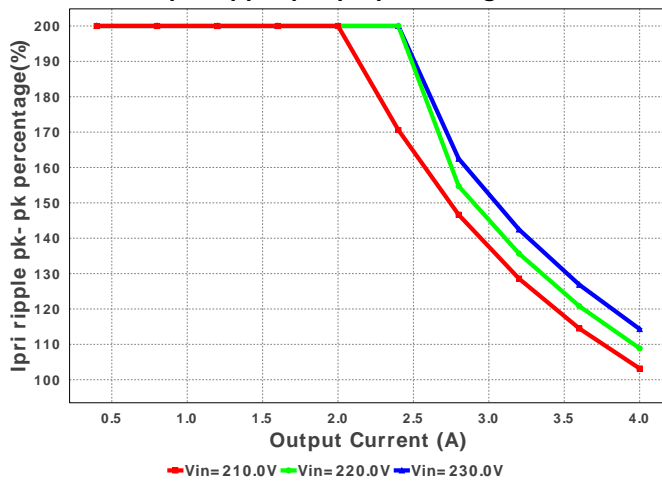


Power Factor






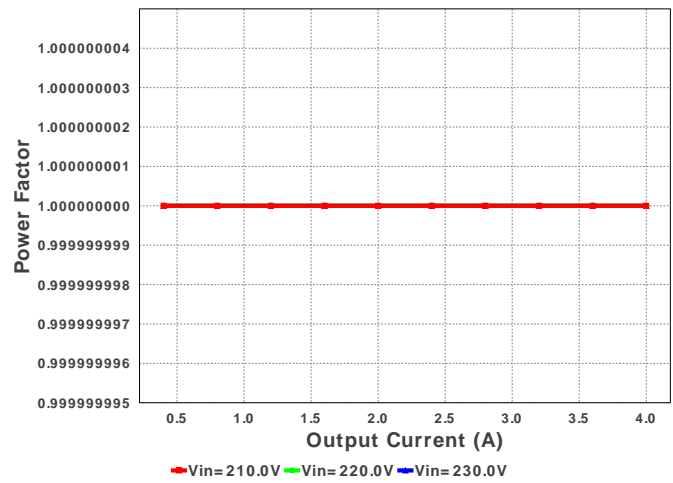



Dsec Vf

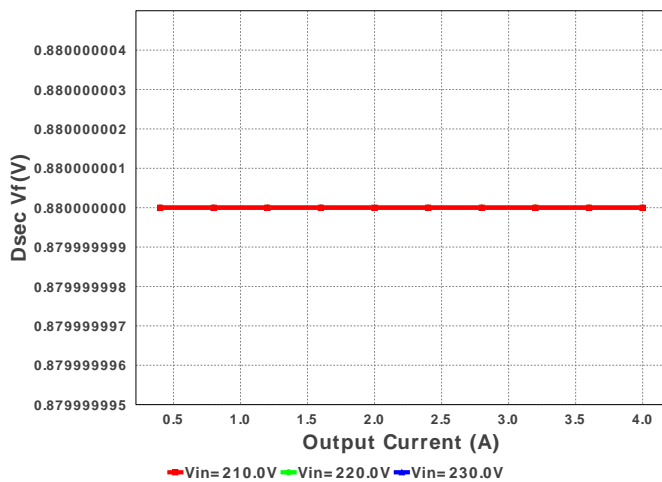

Vsnub

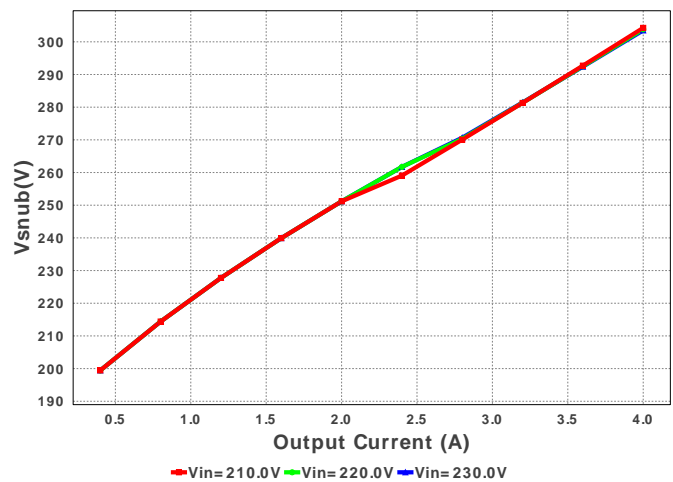

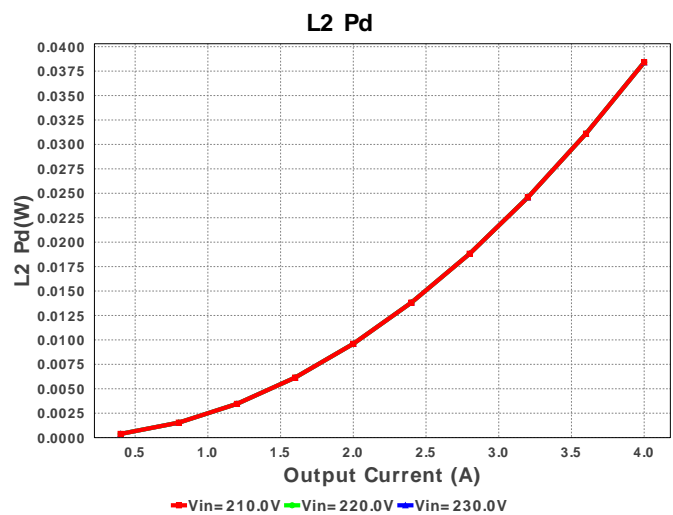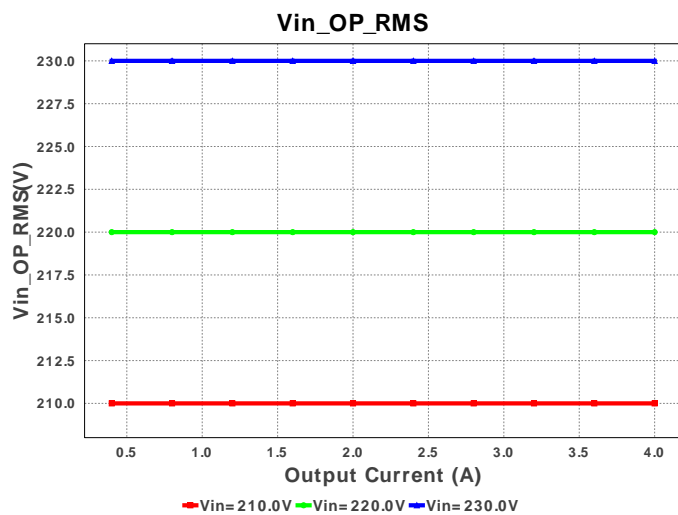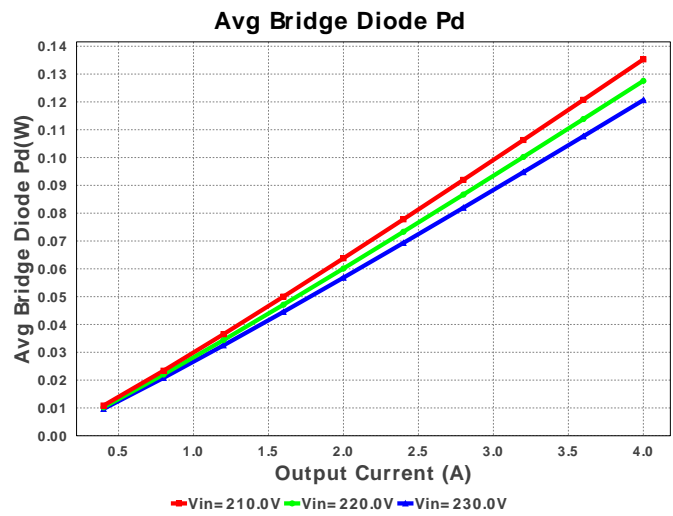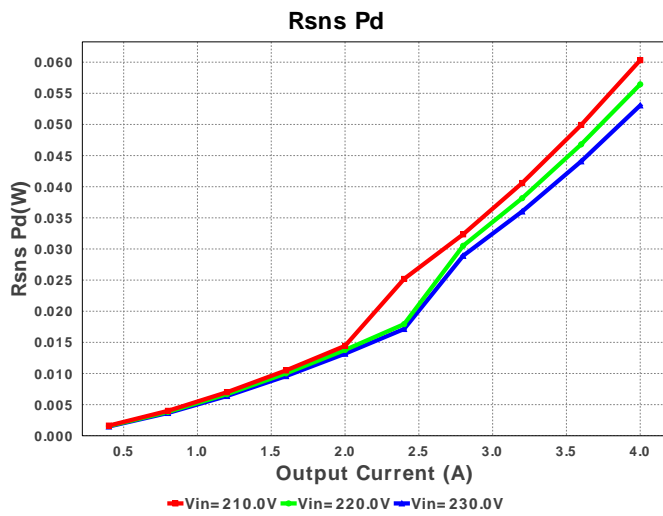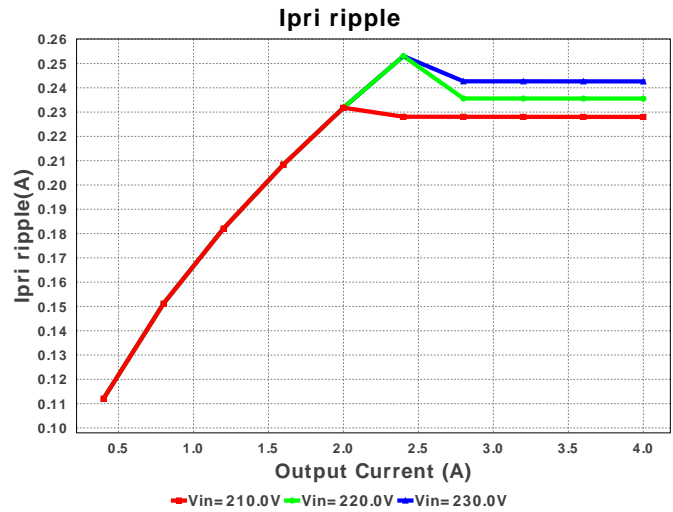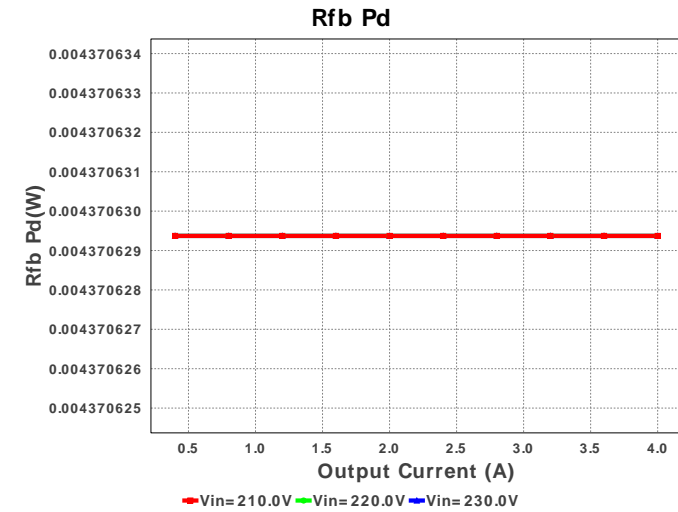

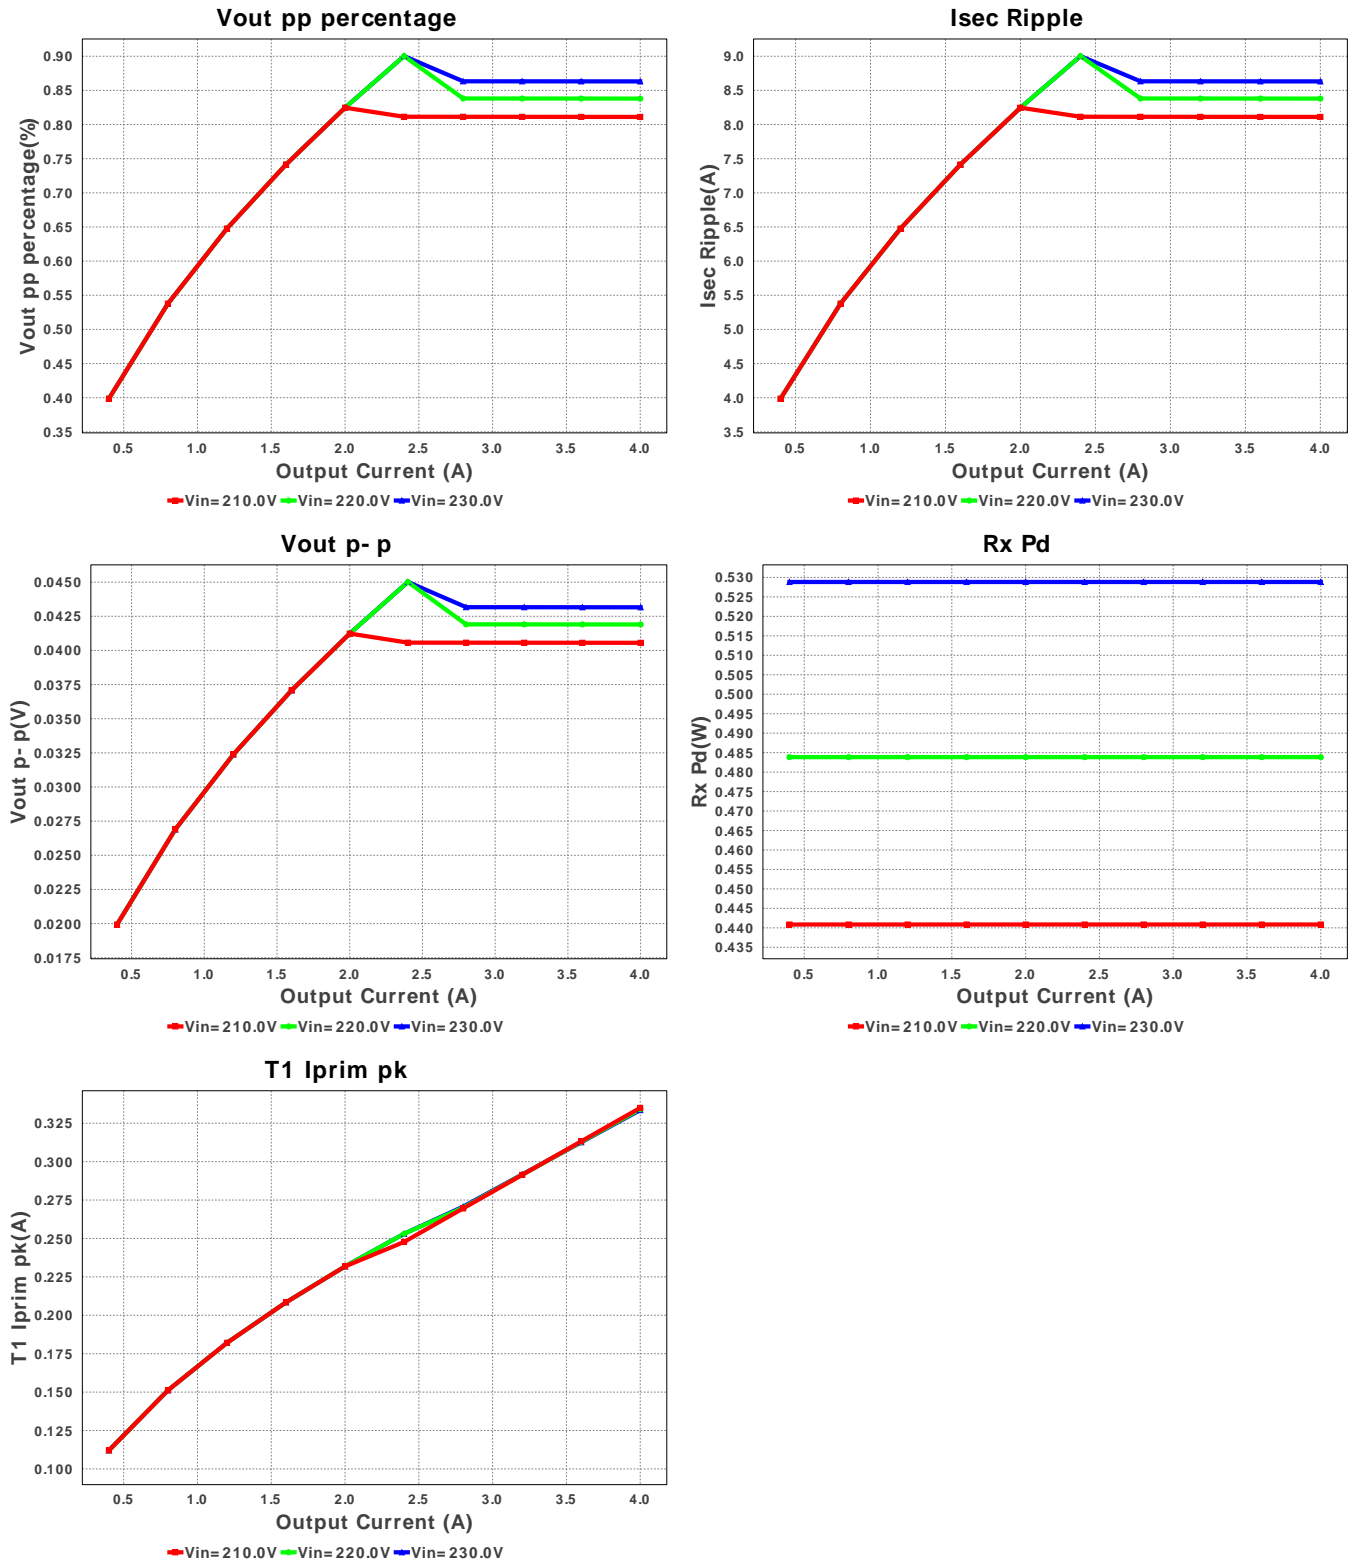

## Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	4.185 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	127.8 mA	Current	RMS Input Current
3.	Iout_DCM	2.383 A	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	110.935 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	228.01 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	103.172 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	8.111 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	163.376 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	335.006 mA	Current	Transformer Primary Peak Current

#	Name	Value	Category	Description
10.	T1 Is1 RMS	5.789 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	11.918 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	50.0 Hz	General	Input AC frequency
13.	BOM Count	58	General	Total Design BOM count
14.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	880.0 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	0.0 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	880.0 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	0.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	3.435 k mm <sup>2</sup>	General	Total Foot Print Area of BOM components
20.	Frequency	98.851 kHz	General	Switching frequency
21.	Mode	CCM	General	Conduction Mode
22.	Pout	20.0 W	General	Total output power
23.	Power Factor	1.0	General	Assumed Power Factor for the Application
24.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
25.	Toff	5.147 us	General	Approximate Converter Off Time
26.	Ton Act	5.078 us	General	Approximate Converter On Time
27.	Total BOM	\$0.0	General	Total BOM Cost
28.	Tsw	10.116 us	General	Switching Time Period
29.	Vaux	16.669 V	General	Auxiliary Voltage
30.	Vsnub	304.27 V	General	Voltage Across the Snubber
31.	Vout Actual	4.995 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
32.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
33.	Duty Cycle	50.197 %	Op_point	Duty cycle
34.	Efficiency	74.519 %	Op_point	Steady state efficiency
35.	IC Tj	78.716 degC	Op_point	IC junction temperature
36.	ICThetaJA	160.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
37.	IOUT_OP	4.0 A	Op_point	Iout operating point
38.	M1 TJOP	34.695 degC	Op_point	M1 MOSFET junction temperature
39.	Peak Rectified Vin	296.982 V	Op_point	Peak voltage seen at rectified input
40.	Vin_OP_RMS	210.0 V	Op_point	AC Input RMS Voltage
41.	Vout p-p	40.557 mV	Op_point	Peak-to-peak output ripple voltage
42.	Avg Bridge Diode Pd	135.298 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
43.	Cbulk Pd	130.019 mW	Power	Bulk capacitor power dissipation
44.	Cout1 Pd	87.577 mW	Power	Output capacitor1 power dissipation
45.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
46.	Cy Pd	0.0 W	Power	Y-caps Power Dissipation
47.	Dsec Pd	1.76 W	Power	Secondary Diode Power Dissipation
48.	Dsec2 Pd	1.76 W	Power	Secondary Diode Power Dissipation
49.	IC Pd	304.474 mW	Power	IC power dissipation
50.	L1 Pd	732.424 μW	Power	Power Dissipation in the Inductor
51.	L2 Pd	38.4 mW	Power	Average Power Dissipation in the Inductor Over the AC Line Period
52.	M1 Pd	75.115 mW	Power	M1 MOSFET total power dissipation
53.	Paux	26.593 mW	Power	Power Dissipation in Raux and Daux
54.	Pd Rstartup	3.058 W	Power	Power Dissipation in Rstartup1 and Rstartup2
55.	Rdrv Pd	40.956 μW	Power	Power Dissipation in Gate Drive Resistor
56.	Rfb Pd	4.371 mW	Power	Rfb Power Dissipation
57.	Rsns Pd	60.323 mW	Power	Current Limit Sense Resistor Power Dissipation
58.	Rx Pd	440.858 mW	Power	Total Power Dissipation in Rx1 and Rx2
59.	Snubber Pd	309.108 mW	Power	Snubber Power Dissipation
60.	T1 Pd	622.908 mW	Power	Estimated Losses in Transformer
61.	Total Pd	6.839 W	Power	Total Power Dissipation
62.	Vout Tolerance	1.478 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
63.	Vout pp percentage	811.145 m%		Output Voltage ripple percentage

## Design Inputs

#	Name	Value	Description
1.	Iout	4.0	Maximum Output Current
2.	VinMax	230.0	Maximum input voltage
3.	VinMin	210.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	line_fsw	50.0	Light Output in Lumen
6.	base_pn	UC1842	Base Product Number
7.	source	AC	Input Source Type
8.	Ta	30.0	Ambient temperature

## Design Assistance

1. **UC1842** Product Folder : <http://www.ti.com/product/UC1842> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

**You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.**

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).