


## WEBENCH® Design Report

Design : 4799758/3 LP2998MR/NOPB  
Design 3 - LP2998MR/NOPB

DDRTYPE = DDR3  
PVIN = 1.5V  
AVIN = 2.2V  
I<sub>tt</sub> = 0.5A  
T<sub>a</sub> = 25.0degC  
VDDQ = 1.5V  
VTT = 0.75V


Device = LP2998MR/NOPB  
Topology = DDRLDO  
Created = 9/22/16 1:43:24 AM  
BOM Cost = \$1.44  
BOM Count = 5  
Total Pd = 0.38W

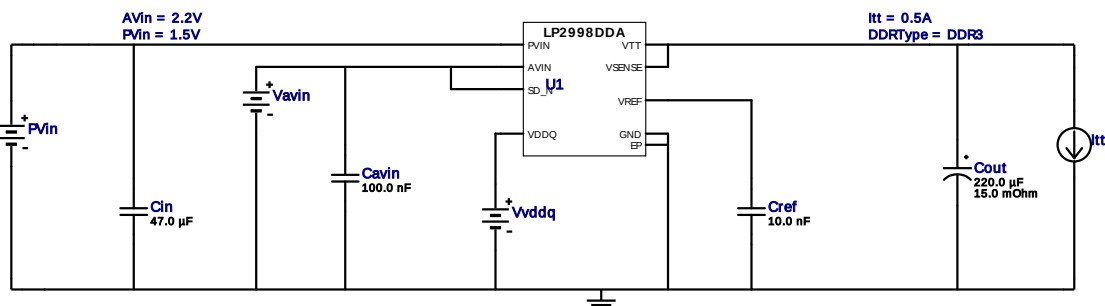


### Electrical BOM

| #  | Name  | Manufacturer      | Part Number                       | Properties                                                   | Qty | Price  | Footprint                                                                                                             |
|----|-------|-------------------|-----------------------------------|--------------------------------------------------------------|-----|--------|-----------------------------------------------------------------------------------------------------------------------|
| 1. | Cavin | MuRata            | GRM155R60J104KA01D<br>Series= X5R | Cap= 100.0 nF<br>VDC= 6.3 V<br>IRMS= 0.0 A                   | 1   | \$0.01 |  0402 3 mm <sup>2</sup>            |
| 2. | Cin   | Taiyo Yuden       | JMK212BJ476MG-T<br>Series= X5R    | Cap= 47.0 uF<br>VDC= 6.3 V<br>IRMS= 0.0 A                    | 1   | \$0.14 |  0805 7 mm <sup>2</sup>          |
| 3. | Cout  | Panasonic         | 2R5TPE220MAFB<br>Series= ?        | Cap= 220.0 uF<br>ESR= 15.0 mOhm<br>VDC= 2.5 V<br>IRMS= 2.0 A | 1   | \$0.50 |  CAPSMT_6_B2S 17 mm <sup>2</sup> |
| 4. | Cref  | MuRata            | GRM155R60J103KA01D<br>Series= X5R | Cap= 10.0 nF<br>VDC= 6.3 V<br>IRMS= 0.0 A                    | 1   | \$0.01 |  0402 3 mm <sup>2</sup>          |
| 5. | U1    | Texas Instruments | LP2998MR/NOPB                     | Switcher                                                     | 1   | \$0.78 |  DDA0008A 57 mm <sup>2</sup>     |


Quiescent Current Iq Vs. AVin

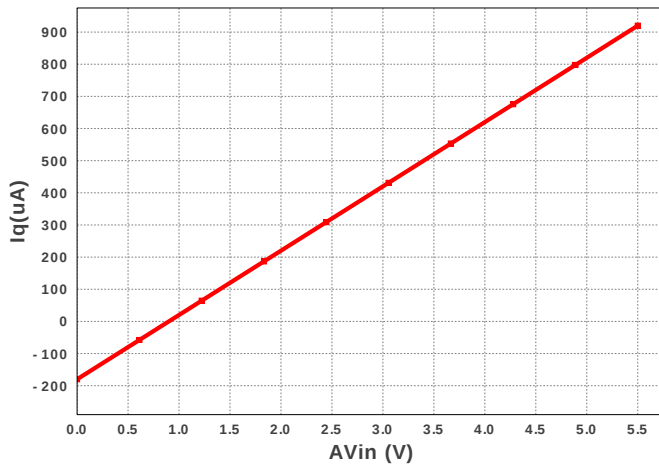

Power Dissipation Vs. Itt

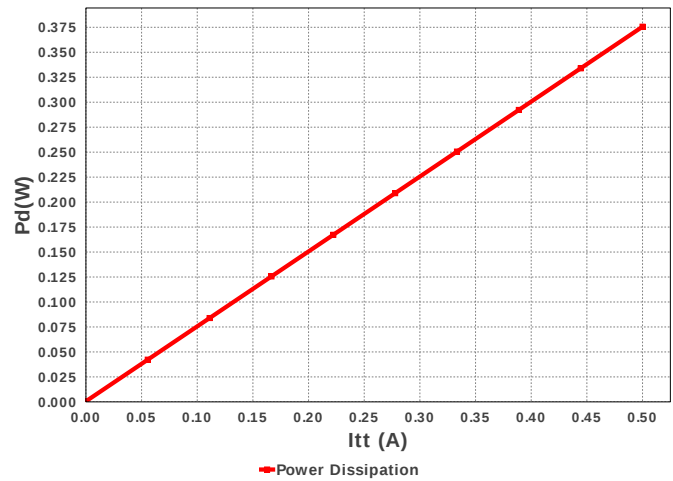

Efficiency Vs. Itt

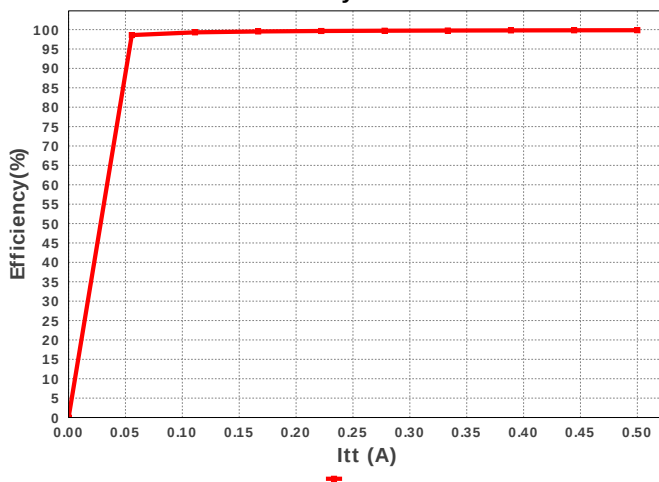

## Operating Values

| #   | Name       | Value                | Category   | Description                               |
|-----|------------|----------------------|------------|-------------------------------------------|
| 1.  | DDR Type   | DDR3                 | DDR Memory | DDR Memory Type                           |
| 2.  | BOM Count  | 5                    | General    | Total Design BOM count                    |
| 3.  | FootPrint  | 87.0 mm <sup>2</sup> | General    | Total Foot Print Area of BOM components   |
| 4.  | Total BOM  | \$1.44               | General    | Total BOM Cost                            |
| 5.  | AVin_OP    | 2.2 V                | Op_Point   | Pvin operating point                      |
| 6.  | Itt_OP     | 500.0 mA             | Op_Point   | Itt Operating Point                       |
| 7.  | PVin_OP    | 1.5 V                | Op_Point   | Pvin operating point                      |
| 8.  | Ta_OP      | 25.0 degC            | Op_Point   | Operating Ambient Temperature             |
| 9.  | Vddq_OP    | 1.5 V                | Op_Point   | Vddq operating point                      |
| 10. | Vtt_OP     | 750.0 mV             | Op_Point   | Vtt operating point                       |
| 11. | Efficiency | 99.842 %             | Op_point   | Steady state efficiency                   |
| 12. | IC Tj      | 41.151 degC          | Op_point   | IC junction temperature                   |
| 13. | ICThetaJA  | 43.0 degC/W          | Op_point   | IC junction-to-ambient thermal resistance |
| 14. | Total Pd   | 375.594 mW           | Power      | Total Power Dissipation                   |

## Design Inputs

| #  | Name        | Value    | Description         |
|----|-------------|----------|---------------------|
| 1. | AVin        | 2.2 A    | AVin                |
| 2. | DDRTYPE     | DDR3     | DDRTYPE             |
| 3. | Itt         | 500.0 mA | Itt                 |
| 4. | PVin        | 1.5 A    | PVin                |
| 5. | application | DDRPower | application         |
| 6. | base_pn     | LP2998   | Base Product Number |
| 7. | Ta          | 25.0 A   | Ambient temperature |

## Design Assistance

1. **LP2998** Product Folder : <http://www.ti.com/product/lp2998> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

**You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.**

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).