


WEBENCH® Design Report





Design : 4801973/2 TPS54232DR
TPS54232DR 15.0V-18.0V to 9.00V @ 2.0A






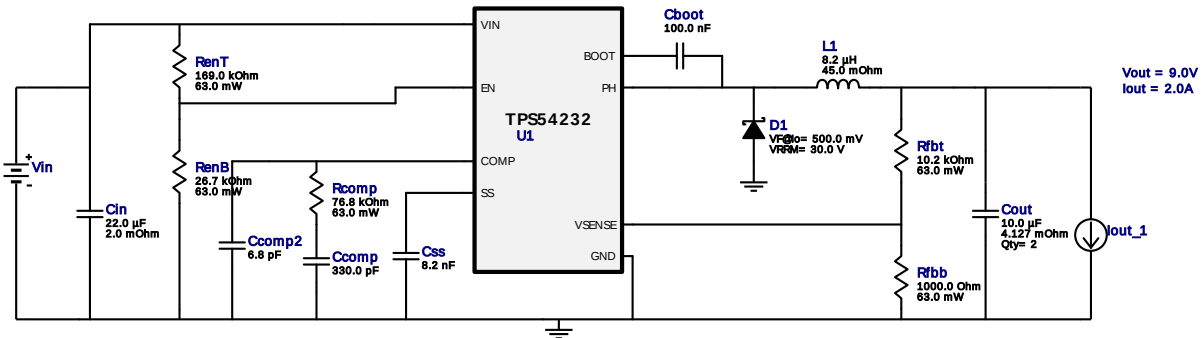








Electrical BOM






#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cboot	MuRata	GRM155R61A104KA01D Series= X5R	Cap= 100.0 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
2.	Ccomp	Samsung Electro-Mechanics	CL21C331JBANFNC Series= C0G/NP0	Cap= 330.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7 mm ²
3.	Ccomp2	MuRata	GRM1555C1H6R8CA01D Series= C0G/NP0	Cap= 6.8 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0402 3 mm ²
4.	Cin	MuRata	GRM32ER61E226KE15L Series= X5R	Cap= 22.0 uF ESR= 2.0 mOhm VDC= 25.0 V IRMS= 3.67 A	1	\$0.16	1210 15 mm ²
5.	Cout	MuRata	GRM21BR61C106KE15L Series= X5R	Cap= 10.0 uF ESR= 4.127 mOhm VDC= 16.0 V IRMS= 2.46634 A	2	\$0.03	0805 7 mm ²
6.	Css	MuRata	GRM033R61A822KA01D Series= X5R	Cap= 8.2 nF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0201 2 mm ²
7.	D1	Diodes Inc.	B230A-13-F	VF@Io= 500.0 mV VRRM= 30.0 V	1	\$0.09	SMA 37 mm ²
8.	L1	Bourns	SRN8040-8R2Y	L= 8.2 uH DCR= 45.0 mOhm	1	\$0.22	SRN8040 100 mm ²
9.	Rcomp	Vishay-Dale	CRCW040276K8FKED Series= CRCW..e3	Res= 76.8 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
10.	RenB	Vishay-Dale	CRCW040226K7FKED Series= CRCW..e3	Res= 26.7 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
11.	RenT	Vishay-Dale	CRCW0402169KFKED Series= CRCW..e3	Res= 169.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²

#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
12.	Rfbb	Vishay-Dale	CRCW04021K00FKED Series= CRCW..e3	Res= 1000.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
13.	Rfbt	Vishay-Dale	CRCW040210K2FKED Series= CRCW..e3	Res= 10.2 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	0402 3 mm ²
14.	U1	Texas Instruments	TPS54232DR	Switcher	1	\$0.55	

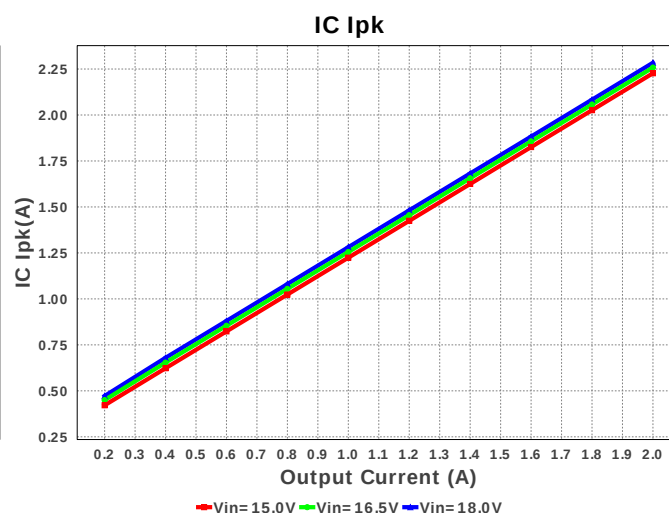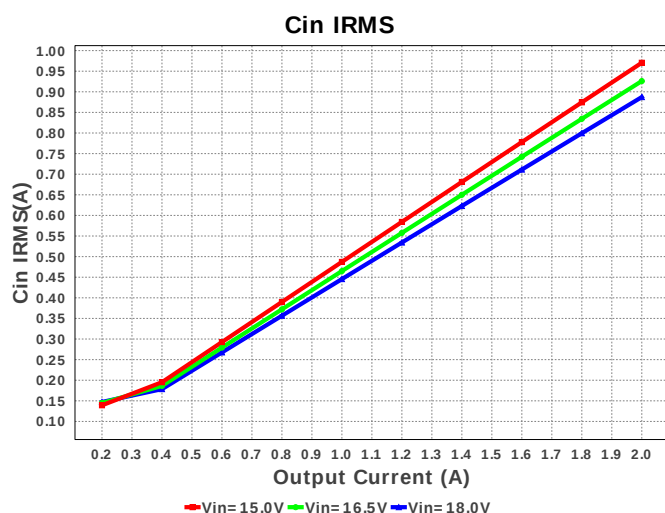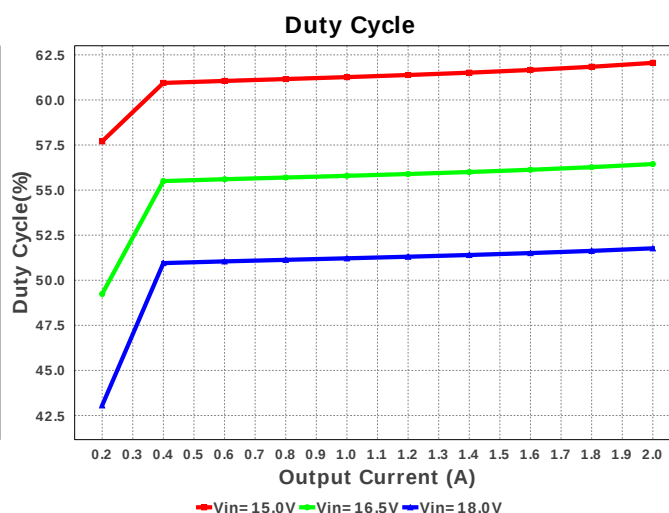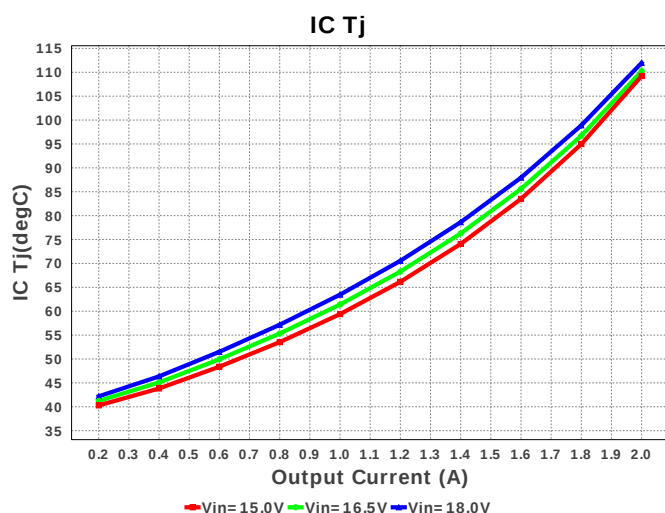D0008A 57 mm²

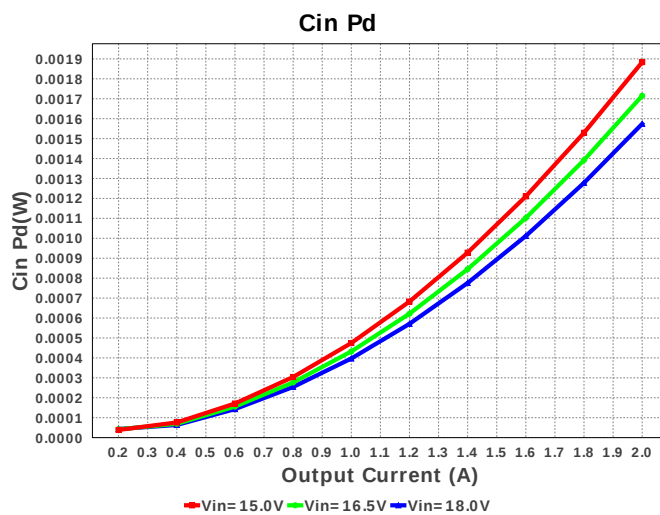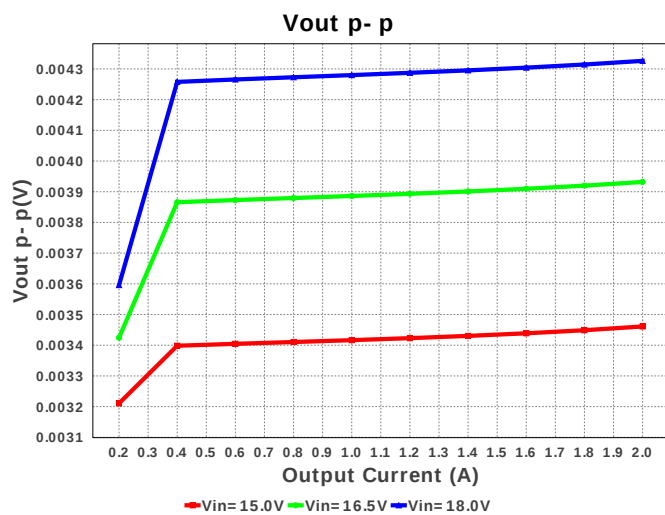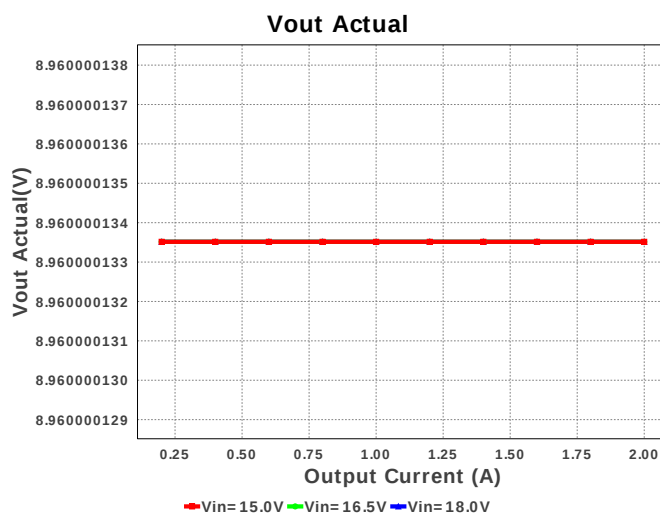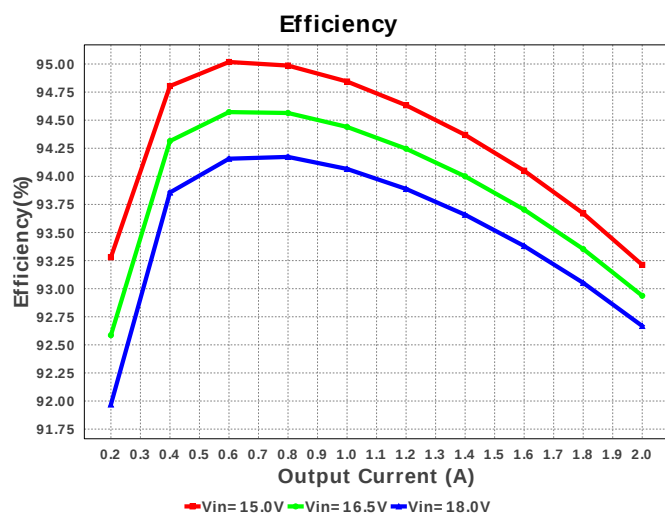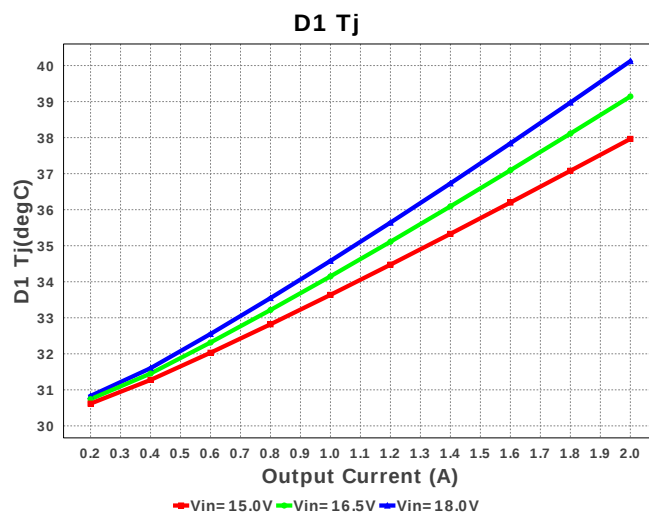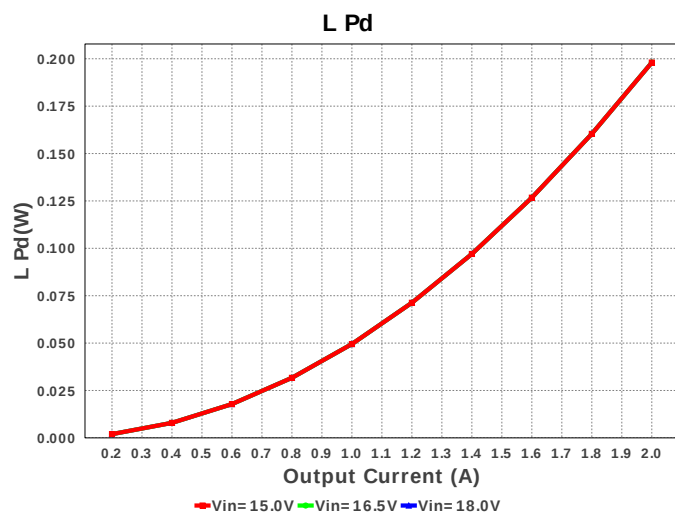

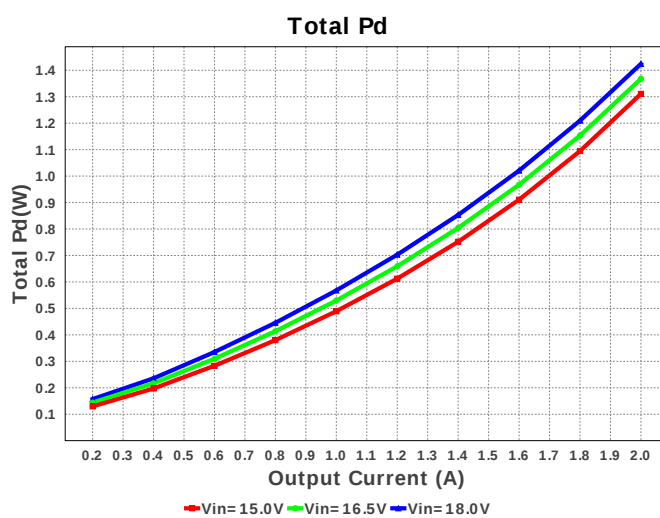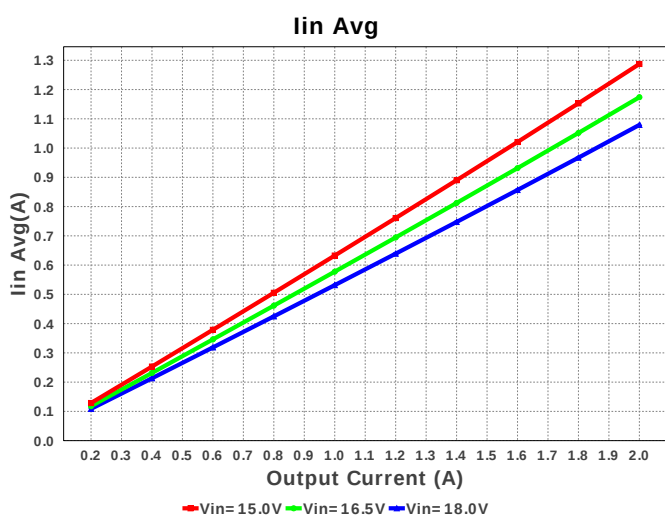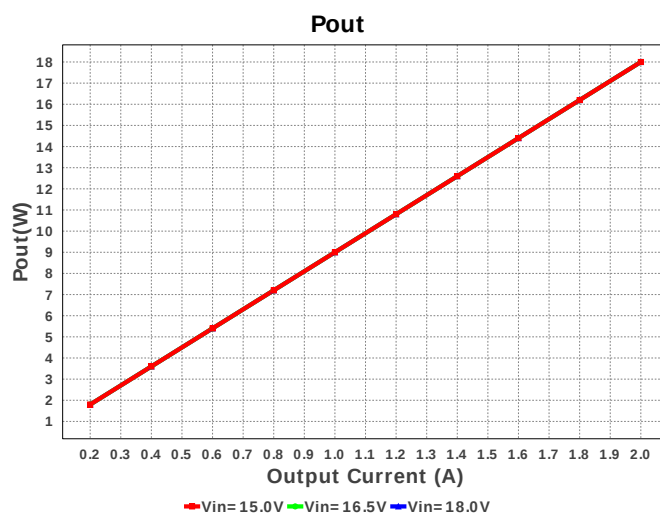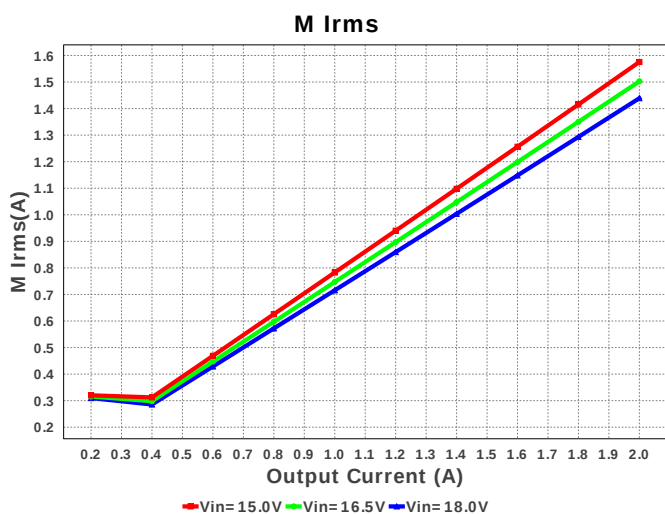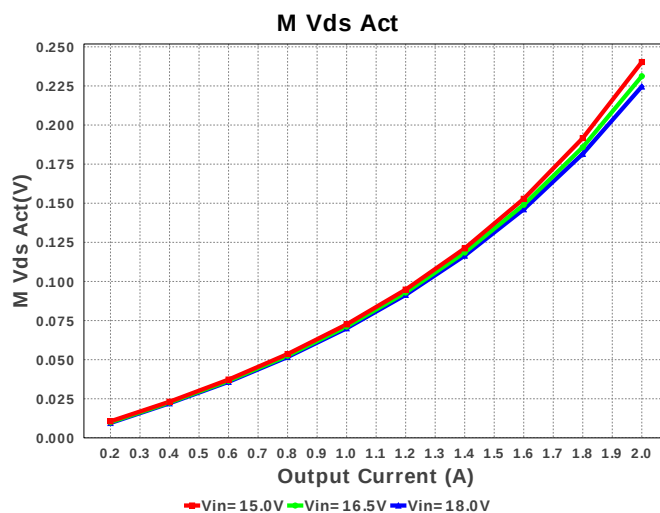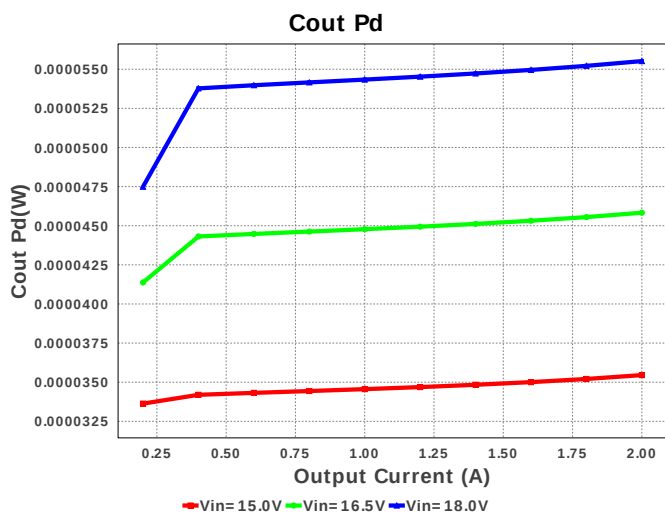

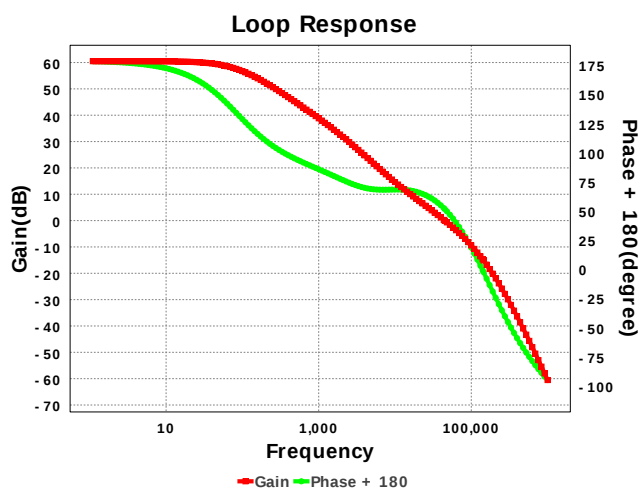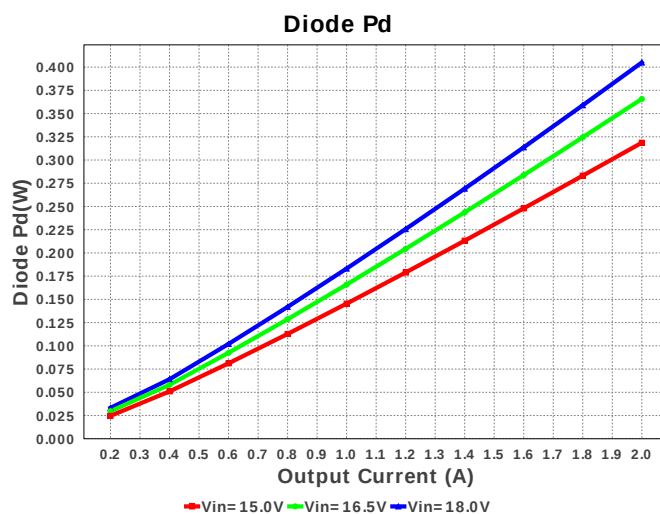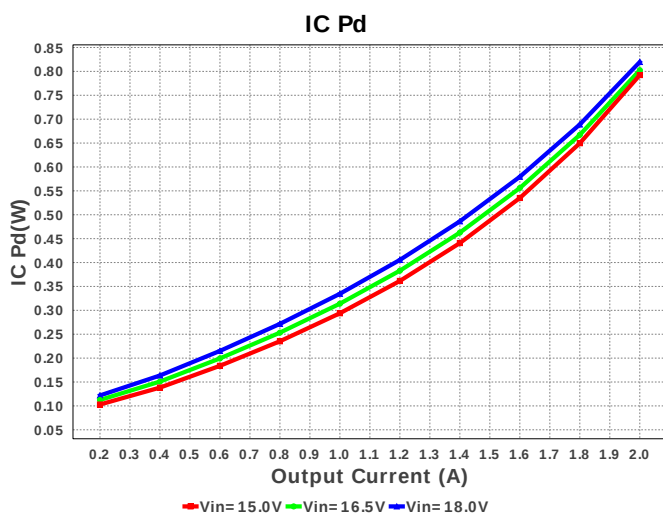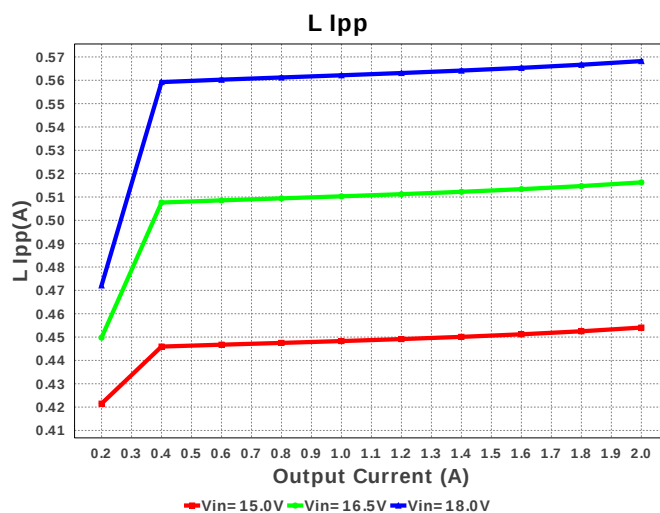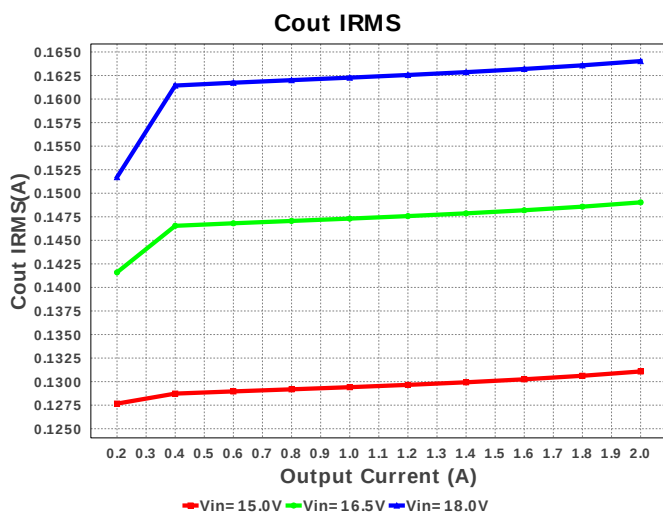

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	887.176 mA	Current	Input capacitor RMS ripple current
2.	Cout IRMS	164.03 mA	Current	Output capacitor RMS ripple current
3.	IC Ipk	2.284 A	Current	Peak switch current in IC
4.	Iin Avg	1.079 A	Current	Average input current
5.	L Ipp	568.22 mA	Current	Peak-to-peak inductor ripple current
6.	M1 Irms	1.439 A	Current	Q lavg
7.	BOM Count	15	General	Total Design BOM count
8.	FootPrint	252.0 mm ²	General	Total Foot Print Area of BOM components
9.	Frequency	1000.0 kHz	General	Switching frequency
10.	M Vds Act	224.617 mV	General	Voltage drop across the MosFET
11.	Mode	CCM	General	Conduction Mode

#	Name	Value	Category	Description
12.	Pout	18.0 W	General	Total output power
13.	Total BOM	\$1.17	General	Total BOM Cost
14.	D1 Tj	40.123 degC	Op_Point	D1 junction temperature
15.	Low Freq Gain	60.503 dB	Op_Point	Gain at 10Hz
16.	Vout Actual	8.96 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
17.	Vout OP	9.0 V	Op_Point	Operational Output Voltage
18.	Cross Freq	44.844 kHz	Op_point	Bode plot crossover frequency
19.	Duty Cycle	51.771 %	Op_point	Duty cycle
20.	Efficiency	92.668 %	Op_point	Steady state efficiency
21.	Gain Marg	-14.662 dB	Op_point	Bode Plot Gain Margin
22.	IC Tj	111.967 degC	Op_point	IC junction temperature
23.	ICThetaJA	100.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
24.	IOUT_OP	2.0 A	Op_point	Iout operating point
25.	Phase Marg	52.488 deg	Op_point	Bode Plot Phase Margin
26.	VIN_OP	18.0 V	Op_point	Vin operating point
27.	Vout p-p	4.326 mV	Op_point	Peak-to-peak output ripple voltage
28.	Cin Pd	1.574 mW	Power	Input capacitor power dissipation
29.	Cout Pd	55.52 µW	Power	Output capacitor power dissipation
30.	Diode Pd	404.939 mW	Power	Diode power dissipation
31.	IC Pd	819.674 mW	Power	IC power dissipation
32.	L Pd	198.0 mW	Power	Inductor power dissipation
33.	Total Pd	1.424 W	Power	Total Power Dissipation
34.	Vout Tolerance	5.404 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable

Design Inputs

#	Name	Value	Description
1.	Iout	2.0	Maximum Output Current
2.	VinMax	18.0	Maximum input voltage
3.	VinMin	15.0	Minimum input voltage
4.	Vout	9.0	Output Voltage
5.	base_pn	TPS54232	Base Product Number
6.	source	DC	Input Source Type
7.	Ta	30.0	Ambient temperature

Design Assistance

1. **TPS54232** Product Folder : <http://www.ti.com/product/TPS54232> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).