


WEBENCH® Design Report



Design : 4652143/7 UCC1800J
UCC1800J 110.0V-130.0V to 5.00V @ 2.6A

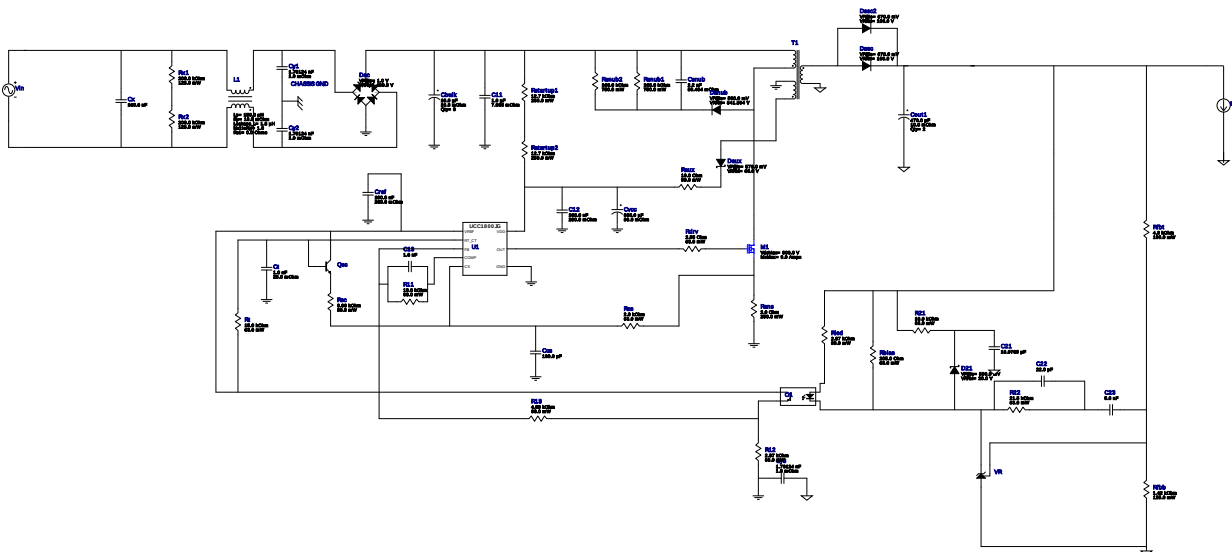



1. The EMI filter selected here contains the estimated values. The real numbers will depend on the attenuation needed at a particular frequency.







Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	C11	MuRata	GRM55DR72E105KW01L Series= X7R	Cap= 1.0 uF ESR= 7.086 mOhm VDC= 250.0 V IRMS= 2.0605 A	1	\$0.26	 2220_200 54 mm ²
2.	C12	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
3.	C13	Samsung Electro-Mechanics	CL21C102JBCNFNC Series= C0G/NP0	Cap= 1.0 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
4.	C21	CUSTOM	CUSTOM Series= ?	Cap= 18.0769 uF VDC= 10.0 V IRMS= 0.0 A	1	NA	CUSTOM 0 mm ²
5.	C22	Kemet	C0805C220K3GACTU Series= C0G/NP0	Cap= 22.0 pF VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
6.	C23	Yageo America	CC0805KRX7R9BB562 Series= X7R	Cap= 5.6 nF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
7.	Cbulk	Rubycon	200RX3010M8X16 Series= ?	Cap= 10.0 uF ESR= 19.8 mOhm VDC= 200.0 V IRMS= 200.0 mA	3	\$0.18	 RX30_800x1600 100 mm ²
8.	Ccs	Kemet	C0805C181K5GACTU Series= C0G/NP0	Cap= 180.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
9.	Cout1	Nichicon	RNU1C471MDN1PH Series= ?	Cap= 470.0 uF ESR= 10.0 mOhm VDC= 16.0 V IRMS= 6.1 A	2	\$0.52	 NU_1000x1250 144 mm ²
10.	Cref	AVX	08053C104KAT2A Series= X7R	Cap= 100.0 nF ESR= 280.0 mOhm VDC= 25.0 V IRMS= 0.0 A	1	\$0.01	 0805 7 mm ²
11.	Csnub	TDK	C3225X7S3D222K Series= X7S	Cap= 2.2 nF ESR= 50.484 mOhm VDC= 2.0 kV IRMS= 0.0 A	1	\$0.22	 1210 15 mm ²
12.	Ct	Kemet	C0805C102J5GACTU Series= C0G/NP0	Cap= 1.0 nF ESR= 25.0 mOhm VDC= 50.0 V IRMS= 1.71 A	1	\$0.01	 0805 7 mm ²
13.	Cvcc	Panasonic	EEE-FK1C681P Series= FK	Cap= 680.0 uF ESR= 80.0 mOhm VDC= 16.0 V IRMS= 850.0 mA	1	\$0.23	 SM_RADIAL_G 172 mm ²
14.	Cx	TDK	B32913A5104M000 Series= 2231	Cap= 100.0 nF VDC= 1000.0 V IRMS= 0.0 A	1	\$0.46	 B32913_2650x600x1500 228 mm ²
15.	Cy1	CUSTOM	CUSTOM Series= ?	Cap= 1.70124 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
16.	Cy2	CUSTOM	CUSTOM Series= ?	Cap= 1.70124 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
17.	Cy3	CUSTOM	CUSTOM Series= ?	Cap= 1.70124 nF ESR= 1.0 mOhm VDC= 220.62 V IRMS= 500.0 uA	1	NA	CUSTOM 0 mm ²
18.	D21	Diodes Inc.	B220-13-F	VF@Io= 500.0 mV VRRM= 20.0 V	1	\$0.08	 SMB 44 mm ²
19.	Dac	Diodes Inc.	HD04-T	VF@Io= 1.0 V VRRM= 400.0 V	1	\$0.12	 MiniDIP 62 mm ²
20.	Daux	NXP Semiconductor	PMEG6010CEH,115	VF@Io= 570.0 mV VRRM= 60.0 V	1	\$0.04	 SOD-123F 12 mm ²
21.	Dsec	Fairchild Semiconductor	FSV8100V	VF@Io= 670.0 mV VRRM= 100.0 V	1	\$0.21	 TO-277A 56 mm ²
22.	Dsec2	Fairchild Semiconductor	FSV8100V	VF@Io= 670.0 mV VRRM= 100.0 V	1	\$0.21	 TO-277A 56 mm ²
23.	Dsnub	CUSTOM	CUSTOM	VF@Io= 500.0 mV VRRM= 541.594 V	1	NA	CUSTOM 0 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
24.	L1	API Delevan	CM6296R-154	Lp= 150.0 μ H Rp= 16.0 mOhm Leakage_L= 1.8 μ H Ns1toNp= 1.0 Rs1= 0.0 Ohms	1	\$6.32	 CM6296 833 mm ²
25.	M1	STMicroelectronics	STF10N80K5	VdsMax= 800.0 V IdsMax= 9.0 Amps	1	\$2.52	 TO-220FP 79 mm ²
26.	O1	Vishay-Semiconductor	TCMT1109	Optocoupler	1	\$0.21	 SOP-4 44 mm ²
27.	Qsc	STMicroelectronics	2N2222A	Bipolar Transistor	1	\$0.97	 TO-18 57 mm ²
28.	R11	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
29.	R12	Vishay-Dale	CRCW04022K37FKED Series= CRCW..e3	Res= 2.37 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
30.	R13	Vishay-Dale	CRCW04024K99FKED Series= CRCW..e3	Res= 4.99 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
31.	R21	Vishay-Dale	CRCW040210K0FKED Series= CRCW..e3	Res= 10.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
32.	R22	Vishay-Dale	CRCW040221K5FKED Series= CRCW..e3	Res= 21.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
33.	Raux	Vishay-Dale	CRCW040210R0FKED Series= CRCW..e3	Res= 10.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
34.	Rbias	Vishay-Dale	CRCW0402205RFBKED Series= CRCW..e3	Res= 205.0 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
35.	Rcs	Vishay-Dale	CRCW04022K00FKED Series= CRCW..e3	Res= 2.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
36.	Rdrv	Vishay-Dale	CRCW04022R55FKED Series= CRCW..e3	Res= 2.55 Ohm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
37.	Rfbb	Yageo America	RT0805BRD071K42L Series= RT0805	Res= 1.42 kOhm Power= 125.0 mW Tolerance= 0.1%	1	\$0.05	 0805 7 mm ²
38.	Rfbt	Yageo America	RC0603FR-074K3L Series= ?	Res= 4.3 kOhm Power= 100.0 mW Tolerance= 1.0%	1	\$0.01	 0603 5 mm ²
39.	Rled	Vishay-Dale	CRCW04022K87FKED Series= CRCW..e3	Res= 2.87 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
40.	Rsc	Vishay-Dale	CRCW04028K66FKED Series= CRCW..e3	Res= 8.66 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
41.	Rsns	Vishay-Dale	CRCW12062R00FKEA Series= CRCW..e3	Res= 2.0 Ohm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
42.	Rsnub1	Vishay-Dale	CRCW2010160KFKEF Series= ?	Res= 160.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
43.	Rsnub2	Vishay-Dale	CRCW2010160KFKEF Series= ?	Res= 160.0 kOhm Power= 750.0 mW Tolerance= 1.0%	1	\$0.03	 2010 32 mm ²
44.	Rstartup1	Panasonic	ERJ-8ENF1272V Series= ERJ-8E	Res= 12.7 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
45.	Rstartup2	Panasonic	ERJ-8ENF1272V Series= ERJ-8E	Res= 12.7 kOhm Power= 250.0 mW Tolerance= 1.0%	1	\$0.01	 1206 11 mm ²
46.	Rt	Vishay-Dale	CRCW040215K0FKED Series= CRCW..e3	Res= 15.0 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3 mm ²
47.	Rx1	Panasonic	ERJ-6ENF2003V Series= ERJ-6E	Res= 200.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
48.	Rx2	Panasonic	ERJ-6ENF2003V Series= ERJ-6E	Res= 200.0 kOhm Power= 125.0 mW Tolerance= 1.0%	1	\$0.01	 0805 7 mm ²
49.	T1	Core=TDK , CoilFormer=TDK	Core=B66307G0000X127 , CoilFormer=B66308B1108T001	Lp= 2.66 mH Turns Ratio(Nas)= 12:7 Turns Ratio(Nps)= 182:7 Npri= 182.0 Naux= 12.0 Nsec= 7.0	1	\$0.66	 TDK_B66305 199 mm ²
50.	U1	Texas Instruments	UCC1800J	Switcher	1	\$18.93	 JG0008A 111 mm ²
51.	VR	Texas Instruments	LMV431CM5/NOPB	Voltage References	1	\$0.16	 R-PDSO-G3 16 mm ²

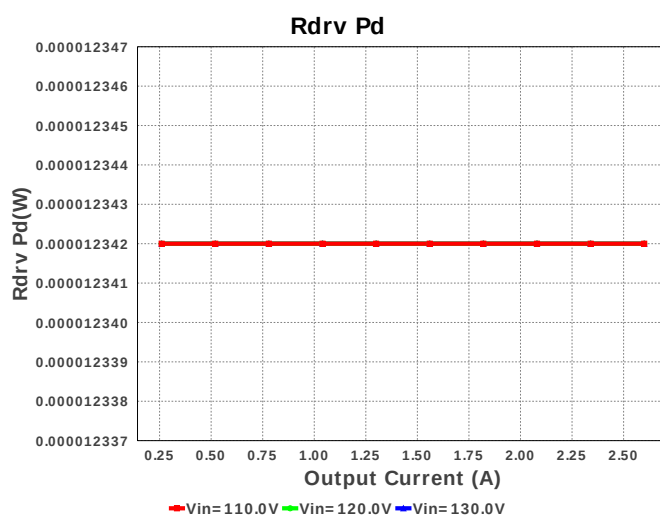
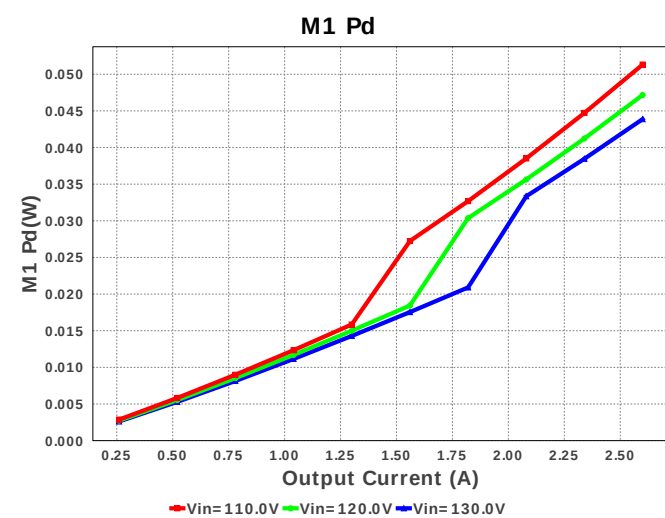
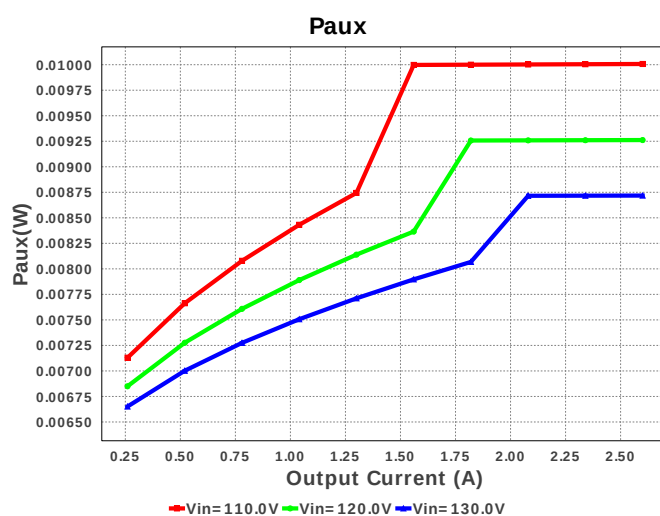
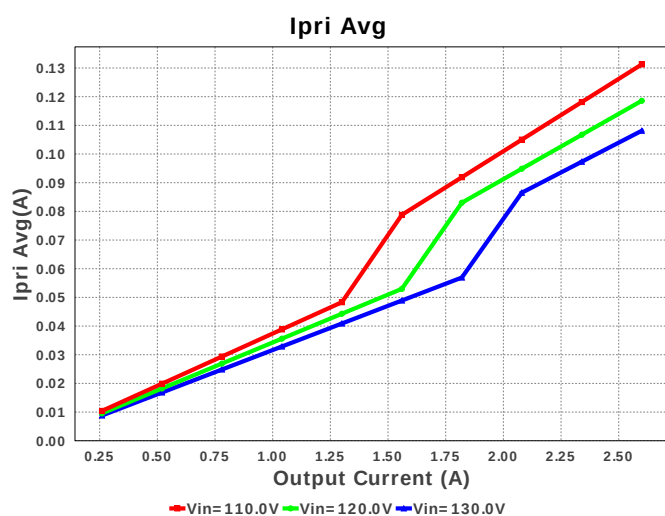
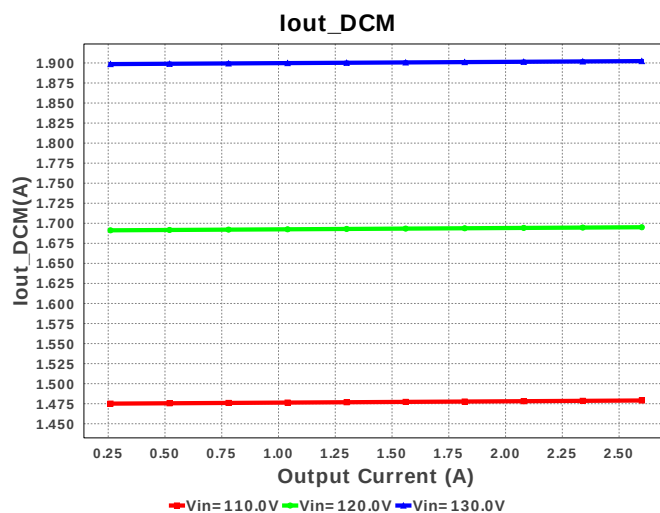
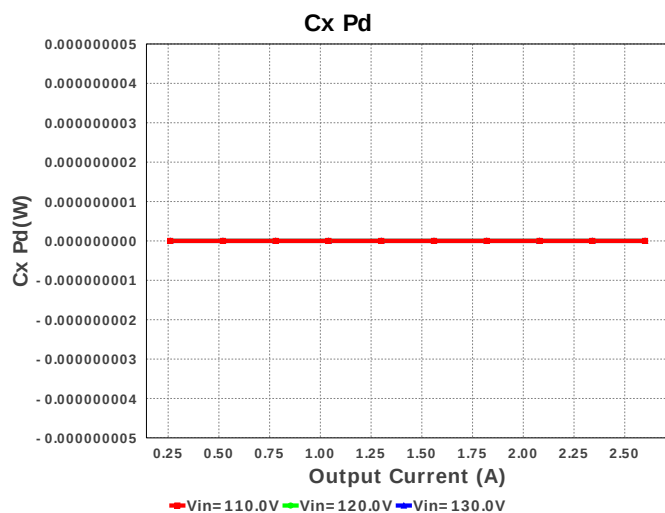


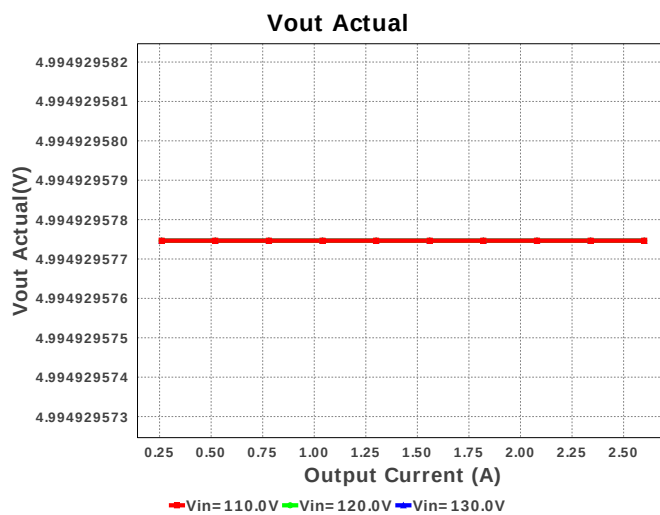
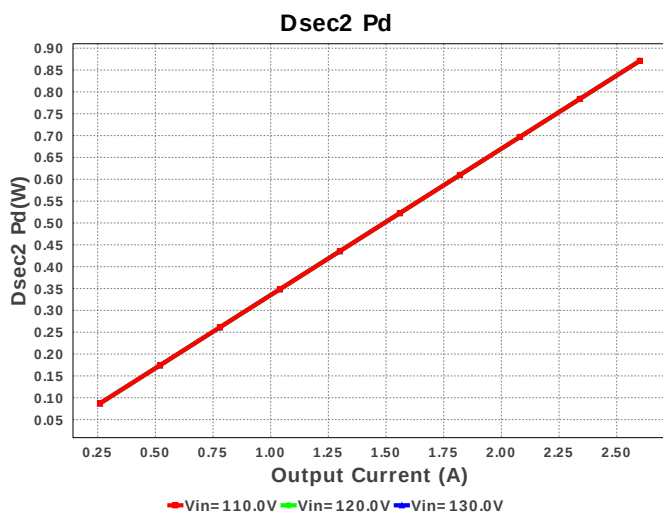
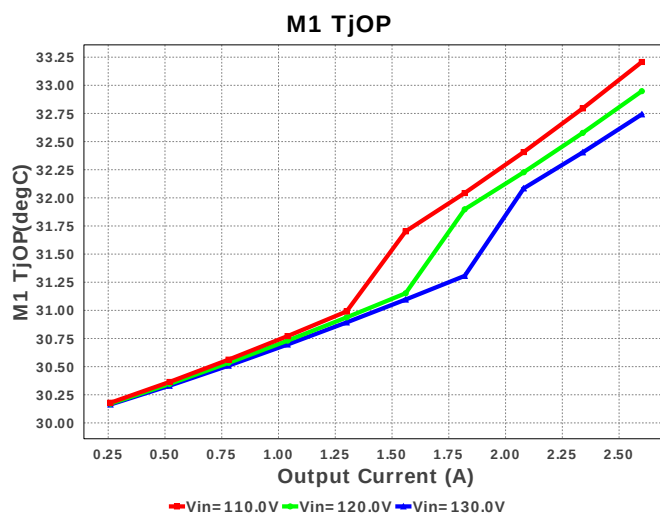
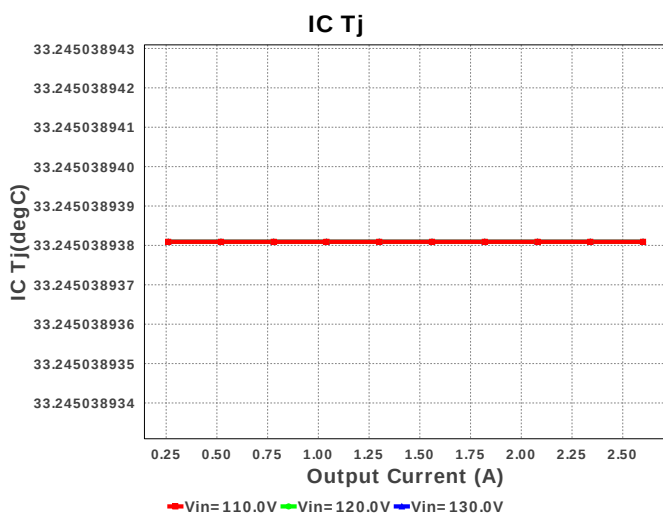
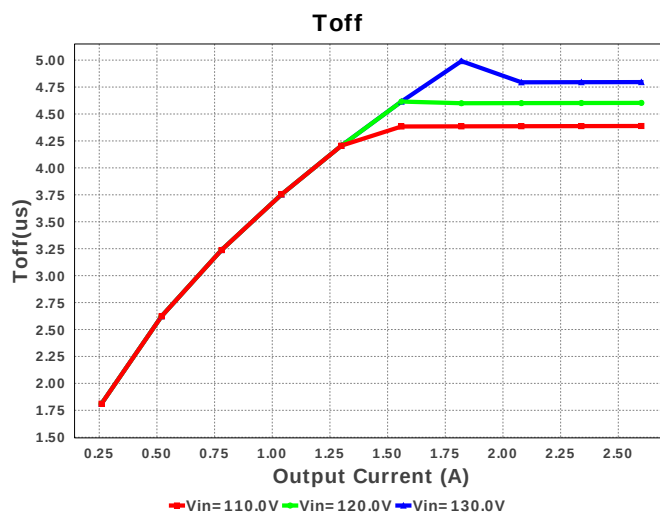
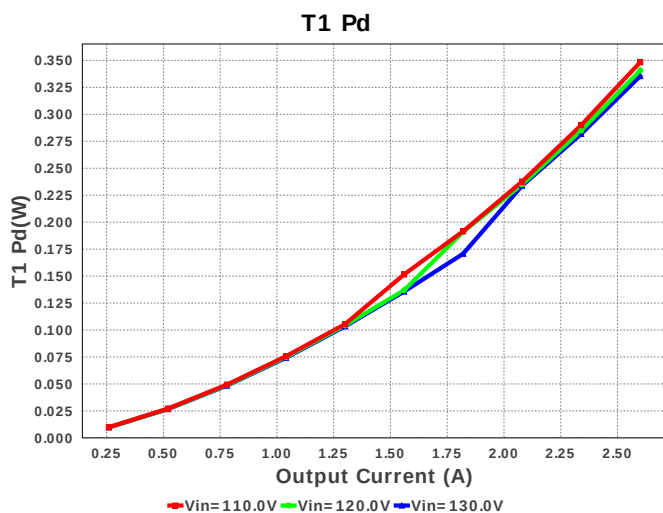


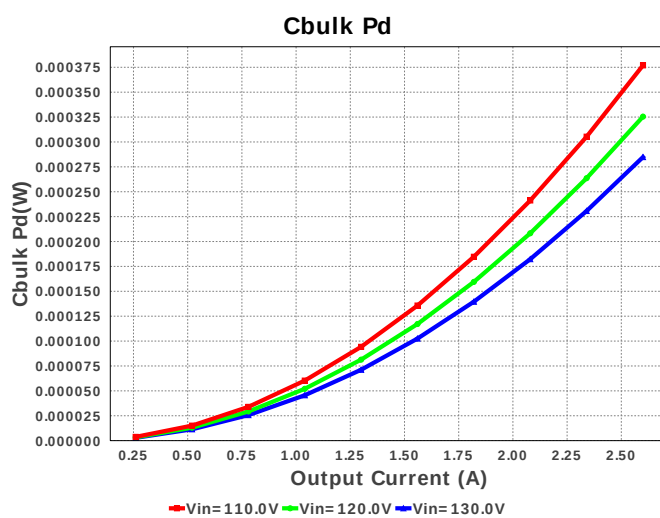
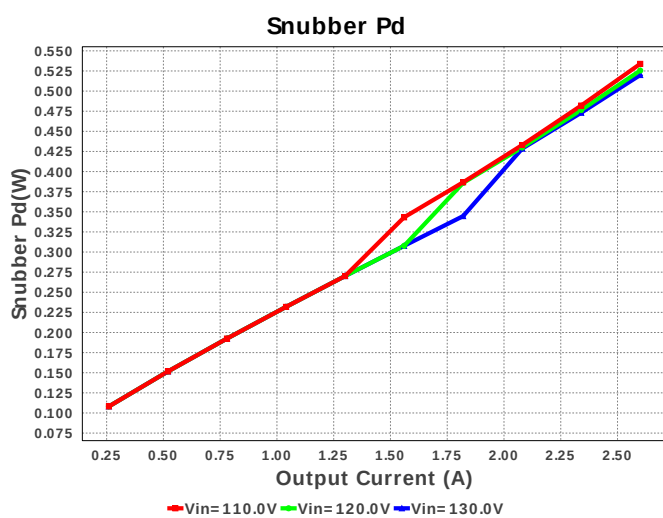
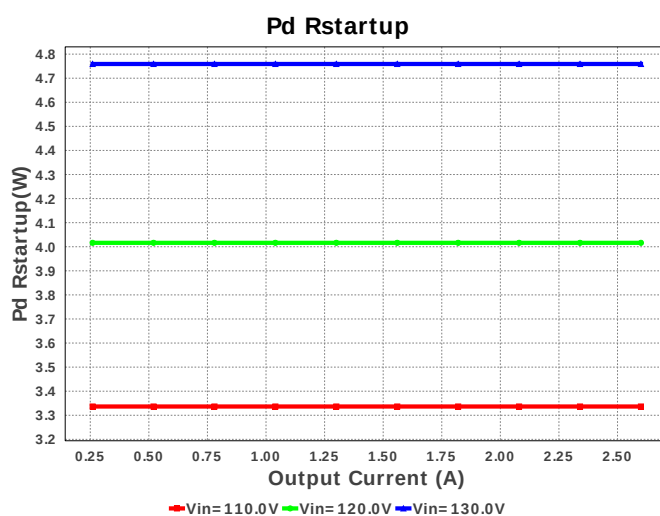
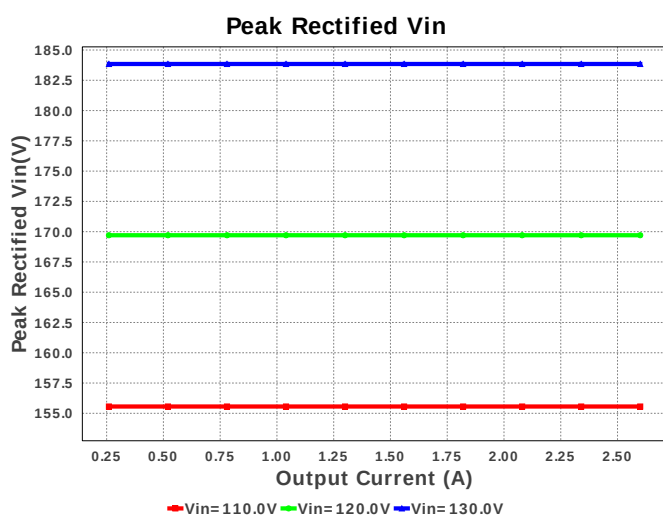
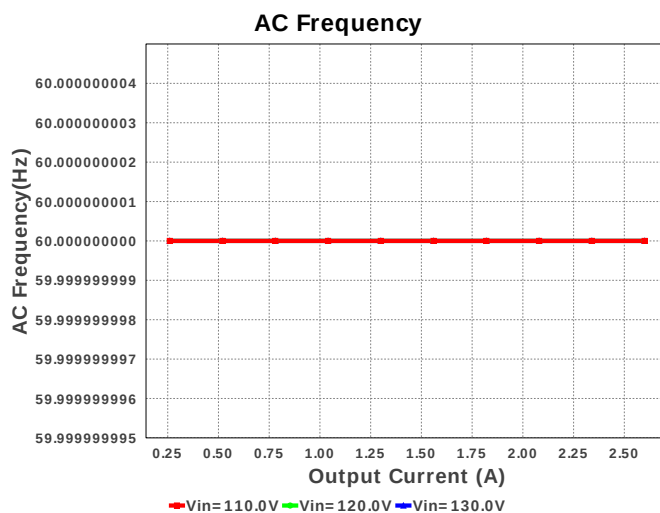
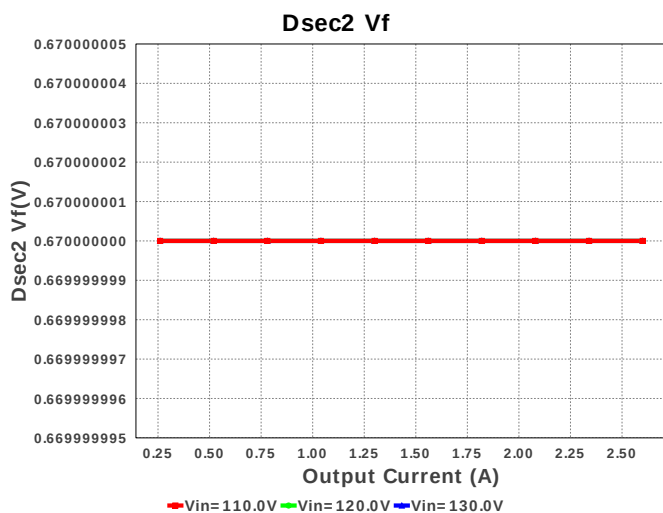


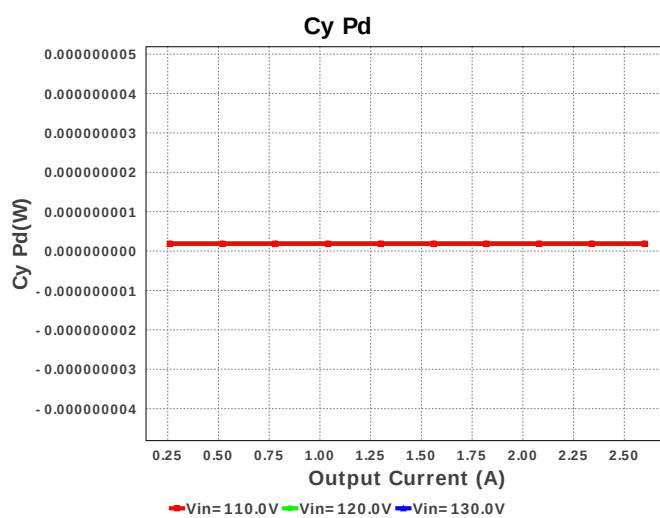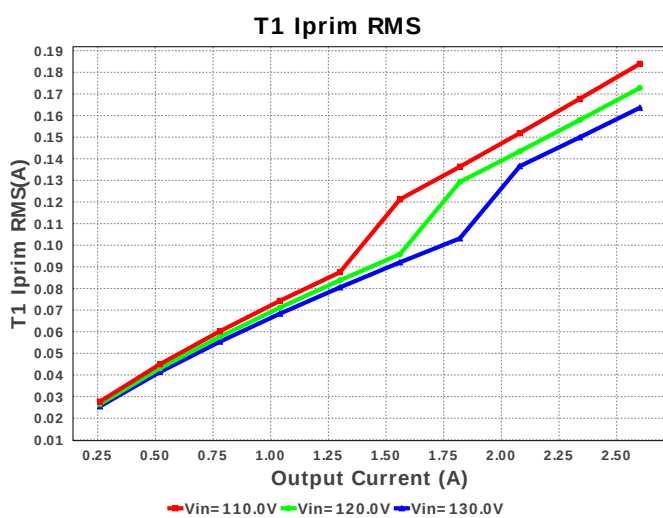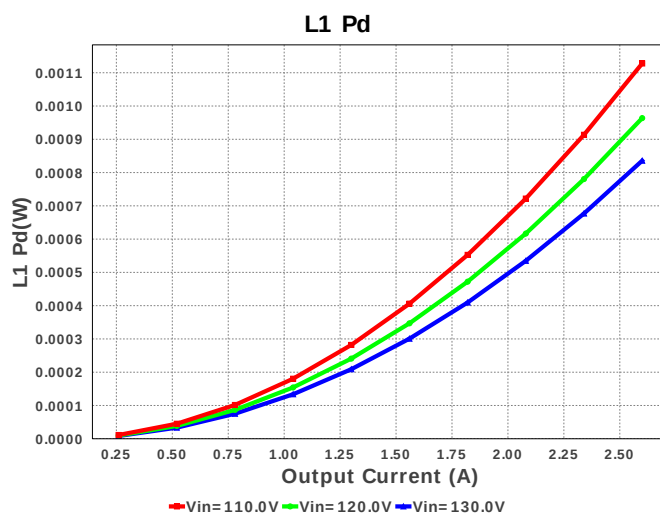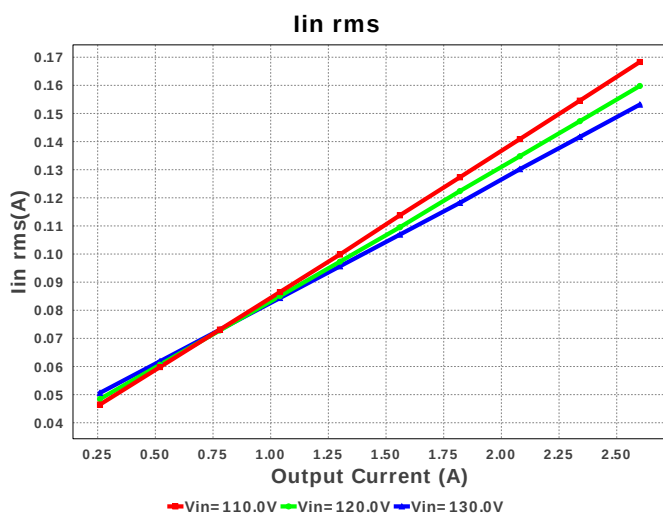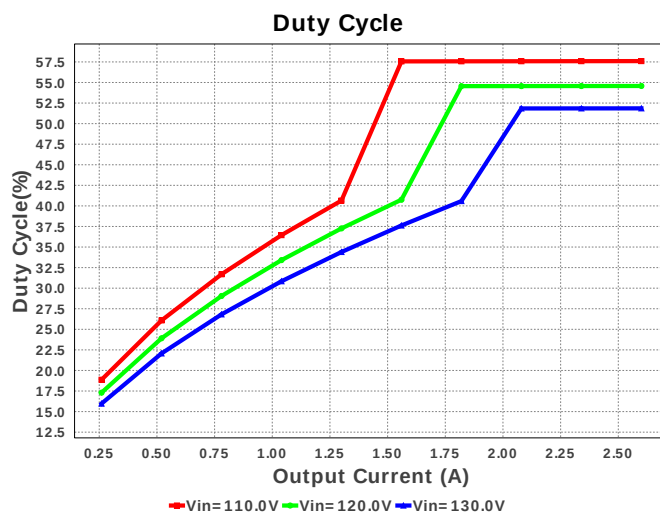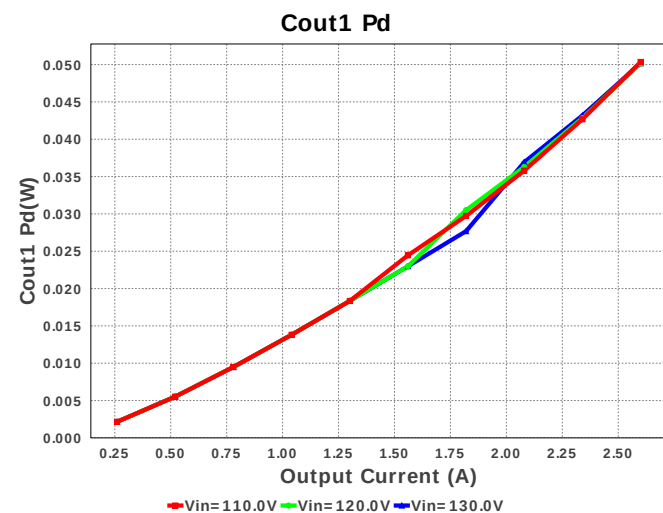


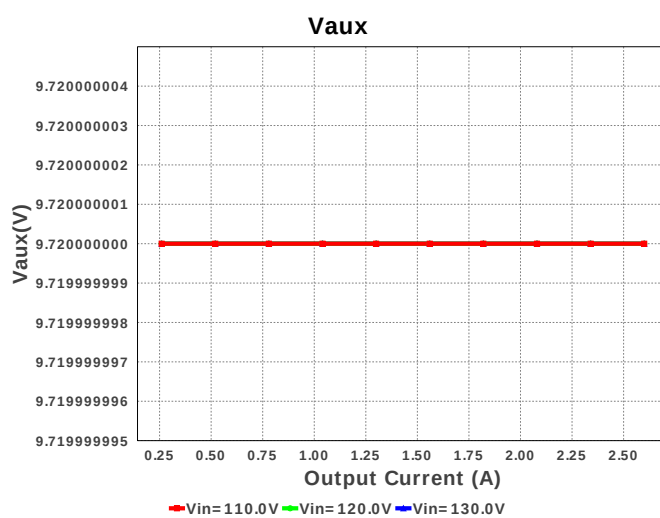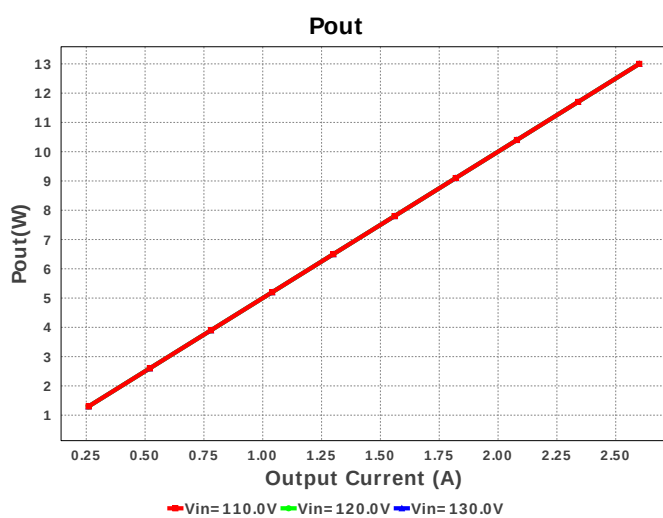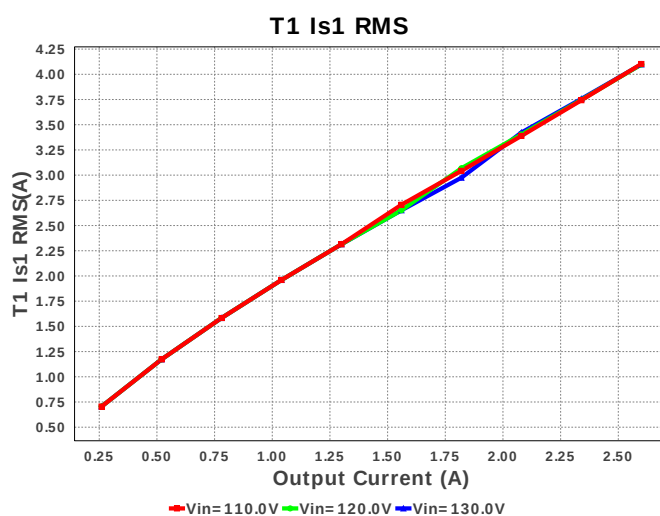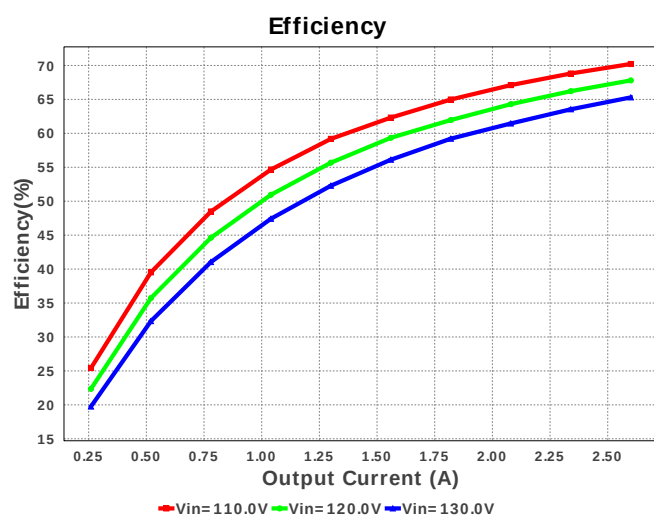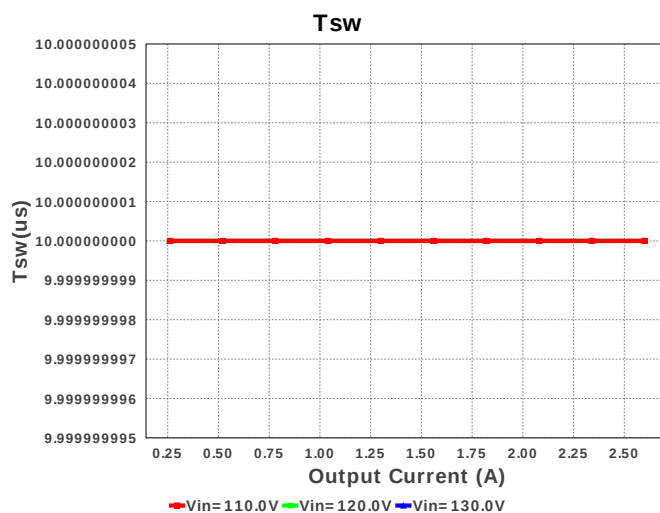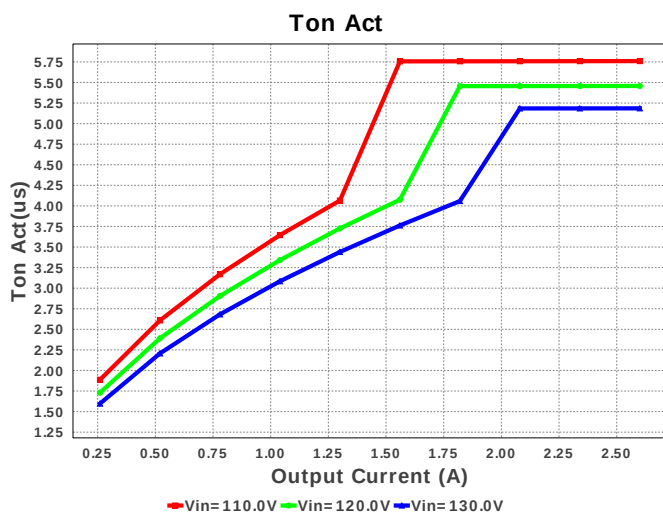

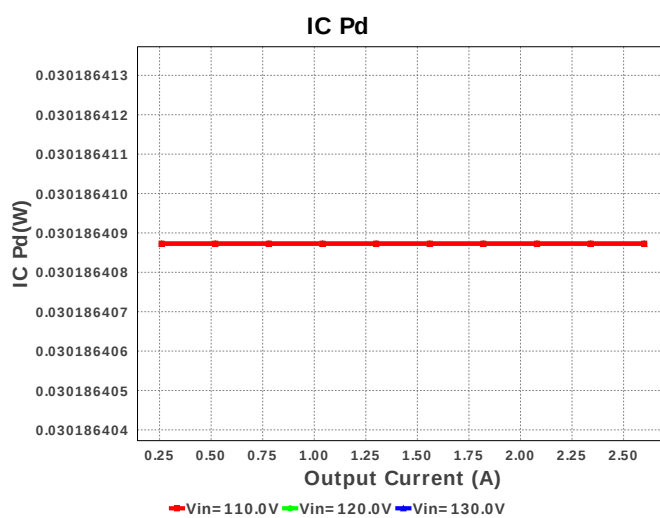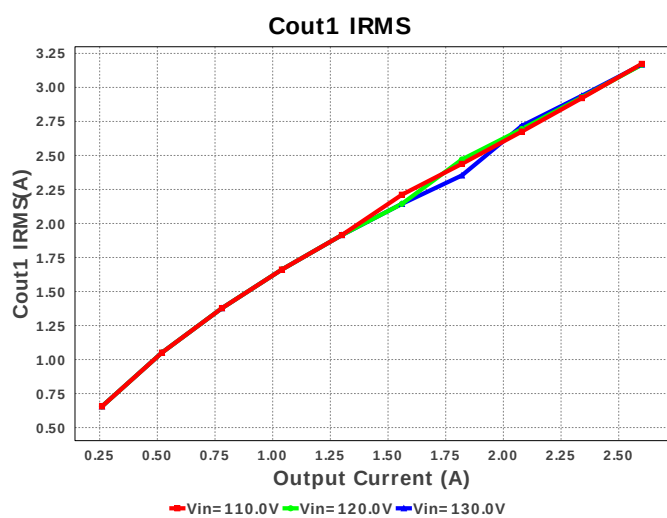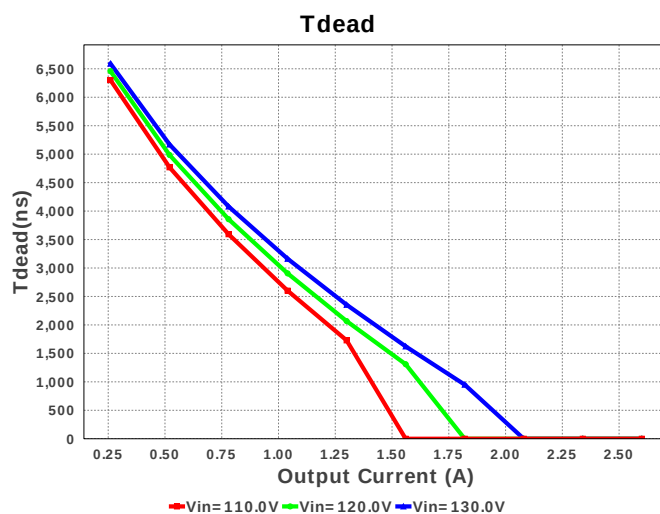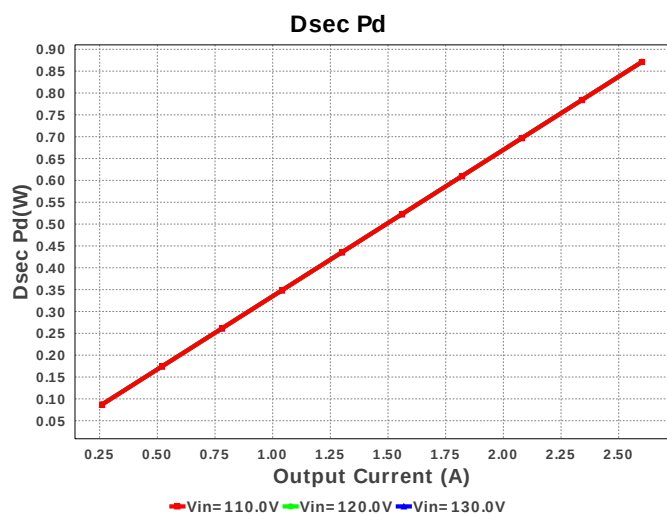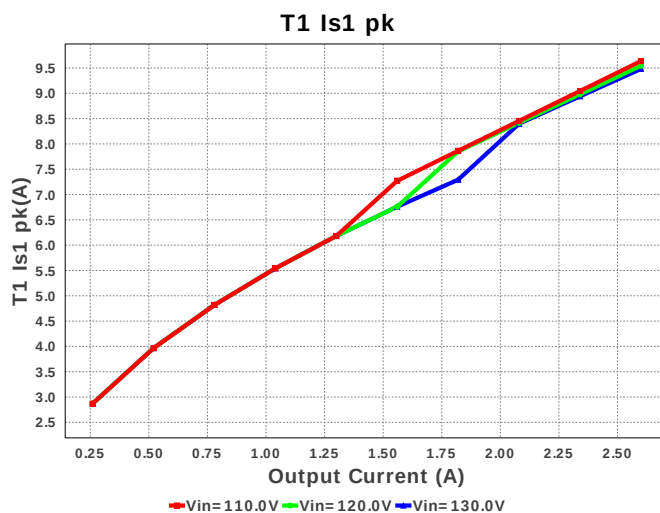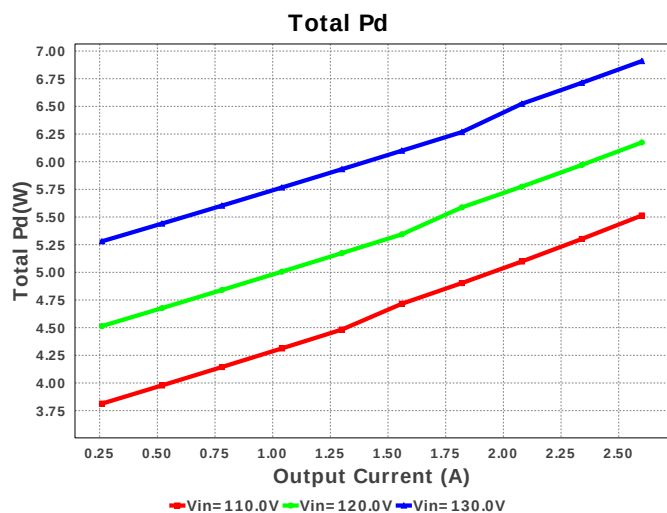

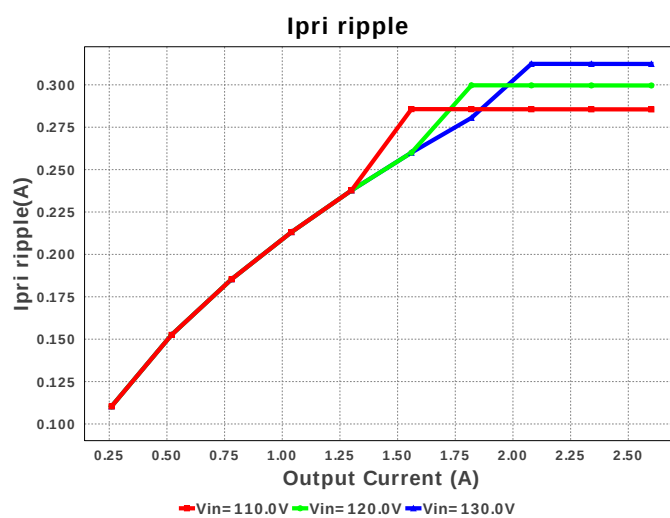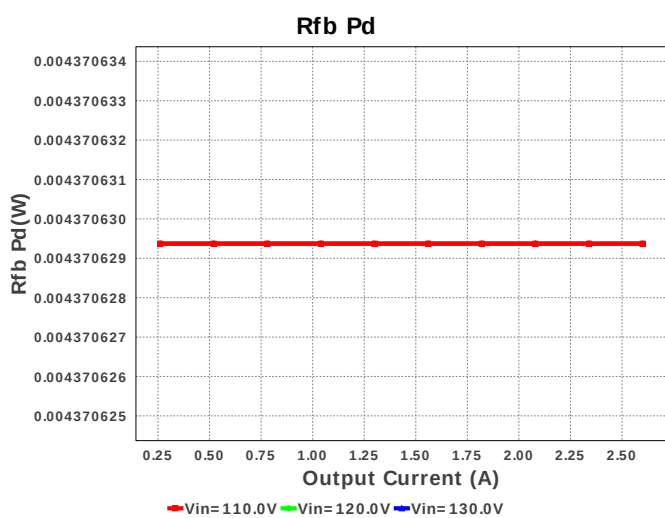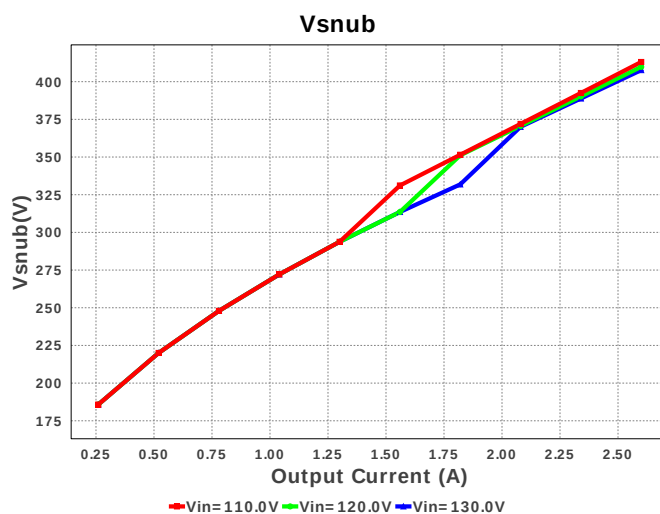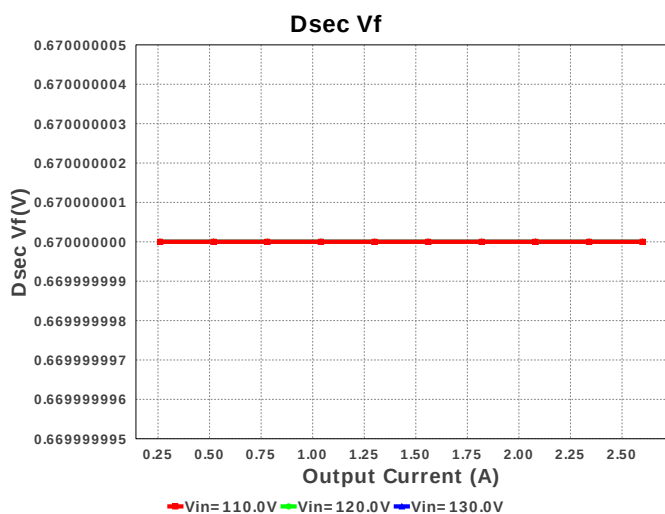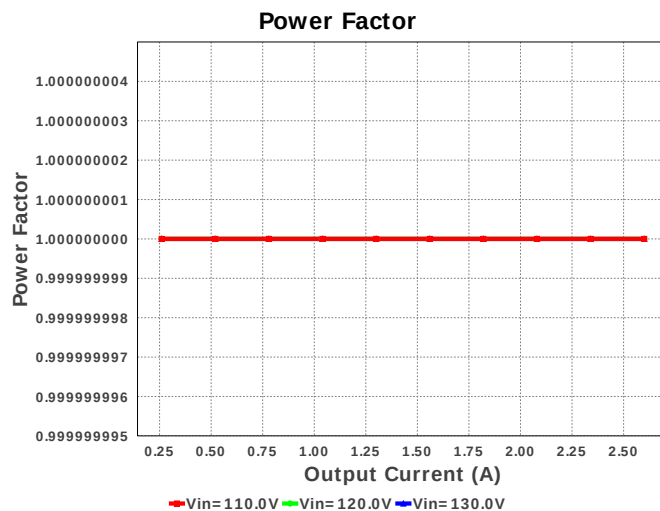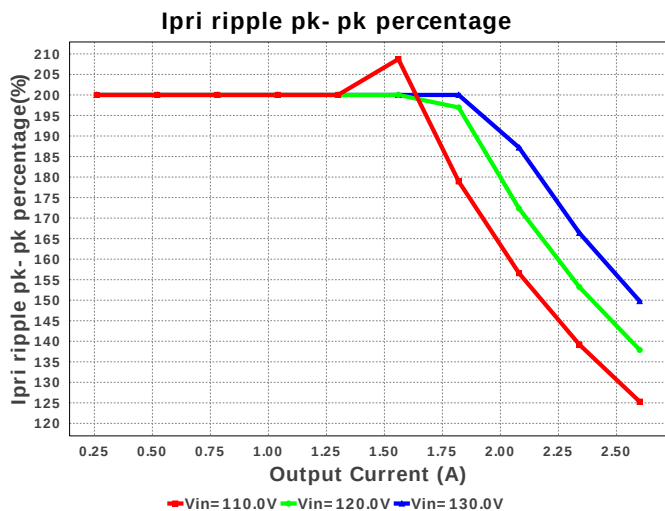

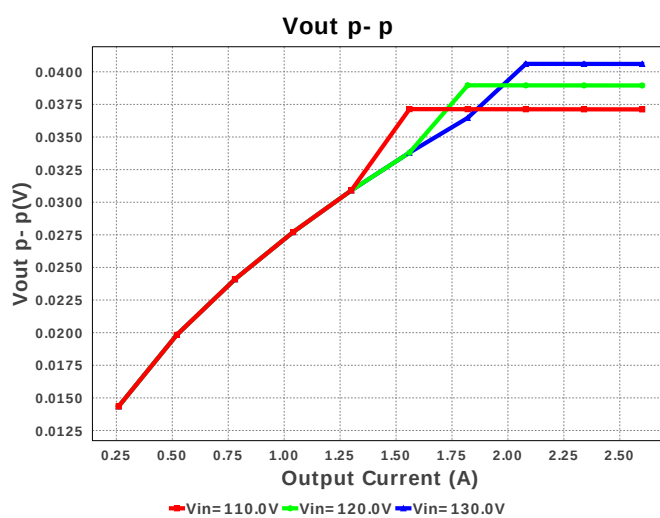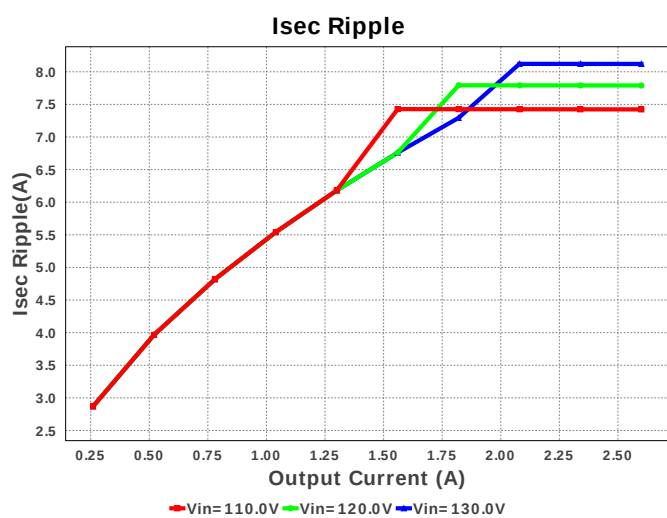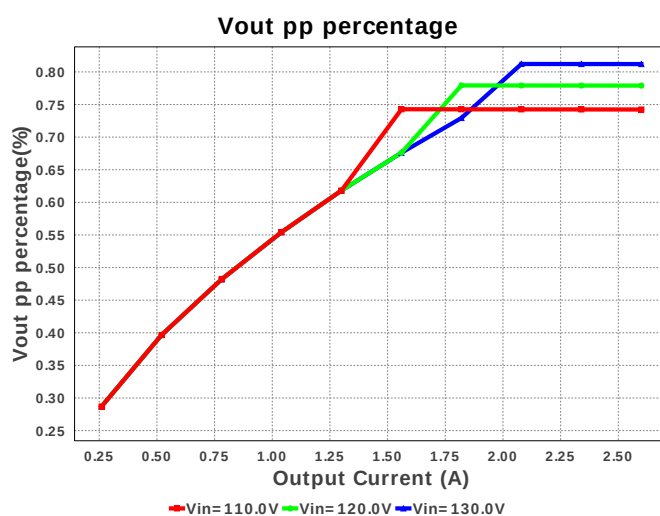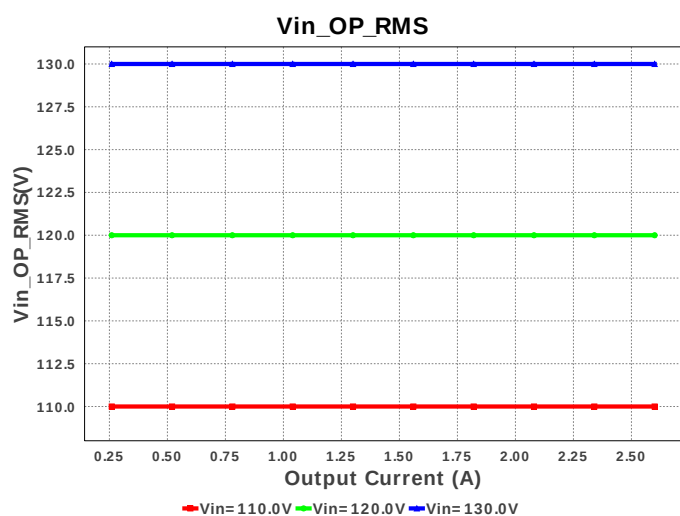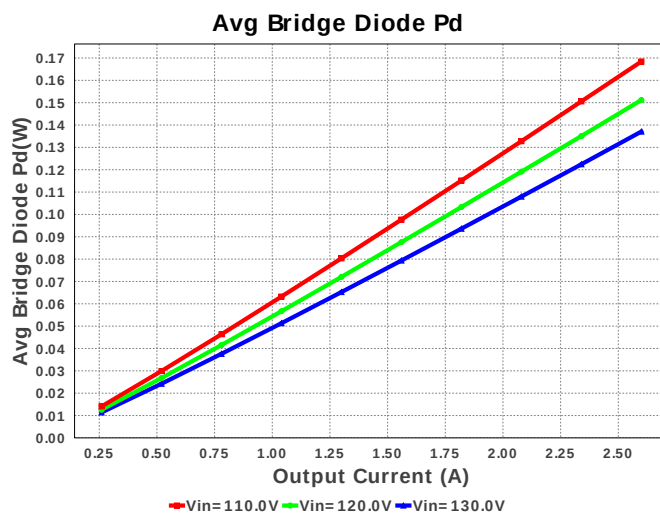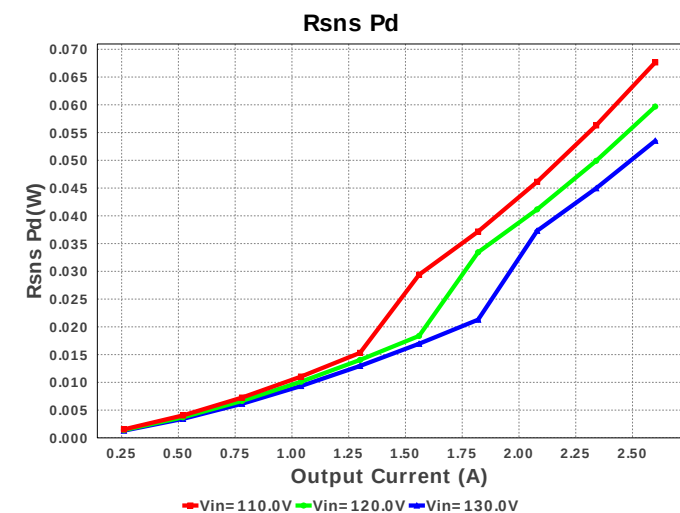

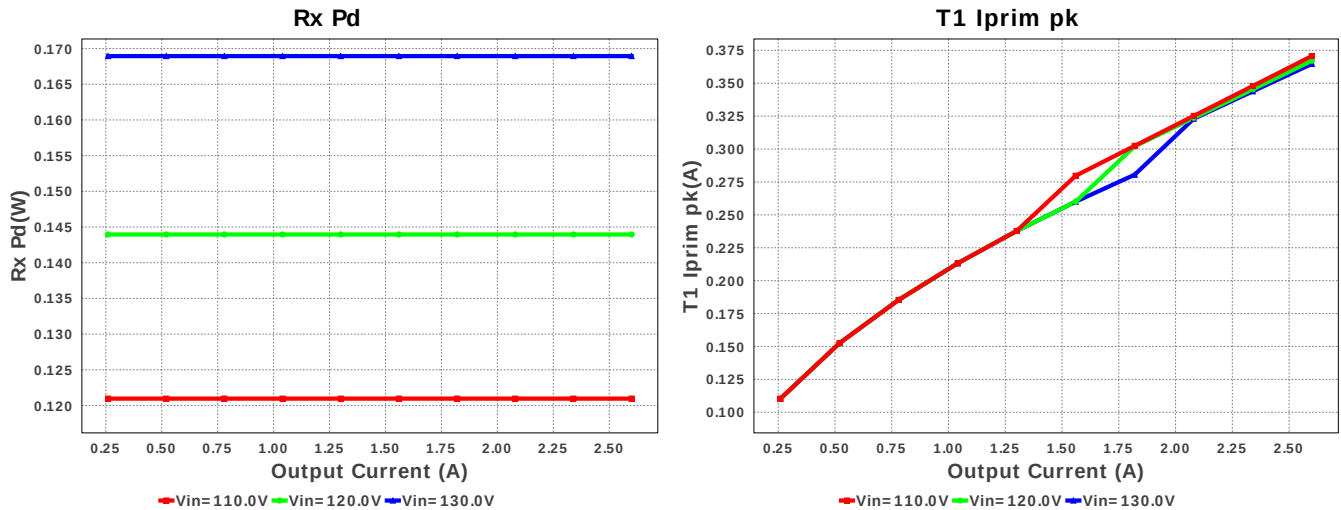

Operating Values

#	Name	Value	Category	Description
1.	Cout1 IRMS	3.173 A	Current	Output capacitor1 RMS ripple current
2.	Iin rms	168.31 mA	Current	RMS Input Current
3.	Iout_DCM	1.479 A	Current	Approximate Current below which DCM mode of operation will begin
4.	Ipri Avg	131.251 mA	Current	Average Current in Primary Winding over the complete Switching Period
5.	Ipri ripple	285.536 mA	Current	Ripple Current in the Primary Winding
6.	Ipri ripple pk-pk percentage	125.309 %	Current	Primary Current pk-pk ripple percentage(of Ipri avg during ton only)
7.	Isec Ripple	7.424 A	Current	Ripple Current in the Secondary Winding
8.	T1 Iprim RMS	183.905 mA	Current	Transformer Primary RMS Current
9.	T1 Iprim pk	370.633 mA	Current	Transformer Primary Peak Current
10.	T1 Is1 RMS	4.102 A	Current	Transformer Secondary1 RMS Current
11.	T1 Is1 pk	9.636 A	Current	Transformer Secondary1 Peak Current
12.	AC Frequency	60.0 Hz	General	Input AC frequency
13.	BOM Count	54	General	Total Design BOM count
14.	Daux trr	0.0 ns	General	Auxiliary Diode Reverse Recovery Time
15.	Dsec Vf	670.0 mV	General	Effective Forward Voltage Drop at the Operating Current
16.	Dsec trr	19.64 ns	General	Output Diode Reverse Recovery Time
17.	Dsec2 Vf	670.0 mV	General	Effective Forward Voltage Drop at the Operating Current
18.	Dsnub trr	0.0 ns	General	Snubber Diode Reverse Recovery Time
19.	FootPrint	2.856 k mm ²	General	Total Foot Print Area of BOM components
20.	Frequency	100.0 kHz	General	Switching frequency
21.	Mode	CCM	General	Conduction Mode
22.	Pout	13.0 W	General	Total output power
23.	Power Factor	1.0	General	Assumed Power Factor for the Application
24.	Tdead	0.0 ns	General	Approximate Dead Time of the Regulator
25.	Toff	4.389 us	General	Approximate Converter Off Time
26.	Ton Act	5.76 us	General	Approximate Converter On Time
27.	Total BOM	\$0.0	General	Total BOM Cost
28.	Tsw	10.0 us	General	Switching Time Period
29.	Vaux	9.72 V	General	Auxiliary Voltage
30.	Vsnub	413.057 V	General	Voltage Across the Snubber
31.	Vout Actual	4.995 V	Op_Point	Vout Actual calculated based on selected voltage divider resistors
32.	Vout OP	5.0 V	Op_Point	Operational Output Voltage
33.	Duty Cycle	57.6 %	Op_point	Duty cycle
34.	Efficiency	70.219 %	Op_point	Steady state efficiency
35.	IC Tj	33.245 degC	Op_point	IC junction temperature
36.	ICThetaJA	107.5 degC/W	Op_point	IC junction-to-ambient thermal resistance
37.	IOUT_OP	2.6 A	Op_point	Iout operating point
38.	M1 TJOP	33.207 degC	Op_point	M1 MOSFET junction temperature
39.	Peak Rectified Vin	155.562 V	Op_point	Peak voltage seen at rectified input
40.	Vin_OP_RMS	110.0 V	Op_point	AC Input RMS Voltage
41.	Vout p-p	37.12 mV	Op_point	Peak-to-peak output ripple voltage
42.	Avg Bridge Diode Pd	168.424 mW	Power	Average Power Dissipation in the Bridge Diode over the AC Line Period
43.	Cbulk Pd	376.931 μW	Power	Bulk capacitor power dissipation
44.	Cout1 Pd	50.348 mW	Power	Output capacitor1 power dissipation
45.	Cx Pd	0.0 W	Power	X-cap Power Dissipation
46.	Cy Pd	187.5 pW	Power	Y-caps Power Dissipation
47.	Dsec Pd	871.0 mW	Power	Secondary Diode Power Dissipation
48.	Dsec2 Pd	871.0 mW	Power	Secondary Diode Power Dissipation
49.	IC Pd	30.186 mW	Power	IC power dissipation
50.	L1 Pd	1.128 mW	Power	Power Dissipation in the Inductor

#	Name	Value	Category	Description
51.	M1 Pd	51.319 mW	Power	M1 MOSFET total power dissipation
52.	Paux	10.007 mW	Power	Power Dissipation in Raux and Daux
53.	Pd Rstartup	3.336 W	Power	Power Dissipation in Rstartup1 and Rstartup2
54.	Rdrv Pd	12.342 μ W	Power	Power Dissipation in Gate Drive Resistor
55.	Rfb Pd	4.371 mW	Power	Rfb Power Dissipation
56.	Rsns Pd	67.642 mW	Power	Current Limit Sense Resistor Power Dissipation
57.	Rx Pd	120.961 mW	Power	Total Power Dissipation in Rx1 and Rx2
58.	Snubber Pd	533.821 mW	Power	Snubber Power Dissipation
59.	T1 Pd	348.317 mW	Power	Estimated Losses in Transformer
60.	Total Pd	5.514 W	Power	Total Power Dissipation
61.	Vout Tolerance	1.478 %		Vout Tolerance based on IC Tolerance (no load) and voltage divider resistors if applicable
62.	Vout pp percentage	742.394 m%		Output Voltage ripple percentage

Design Inputs

#	Name	Value	Description
1.	Iout	2.6	Maximum Output Current
2.	VinMax	130.0	Maximum input voltage
3.	VinMin	110.0	Minimum input voltage
4.	Vout	5.0	Output Voltage
5.	line_fsw	60.0	Light Output in Lumen
6.	base_pn	UCC1800	Base Product Number
7.	source	AC	Input Source Type
8.	Ta	30.0	Ambient temperature

Design Assistance

1. **UCC1800** Product Folder : <http://www.ti.com/product/UCC1800> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).